CITY OF AUSTIN
PUBLIC WORKS DEPARTMENT

PROJECT MANUAL
Contract Documents and Technical Specifications

VOLUME 2 OF 3

Dalton Lane Site Utilities and Service Center Improvements

C.I.P. PROJECT NUMBER: 6016.018
SOLICITATION NUMBER: IFB 6100 CLMC 798

CITY OF AUSTIN
Public Works Department
6800 Burleson Road, Building 312, Suite 200
Austin, Texas 78744

REGISTERED ARCHITECT
MARY FRANZOSA
22359
STATE OF TEXAS
02/14/20

STATE OF TEXAS
SHARON S. BICKFORD
77390
LICENSED
PROFESSIONAL ENGINEER
02/14/2020

STATE OF TEXAS
MATTHEW A. RECTOR SR.
122861
LICENSED
PROFESSIONAL ENGINEER

02/14/2020

The City of Austin is committed to compliance with the Americans with Disabilities Act.
Reasonable modifications and equal access to communications will be provided upon request.

Item No. 101S
Preparing Right of Way

101S.1 Description

This item shall govern the preparation of the right of way for construction operations by removal and disposal of all obstructions from the right of way and from designated easements, where removal of such obstructions is not otherwise indicated as a separate pay item.

Such obstructions shall be considered to include, but not be limited to, remains of houses not completely removed by others, foundations, floor slabs, concrete, brick, lumber, plaster, cisterns, water wells, septic tanks and drain fields, basements; abandoned utility pipes, conduits, underground service station tanks, fences, retaining walls, outhouses, shacks and all other debris.

This item shall also include, but not be limited to, the removal of trees, stumps, roots, bushes, shrubs, curb and gutter, driveways, paved parking areas, miscellaneous stone, brick, sidewalks, drainage structures, manholes, inlets, abandoned railroad tracks, scrap iron, and all rubbish and debris whether above or below ground. Care should be taken to identify and protect existing infrastructure.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text the inch-pound units are given preference followed by SI units shown within parentheses.

101S.2 Submittals

The submittal requirements of this specification item may include:

A. A permit when utility adjustments are made in the right-of-way, and

B. A plan for removal and deposition of all non-salvageable materials and debris.

101S.3 Construction Methods

Prior to commencement of this work, all required erosion controls and tree protection measures indicated on the Drawings shall be in place. The existing utilities shall be located and protected as specified in the Standard Contract Documents, Section 00700, "General Conditions" and/or as specified on the Drawings. A permit shall be required when utility adjustments are to be made in preparation for construction in the right-of-way, as specified in Section 5.2.0 of the City of Austin Utilities Criteria Manual.

Areas within the construction limits shall be cleared of all obstructions, abandoned structures, and other items as defined above. All vegetation, except trees or shrubs indicated for preservation, shall also be removed. Trees and shrubs, which are scheduled for preservation, shall be carefully trimmed as directed and shall be protected from scarring, barking or other injuries during construction operations in accordance with Item No. 610S, " Preservation of Trees and Other Vegetation". All exposed cuts over 2 inches

(50 millimeters) in diameter, exposed ends of pruned limbs or scarred bark shall be treated with an approved asphalt material within 24 hours of the pruning or injury.

Construction equipment shall not be operated nor construction materials stockpiled under the canopies of trees, unless otherwise indicated on the Drawings and/or specified in the Contract Documents. Excavation or embankment materials shall not be placed within the drip line of trees until tree wells are constructed.

Culverts, storm sewers, manholes and inlets shall be removed in proper sequence for maintenance of traffic and drainage.

Unless otherwise indicated on the Drawings and/or Contract Documents, all underground obstructions, stumps and roots shall be removed to the following depths:

1. In areas to receive 6 inches (150 mm) or more embankment, a minimum of 12 inches (300 mm) below natural ground.
2. In areas to receive less than 6 inches (150 mm) of embankment, a minimum of 18 inches (450 mm) below the lower elevation of embankment, structure or excavation.
3. In areas to be excavated a minimum of 18 inches (450 mm) below the lower elevation of the embankment, structure or excavation.
4. In all other areas, a minimum of 12 inches (300 mm) below natural ground.

Holes remaining after removal of all obstructions, objectionable material, trees, stumps, etc. shall be backfilled with select embankment material and compacted by approved methods.

When a utility in service conflicts with the construction, it shall be modified as specified in the Standard Contract Documents, Section 00700, "General Conditions" and/or as specified on the Drawings.

Where an abandoned underground piped utility is found, it shall be cut and plugged with 6 inches (150 mm) of concrete (in accordance with Specification Item 403S, “Concrete for Structures”) brick and mortar (in accordance with Specification Item 506S, “Manholes”) or a precast stopper grouted in place.

Material to be removed will be designated as salvageable or non-salvageable by the Engineer or designated representative prior to removal from the construction site by the Contractor. All material, which is located within the public right-of-way and is declared by the Engineer as salvageable, will remain the property of the City of Austin and will be stored at the site or loaded on city trucks as directed by the Engineer. All non-salvageable materials and debris shall become the property of the Contractor and shall be removed from the site and deposited at a permitted disposal site.

101S.4 Measurement

The preparation of right of way for new construction, when included in the contract as a pay item, will be measured by the acre (hectare: 1 hectare equals 2.471 acres), 100 foot (100 feet equals 30.5 meters) stations or lump sum, regardless of the width of the right of way.

Measurement for payment will be made only on areas indicated and classified as "Preparing Right of Way".

101S.5 Payment

The work and material presented herein will not be paid for directly, but shall be included in the unit price bid for the item of construction in which this item is used unless specified as a separate pay item in the contract bid form. When included for payment, it shall be paid for at the contract bid price for "Preparing Right of Way". This price shall include full compensation for work herein specified, including the furnishing of all materials, equipment, tools, labor and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under one of the following:

Pay Item No. 101S-A:	Preparing Right of Way -	Per Acre.
Pay Item No. 101S-B:	Preparing Right of Way -	Per 100 foot Station.
Pay Item No. 101S-C:	Preparing Right of Way -	Per Lump Sum.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 101S, “PREPARING RIGHT-OF-WAY”

City of Austin Standard Contract Documents

Designation	Description
00700	General Conditions

City of Austin Utilities Criteria Manual

Designation	Description
Section 5.2.0	Permit for Excavation in the Public Right-of-Way

City of Austin Standard Specifications

Designation	Description
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 132S	Embankment
Item No. 403S	Concrete for Structures
Item No. 506S	Manholes
Item No. 610S	Preservation of Trees and Other Vegetation

102S.1 Description

This item shall govern the removal and disposal of all trees, stumps, brush, roots, shrubs, vegetation, logs, rubbish and other objectionable material.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text the inch-pound units are given preference followed by SI units shown within parentheses.

102S.2 Submittals

The submittal requirements of this specification item may include:

A. A permit when utility adjustments are made in the right-of-way, and

B. A plan for removal and deposition of all clearing and grubbing materials and debris.

102S.3 Construction Methods

Prior to commencement of this work, all required erosion control and tree protection measures indicated on the Drawings shall be in place. The existing utilities shall be located and protected as specified in the Standard Contract Documents, Section 00700, "General Conditions" and/or indicated on the Drawings. A permit shall be required when utility adjustments are to be made in preparation for construction in the right-of-way, as specified in Section 5.2.0 of the City of Austin Utilities Criteria Manual.

Areas within the construction limits indicated on the Drawings shall be cleared of all trees, stumps, brush, etc., as defined in section 102S.1; except trees or shrubs scheduled for preservation which shall be carefully trimmed as directed, in accordance with Item No. 610S, " Preservation of Trees and Other Vegetation" and shall be protected from scarring, barking or other injuries during construction operations. All exposed cuts over 2 inches (50 millimeters) in diameter, exposed ends of pruned limbs or scarred bark shall be treated with an approved asphalt material within 24 hours of the pruning or injury.

Construction equipment shall not be operated nor construction materials stockpiled under the canopies of trees, unless otherwise indicated on the Drawings and/or specified in the Contract Documents. Excavation or embankment materials shall not be placed within the drip line of trees until tree wells are constructed.

Within the construction limits or areas indicated, all obstructions, stumps, roots, vegetation, abandoned structures, rubbish and objectionable material shall be removed to the following depths:

1. In areas to receive 6 inches (150 mm) or more embankment, a minimum of 12 inches (300 mm) below natural ground.

2. In areas to receive embankment less than 6 inches (150 mm), a minimum of 18 inches (450 mm) below the lower elevation of embankment, structure or excavation.
3. In areas to be excavated a minimum of 18 inches (450 mm) below the lower elevation of the embankment, structure or excavation.
4. In all other areas a minimum of 12 inches (300 mm) below natural ground.

Holes remaining after removal of all obstructions, objectionable material, trees, stumps, etc. shall be backfilled with select embankment material and compacted by approved methods. All cleared and grubbed material shall be disposed of in a manner satisfactory to the Engineer or designated representative. Unless otherwise provided, all materials as described above shall become the property of the Contractor and removed from the site and disposed of at a permitted disposal site.

Burning materials at the site shall conform to Standard Contract Document Section 01550, "Public Safety and Convenience".

102S.4 Measurement

"Clearing and Grubbing", when included in the contract as a pay item, will be measured by the acre (hectare: 1 hectare is equal to 2.471 acres), 100 foot (100 feet is equal to 30.5 meters) stations or lump sum, regardless of the width of the right of way.

102S.5 Payment

The work and materials presented herein will not be paid for directly, but shall be included in the unit price bid for the item of construction in which this item is used, unless specified as a separate pay item in the contract bid form. When included for payment, it shall be paid for at the unit bid price for "Clearing and Grubbing". This price shall include full compensation for all work herein specified, including the furnishing of all materials, equipment, tools, labor and incidentals necessary to complete the Work.

Payment, when included as a contract pay items, will be made under one of the following:

Pay Item No. 102S-A: Clearing and Grubbing	Per Acre.
Pay Item No. 102S-B: Clearing and Grubbing	Per 100 foot Station.
Pay Item No. 102S-C: Clearing and Grubbing	Lump Sum.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 102S, “CLEARING AND GRUBBING”

City of Austin Standard Contract Documents

Designation	Description
00700	General Conditions
01550	Public Safety and Convenience

City of Austin Utilities Criteria Manual

Designation	Description
Section 5.2.0	Permit for Excavation in the Public Right-of-Way

City of Austin Standard Specifications

Designation	Description
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 610S	Preservation of Trees and Other Vegetation

RELATED CROSS REFERENCE MATERIALS

The Code of the City of Austin, Code of Ordinances, Volume 1

Designation	Description
Article 14-11-181	Permit Required
Article 14-11-189	Conditions for Permit Issuance
Article 14-11-190	Excavation Sequence and Permit Term

City of Austin Standard Contract Documents

Designation	Description
01500	Temporary Facilities

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 104S	Removing Portland Cement Concrete
Item No. 120S	Channel Excavation
Item No. 132S	Embankment
Item No. 201S	Subgrade Preparation
Item No. 203S	Lime Treatment for Materials In Place
Item No. 204S	Portland Cement Treatment for Materials In Place
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 234S	Rolling (Tamping)
Item No. 236S	Rolling (Proof)
Item No. 602S	Sodding for Erosion Control
Item No. 604S	Seeding for Erosion Control
Item No. 622S	Diversion Dike
Item No. 628S	Sediment Containment Dikes
Item No. 642S	Silt Fence

City of Austin Standard Details

Designation	Description
610S-1	Tree Protection Fence Locations
610S-2	Tree Protection Fence, Type B Chainlink
610S-3	Tree Protection Fence, Type B Wood
610S-4	Tree Protection Fence, Modified Type A
610S-5	Tree Protection Fence, Modified Type B
621S-1	Diversion
622S-1	Diversion Dike
624S-1	Earth Outlet Sediment Trap

RELATED CROSS REFERENCE MATERIALS-Continued

Specification 102S, “CLEARING AND GRUBBING”

City of Austin Standard Details

Designation	Description
625S-1	Grade Stabilization Structure
627S-1	Grass Lined Swale
627S-2	Grass Lined Swale With Stone Center
628S	Triangular Sediment Filter Dike
628S-1	Hay Bale Dike

629S-1	Brush Berm
630S-1	Interceptor Dike
631S-1	Interceptor Swale
632S-1	Storm Inlet Sediment Trap
633S-1	Landgrading
634S-1	Level Spreader
635S-1	Perimeter Dike
636S-1	Perimeter Swale
637S-1	Pipe Slope Drain (Flexible)
637S-2	Pipe Slope Drain (Flexible)
638S-1	Pipe Outlet Sediment Trap
639S-1	Rock Berm
641S-1	Stabilized Construction Entrance
642S-1	Silt Fence
643S-1	Stone Outlet Structure
644S-1	Stone Outlet Sediment Trap

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 112	Subgrade Widening
Item No. 132	Embankment
Item No. 150	Blading
Item No. 158	Specialized Excavation Work
Item No. 160	Furnishing and Placing Topsoil
Item No. 164	Seeding for Erosion Control
Item No. 204	Sprinkling
Item No. 210	Rolling (Flat Wheel)
Item No. 211	Rolling (Tamping)
Item No. 213	Rolling (Pneumatic Tire)
Item No. 260	Lime Treatment for Materials Used as Subgrade (Road Mixed)
Item No. 265	Lime-Fly Ash (LFA) Treatment for Materials Used as Subgrade

Texas Department of Transportation:
Manual of Testing Procedures

Designation	Description
Tex-103-E	Determination of Moisture Content of Soil Materials
Tex-105-E	Determination of Plastic Limit of Soils
Tex-106-E	Method of Calculating the Plasticity Index of Soils
Tex-114-E	Laboratory Compaction Characteristics and Moisture Density Relationship of Subgrade & Embankment Soil
Tex-115-E	Field Method for Determination of In-Place Density of Soils and Base Materials

Item No. 104S
Removing Portland Cement Concrete

104S.1 Description

This item shall govern the demolition, removal and satisfactory disposal of existing Portland cement concrete, as classified, at locations indicated on the Drawings or as directed by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text inch-pound units are given preference followed by SI units shown within parentheses.

104S.2 Submittals

The submittal requirements of this specification item may include:

A. A permit when utility adjustments are made in the right-of-way, and

B. A plan for removal and deposition of all 'broken up' existing Portland cement (p.c.) concrete materials and debris.

104S.3 Classification

Existing Portland cement concrete, when removed under this section, will be classified as follows:

1. Concrete Curb will include curb, curb and gutter and combinations thereof,
2. Concrete Slabs will include, but not be limited to, house slabs, patio slabs, porch slabs, concrete riprap and concrete pavement,
3. Sidewalks and Driveways will include concrete sidewalks and driveways,
4. Concrete Walls will include all walls, regardless of height, and wall footings,
5. Concrete Steps will include all steps and combinations of walls and steps,
6. Abandoned Foundations will include abandoned utility foundations,
7. Miscellaneous Concrete shall include all other concrete items, which are not identified in items 1 through 6 above.

104S.4 Materials

Mortar shall conform to mortar specified in Standard Specification Item No. 403S, “Concrete for Structures”.

104S.5 Construction Methods

Prior to commencement of this work, all required erosion control and tree protection measures shall be in place. The existing utilities shall be located and protected as specified in the Standard Contract Documents, Section 00700, "General Conditions". A permit shall be required when utility adjustments are to be made in preparation for

highway construction, as specified in Section 5.2.0 of the City of Austin Utilities Criteria Manual.

The existing Portland cement concrete shall be broken up, removed in accordance with Item No. 101S, "Preparing Right of Way" and disposed of by the Contractor and deposited at a permitted disposal site.

When it is specified that only a portion of the existing Portland cement (p.c.) concrete is to be removed and that the remaining p.c. concrete will continue to serve its purpose, special care shall be exercised to avoid damage to that portion which will remain in place. Unless otherwise established by the Engineer or designated representative, existing p.c. concrete shall be cut to the neat lines, that are indicated on the Drawings, by sawing with an appropriate type circular type circular concrete saw to a minimum depth of 1/2 inch (12.5 mm). Any reinforcing steel encountered shall be cut off 1 inch (25 mm) inside of p.c. concrete sawed line. Any existing p.c. concrete, which is damaged or destroyed beyond the neat lines so established, shall be replaced at the Contractor's expense. Remaining p.c. concrete shall be mortared to protect the reinforcing steel and provide a neat clean appearance.

When reinforcement is encountered during the removal of portions of existing structures to be modified, a minimum of 1 foot (300 mm) of steel length shall be cleaned of all old p.c. concrete and left in place to tie into the new construction where applicable. All unsuitable material shall be removed and replaced with approved material. All foundations, walls or other objectionable material shall be removed to a minimum depth of 18 inches (450 mm) below all structures and 12 inches (300 mm) below areas to be vegetated.

104S.6 Measurement

When included in the contract as a separate pay item, the removal of p.c. concrete curb and p.c. concrete wall as prescribed above will be measured by the lineal foot (meter: 1 meter is equal to 3.281 feet) in its original position regardless of the dimensions or size. The removal of p.c. concrete slabs, p.c. concrete sidewalks and driveways, as prescribed above, will be measured by the square foot (square meter: 1 square meter is equal to 10.764 square feet) in original position, regardless of the thickness and existence of reinforcing steel. Portland cement concrete steps removed will be measured per lineal foot (meter: 1 meter is equal to 3.281 feet) of each individual step tread including the bottom step. The removal of p.c. concrete foundations will be measured per each individual foundation. The removal of miscellaneous concrete will be measured per lump sum.

104S.7 Payment

The work and materials presented herein will generally not be paid for directly, but shall be included in the unit price bid for the item of construction in which this item is used.

When specified in the contract bid form as a separate pay item, the item will be paid for at the contract unit bid price(s) for "Remove P.C. Concrete Curb", "Remove P.C. Concrete Slab", "Remove P.C. Concrete Sidewalks and Driveways", "Remove P.C. Concrete Walls", "Remove P.C. Concrete Steps", "Remove P.C. Concrete Foundations" and "Remove Miscellaneous P.C. Concrete". The bid prices shall include full compensation for all Work herein specified, including the disposal of all material not required in the

Work, the furnishing of all materials, equipment, tools, labor and incidentals necessary to complete the Work.

Payment will be made under one of the following:

Pay Item No.	**104S-A:**	Remove P.C. Concrete Curb	Per Lineal foot.
Pay Item No.	**104S-B:**	Remove P.C. Concrete Slab	Per Square foot.
Pay Item No.	**104S-C:**	Remove P.C. Concrete Sidewalks and Driveways	Per Square foot
Pay Item No.	**104S-D:**	Remove P.C. Concrete Wall	Per Lineal foot.
Pay Item No.	**104S-E:**	Remove P.C. Concrete Steps	Per Lineal foot.
Pay Item No.	**104S-F:**	Remove P.C. Concrete Foundations	Per Each.
Pay Item No.	**104S-G:**	Remove Miscellaneous P.C. Concrete	Per Lump Sum.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 104S, "REMOVING CONCRETE"

City of Austin Standard Contract Documents

Designation	Description
00700	General Conditions

City of Austin Utilities Criteria Manual

Designation	Description
Section 5.2.0	Permit for Excavation in the Public Right-of-Way

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 132S	Embankment
Item No. 403S	Concrete for Structures
Item No. 610S	Preservation of Trees and Other Vegetation

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Contract Documents

Designation	Description
01500	Temporary Facilities
01550	Public Safety and Convenience

The Code of the City of Austin, Code of Ordinances, Volume 1

Designation	Description
Article 14-11-181	Permit Required
Article 14-11-189	Conditions for Permit Issuance
Article 14-11-190	Excavation Sequence and Permit Term

City of Austin Standard Specifications

Designation	Description
Item No. 201S	Subgrade Preparation
Item No. 602S	Sodding for Erosion Control
Item No. 604S	Seeding for Erosion Control

Item No. 622S	Diversion Dike
Item No. 628S	Sediment Containment Dikes
Item No. 642S	Silt Fence

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item 104S, "REMOVING CONCRETE"

City of Austin Standard Details

Designation	Description
610S-1	Tree Protection Fence Locations
610S-2	Tree Protection Fence, Type B Chainlink
610S-3	Tree Protection Fence, Type B Wood
610S-4	Tree Protection Fence, Modified Type A
610S-5	Tree Protection Fence, Modified Type B
621S-1	Diversion
622S-1	Diversion Dike
624S-1	Earth Outlet Sediment Trap
625S-1	Grade Stabilization Structure
627S-1	Grass Lined Swale
627S-2	Grass Lined Swale With Stone Center
628S	Triangular Sediment Filter Dike
628S-1	Hay Bale Dike
629S-1	Brush Berm
630S-1	Interceptor Dike
631S-1	Interceptor Swale
632S-1	Storm Inlet Sediment Trap
633S-1	Landgrading
634S-1	Level Spreader
635S-1	Perimeter Dike
636S-1	Perimeter Swale
637S-1	Pipe Slope Drain (Flexible)
637S-2	Pipe Slope Drain (Flexible)
638S-1	Pipe Outlet Sediment Trap
639S-1	Rock Berm
641S-1	Stabilized Construction Entrance
642S-1	Silt Fence
643S-1	Stone Outlet Structure
644S-1	Stone Outlet Sediment Trap

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 104	Removing Concrete
Item No. 110	Excavation
Item No. 112	Subgrade Widening
Item No. 132	Embankment
Item No. 158	Specialized Excavation Work
Item No. 420	Concrete Structures

Item No. 110S
Street Excavation

110S.1 Description

This item shall govern: (1) the excavation and proper utilization or otherwise satisfactory disposal of all excavated material, of whatever character, within the right of way or other limits of the work indicated and (2) the construction, compaction, shaping and finishing of all earthwork on the entire project in accordance with the specification requirements herein outlined, in conformity with the required lines, grades and typical cross sections indicated on the Drawings or as directed by the Engineer or designated representative. When not otherwise included in the Contract Documents, this item shall include the Work described in specification Item Nos. 101S, "Preparing Right of Way", 102S, "Clearing and Grubbing", 104S, "Removing Portland Cement Concrete", 132S, "Embankment", 201S, "Subgrade Preparation" and 236S, “Proof Rolling”.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text inch-pound units are given preference followed by SI units shown within parentheses.

110S.2 Submittals

The submittal requirements of this specification item may include:

A. A permit when utility adjustments are made in the right-of-way,

B. A plan for removal and deposition of all 'Waste' materials, and

C. A Blasting Permit if blasting is required and allowed on the project.

110S.3 Classification

All excavation shall be unclassified and shall include all materials encountered regardless of their nature or the manner in which they are removed.

110S.4 Construction Methods

Prior to commencement of this work, all required erosion control and tree protection measures shall be in place. The existing utilities shall be located and protected as specified in the Standard Contract Documents, Section 00700, "General Conditions" and/or indicated on the Drawings. A permit shall be required when utility adjustments are to be made in preparation for construction in the right-of-way, as specified in Section 5.2.0 of the City of Austin Utilities Criteria Manual.

Construction equipment shall not be operated nor construction materials stockpiled under the canopies of trees, unless otherwise indicated on the Drawings. Excavation or embankment materials shall not be placed within the drip line of trees until tree wells are constructed, that conform to Item No. 610S, " Preservation of Trees and Other Vegetation ".

All street excavation shall be performed as specified herein and shall conform to the established alignment, grades and cross sections. The Contractor will be required to set blue-tops for the subgrade along centerlines, at quarter points and curb lines or edge of

pavement at intervals not exceeding 50 feet (15 meters). Suitable excavated materials shall be utilized, insofar as practicable, in constructing any required embankments. The construction of all embankments shall conform to Item No. 132S, "Embankment".

All earth cuts for base and/or pavement structure construction shall be scarified to a uniform depth of at least 6 inches (150 millimeters) below the required finished subgrade elevation for the entire roadbed width. The material shall be mixed, reshaped by blading, sprinkled and then rolled in accordance with Section 2 of the City of Austin Specification Item 132S, "Embankment".

High PI materials (i.e. PI $\geq$ 20 %) which exhibit a Plasticity Index (PI) greater by 5 % than the surrounding materials or any materials with a moisture content greater than 2 percent (%) in excess of optimum moisture shall be classified as unsuitable and must be removed or manipulated to meet the above criteria before use.

Unsuitable excavated materials or excavation in excess of that needed for construction shall be known as "Waste" and shall become the property of the Contractor. Unsuitable material encountered below the subgrade elevation in roadway cuts, when declared “Waste” by the Engineer, shall be replaced with material from the roadway excavation or with other suitable material as approved by the Engineer or designated representative. It shall become the Contractor’s responsibility to dispose of this material off the limits of the right of way in an environmentally sound manner at a permitted disposal site.

All blasting shall conform to the General Notes on the Drawings and to the Standard Contract Document Section 01550, "Public Safety and Convenience". In all cases where blasting is permitted, a Blasting Permit must be obtained in advance from the City of Austin Department of Public Works and Transportation.

110S.5 Measurement

All accepted street excavation will be measured by either Method A or B as follows:

A. Method A

Measurement of the volume of excavation in cubic yards (cubic meters: 1 cubic meter is equal to 1.308 cubic yards) by the average end areas. Cross sectional areas shall be computed from the existing ground surface to the established line of the subgrade over the limits of the right of way or other work limits shown on the Drawings, including parkway slopes and sidewalk areas.

B. Method B

Measurement of the volume of excavation in cubic yards (cubic meters: 1 cubic meter is equal to 1.308 cubic yards), based upon the average end areas taken from pre-construction cross sections and planned grades. The planned quantities for street excavation will be used as the measurement for payment of this item.

110S.6 Payment

This item will be paid for at the contract unit bid price for "Street Excavation", as provided under measurement Method A or B as included in the bid. The bid price shall include full compensation for all work herein specified, including subgrade preparation, unless specified otherwise, and the furnishing of all materials, equipment, tools, labor and incidentals necessary to complete the work.

Payment will be made under one of the following:

Pay Item No. 110S-A:	Street Excavation	Per Cubic yard.
Pay Item No. 110S-B:	Street Excavation, Plan Quantity	Per Cubic yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 110S, "STREET EXCAVATION"

City of Austin Standard Contract Documents

Designation	Description
00700	General Conditions
01550	Public Safety and Convenience

City of Austin Utilities Criteria Manual

Designation	Description
Section 5.2.0	Permit for Excavation in the Public Right-of-Way

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 104S	Removing Portland Cement Concrete
Item No. 132S	Embankment
Item No. 201S	Subgrade Preparation
Item No. 236S	Proof Rolling
Item No. 610S	Preservation of Trees and Other Vegetation

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Contract Documents

Designation	Description
01500	Temporary Facilities

The Code of the City of Austin, Code of Ordinances, Volume 1

Designation	Description
Article 14-11-181	Permit Required
Article 14-11-189	Conditions for Permit Issuance
Article 14-11-190	Excavation Sequence and Permit Term

City of Austin Standard Specifications

Designation	Description
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 203S	Lime Treatment for Materials In Place
Item No. 204S	Portland Cement Treatment for Materials In Place
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 234S	Rolling (Tamping)
Item No. 602S	Sodding for Erosion Control
Item No. 604S	Seeding for Erosion Control
Item No. 610S	Preservation of Trees and Other Vegetation
Item No. 622S	Diversion Dike
Item No. 628S	Sediment Containment Dikes
Item No. 642S	Silt Fence

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item 110S, "STREET EXCAVATION"

City of Austin Standard Details

Designation	Description
610S-1	Tree Protection Fence Locations
610S-2	Tree Protection Fence, Type B Chainlink
610S-3	Tree Protection Fence, Type B Wood
610S-4	Tree Protection Fence, Modified Type A
610S-5	Tree Protection Fence, Modified Type B
610S-6	Tree Protection, Tree Wells
621S-1	Diversion
622S-1	Diversion Dike
624S-1	Earth Outlet Sediment Trap
625S-1	Grade Stabilization Structure
627S-1	Grass Lined Swale
627S-2	Grass Lined Swale With Stone Center
628S	Triangular Sediment Filter Dike
628S-1	Hay Bale Dike
629S-1	Brush Berm
630S-1	Interceptor Dike
631S-1	Interceptor Swale
632S-1	Storm Inlet Sediment Trap
633S-1	Landgrading
634S-1	Level Spreader
635S-1	Perimeter Dike
636S-1	Perimeter Swale
637S-1	Pipe Slope Drain (Flexible)
637S-2	Pipe Slope Drain (Rigid)
638S-1	Pipe Outlet Sediment Trap
639S-1	Rock Berm
641S-1	Stabilized Construction Entrance
642S-1	Silt Fence
643S-1	Stone Outlet Structure
644S-1	Stone Outlet Sediment Trap

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 112	Subgrade Widening
Item No. 132	Embankment
Item No. 150	Blading
Item No. 158	Specialized Excavation Work
Item No. 160	Furnishing and Placing Topsoil
Item No. 164	Seeding for Erosion Control
Item No. 204	Sprinkling
Item No. 210	Rolling (Flat Wheel)
Item No. 211	Rolling (Tamping)
Item No. 213	Rolling (Pneumatic Tire)
Item No. 260	Lime Treatment for Materials Used as Subgrade (Road Mixed)
Item No. 265	Lime-Fly Ash (LFA) Treatment for Materials Used as Subgrade

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item 110S, "STREET EXCAVATION"

Texas Department of Transportation:
Manual of Testing Procedures

Designation	Description
Tex-103-E	Determination of Moisture Content of Soil Materials
Tex-104-E	Determination of Liquid Limit of Soils
Tex-105-E	Determination of Plastic Limit of Soils
Tex-106-E	Method of Calculating the Plasticity Index of Soils
Tex-114-E	Laboratory Compaction Characteristics and Moisture-Density Relationship of Subgrade & Embankment Soil
Tex-115-E	Field Method for Determination of In-Place Density of Soils and Base Materials

Item No. 111S
Excavation

111S.1 Description

This item shall govern: (1) the excavation and proper utilization or satisfactory disposal of all excavated materials, of whatever character, within the limits of the Work and (2) construction, compaction, shaping and finishing of all designated earthwork areas in accordance with the specification requirements outlined herein and in conformity with the required lines, grades and typical cross sections indicated on the Drawings or as directed by the Engineer or designated representative. When not otherwise included in the Contract Documents, this item shall include the work described in Specification Item Nos. 101S, "Preparing Right of Way", No. 102S, "Clearing and Grubbing", No. 104S, "Removing Portland Cement Concrete", No. 132S "Embankment" and No. 201S, "Subgrade Preparation".

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text inch-pound units are given preference followed by SI units shown within parentheses.

111S.2 Submittals

The submittal requirements of this specification item may include:

A. A permit when utility adjustments are made in the right-of-way,

B. A plan for removal and deposition of all 'Waste' materials, and

C. A Blasting Permit if blasting is required and allowed on the project.

111S.3 Classification

All excavation shall be unclassified and shall include all materials encountered regardless of their nature or the manner in which they are removed.

111S.4 Construction Methods

Prior to commencement of this work, all required erosion control and tree protection measures shall be in place. The existing utilities shall be located and shall be protected as specified in the Standard Contracts Document Section 00700, "General Conditions" and/or indicated on the Drawings. A permit shall be required when utility adjustments are to be made in preparation for construction in the right-of-way, as specified in Section 5.2.0 of the City of Austin Utilities Criteria Manual.

Construction equipment shall not be operated nor construction materials stockpiled under the canopies of trees, unless otherwise indicated on the Drawings. Excavation or embankment materials shall not be placed within the drip line of trees until tree wells are constructed, that conform to Specification Item No. 610S, “Preservation of Trees and Other Vegetation”.

All excavation shall be performed as specified herein and shall conform to the established alignment, grades and cross sections indicated on the Drawings. Suitable excavated

materials shall be utilized, insofar as practical, in constructing required embankments. The construction of all embankments shall conform to Specification Item No. 132S, "Embankment". No material shall be stockpiled within the banks of a waterway.

Unsuitable excavated materials or excavation in excess of that needed for construction shall be known as "Waste" and shall become the property of the Contractor. Unsuitable material encountered below the subgrade elevation in roadway cuts, when declared “Waste” by the Engineer or designated representative, shall be replaced with material from the roadway excavation or with other suitable material as approved by the Engineer. It shall become the Contractor’s responsibility to dispose of this material off the limits of the right of way in an environmentally sound manner at a permitted disposal site.

All blasting shall conform to the Provisions of the Standard Contract Document Section 01550, "Public Safety and Convenience". In all cases, a Blasting Permit must be obtained in advance from the City of Austin, Department of Public Works and Transportation.

Adequate dewatering and drainage of excavation shall be maintained throughout the time required to complete the excavation work.

111S.5 Measurement

All accepted excavation will be measured by either Method A or B as follows:

(1) Method A

Measurement of the volume of excavation in cubic yards (cubic meters: 1 square meter is equal to 1.306 square yards) by the average end area methods. Cross-sectional areas shall be computed from the existing ground surface to the established line of the subgrade, as shown on typical sections in the Drawings, over the limits of the right of way or other work limits, including parkway slopes and sidewalk areas.

(2) Method B

Measurement of the volume of excavation in cubic yards (cubic meters: 1 square meter is equal to 1.306 square yards), based upon the average end area method taken from pre-construction cross sections and planned grades. The planned quantities for excavation will be used as the measurement for payment for this item.

111S.6 Payment

This item will be paid for at the contract unit bid price for "Excavation", as provided under measurement Method A or B as included in the bid. The bid price shall include full compensation for all work herein specified including dewatering, drainage, subgrade preparation, unless otherwise indicated, and the furnishing of all materials, equipment, tools, labor and incidentals necessary to complete the work.

Payment will be made under one of the following:

Pay Item No. 111S-A:	Excavation	Per Cubic Yard.
Pay Item No. 111S-B:	Excavation, Plan Quantity	Per Cubic Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 111S, "EXCAVATION"

City of Austin Standard Contract Documents

Designation	Description
00700	General Conditions
01550	Public Safety and Convenience

City of Austin Utilities Criteria Manual

Designation	Description
Section 5.2.0	Permit for Excavation in the Public Right-of-Way

City of Austin Technical Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing-
Item No. 104S	Removing Portland Cement Concrete
Item No. 132S	Embankment
Item No. 201S	Subgrade Preparation
Item No. 236S	Proof Rolling
Item No. 610S	Preservation of Trees and Other Vegetation

RELATED CROSS REFERENCE MATERIALS
Specification Item 111S, "EXCAVATION"

City of Austin Standard Contract Documents

Designation	Description
01500	Temporary Facilities

City of Austin Standard Specifications

Designation	Description
Item No. 120S	Channel Excavation
Item No. 203	Lime Treatment for Materials In Place
Item No. 204S	Portland Cement Treatment for Materials In Place
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 234S	Rolling (Tamping)
Item No. 602S	Sodding for Erosion Control
Item No. 604S	Seeding for Erosion Control
Item No. 622S	Diversion Dike
Item No. 628S	Sediment Containment Dikes
Item No. 642S	Silt Fence

City of Austin Standard Details

Designation	Description
No. 610S-1	Tree Protection Fence Locations
No. 610S-2	Tree Protection Fence, Type B Chainlink
No. 610S-3	Tree Protection Fence, Type B Wood
No. 610S-4	Tree Protection Fence, Modified Type A

No. 610S-5	Tree Protection Fence, Modified Type B
No. 621S-1	Diversion
No. 622S-1	Diversion Dike
No. 624S-1	Earth Outlet Sediment Trap
No. 625S-1	Grade Stabilization Structure
No. 627S-1	Grass Lined Swale
No. 627S-2	Grass Lined Swale With Stone Center
No. 628S	Triangular Sediment Filter Dike

City of Austin Standard Details

Designation	Description
No. 628S-1	Hay Bale Dike
No. 629S-1	Brush Berm
No. 630S-1	Interceptor Dike
No. 631S-1	Interceptor Swale
No. 632S-1	Storm Inlet Sediment Trap
No. 633S-1	Landgrading
No. 634S-1	Level Spreader
No. 635S-1	Perimeter Dike
No. 636S-1	Perimeter Swale
No. 637S-1	Pipe Slope Drain (Flexible)
No. 637S-2	Pipe Slope Drain (Flexible)
No. 638S-1	Pipe Outlet Sediment Trap
No. 639S-1	Rock Berm
No. 641S-1	Stabilized Construction Entrance
No. 642S-1	Silt Fence
No. 643S-1	Stone Outlet Structure
No. 644S-1	Stone Outlet Sediment Trap

The Code of the City of Austin, Code of Ordinances, Volume 1

Designation	Description
Article 14-11-181	Permit Required
Article 14-11-189	Conditions for Permit Issuance
Article 14-11-190	Excavation Sequence and Permit Term

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 112	Subgrade Widening
Item No. 132	Embankment
Item No. 150	Blading
Item No. 158	Specialized Excavation Work
Item No. 160	Furnishing and Placing Topsoil
Item No. 164	Seeding for Erosion Control
Item No. 204	Sprinkling
Item No. 210	Rolling (Flat Wheel)
Item No. 211	Rolling (Tamping)
Item No. 213	Rolling (Pneumatic Tire)
Item No. 260	Lime Treatment for Materials Used as Subgrade (Road Mixed)
Item No. 265	Lime-Fly Ash (LFA) Treatment for Materials Used as Subgrade

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-103-E	Determination of Moisture Content of Soil Materials
Tex-104-E	Determination of Liquid Limit of Soils
Tex-105-E	Determination of Plastic Limit of Soils
Tex-106-E	Method of Calculating the Plasticity Index of Soils
Tex-114-E	Laboratory Compaction Characteristics and Moisture-Density Relationship of Subgrade & Embankment Soil
Tex-115-E	Field Method for Determination of In-Place Density of Soils and Base Materials

Item No. 201S
Subgrade Preparation

201S.1 Description

This item shall govern scarifying; blading and rolling the subgrade to obtain a uniform texture and provide as nearly as practicable a uniform density for the top 6 inches (150 mm) of the subgrade.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

201S.2 Submittals

The submittal requirements of this specification item may include:

A. A plan identifying classification and characteristics (P.I., optimum moisture-density, etc.) of insitu subgrade soils, as well as the source, classification and characteristics of any proposed borrow material,
B. Type and size of equipment proposed to produce the required compaction, and
C. Compaction (moisture-density, etc) test results for in-situ subgrade soils and/or borrow materials.

201S.3 Construction Methods

Prior to initiation of subgrade preparation activities, all operations involving Standard Specification Item No. 101S," Preparing Right of Way" and/or Standard Specification Item No. 102S, "Clearing and Grubbing" shall be completed. The surface of the subgrade shall be scarified and shaped in conformity with the typical sections and the lines and grades indicated on the Drawings; by the removal of existing material or addition of approved material as established by the Engineer or designated representative. Any deviation in the subgrade cross section which exceeds 1/2 inch in a length of 10 feet (12 mm in a length of 3 meters), measured longitudinally, shall be corrected by loosening, adding or removing material, and then reshaping and compacting by sprinkling and rolling.

All unsuitable material shall be removed and replaced with approved material. All foundations, walls or other objectionable material shall be removed in accordance with Standard Specification Item No. 104S, "Removing Portland Cement Concrete" to a minimum depth of 18 inches (450 mm) under all structures and 12 inches (300 mm) under areas to be vegetated. All holes, ruts and depressions shall be filled with approved material and compacted by approved methods.

The subgrade shall be prepared sufficiently in advance to insure satisfactory prosecution of the Work. The Contractor will be required to set blue tops for the subgrade on the centerline, at the quarter points and along the curb lines or edge of pavement at maximum intervals of 50 feet (15 meters). The subgrade shall be tested by proof rolling

in conformity with Standard Specification Item No. 236S, "Proof Rolling" prior to placement of the first course of base material. Any unstable or spongy subgrade areas identified by proof rolling shall be corrected either by additional re-working, drying and compaction, or by removal and replacement of unsuitable materials. When specifically directed by the Engineer or designated representative, the Contractor shall re-work the subgrade* as follows:

A. Remove the unstable subgrade to the full depth of the unstable insitu material or to a minimum depth of 6 inches (150 mm), whichever is greater;
B. Spread the material over a sufficient area to allow reworking of the excavated material;
C. Disc, scarify or otherwise breakup the excavated material and allow to dry (Note: If approved by the Engineer or designated representative, the addition of lime or other additive may be used to aid in the drying process or to stabilize the unstable material);
D. Fill the excavated area with the re-worked material and compact to specified densities; and
E. Proof roll the re-worked area.

* The Rework process will not be allowed for unstable organic subgrade soils. These type soils will be permanently removed and replaced with materials approved by the Engineer or designated representative.

All suitable material removed in accordance with Standard Specification Item No, 111S, "Excavation", may be utilized in the subgrade with the approval of the Engineer or designated representative. All other material required for completion of the Subgrade, including those defined in accordance with Specification Item No. 130S, "Borrow", shall also be subject to approval by the Engineer or designated representative.

It is the intent of this specification to provide the required density and moisture control for the subgrade based on the plasticity characteristics of the approved materials. The subgrade materials shall be sprinkled as required and compacted to the extent necessary to provide the density specified below, unless otherwise indicated on the Drawings. The Plasticity Index (P.I.) will be established in accordance with TxDOT Test Methods Tex-104-E, Tex-105-E and Tex-106-E. The density determination will be made in accordance with TxDOT Test Method Tex-114-E and field density measurements will be made in accordance with TxDOT Test Method Tex-115-E.

Description	Density, Percent	Moisture
Non-swelling Soils (P.I. less than 20)	Not less than 95	
Swelling Soils (P.I. between 20 and 35)	Not less than 95 nor more than 102	Not less than optimum
Swelling Soils (P.I. greater than 35)	Not less than 95 nor more than 100	Not less than optimum

Subgrade materials on which planting or turf will be established shall be compacted to a minimum of 85 percent of the density as determined in accordance with TxDOT Test

Method Tex-114-E. Field tests for density in accordance with TxDOT Test Method Tex-115-E will be made as soon as possible after compaction operations are completed. If the material fails to meet the density specified, it shall be reworked as necessary to obtain the density required.

Prior to placement of any base materials, the in-place density and moisture content of the top 6 inches (150 mm) of compacted subgrade shall be checked. If the tests indicate that the relative density and moisture do not meet the limits specified in the table above, the subgrade shall be reworked as necessary to obtain the specified compaction and moisture content. All initial testing will be paid for by the City of Austin. All retesting shall be paid for by the Contractor.

201S.4 Measurement

All acceptable subgrade preparation when included in the contract as a separate pay item, will be measured by the square yard (square meter: 1 square meter equals 1.196 Square yards). The measured area includes the entire width of the roadway for the entire length as indicated on the Drawings.

201S.5 Payment

The work and materials presented herein will generally not be paid for directly, but shall be included in the unit price bid for the item of construction in which this item is used when specified as a separate pay item in the contract bid form, subgrade preparation shall be measured as specified above and paid for at the contract unit bid price for "Subgrade Preparation". The bid price shall include full compensation for all work herein specified, including the furnishing of all materials, equipment, tools and labor and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 201S: Subgrade Preparation Per Square Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 201S, "SUBGRADE PREPARATION"

City of Austin Standard Specification Items

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 104S	Removing Portland Cement Concrete
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 130S	Borrow
Item No. 236S	Proof Rolling

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-103-E	Determination of Moisture Content of Soil Materials
Tex-104-E	Determination of Liquid Limit of Soils
Tex-105-E	Determination of Plastic limit of Soils
Tex-106-E	Method of Calculating the Plasticity Index of Soils
Tex-114-E	Laboratory Compaction Characteristics & Moisture Density Relationship of Subgrade & Embankment Soil
Tex-115-E	Field Method for Determination of In-Place Density of Soils & Base Materials

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Specifications

Designation	Description
Item No.132S	Embankment

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 112	Subgrade Widening
Item No. 132	Embankment
Item No. 150	Blading
Item No. 158	Specialized Excavation Work
Item No. 204	Sprinkling
Item No. 210	Rolling (Flat Wheel)
Item No. 211	Rolling (Tamping)
Item No. 213	Rolling (Pneumatic Tire)

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-103-E	Determination of Moisture Content of Soil Materials

Item No. 206S
Asphalt Stabilized Base

206S.1 Description

This item shall govern Asphalt Stabilized Base (ASB) courses composed of a compacted mixture of aggregates and asphalt cement mixed hot in a mixing plant. The ASB shall be constructed on previously completed and approved subgrade, base material, existing pavement or bituminous surface in accordance with the details shown on the Drawings and the requirements specified herein.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

206S.2 Submittals

The submittal requirements of this specification item may include:

A. A mix design identifying classification and gradation of aggregate materials, source and designation of the asphalt cement and quantities of aggregate materials and asphalt cement required in the proposed application to meet the specified strength (grade) requirements,

B. An update in the mix design, if source of material changes during construction,

C. A Job Mix Formula for each mix design prior to placement of ASB, and

D. A plan describing the construction equipment proposed for the work and identifying the type and condition of each equipment item.

206S.3 Materials

A. Asphalt Material:

The asphalt cement for the asphalt stabilized mixture shall be the grade shown on the Drawings or designated by the Engineer or designated representative and shall meet the requirements of Standard Specification Item No. 301, "Asphalts, Oils and Emulsions". The Contractor shall notify the Engineer or designated representative of the source of the asphalt material prior to the design of the asphalt stabilized mixture. This source shall not be changed during the course of the project without the authorization of the Engineer or designated representative. If the source of asphalt material is changed, the moisture resistance of the new material combination will be evaluated to verify that the requirements of section 206S.4 are met.

Asphalt material for tack coat, if directed, shall conform to Standard Specification Item No. 307S, "Tack Coat".

B. Aggregate:

The aggregate shall meet all requirements of and conform to Type A of Specification Item 340S, "Hot Mix Asphalt Concrete Pavement". When shown on the drawings, the gravel portion of the aggregate shall be so crushed as to have a minimum of 60

percent of the particles retained on the # 4 (4.75 mm) sieve with two or more mechanically induced crushed faces, as determined by TxDoT Test Method Tex-460-A (Part I).

206S.4 Asphalt Stabilized Mixtures

Asphalt Stabilized Base mixture shall consist of a uniform mixture of aggregate, hot asphalt cement and additives if allowed or required on the Drawings. The mix will be designed in accordance with TxDoT Test Method Tex-126-E to conform to the requirements herein.

A. Mixture Design.

The Contractor shall submit to the Engineer or designated representative a mix design: (1) which has been reviewed, signed and sealed by a Registered Professional Engineer, currently Licensed in the State of Texas, or (2) prepared and certified by a Level II Quality Management and Mix Design Specialist as certified by the Hot Mix Asphalt Center. The mix design will be valid for one (1) year provided that there are no significant changes in the material being produced.

Unless otherwise shown on the Drawings, the mixture of aggregate, asphalt and additives proposed for use will be evaluated in the design stage for moisture susceptibility, in accordance with TxDoT Standard Specification Item No. 301, “Asphalt Anti-stripping Agents”. The Engineer or designated representative may waive this test if a similar design, using the same ingredients, has proven satisfactory.

To substantiate the design, trial batches shall be produced and tested using all the proposed project materials and equipment prior to any ASB placement. The Engineer or designated representative may waive trial mixtures if similar designs have proven satisfactory.

A Job Mix Formula shall be submitted for each project for review by the Engineer or designated representative before ASB is placed. The ASB mixture shall contain between 3.0 and 9.0 percent asphalt cement when designed in accordance with TxDoT Test Method Tex-126-E. At optimum asphalt content, the design specimens shall have the following minimum strength when tested in accordance with TxDoT Test Method Tex-126-E.

	*SLOW STRENGTH**	
GRADE	*PSI*	*kPa*
1	*50*	345
2	*40*	*275*
3	*30*	*205*
*4**	*30*	*205*

* Unless a higher minimum strength is shown on the Drawings.

B. Grades

The aggregate gradation shall conform to the master grading limits shown below for the grade of mix specified on the Drawings.

Sieve Size		Grade			
US	SI	1	2	3	4
1 3/4"	45 mm		100	100	As Shown On Drawings
1 1/2"	38 mm	100	90-100		
1	25 mm	90-100			
3/8	9.5 mm	45-70			
#4	4.75 mm	30-55	25-55		
#40	425 μm	15-30	15-40	15-40	

C. Tolerances:

Gradation approval may be based on stockpile samples if a single stockpile is used. If more than one stockpile is used, the mixture will be tested in accordance with TxDoT Test Method Tex-210-F or TxDoT Test Method Tex-228-F will be used in conjunction with combined cold feed belt samples tested in accordance with TxDoT Test Method Tex-229-F. Other tests of proven accuracy may be used if approved by the Engineer or designated representative. The gradation of the aggregate shall not vary from the master grading limits for the specified grade except that a tolerance of 2 percent is allowed on the sieve size for each mixture grade in the table above, which shows 100 percent passing. When disagreements concerning the determination of specification compliance occur between allowed sampling and testing procedures, extracted aggregate testing shall take precedence over the cold feed belt sampling.

The asphalt content shall not vary by more than 0.5 percent from that designated by the Engineer or designated representative using TxDoT Test Method Tex-210-F or Test Method Tex-228-F.

If the produced mixture varies from the master grading limits and/or the asphalt content tolerance, adjustments shall be made by the Contractor until the mixture meets these requirements.

206S.5 Equipment

The equipment for the handling of all materials and for mixing, placing and compacting of the mixture shall be maintained in good repair and operating condition and subject to the approval of the Engineer or designated representative. Any equipment found to be defective or which may potentially yield a negative impact on the quality of the paving mixture will not be allowed.

All equipment shall conform to the requirements of Standard Specification Item No. 340, "Hot Mix Asphalt Concrete Pavement" with the following exception.

ASB for confined or isolated areas or for a single day's production of 500 square yards (400 square meters) or less may be spread with a maintainer or a rubber-tired front-end loader. The Contractor shall exercise caution to assure that the use of a maintainer or a loader does not produce segregation of the aggregate in the ASB.

206S.6 Storage, Proportioning and Mixing

All storage, proportioning and mixing shall conform to the requirements of Standard Specification Item No. 340S, “Hot Mix Asphaltic Concrete Pavement”.

206S.7 Construction Methods

A. General:

The Contractor shall produce, transport, place and compact a paving mixture conforming to these specifications and provide a safe environment to enable inspection forces to inspect the work, acquire samples and inspect/monitor the plant.

When the ASB is placed directly on the subgrade, the subgrade shall be proof rolled prior to placing the ASB in accordance with Standard Specification Item No. 236S. Soft spots shall be repaired and area proof rolled again until entire subgrade is free of soft spots.

When a spreading and finishing machine is used, the ASB shall not be placed when the air temperature is 40°F (4^0C) and is rising. When a motor grader is used, the ASB shall not be placed when the air temperature is below 60°F (16^0C) and is falling, but it may be placed when the air temperature is 50°F (10^0C) and is rising. The air temperature shall be taken in the shade away from any artificial heat.

It is further provided that the ASB shall be placed only when the humidity, general weather conditions, temperature and moisture conditions of the subgrade and subbase, in the opinion of the Engineer or designated representative, are suitable.

If, after being discharged from mixer and prior to placing, the temperature of the asphalt mixture is 50^0F (10^0C) or more below the selected discharge temperature established by the Contractor in the submitted mix design, all or any part of load may be rejected and payment will not be made for rejected material. Any material placed which is too cool to compact properly shall be removed and replaced with material, which meets these specifications.

Thickness of the compacted lift shall not exceed 8 inches (200 mm) and shall not be less than twice the size of the maximum nominal size aggregate.

During placement of tack coat, care shall be taken to prevent splattering of adjacent pavement, curb and gutters or structures. Contractor shall clean any splattered areas.

B. Tack Coat:

The tack coat shall be applied conforming to Standard Specification Item No. 307S, "Tack Coat". Before ASB mixture is placed, the surface upon which the tack coat is

to be placed shall be thoroughly cleaned to satisfaction of Engineer or designated representative. The surface shall be given a uniform application of tack coat in accordance with Standard Specification Item No. 307S. The tack coat shall be applied as directed by Engineer or designated representative but in no case more than 0.10 gallons per square yard (0.45 liters per square meter).

Where the ASB mixture will adhere to the surface without the use of a tack coat, the tack coat application may be eliminated, if approved by the Engineer or designated representative. Contact surfaces of curbs, structures and all joints shall be painted with a thin uniform coat of asphalt material meeting requirements for tack coat (Standard Specification Item No. 307S). The tack coat shall be rolled with a light pneumatic tire roller when directed by Engineer or designated representative.

C. Compaction:

The ASB mixture shall be compacted thoroughly and uniformly with the necessary rollers to obtain the required density (as determined by TxDoT Test Method Tex-126-E) and cross-section of the finished pavement in accordance with the requirements of the Drawings and Specifications.

The Contractor shall be responsible for determining the numbers and type of rollers to be used to obtain the required density. The rollers shall be operated in accordance with the requirements of this specification, Standard Specification Item Nos. 230S and 232S, and as approved by the Engineer or designated representative. The rolling patterns shall be established by the Contractor as outlined in TxDoT Test Method Tex-207-F, Part IV, to achieve the maximum compaction, unless otherwise directed by the Engineer or designated representative. When changes develop in the mixture or placement conditions, a new rolling pattern shall be established.

Static, vibratory, and flat steel wheel rolling shall be terminated before the ASB surface temperature cools below 175^0F (80^0C). Pneumatic tire rolling may be undertaken on the ASB layer at temperatures below 175^0F (80^0C). The surface of the ASB, after compaction, shall be smooth and true to established line, grade and cross-section.

The motion of rollers shall be slow enough to avoid other than normal initial displacement of the mixture. If any displacement occurs, it shall be corrected to the satisfaction of the Engineer or designated representative. The roller shall not be allowed to stand on a pavement, which has not been fully compacted. In order to prevent adhesion of the surface mixture to the steel wheel rollers, the wheels shall be kept thoroughly moistened with water, but an excess of water will not be permitted. The Contractor shall take necessary precautions to prevent the dropping of diesel, gasoline, oil, grease or other foreign matter on the ASB, either when the rollers are in operation or when standing.

D. Density Control.

For the purpose of determining the density, the "project" shall be defined to be the total quantity of ASB to be placed. Portions of the ‘project’ may designated by the Engineer or designated representative as separate ’paving sections’ created by: (a) staging of paving operations due to traffic considerations, (b) changes in the Job Mix Formula, (c) phasing of large projects or (d) other factors affecting the consistency in the production,

lay-down compaction and/or use of completed portions. Acceptability of the completed work will be based on the average of tests per paving section as defined above.

The Engineer or designated representative will secure, in accordance with TxDoT Test Method Tex-222-F, a minimum of three 6 inch (150 mm) diameter core samples or sections of completed ASB lifts, for every 1,500 square yards (1250 square meters) or portions thereof, of ASB placed. The in place densities of the sampled locations shall be determined in accordance with TxDoT Test Method Tex-126-E, unless directed otherwise by the Engineer or designated representative. The nuclear-density gauge or other methods of determining in-place compaction, which correlate satisfactorily with those results obtained through the use of TxDoT Test Method Tex-126-E, may be used. In-place density at the sampled locations shall be determined by the following equation:

Percent in place Density = $[G_A / G_T] \times 100$

where G_A = Bulk specific gravity of core (tested in conformance with Tex-207-F) and

G_T = Maximum theoretical specific gravity of each core (tested in conformance with Tex-227-F.

If the in-place density falls 0.1 to 1.0 percentage points below the minimum density from TxDoT Test Method Tex-126-E, the Contractor shall investigate the causes and make the necessary corrections. Production may proceed for no more than one full day while corrections to the construction operations or mixture are being made to obtain the minimum density. If the minimum density is not obtained after one day, production shall cease. The Contractor will then be required to place a test strip in accordance with Item 345.6 of TxDoT Standard Specification Item 345, " Asphalt Stabilized Base (Plant Mixed)" to demonstrate that the minimum density is produced.

If the in-place density is more than 1.0 percent below the minimum density, production shall cease immediately and a test strip shall be required. Full production may only resume when it is demonstrated in a test strip that a satisfactory density can be obtained.

Increasing the asphalt content of the ASB mixture in order to increase density shall not be allowed.

The Contractor is encouraged to perform supplemental nuclear density compaction testing to aid in developing rolling patterns.

The Contractor shall patch the area where samples are taken with no extra payment being made for this work. Laboratory technician will remove the ASB specimen on the day following placement or as soon as practicable thereafter.

Initial sampling and testing of the in place ASB will be at no cost to Contractor, except for the cost of material and work involved in the restoration of damage caused by the sampling procedures. Retesting expense shall conform to Standard Contract Document Section 00700, "General Conditions", Article 13.3.2.

E. Opening to Traffic:

Pavement may be opened to local traffic as soon as possible after required temporary pavement markings are in place and after approval from Engineer or designated representative.

Contractor's attention is directed to the fact that all construction traffic allowed on any pavement open to public will be subject to City Ordinances and State Laws governing traffic on streets and highways.

Surface raveling, cracking, segregation and other defects resulting from traffic shall be corrected at Contractor's expense as directed by Engineer or designated representative. The Contractor shall provide traffic control and other expenses, if any, necessitated by required repairs.

206S.8 Measurement

Measurement for this item shall be by either Method A or Method B as described below and as established in Bid Documents.

Method A: Work and material shall be measured by the ton of 2000 pounds (megagrams: 1 megagram equals 1.1 tons) of composite “Asphalt Stabilized Base” of the grade actually used in the completed and accepted in accordance with the Drawings and Specifications for the project. The material weight (mass) shall be calculated using the average densities of the designated ‘paving sections’ and the specified ASB layer thickness.

Method B: Work and materials shall be measured by the square yard (square meter: 1 square meter equals 1.196 square yards) of surface area in the each designated ‘paving sections’ to the specified thickness, complete in accordance with the Drawings and Specifications for the project.

206S.9 Payment

The work performed and materials furnished in accordance with this item and measured as provided under "Measurement" will be paid at unit bid price for "Asphalt Stabilized Base," of the grade specified. The unit bid price shall represent full compensation for a) quarrying, furnishing all materials and additives, b) all heating mixing, and hauling, c) cleaning the existing sub base, base or surface course, d) tack coat, e) placing, rolling and finishing, temporary pavement markings and f) all manipulations, labor, tools, equipment, freight involved; and incidentals necessary to complete the work. Correction of defective work and subsequent retesting shall be included in the unit price bid for "Asphalt Stabilized Base".

The contract unit price for Asphalt Stabilized Base shall be adjusted in accordance with the following for all work that fails to meet density requirements:

DENSITY ACCEPTANCE SCHEDULE (TEX-207-F/TEX-227-F)

Percent Density	Percent Contract Unit Price Reduction
Above 97	100, Remove and Replace
91.0 to 97.0	0
90.9 to 87.0	0.625% per 0.10% Deficiency in Density

Less than 87.0	100, Remove and Replace

Templates, straightedges, scales and other weighing and measuring devices necessary for proper construction, measuring and checking work shall be furnished, operated and maintained by Contractor at its own expense.

Saw cutting as indicated or as directed by Engineer or designated representative will not be measured or paid for directly, but shall be included in the unit price bid for the item of construction in which this item is used,, unless included as a separate pay item in the Bid Document.

Payment for work meeting specifications will be made under one of the following:

Pay Item No. 206S-A: Asphalt Stabilized Base PerTon.

Pay Item No. 206S-B: Asphalt Stabilized Base _____In. Per Square Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 206S, "ASPHALT STABILIZED BASE"

City of Austin Contract Documents

Designation	Description
Section 00700	General Conditions

City of Austin Standard Specifications

Designation	Description
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 236S	Proof Rolling
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 307S	Tack Coat
Item No. 340S	Hot Mix Asphaltic Concrete Pavement

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 301	Asphalt Anti-stripping Agents
Item No. 345	Asphalt Stabilized Base (Plant Mixed)

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-126-E	Molding, Testing and Evaluation of Bituminous Black Base Materials
Tex-207-F	Determination of Density of Compacted Bituminous Mixtures
Tex-210-F	Determination of Asphalt Content of Bituminous Mixtures by Extraction
Tex-222-F	Method of Sampling Bituminous Mixtures
Tex-227-F	Theoretical Maximum Specific Gravity of Bituminous Mixtures
Tex-228-F	Determination of Asphalt Content of Bituminous Mixtures By The Nuclear Method

Tex-229-F	Combined HMAC Cold-Belt Sampling and Testing Procedures
Tex-460-A	Determination of Crushed Face Particle Count

RELATED CROSS REFERENCE MATERIALS
Specification 206S, "ASPHALT STABILIZED BASE"

City of Austin Standard Details

Designation	Description
1000S-10	Local Street Sections
1000S-11(1)	Residential and City of Austin Neighborhood Collector Street Sections
1000S-11(2)	Industrial and Commercial Collector Street Sections
1000S-12(1)	Primary Collector Street Sections
1000S-12(2)	Primary Arterial Street Sections
1000S-13(1)	Minor Arterial Street Sections (4 Lanes)
1000S-13(2)	Minor Arterial Street Sections-(4 Lanes divided)
1000S-14	Major Arterial Street Sections

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 210	Rolling (Flat Wheel)
Item No. 211	Rolling (Tamping)
Item No. 213	Rolling (Pneumatic Tire)
Item No. 300	Asphalts, Oils and Emulsions

City of Austin Standard Specifications

Designation	Description
Item No. 101S	*Preparing Right of Way*
Item No. 102S	Clearing and Grubbing
Item No. 104S	Removing Portland Cement Concrete
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 130S	Borrow
Item No. 132S	*Embankment*
Item No. 202S	Hydrated Lime and Lime Slurry
Item No. 203S	Lime Treatment for Materials in Place
Item No. 210S	Flexible Base
Item No. 310S	Emulsified Asphalt Treatment
Item No. 320S	Two Course Surface Treatment

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 112	Subgrade Widening
Item No. 132	Embankment
Item No. 150	Blading
Item No. 158	Specialized Excavation Work
Item No. 204	Sprinkling
Item No. 210	Rolling (Flat Wheel)
Item No. 211	Rolling (Tamping)

Item No. 213	Rolling (Pneumatic Tire)
Item No. 300	Asphalts, Oils and Emulsions
Item No. 301	Asphalt Anti-stripping Agents
Item No. 345	Asphalt Stabilized Base (Plant Mixed)

RELATED CROSS REFERENCE MATERIALS - Continued
Specification 206S, "ASPHALT STABILIZED BASE"

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-101-E	Surveying and Sampling Soils for Highways
Tex-103-E	Determination of Moisture Content of Soil Materials
Tex-104-E	Determination of Liquid Limit of Soils
Tex-105-E	Determination of Plastic limit of Soils
Tex-106-E	Method of Calculating the Plasticity Index of Soils
Tex-114-E	Laboratory Compaction Characteristics & Moisture Density Relationship of Subgrade & Embankment Soil
Tex-115-E	*Field Method for Determination of In-Place Density of Soils & Base Materials*
Tex-117-E	Triaxial Compression Tests for Disturbed Soils and Base Materials

210S.1 Description

This item governs furnishing and placing a crushed stone base course for surfacing, pavement, or other base courses. “Flexible Base" shall be constructed on an approved, prepared surface in one or more courses conforming to the typical sections and to the lines and grades, indicated on the Drawings or established by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

210S.2 Submittals

The submittal requirements of this specification item may include:

A. Source, gradation and test results for the crushed limestone material,

B. Notification that the crushed limestone stockpile is completed and ready for testing, and

C. Field density test results for in-place compacted flexible base,

210S.3 Material

A. Mineral Aggregate

The material shall be crushed argillaceous limestone meeting the requirements specified herein. The material shall be from sources approved by the City and shall consist of durable crushed stone that has been screened to the required gradation.

Flexible base materials shall be tested according to the following TxDoT standard test methods:

a) Preparation for Soil Constants and Sieve Analysis	Tex-101-E
b) Liquid Limit	Tex-104-E
c) Plastic Limit[1]	Tex-105-E
d) Plasticity Index	Tex-106-E
e) Sieve Analysis	Tex-110-E
f) Wet Ball Mill[2]	Tex-116-E
g) Triaxial Test	Tex-117-E, Part II

1. Plasticity Index shall be determined in accordance with Tex-107-E (Linear Shrinkage) when liquid limit is unattainable as defined in Tex-104-E.
2. When a soundness value is required on the drawings, the material shall be tested in accordance with Tex-411-A.

Base material shall be stockpiled after crushing, then tested by the City's designated laboratory and approved by the Engineer or designated representative prior to being hauled to the Project.

The material shall be well graded and shall meet the following requirements:

Sieve Designation		Other Requirements	% Retained	
US	SI			
1 3/4"	45 mm		0	
7/8"	22.4 mm		10-35	
3/8"	9.5 mm		30-50	
#4	4.75 mm		45-65	
#40	425 μm		70-85	
		Maximum Plasticity Index		10
		Maximum Wet Ball Mill		42
Maximum Increase in passing #40 (425 μm) sieve from Wet Ball Mill Test			20	

Minimum compressive strength when subjected to the triaxial test shall be 35 psi at 0 psi lateral pressure [240 kiloPascal (kPa) at 0 kPa lateral pressure] and 175 psi at 15 psi lateral pressure [1200 kiloPascal (kPa) at 100 kPa lateral pressure].

B. Asphaltic Material

Prime Coat. Prime Coat shall conform to the requirements of Standard Specification Item 306S, "Prime Coat", except for measurement and payment.

210S.4 Stockpiling, Storage and Management

A. Managing Material**:**

The stockpile shall be constructed on a relatively smooth area that has been cleared of debris, weeds, brush, trees and grass. Stockpiles shall contain between 25,000 and 50,000 cubic yards (19,100 to 38,200 cubic meters). The stockpile shall be constructed using scrapers, bottom dumps or other similar equipment that allows dumping and spreading without rehandling. The stockpile shall be constructed to allow dumping and spreading in one direction only. The height of the stockpile shall not exceed the capabilities of available equipment to make a full cut (bottom to top) on any of the four sides.

A stockpile shall be completed before being tested by the City. The Contractor’s supplier shall notify the City when a stockpile has been completed and is ready to be tested. The stockpile shall not be added to after it has been tested.

The Contractor shall provide material only from stockpiles that have been inspected, tested and accepted by the City. A ticket showing the date, source, stockpile number, and net weight (mass) shall be provided to the Inspector with each load of material delivered to the Project.

Material shall be loaded from the stockpile by making successive vertical cuts through its entire depth.

B. Test Sampling:

The Contractor's supplier may choose the method of sample gathering for testing by the City's laboratory as follows:

1. The supplier shall make a full-height cut a sufficient distance into each side of the stockpile to obtain a uniform sample. The four samples (one from each side of the stockpile) shall then be combined and mixed into a single "test" specimen from which the City's laboratory can obtain a sample.

2. As the stockpile is constructed, a perpendicular cut will be made across the spreading direction at every two feet to four feet (0.6 to 1.2 meters) of height and the sample used to start a "mini" stockpile. The process shall be repeated in two feet to four feet (0.6 to 1.2 meter) increments of height, until the stockpile and the "mini" stockpile are completed. Samples shall be obtained from the "mini" stockpile in the same manner described in (1) above.

C. Testing and Acceptance:

When initial tests indicate
that the material is unacceptable, the City may, if requested by the Contractor's supplier, sample and test the material one more time. The additional sampling and testing shall be paid for by the supplier.

210S.5 Construction Methods

A. Preparation of Subgrade:

Flexible base shall not be placed until the Contractor has verified by proof rolling that the subgrade has been prepared and compacted in conformity with Standard Specification Item 201S, "Subgrade Preparation," to the typical sections, lines and grades indicated on the Drawings. Any deviation shall be corrected and proof rolled prior to placement of the flexible base material.

The Contractor shall not place flexible base until the subgrade has cured to the satisfaction of the Engineer or designated representative, regardless of whether or not the subgrade has been successfully proof rolled. As a minimum, this will be after the surface displays no damp spots and there is no evidence of "sponginess" in the subgrade.

B. First Lift:

Immediately before placing the flexible base material, the subgrade shall be checked for conformity with grade and section. The thickness of each lift of flexible base shall be equal increments of the total base depth. No single lift shall be more than six inches (150 mm) or less than three inches (75 mm) compacted thickness.

The material shall be delivered in approved vehicles. It shall be the responsibility of the Contractor to deliver the required amount of material. If it becomes evident that insufficient material was placed, additional material as

necessary shall be delivered and the entire course scarified, mixed and compacted.

Material deposited upon the subgrade shall be spread and shaped the same day unless otherwise approved by the Engineer or designated representative. In the event inclement weather or other unforeseen circumstances render spreading of the material impractical, the material shall be spread as soon as conditions allow.

Additionally, if the material cannot be spread and worked the same day it is deposited, the Contractor shall "close up" the dump piles before leaving the job site. “Closed up” shall be defined as the use of a motor grader to blade all dump piles together, leaving no open space between piles.

The material shall be spread, sprinkled, if required, then thoroughly mixed; bladed, dragged and shaped to conform to the typical sections indicated on the Drawings.

All areas and "nests" of segregated coarse or fine material shall be corrected or removed and replaced with well-graded material.

Each lift shall be sprinkled as required to bring the material to optimum moisture content, then compacted to the extent necessary to provide not less than the percent density specified in Section 210S.5.D, "Density." In addition to the requirements specified for density, the full depth of flexible base material shall be compacted to the extent necessary to remain firm and stable under construction equipment. After each section of flexible base material is completed, tests, as necessary, will be made by the Engineer or designated representative. As a minimum, three in-place density tests per section per day will be taken. If the material fails to meet the density requirements, it shall be reworked as necessary to meet these requirements. All initial testing will be paid for by the City. All retesting shall be paid for by the Contractor.

Throughout the entire operation, the surface of the material shall be maintained by blading and, upon completion, shall be smooth and shall conform to the typical section indicated on the Drawings and to the established lines and grades.

In that area on which pavement is to be placed, any deviation in excess of 1/4 inch (6.5 mm) in cross section or 1/4 inch in a length of 16 feet (6.5 mm in a length of 5 meters) measured longitudinally shall be corrected by loosening, adding or removing material, and by reshaping and recompacting. All irregularities, depressions or weak spots shall be corrected immediately by scarifying the areas affected, adding suitable material as required, and by reshaping and recompacting. Should the lift, due to any reason or cause, lose the required stability, density and/or finish before the surfacing is complete, it shall be recompacted and refinished at the Contractor's expense.

C. Succeeding Lifts:

Construction methods for succeeding lifts shall be the same as prescribed for the first lift. For that lift of the flexible base upon which the curb and gutter will be constructed, as well as the last flexible base lift (i.e. top of the flexible base), the Contractor shall check the surface of the lift for conformity to the lines and grades by setting "blue tops" at intervals not exceeding 50 feet (15 meters) on

the centerline, at quarterpoints, at curb lines or edge of pavement, and at other points that may be indicated on the Drawings.

When the thickness of a particular lift of the flexible base is in question, the Contractor shall check the surface of the lift for conformity to the lines and grades by setting "blue tops" at intervals not exceeding 50 feet (15 meters) on the centerline, at quarter points, at curb lines or edge of pavement, and at other points that may be indicated on the Drawings

D. Density:

The flexible base shall be compacted to not less than 100 percent density as determined by TxDoT Test Method Tex-113-E.

Field density determination shall be made in accordance with TxDoT Test Method Tex-115-E unless otherwise approved by the Engineer or designated representative. Each lift of the flexible base shall also be tested by proof rolling in conformity with Standard Specification Item 236S “Proof Rolling.”

E. Priming:

After the flexible base material has been compacted to not less than 100 percent density, and tested by proof rolling, a prime coat will be applied in accordance with Standard Specification Item 306S, "Prime Coat."

F. Curing:

Pavement materials, such as a tack coat or surface course, shall not be placed on the primed surface until the prime coat has been absorbed into the base course. At least 24 hours, or longer if designated by the Engineer or designated representative, shall be allowed when cutback asphalt is used as the prime coat.

210S.6 Measurement

"Flexible Base" will be measured by the cubic yard (cubic meter: 1 cubic meter equals 1.196 cubic yards), complete in place, as indicated in the Contract Documents.

210S.7 Payment

This item will be paid for at the contract unit bid price for "Flexible Base". The unit bid price shall include full compensation for all work specified herein, including the furnishing, hauling, placing and compacting of all materials; for rolling, proof rolling, recompacting and refinishing; for all water required; for retesting as necessary; for priming; and for all equipment, tools, labor and incidentals necessary to complete the Work.

Prime coat will not be measured and paid for directly but shall be included in the unit price bid for Standard Specification Item 210S, "Flexible Base.”

Payment will be made under one of the following:

Pay Item No. 210S-A: Flexible Base Per Cubic Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS

City of Austin Standard Specifications

Designation	Description
Item No. 201S	Subgrade Preparation
Item No. 236S	Proof Rolling
Item No. 306S	Prime Coat

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Tex-101-E	Preparation of Soil and Flexible Base Materials for Testing
Tex-104-E	Determination of Liquid Limit of Soils
Tex-105-E	Determination of Plastic Limit of Soils
Tex-106-E	Method of Calculating the Plasticity Index of Soils
Tex-107-A	Determination of Bar Linear Shrinkage of Soils
Tex-110-E	Determination of Particle Size Analysis of Soils
Tex-113-E	Laboratory Compaction Characteristics and Moisture-Density Relationship of Base Materials and Cohesionless Sands
Tex-115-E	Field Method for Determination of In-Place Density of Soils and Base Materials
Tex-116-E	Ball Mill Method for Determination of the Disintegration of Flexible Base Material
Tex-117-E	Triaxial Compression Tests for Disturbed Soils and Base Materials
Tex-411-A	Soundness of Aggregate By Use Of Sodium Sulfate Or Magnesium Sulfate

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Details

Designation	Description
No. 1000S-2	Flexible Base with Asphalt Surface Trench Repair-Existing Pavement
No. 510S-3	Typical Trench with Paved Surface
No. 1000S	Bus Stop Paving
No. 1000S-10	Local Street Sections
No. 1000S-11(1)	Residential and City of Austin Neighborhood Collector Street Sections
No. 1000S-11(2)	Industrial and Commercial Collector Street Sections
No. 1000S-12(1)	Primary Collector Street Sections
No. 1000S-12(2)	Primary Arterial Street Sections
No. 1000S-13(1)	Minor Arterial Street Sections (4 Lanes)
No. 1000S-13(2)	Minor Arterial Street Sections-(4 Lanes divided)
No. 1000S-14	Major Arterial Street Sections

City of Austin Utility Criteria Manual

Designation	Description
Section 5.8.2	Flexible Base
Section 5.7.3	Flexible Base with Asphalt Surface
Section 5.9.1	Excavation in Alley

City of Austin Transportation Criteria Manual

Designation	Description
Section 3.2.0	General Criteria
Section 3.4.3 .D	Layer Data-Minimum Thickness
Table 3-1	Minimum Layer Thickness
Section 3.4.3 .F	Layer Data- Minimum Thickness
Table 3-2	Layer Thickness Increment
Section 3.4.3 .J	Layer Data- Stiffness Coefficient
Table 3-3	Stiffness Coefficient
Table 3-9	Recommended Salvage values
Table 3-10	AASHTO Layer Coefficients

Item No. 301S
Asphalts, Oils and Emulsions

301S.1 Description

This item includes the requirements for cutback asphalts, emulsified asphalts, polymer modified asphalt cements, performance graded asphalt binders and other miscellaneous asphaltic materials and latex additives.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text the inch-pound units are given preference followed by SI units shown within parentheses.

301S.2 Submittals

Submittals shall include test results for each the materials described herein when specifically identified on the Drawings and/or referenced in associated standard specification items and standard details.

Submittals may include samples of the base asphalt cement and polymer additives.

301S.3 Materials

When tested in accordance with designated TxDoT, AASHTO and/or ASTM Test Methods, the various materials shall meet the applicable requirements of this specification.

A. Acronyms

The acronyms used in this specification are defined in the following table.

Table 1: Acronyms

Acronym	Definition	Acronym	Definition
Test Method Prefix Tex T D	 TxDOT AASHTO ASTM	Polymer Modifier SBR or L SBS TR P	 Styrene-Butadiene Rubber (Latex) Styrene-Butadiene-Styrene Block Copolymer Tire Rubber, from ambient temperature grinding of truck and passenger tires Polymer Modified
AC	Asphalt Cement	SS	Slow Setting
RC	Rapid Curing	H-suffix	Harder Residue (Lower Penetration)
MC	Medium Curing	AE	Asphalt Emulsion
SCM	Special Cutback Material	S-suffix	Stockpile Usage
HF	High Float	AE-P	Asphalt Emulsion Prime
C	Cationic	EAP&T	Emulsified Asphalt Prime and Tack
RS	Rapid Setting	PCE	Prime, Cure, and Erosion Control
MS	Medium Setting	PG	Performance Grade

B. Asphalt Cement

The material shall be homogeneous, free from water, shall not foam when heated to 350°F (177°C) and shall meet the requirements in Table 2.

Table 2: Asphalt Cement Requirements

Viscosity Grade		AC-10		AC-20		AC-30	
Property	Test Method	Min	Max	Min	Max	Min	Max
Viscosity: 140°F, poises (60°C, pascals)	T202	800 (80)	1200 (120)	1600 (160)	2400 (240)	2400 (240)	3600 (360)
Viscosity: 275°F, stokes (135°C, pascals)	T202	1.9 (.19)	-	2.5 (.25)	-	3.0 (.30)	-
Penetration: 77°F (25°C), 100g, 5s	T49	85	-	55	-	45	-
Flash Point, C.O.C. °F (°C)	T48	450 (232)	-	450 (232)	-	450 (232)	-
% Solubility trichloroethylene	T44	99.0	-	99.0	-	99.0	-
Spot test	Tex 509-C						
Viscosity: 140°F stokes (60°C pascals)	T202	-	3000 (300)	-	6000 (600)	-	9000 (900)
Ductility 77°F (25°C), 5 cm/min, cm	T202	100	-	70	-	50	-

C. Polymer Modified Asphalt Cement.

Polymer modified asphalt cement must be smooth, homogeneous, and shall comply with the requirements listed in Table 3.

Table 3: Polymer Modified Asphalt Cement Requirements

Polymer Modified Viscosity Grade		AC-5		AC-10		AC-15P		AC-45P*	
Polymer Type		SBR		SBR		SBS		SBS	
Property	Test Method	Min	Max	Min	Max	Min	Max	Min	Max
Polymer in % (solids basis)	Tex-533-C	2.0	-	2.0	-	3.0	-	3.0	-
Viscosity									
140ºF, poise (60°C, pascals)	T 202	700 (70)	- -	1300 (130)	- -	1500 (150)	- -	4500 (450)	- -
275ºF, poise (135°C, pascals)	T 202	- -	7.0 (0.7)	- -	8.0 (0.8)	- -	8.0 (0.8)	14.0 (1.4)	
Penetration, 77ºF (25°C), 100 g, 5 s.	T 49	120	-	80	-	100	150	50	74
Ductility, 5cm/min., 39.2ºF, cm	T 51	70	-	60	-	-	-	15	-
Elastic Recovery, 50ºF (10°C), %	Tex-539-C	-	-	-	-	55	-		-
Polymer Separation, 48 hrs**.	Tex-540-C	None		None		None		None	
Flash Point, C.O.C., ºF (°C),	T 48	425 (218)	- -	425 (218)	- -	425 (218)	- -	425 (218)	- -
Tests on Residue from Thin Film Oven Test: (T179)									
Retained Penetration Ratio, 77ºF (25°C), % original	T 49	-	-	-	-	0.60	1.00	0.60	0.90

* The SBS block copolymer may be pre-blended with a polymer processing oil (up to a 1:1 ratio of polymer to oil) to aid the solution of the polymer in the asphalt.

** A 350-gram (0.77 pound) sample of the asphalt-SBS blend is stored for 48 hours at 325°F (163°C). Upon completion of the storage time, the sample is visually examined for separation of the SBS from the asphalt (smoothness and homogeneity). If a question still exists about the separation of the SBS, samples shall be taken from the top and bottom of the sample for Infrared Spectroscopy analysis. A difference of 0.4% or more in the concentration of the SBS between the top and bottom samples shall constitute separation.

D. Cutback Asphalt

Cutback Asphalt shall meet the requirements presented in tables 4, and 5 for the specified type and grade.

Table 4: RAPID CURING TYPE CUTBACK ASPHALT Requirements

Type-Grade		RC-250		RC-800		RC-3000	
Properties	Test Method	Min	Max	Min	Max	Min	Max
Water, percent	T55	-	0.2	-	0.2	-	0.2
Flash Point, T.O.C.,°F [°C]	T79	80 (27)	-	80 (27)	-	80 (27)	-
Kinematic viscosity @ 140°F, cst [60°C, mm²/s]	T201	250	400	800	1600	3000	6000
Distillation Test:	T78						
Distillate, % by volume of total distillate to 680°F [360°C]:							
to 437°F [225°C]:		40	75	35	70	20	55
to 500°F [260°C]:		65	90	55	85	45	75
to 600°F [316°C]:		85	-	80	-	70	-
Residue from Distillation, Volume %		70	-	75	-	82	-
Tests of Distillation Residue:							
Penetration, 100g, 5 sec., 77°F [25°C], cm	T49	80	120	80	120	80	120
Ductility, 5 cm/min., 77°F, 5 cm/min., cm	T51	100	-	100	-	100	-
[25°C, 50 mm/min., mm]		1000	-	1000	-	1000	-
Solubility in trichloroethylene, % T44		99.0	-	99.0	-	99.0	-
Spot Test	Tex 509-C	ALL NEGATIVE					

Table 5: MEDIUM CURING TYPE CUTBACK ASPHALT Requirements

Type		MC-30		MC-70		MC-250		MC-800		MC-3000	
Properties	Test Method	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Water, %	T55	-	0.2	-	0.2	-	0.2	-	0.2	-	0.2
Flash Point, T.O.C.,°F [°C]	T79	100 [38]	-	100 [38]	-	150 [65]	-	150 [65]	-	150 [65]	-
Kinematic viscosity. @ 140°F. cst [60°C, mm²/s]	T201	30	60	70	140	250	500	800	1600	3000	6000
Distillation Test:	T78										
Distillate, as % by volume to total distillate to 680°F[360°C]:, shall be as follows:											
to 437°F [225°C]:		-	25	-	20	-	10	-	-	-	-
to 500°F [260°C]:		40	70	20	60	15	55	-	35	-	15
to 600°F [316°C]:		75	93	65	90	60	87	45	80	15	75
Residue from 80°F [225°C] distillation											
Volume Percent		50	-	55	-	67	-	75	-	80	-
Tests on Distillation Residue:											
Penetration @ 77°F [25°C], 100g, s, 01mm:	T49	120	250	120	250	120	250	120	250	120	250
Ductility @ 77°F, 5 cm/min, cms	T51	100*	-	100*	-	100*	-	100*	-	100*	-
[25°C, 50 mm/min., mm]		1000*	-	1000*	-	1000*	-	1000*	-	1000*	-
% Solubility in trichloroethylene	T44	99.0	-	99.0	-	99.0	-	99.0	-	99.0	-
Spot Test	Tex 509-C	ALL NEGATIVE									

* If penetration of residue is more than 200 and the ductility at 77°F [25°C] is less than 100 cm [1000 mm], the material will be acceptable if its ductility at 60°F [16°C] is more than 100cm [1000 mm].

E. Emulsified Asphalt

The material shall be homogenous. It shall show no separation of asphalt after thorough mixing and shall meet the requirements for the specified type and grade presented in Tables 6, 7 and 8.

Table 6: ANIONIC EMULSION Requirements

	Type	Medium Setting		Slow Setting			
	Grade	MS-2		SS-1		SS-1h	
Property	Test Method	Min	Max	Min	Max	Min	Max
Furol Viscosity @ 77°F [25°C], sec.	T72	-	-	20	100	30	100
@ 122°F[50°C], sec		100	300	-	-	-	-
Sieve Test, %.	T59	-	0.1	-	0.1	-	0.1
Miscibility (Standard Test)	T59	-	-	Passing		Passing	
Cement Mixing, %	T59	-	-	-	2.0	-	2.0
% Demulsibility: 35 cc 0.02N $CaCl_2$	T59	-	30	-	-	-	-
Storage Stability 1 day, %	T59	-	1	-	1	-	1
Freezing Test, 3 Cycles*	T59	Passing		Passing		Passing	
Distillation Test	T59						
Distillation Residue, %		65	-	60	-	60	-
Distillate Oil Portion, %		-	½	-	½	-	½
Tests of Residue from Distillation:							
Penetration @ 77°F [25°C], 100g, 5s	T49	120	160	120	160	70	100
Solubility in Trichloroethylene, %	T44	97.5	-	97.5	-	97.5	-
Ductility @ 77F, 5 cm/min., cm	T51	100	-	100	-	80	-
[@ 25°C, 50 mm/min., mm]		1000	-	1000	-	800	-

* Applies only when Engineer or designated representative specifies the material for winter use.

Table 7: HIGH FLOAT ANIONIC EMULSION Requirements

	Type	Rapid Setting		Medium Setting	
	Grade	HFRS-2		AES-300	
Property	Test Method	Min	Max	Min	Max
Viscosity, Saybolt Furol	T72				
@ 77°F [25°C], sec.		-	-	75	400
@ 122°F [50°C], sec.		150	400	-	-
Oil Portion of Distillate, %	T59	-	2	-	7
Sieve Test, %	T59	-	0.1	-	0.1
Particle Charge	T59	positive		positive	
Coating Ability and Water Resistance:	T59				
Coating, dry aggregate		-	-	good	
Coating, after spraying		-	-	fair	
Coating, wet aggregate				fair	
Coating, after spraying				fair	
% Demulsibility: 35 ml 0.02 N $CaCl_2$	T59	50	-	-	-
Storage Stability Test, 1 day, %	T59	-	1	-	1
Distillation Test	T59				
Residue by Distillation, % by weight		65	-	65	-
Oil Distillate, by volume of emulsion, %		-	1/2	-	5
Tests on Residue from Distillation:					
Penetration at 77°F [25°C], 100 g, 5s	T49	100	140	300	-
Solubility in Trichloroethylene, %	T44	97.5	-	97.5	-
Ductility @ 77°F., 5 cm/min, cms	T51	100	-	-	-
[25°C., 50 mm/min, mm]		[1000}			

Float Test at 140°F [60°C], sec.	Tex 509-C	1200	-	1200	-

Table 8: CATIONIC EMULSION Requirements

Type		Rapid Setting				Medium Setting				Slow Setting			
Grade		CRS-2		CRS-2h		CMS-2		CMS-2s		CSS-1		CSS-1h	
Property	Test Method	Min	Max	Min	Max	Min.	Max	Min	Max	Min	Max	Min	Max
Viscosity, Saybolt Furol	T72												
@ 77°F [25°C], sec.		-	-	-	-	-	-	-	-	20	100	20	100
@ 122°F [50°C],sec.		150	400	150	400	100	300	100	300	-	-	-	-
Storage stability test, 1 day %	T59	-	1	-	1	-	1	-	1	-	1	-	1
% Demulsibility: *,**	T59	40	-	40	-	-	-	-	-	-	-	-	-
Coating, ability & water resistance	T59												
Coating, dry aggregate		-	-	-	-	good		good		-	-	-	-
Coating, after spraying		-	-	-	-	fair		fair		-	-	-	-
Coating, wet aggregate		-	-	-	-	fair		fair		-	-	-	-
Coating, after spraying		-	-	-	-	fair		fair		-	-	-	-
Particle charge test	T59	Positive		Positive		Positive		Positive		Positive		Positive	
Sieve test, %	T59	-	0.10	-	0.10	-	0.10	-	0.10	-	0.10	-	0.10
Cement Mixing test, %	T59	-	-	-	-	-	-	-	-	-	2.0	-	2.0
Distillation Test:	T59												
% Oil distillate, vol. of emulsion		-	1/2	-	1/2	-	7	-	5	-	1/2	-	1/2
Residue by Distillation,% by wgt		65	-	65	-	65	-	65	-	60	-	60	-
Tests on Residue from Distillation:													
Penetration,77°F [25°C], 100g, 5s.	T49	120	160	80	110	120	200	300	-	120	160	80	110
Ductility,	T51												
77°F, 5 cm/min, cm		100	-	80	-	100	-	-	-	100	-	80	-
[25°C, 50 mm/min, mm]		1000	-	800	-	1000	-	-	-	1000	-	800	-
% Solubility in trichloroethylene	T44	97.5	-	97.5	-	97.5	-	97.5	-	97.5	-	97.5	-

* At a level of 35 ml 0.8% sodium dioctyl sulfosuccinate.

** The demulsibility test shall be made within 30 days from date of shipment.

F. Polymer Modified Emulsions

The material shall be homogenous. It shall show no separation of asphalt after thorough mixing and shall meet the requirements for the specified type and grade presented in Tables 9 and 10.

G. Specialty Emulsions.

Specialty emulsions may be either asphaltic-based or resin-based and must meet the requirements included in Table 11.

H. Recycling Agent.

Recycling agent and emulsified recycling agent must meet the requirements of table 12. Additionally, recycling agent and residue from emulsified recycling agent, when added in the specified proportions to the recycled asphalt, must meet the properties specified on the drawings.

Table 9: Polymer Modified Emulsified Asphalt Requirements

Type-Grade		Rapid Setting				Medium Setting						Slow Setting	
		RS-1P		HFRS-2P		AES-150P		AES-300P		AES-300S		SS-1P	
Property	Test Method	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Viscosity, Saybolt Furol	T 72												
77ºF, sec.		-	-	-	-	75	400	75	400	75	400	30	100
122ºF, sec.		50	200	150	400	-	-	-	-	-	-	-	-
Sieve Test, %	T 59	-	0.1	-	0.1	-	0.1	-	0.1	-	0.1	-	0.1
Miscibility	T 59	-		-		-		-		-		pass	
Coating Ability and Water Resistance:	T59												
dry aggregate/after spray		-		-		good/fair		good/fair		good/fair		-	
wet aggregate/after spray		-		-		fair/fair		fair/fair		fair/fair		-	
Demulsibility, 35 ml of 0.02 N $CaCl_2$, %	T 59	60	-	50	-	-	-	-	-	-	-	-	-
Storage Stability, 1 day, %	T 59	-	1	-	1	-	1	-	1	-	1	-	1
Breaking Index, g	Tex-542-C	-	80	-	-	-	-	-	-	-	-	-	-
Distillation Test:[1]	T 59												
Residue by Distillation, % by wt.		65	-	65	-	65	-	65	-	65	-	60	-
Oil Distillate, % by vol of emulsion		-	3	-	0.5	-	3	-	5	-	7	-	0.5
Tests: Residue from Distillation:													
Polymer Content, wt. % (solids basis)	Tex-533-C	-	-	3.0	-	-	-	-	-	-	-	3.0	-
Penetration, 77ºF, (25ºC) 100 g, 5 sec.	T 49	225	300	90	140	150	300	300	-	300	-	100	140
Solubility in Trichloroethylene, %	T 44	97.0	-	97.0	-	97.0	-	97.0	-	97.0	-	97.0	-
Viscosity, 140ºF, poise 60ºC, Pa-s	T 202	-	-	1500	-	-	-	-	-	-	-	1300	-
Float Test, 140ºF, sec.	T 50	-	-	1200	-	1200	-	1200	-	1200	-	-	-
Ductility[2], 39.2ºF, 5 cm/min., cm (4ºC, 5 cm/min., mm)	T 51	-	-	50 500	-	-	-	-	-	-	-	50 500	-
Elastic Recovery[2], 50ºF,(10ºC), %	Tex-539-C	55	-	55	-	-	-	-	-	-	-	-	-
Tests on RTFO Curing of Distillation Residue:	Tex-541-C												
Elastic Recovery, 50ºF,(10ºF) %	Tex-539-C	-	-	-	-	50	-	50	-	30	-	-	-

[1] Exception to AASHTO T 59: Bring the temperature on the lower thermometer slowly to 350ºF +/- 10ºF. Maintain at this temperature for 20 min. Complete total distillation in 60 +/- 5 min. from the first application of heat.

[2] HFRS-2P must meet one of either the Ductility or Elastic Recovery.

Table 10: Polymer Modified Cationic Emulsified Asphalt Requirements

Type-Grade		Rapid Setting				Slow Setting	
		CRS-1P		CRS-2P		CSS-1P	
Property	Test Method	Min	Max	Min	Max	Min	Max
Viscosity, Saybolt Furol	T 72						
77ºF (25ºC), sec.		-	-	-	-	20	100
122ºF (50ºC), sec.		50	150	150	400	-	-
Sieve Test, %	T 59	-	0.1	-	0.1	-	0.1
Demulsibility, 35 ml of 0.8% sodium dioctyl sulfosuccinate, %	T 59	60	-	70	-	-	-
Storage Stability, 1 day, %	T 59	-	1	-	1	-	1
Breaking Index, g	Tex-542-C	-	80	-	-	-	-
Particle Charge	T 59	positive		positive		positive	
Distillation Test:[1]	T 59						
Residue by Distillation, % by wt.		65	-	65	-	62	-
Oil Distillate, % by volume of emulsion		-	3	-	0.5	-	0.5
Tests on Residue from Distillation:							
Polymer Content, wt. % (solids basis)	Tex-533-C	-	-	3.0	-	3.0	-
Penetration, 77ºF (25ºC), 100 g, 5 sec.	T 49	225	300	90	150	55	90
Viscosity, 140ºF, poise (60ºC, Pa-s)	T 202	-	-	1300	-	-	-
Solubility in Trichloroethylene, %	T 44	97.0	-	97.0	-	97.0	-
Softening Point, ºF	T 53	-	-	-	-	135	-
Ductility, 77ºF, 5 cm/min., cm (25ºC, 5 cm/min., mm)	T 51	-	-	-	-	70 700	-
Ductility[2], 39.2ºF, 5 cm/min., cm (4ºC, 5 cm/min., mm)	T 51	-	-	50	-	-	-
Elastic Recovery[2], 50ºF (10ºC), %	Tex-539-C	45	-	55	-	-	-

[1] Exception to AASHTO T 59: Bring the temperature on the lower thermometer slowly to 350ºF +/- 10ºF. Maintain at this temperature for 20 min. Complete total distillation in 60 +/- 5 min. from the first application of heat.

[2] CRS-2P must meet one of either the Ductility or Elastic Recovery.

Table 11: Specialty Emulsion Requirements

Type-Grade		Medium Setting				Slow Setting	
		AE-P		EAP&T		PCE[1]	
Property	Test Method	Min	Max	Min	Max	Min	Max
Viscosity, Saybolt Furol	T 72						
77ºF (25ºC), sec.		-	-	-	-	10	100
122ºF (50ºC), sec.		15	150	-	-	-	-
Sieve Test, %	T 59	-	0.1	-	0.1	-	0.1
Miscibility[2]	T 59	-		pass		pass	
Demulsibility, 35 ml of 0.10 N $CaCl_2$, %	T 59	-	70	-	-	-	-
Storage Stability, 1 day, %	T 59	-	1	-	1	-	-
Particle Size[3], % by volume < 2.5 □m	Tex-238-F	-	-	90	-	-	-
Asphalt Emulsion Distillation to 500ºF (260ºC) followed by Cutback Asphalt Distillation of Residue to 680ºF (360ºC):	T 59 & T 78						
Residue after both Distillations, % by wt.		40	-	-	-	-	-
Total Oil Distillate from both distillations, % by volume of emulsion		25	40	-	-	-	-
Distillation:	T 59						
Residue by Distillation, % by wt.		-	-	60	-	-	-
Evaporation:[4]	T 59						
Residue by Evaporation, % by wt.		-	-	-	-	60	-
Tests on Residue after all Distillation(s):							
Viscosity, 140ºF, poise (60ºC, Pa-s)	T 202	-	-	800	-	-	-
Kinematic Viscosity, 140ºF, cSt [60°C, mm^2/s]	T 201	-	-	-	-	100	350
Flash Point, C.O.C., ºF [°C]	T 48	-	-	-	-	400 204	-
Solubility in Trichloroethylene, %	T 44	97.5	-	-	-	-	-
Float Test, 122ºF (50ºC), sec.	T 50	50	200	-	-	-	-

[1] Supply with each shipment of PCE:

a) a copy of a lab report from an approved analytical lab, signed by a lab official, indicating the PCE formulation does not meet any characteristics of a Resource Conservation Recovery Act (RCRA) hazardous waste;

b) a certification from the producer that the formulation supplied does not differ from the one tested and that no listed RCRA hazardous wastes or PCB's have been mixed with the product; and

c) a Materials Safety Data Sheet.

[2] Exception to AASHTO T 59: In dilution, use 350 ml of distilled or deionized water and a 1000-ml beaker.

[3] Tex-238-F, beginning at "Particle Size Analysis by Laser Diffraction," "Procedure" (using - medium: distilled or deionized water and dispersant: none), or other approved method.

[4] Exception to AASHTO T 59: Leave sample in the oven until foaming ceases, then cool and weigh.

Table 12: Recycling Agent and Emulsified Recycling Agent Requirements

Property	Test Method	Recycling Agent		Emulsified Recycling Agent	
		Min	Max	Min	Max
Viscosity, Saybolt Furol, 77ºF, sec.	T 72	-	-	15	100
Sieve Test, %	T 59	-	-	-	0.1
Miscibility[1]	T 59	-		No Coagulation	
Evaporation Test:[2]	T 59				
Residue by Evaporation, % by wt.		-	-	60	-
Tests on Recycling Agent or Residue from Evaporation:					
Flash Point, C.O.C., ºF	T 48	400	-	400	-
Kinematic Viscosity,	T 201				
140ºF, cSt		75	200	75	200
275ºF, cSt		-	10.0	-	10.0

[1]Exception to AASHTO T 59: Use 0.02 N $CaCl_2$ solution in place of water.

[2]Exception to AASHTO T 59: Maintain sample at 300ºF until foaming ceases, then cool and weigh.

I. Crack Sealer

This section sets forth the requirements for a polymer modified emulsion suitable for sealing fine cracks, and a rubber asphalt compound suitable for sealing cracks of 1/8 inch [3 mm] or greater width.

1. Polymer Modified Asphalt Emulsion Crack Sealer

For cracks on the order of 1/8 inch [3 mm] width, HFRS-2P polymer modified emulsion as described in the table included in Section F, Polymer Modified Emulsions of this item may be used. Requirements for the polymer modified emulsion and rubber-asphalt crack-sealing compound are presented in Table 13.

Table 13: Polymer Modified Asphalt Emulsion Crack Sealer Requirements

Property	Test Methods	Min	Max
Rotational Viscosity, 77ºF, cP	ASTM D 2196, Method A	10,000	25,000
Sieve Test, %	T 59	-	0.1
Storage Stability, 1 day, %	T 59	-	1
Evaporation	Tex-543-C		
Residue by Evaporation, % by wt.		65	-
Tests on Residue from Evaporation:			
Penetration, 77ºF, 100 g, 5 sec.	T 49	35	75
Softening Point, ºF	T 53	140	-
Ductility, 39.2ºF, 5 cm/min., cm	T 51	100	-

2. Rubber-Asphalt Crack Sealing Compound

This specification item may be a proprietary product. The compound shall be capable of being melted and applied at a temperature of 400°F [200°C] or less by a suitable oil jacketed kettle equipped with a pressure pump, a hose and a nozzle. It shall contain no water or highly-volatile matter. It shall not be tracked by vehicular traffic once it cools to road pavement temperature.

The rubber-asphalt crack sealing compound shall meet requirements in Table 14.

Table 14: Rubber-Asphalt Crack Sealer Requirements

Property	Test Methods	Class A		Class B	
		Min	Max	Min	Max
CRM Content, Grade A or B, % by wt.	Tex-544-C	22	26	-	-
CRM Content, Grade B, % by wt.	Tex-544-C	-	-	13	17
Virgin Rubber Content[1], % by wt.		-	-	2	-
Flash Point[2], COC, ºF	T 48	400	-	400	-
Penetration[3], 77ºF, 150g, 5 sec.	T 49	30	50	30	50
Penetration[3], 32ºF, 200g, 60 sec.	T 49	12	-	12	-
Softening Point, ºF	T 53	-	-	170	-
Bond[4], 3 cycles, 20ºF	Tex-525-C	-		Pass	

1 Provide certification that the min. % virgin-rubber was added.

2 Before passing the test flame over the cup, agitate the sealing compound with a 3/8 to 1/2 in. (9.5 to 12.7 mm) wide, square-end metal spatula in a manner so as to bring the material on the bottom of the cup to the surface, i.e., turn the material over. Start at one side of the thermometer, move around to the other, and then return to the starting point using 8 to 10 rapid circular strokes. Accomplish agitation in 3 to 4 sec. Pass the test flame over the cup immediately after stirring is completed.

3 Exception to AASHTO T 49: Substitute the cone specified in ASTM D 217 for the penetration needle.

4 No crack in the crack sealing materials or break in the bond between the sealer and the mortar blocks over 1/4 in. deep for any specimen after completion of the test.

a. Properties of Rubber Used in Sealer. The rubber shall be one of the following types;

1) Type I - Ground tire rubber.

2) Type II - A mixture of ground tire rubber and high natural reclaimed scrap rubber. The natural rubber content, determined by ASTM D 297, shall be a minimum of 25 percent.

b. Ground Rubber. The ground rubber shall comply with the following gradation requirements when tested by TxDoT Test Method Tex-200-F, Part I.

Table 15: Ground Rubber Gradation Requirements

Sieve Size		Percent Retained	
U.S.	SI	Type I	Type II
No. 8	2.36 mm	0	-
No. 10	2.00 mm	0-5	0
No. 30	600µm	90-100	50-70
No. 50	300µm	95-100	70-95
No. 100	150µm	-	95-100

The ground rubber shall be free from fabric, wire, cord or other contaminating materials.

c. Packaging. The rubber-asphalt crack sealing compound shall be packaged in boxes, which contain two (2) 30-35 pound [14-16 kilogram] blocks that are individually packaged in a liner made of polyethylene, or other packaging approved by the Engineer or designated representative.

J. Performance Graded Binders.

Performance graded binders must be smooth, homogeneous, show no separation when tested in accordance with Test Method Tex-540-C, and must meet the requirements in the following table.

Separation testing is not required if:

- a modifier is introduced separately at the mix plant either by injection in the asphalt line or mixer, or
- the binder is blended on site in continuously agitated tanks, or
- binder acceptance is based on field samples taken from an in-line sampling port at the hot mix plant after the addition of modifiers.

Table 16 Performance Graded Binder Requirements

Performance Grade	PG 58			PG 64				PG 70				PG 76				PG 82		
	-22	-28	-34	-16	-22	-28	-34	-16	-22	-28	-34	-16	-22	-28	-34	-16	-22	-28
Average 7-day Max Pavement Design Temperature, ºC[1]	58			64				70				76				82		
Min Pavement Design Temperature, ºC[1]	>-22	>-28	>-34	>-16	>-22	>-28	>-34	>-16	>-22	>-28	>-34	>-16	>-22	>-28	>-34	>-16	>-22	>-28
ORIGINAL BINDER																		
Flash Point, AASHTO T 48: Min,	230ºC																	
Viscosity, AASHTO TP 48:[2, 3] Max, 3.0 Pas, Test Temperature,	135ºC																	
Dynamic Shear, AASHTO TP 5:[4] G*/sin (δ), Min, 1.00 kPa Test Temperature @ 10 rad/sec.,	58ºC			64ºC				70ºC				76ºC				82ºC		
Elastic Recovery, ASTM D 6084, 50ºF, % Min	-	-	30	-	-	30	50	-	30	50	60	30	50	60	70	50	60	70
ROLLING THIN FILM OVEN (Tex-541-C)																		
Mass Loss, Max, %	1.0																	
Dynamic Shear, AASHTO TP 5: G*/sin (δ), Min, 2.20 kPa Test Temperature @10 red/sec.,	58ºC			64ºC				70ºC				76ºC				82ºC		
PRESSURE AGING VESSEL (PAV) RESIDUE (AASHTO PP 1)																		
PAV Aging Temperature	100ºC																	
Dynamic Shear, AASHTO TP 5: G*/sin (δ), Max, 5000 kPa Test Temperature10 rad/sec., ºC	25	22	19	28	25	22	19	28	25	22	19	28	25	22	19	28	25	22
Creep Stiffness, AASHTO TP 1:[5, 6] S, Max, 300 mPa, M - value, Min, 0.300 Test Temperature @ 60 sec., ºC	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18
Direct Tension, AASHTO TP 3:[6] Failure Strain, Min, 1.0% Test Temperature @1.0 mm/min., ºC	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18

[1] Pavement temperatures are estimated from air temperatures using an algorithm contained in the PGEXCEL3.xls software program, may be provided by the Department or by following the procedures as outlined in AASHTO MP 2 and PP 28.

[2] This requirement may be waived at the Department's discretion if the supplier warrants that the asphalt binder can be adequately pumped, mixed and compacted at temperatures that meet all applicable safety, environmental, and constructability requirements. At test temperatures where the binder is a Newtonian fluid, any suitable standard means of viscosity measurement may be used, including capillary (AASTHO T 201 or T 202) or rotational viscometry (AASHTO TP 48).

[3] Viscosity at 135ºC is an indicator of mixing and compaction temperatures that can be expected in the lab and field. High values may indicate high mixing and compaction temperatures. Additionally, significant variation can occur from batch to batch. Contractors should be aware that variation could significantly impact their mixing and compaction operations. Contractors are therefore responsible for addressing any constructability issues that may arise.

[4] For quality control of unmodified asphalt binder production, measurement of the viscosity of the original asphalt binder may be substituted for dynamic shear measurements of G*/sin (□) at test temperatures where the asphalt is a Newtonian fluid. Any suitable standard means of viscosity measurement may be used, including capillary (AASHTO T 201 or T 202) or rotational viscometry (AASHTO TP 48).

[5] Silicone beam molds, as described in AASHTO TP 1-93, are acceptable for use.

[6] If creep stiffness is below 300 mPa, direct tension test is not required. If creep stiffness is between 300 and 600 mPa, the direct tension failure strain requirement can be used instead of the creep stiffness requirement. The m-value requirement must be satisfied in both cases.

301S.4 Equipment.

All equipment necessary to transport, store, sample, heat, apply, and incorporate asphalts, oils, and emulsions shall be provided.

301S.5 Construction

Typical materials used for specific applications are identified in table 17. These are typical uses only and circumstances may require use of other material.

Table 17: Typical Material Use

Material Application	Typically Used Materials
Hot-Mixed, Hot-Laid Asphalt Mixtures	PG Binders, Modified PG Binders
Surface Treatment	AC-5, AC-10, AC-5 w/2% SBR, AC-10 w/2% SBR, AC-15P, AC-15-5TR, HFRS-2, MS-2, CRS-2, CRS-2H, HFRS-2P, CRS-2P,
Surface Treatment (Cool Weather)	RS-1P, CRS-1P, RC-250, RC-800, RC-3000, MC-250, MC-800, MC-3000, MC-2400L
Precoating	AC-5, AC-10, PG 64-22, SS-1, SS-1H, CSS-1, CSS-1H
Tack Coat	RC-250, SS-1, SS-1H, CSS-1, CSS-1H, EAP&T
Fog Seal	SS-1, SS-1H, CSS-1, CSS-1H
Hot-Mixed, Cold-Laid Asphalt Mixtures	AC-0.6, AC-1.5, AC-3, AES-300, AES-300P, CMS-2, CMS-2S
Patching Mix	MC-800, SCM I, SCM II, AES-300S
Recycling	AC-3, AES-150P, AES-300P, Recycling Agent, Emulsified Recycling Agent
Crack Sealing	SS-1P, Polymer Mod AE Crack Sealant, Rubber Asphalt Crack Sealers (Class A, Class B)
Prime	MC-30, AE-P, EAP&T, PCE
Curing Membrane	SS-1, SS-1H, CSS-1, CSS-1H, PCE
Erosion Control	SS-1, SS-1H, CSS-1, CSS-1H, PCE

301S.6 Storage, Heating and Application Temperatures

Asphaltic materials should be applied at the temperature, which provides proper and uniform distribution. Within practical limits higher temperatures than necessary to produce the desired results shall be avoided. Satisfactory application usually should be obtained within the recommended ranges shown below.

No material shall be heated above the following maximum temperatures:

Table:18 Recommended Temperature Ranges

	Recommended Range; °F [°C]	Maximum Temperature; °F [°C] for	
Type-Grade	Application/Mixing	Allowable Application	Storage
AC-5, 10,20,30	275-350 [135-177]	375 [191]	400 [204]
AC-5 or AC-10 + 2% SBR	300-375 [142-191]	390* [199]	375 [191]
AC-10 + 3% SBR, AC-45P	300-350 [142-191]	350 [177]	360 [182]
RC-250	125-180 [52-82]	200 [93]	200 [93]
RC-800	170-230 [77-110]	260 [127]	260 [127]
RC-3000	215-275 [102-135]	285 [141]	285 [141]
MC-30, AEP	70-150 [21-66]	175 [79]	175 [79]
MC-70	125-175 [52-79]	200 [93]	200 [93]
MC-250	125-210 [52-99]	240 [116]	240 [116]
MC-800, SCM I, SCM II	175-260 [79-127]	275 [135]	275 [135]
MC-3000 & MC-2400 Latex	225-275 [107-135]	290 [143]	290 [143]
HFRS-2, MS-2, CRS-2, CRS-2H, HFRS-2P, CRS-2P, CMS-2, CMS-2S, AES-300, AES-300S, AES-150P, AES-300P	120 - 160	180	180
SS-1, SS-1h, SS-1P, CSS-1, CSS-1h, PCE, EAP & T, SS-1P, RS-1P, CRS-1P, CSS-1P, recycling agent, emulsified recycling agent, polymer modified AE crack sealant.	50-130 [10-54]	140 [60]	140 [60]
RS-2, RS-2h, MS-2, CRS-2, CRS-2h, CRS-2p, CMS-2, CMS-2S, HFRS-2, HFRS-2p, AES-300	110-160 [43-71]	170 [77]	170 [77]
Special Precoat Material	125-250 [52-121]	275 [135]	275 [135]
PG Binders, Modified PG Binders	275 - 350	350	350
Rubber Asphalt Crack Sealers (Class A, Class B)	350 - 375	400	-
Rubber-Asphalt Crack Sealer	350-375 [177-191]	400 [204]	-

* AC-5 + 2% SBR and AC-10 + 2% SBR, which is designated for surface treatment work, may be heated to a maximum temperature of 390°F [200°C] by the supplier loading through an in-line heater, or with the permission of the Engineer or designated representative, these materials may be heated to maximum of 390°F [200°C] by the Contractor just prior to application. When any of the SBR-modified asphalt cements are used in asphaltic concrete, the storage temperature at the mix plant should not exceed 350°F [177°C].

Attention is called to the fact that asphaltic materials (except emulsions) are very flammable and constitute fire hazards. Proper precautions should be used in all cases, especially with RC cutbacks.

Utmost care shall be taken to prevent open flames from coming in contact with the asphaltic material or the gases of it. The Contractor shall be responsible for any fires or accidents, which may result from heating the asphaltic materials.

301S.7 Measurement and Payment

All asphaltic materials included in this specification will not be paid for directly but shall be included in the unit price bid for the item of construction in which this item is used.

End

Specific CROSS REFERENCE MATERIALS
Specification Item 301S "Asphalts, Oils and Emulsions"

American Association of State Highway and Transportation Officials (AASHTO)

Designation	Description
AASHTO T-44	Solubility Of Bituminous Materials in Organic Solvents
AASHTO T-48	Flash and Fire Points By Cleveland Open Cup
AASHTO T-49	Penetration of Bituminous Materials
AASHTO T-50	Float Test for Bituminous Materials
AASHTO T-51	Ductility of Bituminous Materials
AASHTO T-53	Distillation of Road Tar
AASHTO T-55	Water in Petroleum Products and Bituminous Materials by Distillation
AASHTO T-59	Testing Emulsified Asphalt
AASHTO T-72	Saybolt Viscosity
AASHTO T-78	Distillation of Cut-Back Asphaltic (Bituminous) Products
AASHTO T-79	Flash Point With Tag Open-Cup Apparatus
AASHTO T-201	Kinematic Viscosity of Asphalts
AASHTO T-202	Viscosity of Asphalts by Vacuum Capillary Viscometer
AASHTO TP-1	Creep Stiffness
AASHTO TP-3	Direct Tension
AASHTO TP-5	Dynamic Shear
AASHTO TP-48	Rotational Viscometry

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-200-F	Sieve Analysis of Fine and Coarse Aggregates
Tex-238-F	Laser Diffraction Particle Size Distribution Analyzer
Tex-509-C	Spot Test of Asphaltic Materials
Tex-525-C	Tests for Asphalt and Concrete Joint Sealers
Tex-533-C	Determination of Polymer Additive Percentages in Polymer Modified Asphalt Cements
Tex-539-C	
Tex-540-C	
Tex-541-C	
Tex-542-C	
Tex-543-C	
Tex-544-C	

American Society for Testing and Materials (ASTM)

Designation	Description
D 217	Test Methods for Cone Penetration of Lubricating Grease
D 297	Test Methods for Rubber Products-Chemical Analysis
D 2186 Method A	Test Methods for Deposit-Forming Impurities in Steam
D 6084	Test Method for Elastic Recovery of Bituminous Materials by Ductilometer

RELATED CROSS REFERENCE MATERIALS
Specification Item 301S "Asphalts, Oils and Emulsions"

City of Austin Standard Specifications

Designation	Description
Item No. 206S	Asphalt Stabilized Base

Item No. 210S	Flexible Base
Item No. 302S	Aggregates for Surface Treatments
Item No. 306S	Prime Coat
Item No. 307S	Tack Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item 301S "Asphalts, Oils and Emulsions"

City of Austin Standard Specifications

Designation	Description
Item No. 312S	Seal Coat
Item No. 313S	Rubber Asphalt Joint and Crack Sealant
Item No. 315S	Milling Asphaltic Concrete Paving
Item No. 320S	Two Course Surface Treatment
Item No. 340S	Hot Mix Asphaltic Concrete Pavement
Item No. 341S	Paving Fabric
Item No. 350S	Heating, Scarifying and Repaving
Item No. 351S	Recycling Agent

City of Austin Standard Details

Designation	Description
1000S-10	Local Street Sections
1000S-11(1)	Residential and Neighborhood collector Street Sections
1000S-11(2)	Industrial and Collector Street Sections
1000S-12(1)	Primary Collector Street Sections
1000S-12(2)	Primary Arterial Street Sections
1000S-13(1)	Minor Arterial Street Sections (4 Lanes)
1000S-13(2)	Minor Arterial Street Sections- (4 Lanes divided)
1000S-14	Major Arterial Street

Texas Department of Transportation: Standard Specifications for Construction And Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 300	Asphalts, Oils and Emulsions
Item 301	Asphalt Antistripping Agents
Item 310	Prime Coat (Cutback Asphaltic Materials)
Item 314	Emulsified Asphalt Treatment
Item 316	Surface Treatments
Item 345	Asphalt Stabilized Base (Plant Mixed)
Item 354	Planing and/or Texturing Pavement
Item 520	Weighing and Measuring Equipment

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-126-E	Molding, Testing and Evaluation of Bituminous Black Base Materials
Tex-207-F	Determination of Density of Compacted Bituminous Mixtures
Tex-211-F	Recovery of Asphalt From Bituminous Mixtures By Abson
Tex-215-	Determination of Asphalt Content of Rock Asphalt Process by Hot Solvent Method
Tex-217-F	Determination of Deleterious Material and Decantation Test For Coarse Aggregates
Tex-224-F	Determination of Flakiness
Tex-400-A	Method of Sampling Stone, Gravel, Sand and Mineral Aggregates
Tex-410-A	Abrasion of Coarse Aggregate Using the Los Angeles Machine
Tex-411-A	Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
Tex-438-A	Accelerated Polish Test for Aggregate
Tex-460-A	Determination of Crushed Face Particle

Tex-501-C	Test for Water in Petroleum Products and Other Bituminous Materials
Tex-502-C	Test for Penetration of Bituminous Material
Tex-503-C	Test for Ductility of Bituminous Materials
Tex-504-C	Test for Flash and Fire Points of Petroleum Materials by Cleveland Open Cup

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item 301S "Asphalts, Oils and Emulsions"

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-505-C	Test for Softening Point of Bituminous Materials by Ring-and-Ball Method
Tex-506-C	Test for Loss on Heating of Oils and Asphaltic Compounds
Tex-507-C	Proportion of Bitumen Soluble in Trichloroethylene
Tex-510-C	Determining the Effect of Heat and Air on Asphaltic Materials when Exposed in Thin Films
Tex-512-C	Test for Flash Points of Volative Flammable Materials By Tag Open-Cup Apparatus
Tex-513-C	Test for Saybolt Viscosity
Tex-515-C	Distillation of Cut-Back Asphalt Products
Tex-519-C	Float Test for Bituminous Materials
Tex-520-C	Test for Residue of Specified Penetration
Tex-521-C	Testing Emulsified Asphalts
Tex-528-C	Test for Absolute Viscosity of Asphalt Cements
Tex-529-C	Test for Kinematic Viscosity of Asphalts

Item No. 302S
Aggregates for Surface Treatments

302S.1 Description

This item shall govern aggregate and precoated aggregate to be used in the construction of surface treatments.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

302S.2 Submittals

The submittal requirements of this specification item include:

A. Aggregate types, gradations and physical characteristics (i.e. flakiness index, % wear, soundness, polish value, etc).

B. Proposed proportioning of materials.

C. Aggregate precoat and fluxing material.

D. Type of mixing plant and associated equipage including chart indicating the calibration of each cold bin

E. Aggregate storage/stockpiling plans.

302S.3 Materials

A. Aggregates

Aggregates shall be composed of clean, tough and durable particles of gravel, crushed gravel, crushed stone, crushed slag or natural limestone rock asphalt. These materials shall not contain more than 2 percent by weight (mass) of soft particles and other deleterious materials as determined by TXDOT Test Method Tex-217-F, Part I. The natural limestone rock asphalt aggregate furnished shall have an average bitumen content from 4 to 7 percent by weight (mass) of naturally impregnated asphalt, as determined by TXDOT Test Method Tex-215-F and shall contain not more than 2 percent by weight (mass) of any one of or combination of iron pyrites or other objectionable matter, as determined by TXDOT Test Method Tex-217-F, Part I. No aggregate shall contain a total of more than 2 percent by weight (mass) of impurities or objectionable matter listed above.

The aggregate shall be either dark in color or be precoated. If not precoated, it shall be sufficiently washed as to produce a clean, dust free surface.

The aggregate shall not contain more than 1 percent loss from fine dust, clay-like particles and/or silt when tested in accordance with TXDOT Test Method Tex-217-F, Part II. The flakiness index for the aggregate, as determined by TXDOT Test Method Tex-224-F, shall not exceed 17 unless otherwise shown on the Drawings.

The percent of wear, as determined by TXDOT Test Method Tex-410-A (Los Angeles Abrasion Test), for each of the materials, except natural limestone rock asphalt (LRA), shall not exceed 35 percent. The percent of wear on natural limestone rock asphalt aggregate (LRA) shall not exceed 40 percent as determined by TXDOT Test Method Tex-410-A on that portion of the material retained on the No. 4 (4.75 mm) sieve, having a impregnated asphalt content of less than 1 percent.

Unless indicated otherwise on the drawings crushed gravel shall have a minimum of 85 percent of the particles retained on the No. 4 (4.75 mm) sieve with two or more mechanically induced crushed faces, as determined by TXDOT Test Method Tex-460-A, Part I.

The aggregate will be subjected to five (5) cycles of magnesium sulfate soundness testing in accordance with Test Method Tex-411-A. The loss shall not exceed 25 percent, unless indicated otherwise on the Drawings.

The polish value for the aggregate used in the surface or finish course shall be the value shown on the Drawings, when tested in accordance with TxDOT Test Method Tex-438-A. Unless otherwise shown on the Drawings, a minimum polish-value requirement of 30 will apply only to aggregate used in the travel lanes.

When aggregates requiring polish value are supplied from a source rated for a previous City of Austin roadway project or rated by TxDOT Materials and Tests Division, the Rated Source Polish Value (RSPV) for that source will be used to meet this requirement. When aggregates are supplied from a source that is not rated, the aggregate will be sampled and tested prior to use. The procedures will be in accordance with TxDOT Test Methods Tex-400-A and Tex-438-A, Part I. Blending of aggregates to achieve polish value will not be permitted, unless otherwise shown on the Drawings. If blending is allowed, TxDOT Test Method Tex-438-A, Part II, Method B will be used to determine the required blend percentages. However, a minimum of 50 percent by volume of non-polishing aggregate is required.

B. Precoat Material and Fluxing Material

1. The precoat material shall meet requirements for "Precoat Materials" as specified in Standard Specification Item No. 301S, "Asphalts, Oils and Emulsions".

2. The fluxing material shall meet the requirements for "Fluxing Material " as specified in Standard Specification Item No. 301S, "Asphalts, Oils and Emulsions".

3. Water in an amount not to exceed 3 percent by weight (mass) of the mixture may be used in preparing the mixture. The water shall be added as directed by the Engineer or designated representative during the mixing. In the event water is used in the mixing operation, adequate measuring devices shall be

used and the water shall be administered to the mix through an approved spray bar. Potable water from City of Austin supplies is preferred, but the Contractor may submit test results of other water sources for approval by the Engineer or designated representative before use.

302S.4 Types of Aggregates

The various types of aggregates are identified as follows:

A. Uncoated Aggregate Types.

Type	Description
A	gravel, crushed slag, crushed stone or natural limestone rock asphalt (LRA)
B	crushed gravel, crushed slag, crushed stone or natural limestone rock asphalt (LRA)
C	gravel, crushed slag or crushed stone
D	crushed gravel, crushed slag or crushed stone
E	Aggregate as shown on drawings
F	Trap Rock

B. Precoated Aggregate.

Precoated aggregate shall be aggregate of the type and grade specified above, coated with 0.5 to 1.5 percent, by mass, of residual bitumen from a precoating material. When indicated on the drawings, specific aggregates may be prohibited from being precoated.

Where limestone rock asphalt (LRA) is used, it shall be fluxed with 0.5 to 1.5 percent by mass of fluxing material. Limestone rock asphalt (LRA) that contains visual surface moisture or excessive quantities of fines shall not be precoated.

The grade of aggregate specified shall meet all requirements of sections 302S.3 and 302S.4 prior to the application of the precoat or fluxing material.

The materials may be mixed on the job or at a central mixing plant and shipped ready for use. Mixes that do not maintain flow qualities such that the precoated aggregate may be satisfactorily spread by approved mechanical spreading devices will not be acceptable.

Materials that are not uniformly and/or properly coated, in the opinion of the Engineer or designated representative, will not be accepted for use.

The various types of precoated aggregates are identified as follows:

Precoated Aggregate Types

Type	Description
PA	gravel, crushed slag, crushed stone or natural limestone rock asphalt (LRA)

PB	crushed gravel, crushed slag, crushed stone or natural limestone rock asphalt (LRA)
PC	gravel, crushed slag or crushed stone
PD	crushed gravel, crushed slag or crushed stone
PE	Aggregate as shown on drawings

302S.5 Grades

When tested by TXDOT Test Method Tex-200-F, Part I, the gradation requirements for the several grades of aggregate shall be as follows:

Sieve Designation		Percent Retained By Weight (Mass) for				
US	SI	Grade 1	Grade 2	Grade 3	Grade 4	Grade 5
1 inch	25.0 mm	0				
7/8 inch	22.4 mm	0 - 2	0			
3/4 inch	19.0 mm	20 - 35	0 - 2	0		
5/8 inch	16.0 mm	85 - 100	20 - 40	0 - 2	0	
1/2 inch	12.5 mm		80 - 100	20 - 40	0 - 5	0
3/8 inch	9.5 mm	95 -100	95 -100	80 -100	20 - 40	0 - 5
1/4 inch	6.25 mm			95 -100		
No. 4	4.75 mm				95 - 100	50 – 80
No. 8	2.36 mm	99 - 100	99 - 100	99 - 100	98 - 100	98 - 100

302S.6 Equipment For Precoating Aggregate

Mixing plants that will not continually meet all the requirements of this specification shall be rejected.

Mixing plants may be either the weigh batching type, the continuous mixing type or the drum mix type. Each type of plant shall be equipped with satisfactory conveyors, power units, aggregate handling equipment, aggregate screens and bins and shall consist of the essential pieces of equipment listed below:

If the Engineer or designated representative approves the use of emulsion as a precoat material, the Engineer or designated representative may also waive the requirement for a dryer, as specified below, if it is demonstrated that a satisfactory coating can be obtained without drying or heating the aggregate.

When using a low grade fuel oil or waste oil, the plant shall meet the requirements of article 340.4.(2) of TxDoT Specification Item 340, "Hot Mix Asphaltic Concrete Pavement".

A. Weigh Batching Type

1. Cold Aggregate Bin and Proportioning Device

The cold aggregate bins or aggregate stockpiles shall be of sufficient number and size to supply the amount of aggregate required to keep the plant in

continuous operation. The proportioning device shall be such as will provide a uniform and continuous flow of aggregate to the plant in the desired proportions.

2. Dryer

The dryer shall be of the type that continually agitates the aggregate during heating and in which the temperature can be so controlled that aggregate will not be damaged in the necessary drying and heating operations, which are required to obtain a mixture of the specified temperature.

3. Burner

The burner or combination of burners and type of fuel used shall be such that in the process of heating the aggregate to the desired or specified temperatures, no residue from the fuel shall adhere to the heated aggregate. A recording thermometer shall be provided which will record the temperature of the aggregate when it leaves the dryer. The dryer shall be of sufficient size to keep the plant in continuous operation. The dryer will not be required for precoating natural limestone rock asphalt.

4. Screening and Proportioning

The screening capacity and size of the bins shall be sufficient to screen and store the amount of aggregate required to properly operate the plant and keep the plant in continuous operation at full capacity. Proper provisions shall be made to enable inspection forces to have easy and safe access to the proper location on the mixing plant where accurate representative samples of aggregate may be taken from the bins for testing.

5. Weighing and Measuring Equipment

The weighing and measuring equipment shall be of sufficient capacity and of adequate design for proper batching. The following equipment, conforming to the requirements of the TxDOT Standard Specification, Item No. 520, "Weighing and Measuring Equipment", shall be furnished:

(a) Aggregate weigh box and batching scales.

(b) Bucket and scales for precoat material for flux oil.

A pressure type flow meter may be used to measure the precoat material or fluxing material for each batch.

If a pressure type flow meter is used to measure the asphaltic material, the requirements of TxDOT Specification Item 520, "Weighing and Measuring Equipment", shall apply.

Provisions of a permanent nature shall be made for checking the accuracy of the asphaltic material measuring device. The line to the measuring device shall be protected with a jacket of hot oil or other means approved by the Engineer to maintain the temperature of the line near the temperature specified for the precoating material.

6. Mixer

The mixer shall be of the pug mill type and shall have a capacity of not less than 3000 pounds (1 350 kilograms) in a single batch. The number of blades and the position of same shall be such as to give a uniform and complete circulation of the batch in the mixer. The mixer shall be equipped with an approved spray bar that will distribute the precoat material or fluxing material quickly and uniformly throughout the mixer. Any mixer that has a tendency to segregate the mineral aggregate or fails to secure a thorough and uniform mixing with the precoat material or fluxing material shall not be used. All mixers shall be provided with an automatic time lock that will lock the discharge doors of the mixer for the required mixing period. The dump door or doors and the shaft seals of the mixer shall be tight enough to prevent the spilling of aggregate or mixture from the pug mill.

B. Continuous Mixing Type

1. Cold Aggregate Bin and Proportioning Device.

Same as for weigh batching type of plant.

2. Dryer.

Same as for weigh batching type of plant.

3. Screening and Proportioning.

Same as for weigh batching type of plant. These requirements shall also apply to materials that are stockpiled and that are proposed for direct use by a continuous mixing plant without the use of plant bins.

4. Aggregate Proportioning Device.

The aggregate proportioning device shall be so designed, that when properly operated, a uniform and continuous flow of aggregate into the mixer will be maintained.

5. Spray Bar for Precoat Material and Fluxing Material.

The spray bar for the precoat material or fluxing material shall be so designed that the material will spray uniformly and continuously into the mixer.

6. Meter for Precoat Material or Fluxing Material.

An accurate recording meter for precoat material or fluxing material shall be placed in the line leading to the spray bar so that the accumulative amount of precoat material or fluxing material being used can be accurately determined. Provisions of a permanent nature shall be made for checking the accuracy of the meter output.

7. Mixer

The mixer shall be of the pug mill continuous type and shall have a capacity of not less than 40 tons (36 megagrams) of mixture per hour. Any mixer that

has a tendency to segregate the aggregate or fails to secure a thorough and uniform mixing of the aggregate with the precoat material or fluxing material shall not be used.

C. Drum Mix Plant

Unless otherwise indicated on the Drawings or if natural limestone rock asphalt is to be used, the Contractor may elect to use the drum-mixing process. The plant shall be adequately designed and constructed for the process of mixing aggregates and precoat material in the dryer-drum without preheating the aggregates. The plant shall be equipped with satisfactory conveyors, power units, aggregate-handling equipment and feed controls and shall consist of the following essential pieces of equipment.

1. Cold Aggregate Bin and Feed System

The number of compartments in the cold aggregate bin shall be equal to or greater than the number of stockpiles of individual materials to be used.

The bin shall be of sufficient size to store the amount of aggregate required to keep the plant in continuous operation and of proper design to prevent overflow of material from one compartment to another. There shall be vertical partitions meeting the requirements of article 340.4. (2) of TxDoT Specification Item 340, "Hot Mix Asphaltic Concrete Pavement". The feed system shall provide a uniform and continuous flow of aggregate in the desired proportion to the dryer. The Contractor shall furnish a chart indicating the calibration of each cold bin in accordance with the manufacturer's recommendations or in a method acceptable to the Engineer or designated representative.

The system shall provide positive weight (mass) measurement of the combined cold aggregate feed by use of belt scales or other approved devices. Provisions of a permanent nature shall be made for checking the accuracy of the measuring device, as required by TxDOT Specification Item 520, "Weighing and Measuring Equipment". When a belt scale is used, mixture production shall be maintained so that the scale normally operates between 50 percent and 100 percent of its rated capacity. Belt scale operation below 50 percent of the rated capacity may be allowed by the Engineer or designated representative if accuracy checks show the scale to meet the requirements of TxDOT Specification Item 520, "Weighing and Measuring Equipment", at the selected rate and it can be satisfactorily demonstrated to the Engineer or designated representative that mixture uniformity and quality have not been adversely affected.

2. Scalping Screen

A scalping screen shall be required, unless otherwise indicated on the Drawings and shall be located ahead of the combined aggregate belt scale.

3. Precoat Material Measuring System

An asphaltic material measuring device meeting the requirements of the TXDOT Item No. 520, "Weighing and Measuring Equipment", shall be placed

in the line leading to the drum mixer so that the accumulative amount of precoat material used can be accurately determined. Provisions of a permanent nature shall be made for checking the accuracy of the measuring device output. The measuring device and line to the measuring device shall be protected with a jacket of hot oil or other approved means to maintain the temperature of the line and measuring device near the temperature specified for the precoat material. The measuring system shall include an automatic temperature compensation device to maintain a constant percent by mass of precoating material in the mixture. Unless otherwise indicated, the temperature of the precoat material entering the measuring device shall be maintained at + 100 F (+60C) of the temperature at which the measuring set was calibrated and set.

4. Synchronization Equipment for Feed-Control Systems

The precoat material feed-control shall be coupled with the total aggregate weight (mass) measuring device in such a manner as to automatically vary the precoat material feed rate as required to maintain the required proportion.

5. Drum Mix System

The drum mix system shall be of the type that continually agitates the aggregate and precoat mixture during heating, and in which the temperature can be so controlled that aggregate and asphalt will not be damaged in the necessary drying and heating operations that are required to obtain a mixture at the specified temperature. A continuously recording thermometer shall be provided which will indicate the temperature of the mixture as it leaves the drum mixer.

6. Surge-Storage System

A surge-storage system will be required. It shall be adequate to minimize the production interruptions during the normal day's operations and shall be constructed to minimize segregation. A device such as a gob hopper or other similar devices approved by the Engineer or designated representative to prevent segregation in the surge-storage bin will be required.

7. Heating Equipment for Precoat Material and Fluxing Material

Heating equipment for precoat material and fluxing material shall be adequate to heat the amount of material required to the desired temperature. The material may be heated by steam coils, which shall be absolutely tight. Direct fire heating will be permitted, provided the heater used is manufactured by a reputable concern and there is positive circulation of the liquid throughout the heater. Agitation with steam or air will not be permitted. The heating apparatus shall be equipped with a recording thermometer with a 24-hour chart that will record the temperature of the precoat material of fluxing material where it is at the point of highest temperature.

302S.7 Storage, Proportioning and Mixing

A. Aggregate Storage

If the mineral aggregates are stored or stockpiled, they shall be handled in such a manner as to prevent segregation, mixing of the various materials or sizes and contamination with foreign materials. The grading of aggregates proposed for use and as supplied to the mixing plant shall be uniform. When directed by the Engineer or designated representative, aggregate materials shall not be added to stockpiles that have already been sampled for approval.

When asphalt cement is the precoating material, stockpile height shall be limited to approximately three (3) feet (one meter) immediately after production to limit the build up of heat. These stockpiles may be consolidated after cooling adequately, in the opinion of the Engineer or designated representative.

The use of limestone rock asphalt aggregate containing moisture in excess of the saturated surface-dry condition will not be permitted. Excess moisture will be evidenced by visual surface moisture on the aggregate or any unusual quantities of fines clinging to the aggregate.

B. Storage and Heating of Precoating Material or Fluxing Material

The precoating or fluxing material storage shall be ample to meet the requirements of the plant. The precoating materials shall not be heated in storage to a temperature in excess of 2500F (1200C) or the maximum temperature established in Standard Specification Item Number 301S, “Asphalts, Oils and Emulsions”. All equipment used in the storage and handling of precoat material or fluxing material shall be kept in a clean condition at all times and shall be operated in such manner that there will be no contamination with foreign matter.

C. Feeding and Drying of Aggregate

The feeding of various sizes of aggregate, other than natural limestone rock asphalt, to the dryer shall be done through the cold aggregate bin and proportioning device in such a manner that a uniform and constant flow of material in the required proportions will be maintained. The aggregate shall be heated to the temperature necessary to produce a mixture meeting the requirements of Article 302S.6.A.3 and 302S.7.

D. Proportioning

The proportioning of the various materials entering into the mixture shall be as directed by the Engineer or designated representative and in accordance with these specifications. Aggregate shall be proportioned by weight (mass) using the weigh box and batching scales herein specified when the weigh-batch type of plant is used and by volume using the aggregate proportioning device when the continuous mixer type of plant is used. The precoat material or fluxing material shall be proportioned by weight (mass) or by volume based on weight (mass) using the specified equipment.

E. Mixing

1. Batch Type Mixer

   In the charging of the weigh box and the charging of the mixer from the weigh box, such methods or devices shall be used as are necessary to secure a uniform mixture. In introducing the batch into the mixer, the mineral aggregate shall be introduced first; shall be mixed thoroughly, as directed, to uniformly distribute the various sizes throughout the batch before the precoat material or fluxing material is added; the precoat material or fluxing material shall then be added and the mixing continued until such time that the aggregate is properly coated. This mixing period may be varied, if in the opinion of the Engineer or designated representative the mixture is not uniform.

2. Continuous Type Mixer and Drum Mixer

   The amount of aggregate and precoat material or fluxing material entering the mixer and the rate of travel through the mixer shall be so coordinated that a uniform mixture of the specified grading and percent by weight (mass) of precoat material or fluxing material will be produced.

302S.8 Physical Properties of the Mixture

The materials shall be mixed at a central mixing plant and shipped ready for use. Mixes that do not remain workable over a sufficient period of time or do not maintain flow qualities such that the precoated aggregate may be satisfactorily spread by normal approved mechanical spreading devices will not be acceptable. Materials that are not uniformly and/or properly coated or fluxed, in the opinion of the Engineer or designated representative will not be accepted for use.

302S.9 Measurement and Payment

Aggregates and precoated aggregates provided in accordance with this specification will not be paid for directly but shall be included in the unit price bid for the item of construction in which this item is used.

End

***SPECIFIC* CROSS REFERENCE MATERIALS**
Specification Item 302S "Aggregates for Surface Treatments"

City of Austin Standard Specifications

Designation	Description
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 340S	Hot Mix Asphaltic Concrete Pavement

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 520	Weighing and Measuring Equipment

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-200-F	Sieve Analysis of Fine and Coarse Aggregates
Tex-215-F	Determination of Asphalt Content of Rock Asphalt By Hot Solvent Method
Tex-217-F	Determination of Deleterious Material and Decantation Test For Coarse Aggregates
Tex-224-F	Determination of Flakiness
Tex-400-A	Method of Sampling Stone, Gravel, Sand and Mineral Aggregates
Tex-410-A	Abrasion of Coarse Aggregate Using the Los Angeles Machine
Tex-411-A	Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate

Tex-438-A	Accelerated Polish Test for Aggregate
Tex-460-A	Determination of Crushed Face Particle

RELATED **CROSS REFERENCE MATERIALS**
Specification Item 302S "Aggregates for Surface Treatments"

City of Austin Standard Specifications

Designation	Description
Item No. 206S	Asphalt Stabilized Base
Item No. 210S	Flexible Base
Item No. 306S	Prime Coat
Item No. 307S	Tack Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving
Item No. 320S	Two Course Surface Treatment

City of Austin Standard Details

Designation	Description
1000S-10	Local Street Sections
1000S-11 (1)	Residential and Neighborhood collector Street Sections
1000S-11 (2)	Industrial and Collector Street Sections
1000S-12 (1)	Primary Collector Street Sections
1000S-12 (2)	Primary Arterial Street Sections
1000S-13 (1)	Minor Arterial Street Sections (4 Lanes)

1000S-13 (2)	Minor Arterial Street Sections- (4 Lanes divided)
1000S-14	Major Arterial Street

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 300	Asphalts, Oils and Emulsions
Item 301	Asphalt Antistripping Agents
Item 310	Prime Coat (Cutback Asphaltic Materials)
Item 314	Emulsified Asphalt Treatment

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-126-E	Molding, Testing and Evaluation of Bituminous Black Base Materials
Tex-207-F	Determination of Density of Compacted Bituminous Mixtures

Item No. 306S
Prime Coat

306S.1 Description

This item shall govern the application of asphaltic material on the completed base course and/or other approved areas in accordance with the Drawings, these specifications or as directed by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

306S.2 Submittals

The submittal requirements of this specification item include:

A. List of recommended materials (i.e. prime material, dispersal agent, etc.).

B. Temperature Viscosity data and proposed temperature of application.

C. Characteristics (i.e. manufacturer, rate of application, speed, etc.) of the proposed pressure distributor including calibration documentation.

D. List of facilities and equipment proposed for temperature measurements.

E. List of facilities and equipment proposed for storage and handling of asphaltic materials.

306S.3 Materials

A. Asphalt Materials

The asphalt material for Prime Coat shall meet the requirements of Cutback Asphalt, MC-30, Emulsion, SS-1, Emulsion CSS-1 or AE-P, Standard Specification Item No. 301S, "Asphalts, Oils and Emulsions".

B. Water

Water shall be furnished by the Contractor and shall be clean and free from industrial wastes and other objectionable matter.

C. Dispersal Agent

Agent shall be added to water and sprayed on surfaces to be primed in accordance with asphalt manufacturer's recommendations.

306S.4 Construction Methods

When, in the opinion of the Engineer or designated representative, the base course or other surface is satisfactory to receive the prime coat, the surface shall be prepared by sweeping or other approved methods as directed by the Engineer or designated representative. The surface shall be lightly sprinkled with water just prior to application of the asphaltic material unless this

requirement is waived by the Engineer or designated representative. The Contractor shall submit a list of prime material(s) recommended for application on the work to the Engineer or designated representative for approval. When emulsions are approved, a dispersal agent shall be added to the water before sprinkling.

The asphaltic material shall be applied on the clean surface by an approved type of self-propelled pressure distributor operated so as to distribute the prime coat at a rate ranging from 0.1 to 0.3 gallons per square yard (0.45 to 1.36 liters per square meter) of surface area. The material shall be evenly and smoothly distributed under pressure sufficient to assure proper distribution. During the application of prime coat, care shall be taken to prevent splattering of adjacent pavement, curb and gutters or structures. The Contractor shall be responsible for cleaning all splattered areas.

Prime Coat may be applied when the temperature of the surface on which the prime coat is to be placed is 60°F (16°C) or above and the air temperature is above 50^{0}F (10^{0}C) and rising; the air temperature being taken in the shade and away from artificial heat. Asphaltic material shall not be placed when general weather conditions, in the opinion of the Engineer or designated representative, are not suitable.

The Contractor shall provide all necessary facilities and equipment for determining the temperature of the asphaltic material in all of the heating equipment and in the distributor, for determining the rate at which it is applied, and for securing uniformity at the junction of two (2) distributor loads.

The distributor shall have been calibrated within three (3) years from the date it is first used on this project. The Engineer or designated representative shall be furnished an accurate and satisfactory record of such calibration. After beginning the work, if the yield on the asphaltic material applied appears in error, the distributor shall be calibrated in a manner satisfactory to the Engineer or designated representative before proceeding with the work.

The Contractor shall be responsible for the maintenance of the surface until the work is accepted by the Engineer or designated representative. No traffic, hauling or placement of any subsequent courses shall be permitted over the freshly applied prime coat for a minimum of 48 hours or until the prime coat is accepted as dry and cured completely by the Engineer or designated representative.

All storage tanks, piping, retorts, booster tanks and distributors used in storing or handling asphaltic material shall be kept clean and in good operating condition at all times and they shall be operated in such a manner that there will be no contamination of the asphaltic material with foreign material. It shall be the responsibility of the Contractor to provide and maintain in good working order a recording thermometer at the storage heating unit at all times.

The Engineer or designated representative will approve the temperature of application based on the temperature-viscosity relationship that will permit application of the asphalt within the limits recommended in Standard Specification Item No. 301S, "Asphalts, Oils and Emulsions". The Contractor

shall apply the asphalt at a temperature within 15^0F (8^0C) of the temperature specified in Standard Specification Item No. 301S, "Asphalt, Oils and Emulsions".

306S.5 Measurement

The prime coat will be included in the unit price bid for Standard Specification Item No. 340, "Hot Mix Asphaltic Concrete Pavement" unless included as a separate pay item in the contract. When included for payment, it shall be measured at point of delivery on the project in gallons (liters: 1 liter equals 0.264 gallons) at the applied temperature. The quantity to be paid for shall be the number of gallons used in the accepted prime coat.

306S.6 Payment

The work performed and materials furnished as prescribed by this item, when included as a contract pay item, will be paid for at the unit bid price per gallon for "Prime Coat". The price shall include full compensation for cleaning the base course or other surface, for furnishing, heating, hauling and distributing the prime coat specified; for all freight involved and for all manipulations, labor, tools, equipment and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 306S: Prime Coat Per Gallon.

End

SPECIFIC *CROSS REFERENCE MATERIALS*
Specification Item 306S "Prime Coat"

City of Austin Standard Specifications

Designation	**Description**
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 340S	*Hot Mix Asphaltic Concrete Pavement*

RELATED *CROSS REFERENCE MATERIALS*

City of Austin Standard Specifications

Designation	**Description**
Item No. 206S	Asphalt Stabilized Base
Item No. 210S	Flexible Base
Item No. 307S	Tack Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving
Item No. 320S	Two Course Surface Treatment

City of Austin Standard Details

Designation	Description
1000S-10	Local Street Sections
1000S-11 (1)	Residential and Neighborhood collector Street Sections
1000S-11 (2)	Industrial and Collector Street Sections
1000S-12 (1)	Primary Collector Street Sections
1000S-12 (2)	Primary Arterial Street Sections
1000S-13 (1)	Minor Arterial Street Sections (4 Lanes)
1000S-13 (2)	Minor Arterial Street Sections- (4 Lanes divided)
1000S-14	Major Arterial Street

RELATED *CROSS REFERENCE MATERIALS - Continued*
Specification Item 306S "Prime Coat"

Texas Department of Transportation: Standard Specifications for Construction

and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 300	Asphalts, Oils and Emulsions
Item 301	Asphalt Antistripping Agents
Item 310	Prime Coat (Cutback Asphaltic Materials)
Item 314	Emulsified Asphalt Treatment
Item 345	Asphalt Stabilized Base (Plant Mixed)
Item 520	Weighing and Measuring Equipment

Item No. 307S
Tack Coat

307S.1 Description

This item shall govern the application of asphaltic material on completed base courses, existing pavement, bituminous surface, bridge deck, slab or prepared surface as indicated on the Drawings and as directed by the Engineer or designated representative. The application of asphaltic material on completed base courses shall only be applied after the prime coat has completely cured in accordance with Standard Specification Item No. 306S, "Prime Coat"

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

307S.2 Submittals

The submittal requirements of this specification item include:

A. List of recommended materials (i.e. tack coat material, sand type, etc.).

B. Temperature Viscosity data and proposed temperature of application.

C. Characteristics (i.e. manufacturer, rate of application, speed, etc.) of the proposed pressure distributor including calibration documentation.

D. List of facilities and equipment proposed for temperature measurements.

E. List of facilities and equipment proposed for storage and handling of asphaltic materials.

307S.3 Materials

A. Asphalt Materials

The asphalt material for "Tack Coat" shall meet the requirements for Cutback Asphalt or Emulsified Asphalt, Standard Specification Item No. 301S, "Asphalts, Oils and Emulsions" as listed below. Cutback asphalt shall be made by combining 50 to 70 percent by volume of the asphaltic material as specified for the type of paving mixture with 30 to 50 percent by volume of gasoline and/or kerosene. The type of material shall be selected from the following table:

Temperature of Surface, ^{0}F (^{0}C)	40 – 70 ^{0}F (5 to 21^{0}C)	Over 70^{0}F (Over 21^{0}C)
	RS-2	SS-1
	RS-2H	
	RC-250	MC-70
	CRS-2	CSS-1
	CRS-2H	CSS-1h

B. Water

Water shall be furnished by the Contractor and shall be clean and free from industrial wastes and other objectionable matter.

C. Sand

Sand may be Grade 1 conforming to Standard Specification Item No. 403S, "Concrete Structures" or washed sand, largely siliceous, with the following gradation:

Sieve Designation US	SI	**Percent Retained by Weight (Mass) Natural Sand**
No. 8	2.36 mm	0
No. 16	1.18 mm	0-40
No. 30	600μm	25-65
No. 50	300μm	65-85
No. 100	150μm	85-98
No. 200	75μm	98-100

There shall not be more than 50 percent of the aggregate retained between any 2 sieves listed above and not more than 25 percent of the aggregate retained between the No. 50 (300 μm) and the No. 100 (150 μm) sieves.

307S.4 Construction Methods

Tack coat shall be applied when the surface on which the tack coat is to be placed is 60° F (16°C) or above and the air temperature is above 50°F (10°C) and rising, where the air temperature is measured in the shade and away from any artificial heat. Asphaltic material shall not be placed when general weather conditions, in the opinion of the Engineer or designated representative, are not suitable.

Before the tack coat is applied, the surface shall be cleaned thoroughly to the satisfaction of the Engineer or designated representative. The asphaltic material shall be applied on the clean surface by an approved type of self-propelled pressure distributor, so operated as to distribute the tack coat at a rate not to exceed 0.10 gallon per square yard (0.45 liters per square meter) of surface, evenly and smoothly with sufficient pressure to provide proper distribution.

In those instances where the pavement mixture will adhere to the surface on which it is to be placed without the use of a tack coat, the tack coat may be eliminated by the Engineer or designated representative. All contact surfaces of curbs and structures and all joints shall be cleaned thoroughly and painted with a thin uniform coat of the asphaltic material used for tack coat. The tack coat shall be rolled with a pneumatic tire roller to distribute the asphaltic material uniformly over the tacked area. During the application of tack coat, care shall be taken to prevent splattering of adjacent pavement, curb and gutters or structures. The Contractor shall clean splattered areas.

The distributor shall have been calibrated within three (3) years from the date it is first used on this project. The Engineer or designated representative shall be

furnished an accurate and satisfactory record of such calibration. After beginning of the work, if the yield on the asphaltic material applied appears in error, the distributor shall be calibrated in a manner satisfactory to the Engineer or designated representative before proceeding with the work.

The Contractor shall provide all necessary facilities and equipment for determining the temperature of the asphaltic material in all of the heating equipment and in the distributor, for determining the rate at which it is applied, and for securing uniformity at the junction of two (2) distributor loads.

The Contractor shall be responsible for the maintenance of the surface until the HMAC is placed over the tack coat or the work is accepted by the Engineer or designated representative. No traffic, hauling or placement of any subsequent courses shall be permitted over the freshly applied tack coat unless it is blotted by the application of sand as directed by the Engineer or designated representative.

All storage tanks, piping, retorts, booster tanks and distributors used in storing or handling asphaltic material shall be kept clean and in good operating condition at all times and they shall be operated in such a manner that there will be no contamination of the asphaltic material with foreign material. It shall be the responsibility of the Contractor to provide and maintain in good working order a recording thermometer at the storage heating unit at all times.

The Contractor shall apply the asphalt at a temperature that will permit application of the asphalt within the limits recommended in Standard Specification Item No 301S, “Asphalts, Oils and Emulsions”. The application temperature shall be within 15^0 F (8^0C) of 160^0 F (71^0C).

307S.5 Measurement

The asphaltic material for "Tack Coat" will be included in the unit price bid for Standard Specification Item 340S, "Hot Mix Asphaltic Concrete Pavement" unless included as a separate pay item in the contract. When included for payment, "Tack Coat" shall be measured at point of delivery on the project in gallons (liters: 1 liter equals 0.264 gallons) at the applied temperature. The quantity to be paid for shall be the number of gallons used.

307S.6 Payment

The work performed and materials furnished as prescribed by this item, when included as a contract pay item, will be paid for at the unit bid price per gallon for "Tack Coat". The price shall include full compensation for cleaning the area to receive the "Tack Coat"; for furnishing, heating, hauling and distributing the tack coat specified; for all freight involved and for all manipulations, labor, tools, equipment and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 307S:	Tack Per Gallon.	Coat

End

SPECIFIC *CROSS REFERENCE MATERIALS*
Specification Item 307S "Tack Coat"

City of Austin Standard Specifications

Designation	**Description**
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 340S	Hot Mix Asphaltic Concrete Pavement

RELATED *CROSS REFERENCE MATERIALS*

City of Austin Standard Specifications

Designation	**Description**
Item No. 206S	Asphalt Stabilized Base
Item No. 210S	Flexible Base
Item No. 306S	Prime Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving
Item No. 320S	Two Course Surface Treatment

City of Austin Standard Details

Designation	Description
1000S-10	Local Street Sections
1000S-11(1)	Residential and Neighborhood collector Street Sections
1000S-11(2)	Industrial and Collector Street Sections
1000S-12(1)	Primary Collector Street Sections
1000S-12(2)	Primary Arterial Street Sections
1000S-13(1)	Minor Arterial Street Sections (4 Lanes)
1000S-13(2)	Minor Arterial Street Sections- (4 Lanes divided)
1000S-14	Major Arterial Street

Texas Department of Transportation: Standard Specifications for Construction

And Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 300	Asphalts, Oils and Emulsions
Item 301	Asphalt Antistripping Agents
Item 310	Prime Coat (Cutback Asphaltic Materials)
Item 314	Emulsified Asphalt Treatment
Item 345	Asphalt Stabilized Base (Plant Mixed)
Item 520	Weighting and Measuring Equipment

Item No. 313S
Cleaning and/or Sealing
Joints and Cracks (Asphaltic Concrete)

313S.1 Description

This item shall govern the cleaning and/or sealing of joints and cracks that are 1/16 inch (1.5 mm) or greater in asphaltic concrete pavement in conformity to the lines, grades and details indicated on the Drawings or as established by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

313S.2 Submittals

The submittal requirements of this specification item include:

A. Sealant Type (Polymer Modified Emulsion, Rubber-Asphalt or Self-Leveling Low Silicone) and method of application (crack sealing, joint sealing, squeegee, etc),

B. Manufacturer certification that the product to be supplied meets or exceeds the specification requirements,

C. Manufacturer recommended procedures for preparation, dispensing, application, curing etc of the sealant, and

D. Listing of the equipment proposed for the Work.

313S.3 Materials

Joints and/or cracks shall be sealed with the materials indicated on the Drawings. The materials shall meet the requirements shown below:

Material	Specification	Recommended Use
Polymer Modified Emulsion	301S;Subarticle 301S.3.I.1	Fine Cracks 1/16 to 1/8 in (1.5 to 3 mm)
Rubber-Asphalt Crack Sealing Compound	301S; Subarticle 301S.3.I.2	Cracks: >1/8 inches (> 3.2 mm)
Self-Leveling Low Modulus Silicon	Class 5, TxDot DMS-6310	Joints

Fine aggregate used to cover the crack-sealing compound shall meet with the approval of the Engineer or designated representative.

The sealing compound shall be delivered in the manufacturer's original sealed containers. Each container shall be legibly marked with the name of the manufacturer, the trade name of the sealer, the manufacturer's batch number or lot, the pouring temperature, and the safe heating temperature.

313S.4 Equipment

Equipment, tools and machinery necessary for proper prosecution of the Work shall be on the project and shall be approved by the Engineer or designated representative prior to the initiation of the joint and crack cleaning and sealing operations

313S.5 Heating and Application Equipment

A. Polymer Emulsified Emulsion

Polymer Emulsified Emulsion may be heated in a conventional asphalt distributor or in an asphalt heater equipped with an agitator to insure that the emulsified asphalt is circulated during the heating process and achieves a uniform temperature rise. Temperature gauges shall be provided at strategic locations to enable the operator to accurately control the temperature of the emulsion to avoid overheating the material. The unit shall be equipped with a gear-driven asphalt pump with adequate pressure to dispense the emulsion in joints and cracks.

B. Rubber-Asphalt Crack Sealing Compound

The sealant shall be heated in a double jacketed heater using a heat transfer oil so that no direct flame comes in contact with the shell of the vessel containing the sealing compound. The heater reservoir shall be equipped with an agitator to insure that the sealing compound is circulated during the heating process to achieve a uniform temperature rise and to maintain the desired temperature. Accurate temperature gauges and positive temperature controls shall be provided to monitor the temperature of the vessel contents and prevent overheating the material. The heater shall be equipped with a gear-driven asphalt pump with adequate pressure to dispense the rubber-asphalt crack sealing compound.

C. Self-Leveling Low Modulus Silicone

The sealant shall be prepared and dispensed using the manufacturer's recommended equipment.

313S.6 Joint and Crack Cleaning Equipment

All equipment used in cleaning joints and cracks shall be capable of delivering a sufficient volume of filtered air, free of oil, water or other contaminants, to insure the removal of all loose debris from the joints or cracks to be sealed.

When specified on the Drawings, joints shall be routed. The router shall be of sufficient size to rout the joints to the widths and depths shown on the Drawings.

313S.7 Construction Methods

The bonding surface of cracks and joints shall be cleaned of infiltrated material with compressed air or other methods approved by the Engineer or designated representative to a depth at least twice the joint or crack width. When routing of the joints is indicated on the Drawings, the joints shall be routed and blown clean with filtered compressed air. All material removed from joints and cracks shall be removed from the paved surface of the roadway.

No sealing of any joints or cracks shall be done when the joints or cracks are damp, unless drying of the joints and cracks with compressed air can be demonstrated and meets with the approval of the Engineer or designated representative.

The joint or crack sealing material shall be applied using a pressure nozzle. Polymer modified emulsion and rubber- asphalt crack sealing compound shall penetrate and completely fill each crack and/or joint. All cracks and/or joints filled with these materials shall be squeegeed. The amount of sealing compound used shall be limited so that after the squeegee has been applied, the finished band shall be no more than 1-1/2 inches (38 mm) wide and shall not exceed a depth of 1/8 in. (3.2 mm) above the pavement surface.

Self-leveling low modulus silicone joint sealing compound shall be applied so that it penetrates the joint and fills so that the top of the sealant shall be ¼ to 3/8 inch (6.4 to 9.5 mm) below the pavement surface.

When directed by the Engineer or designated representative, a light coating of fine aggregate shall be applied to the cracks and joints before opening to traffic to prevent tracking.

When the number of cracks is so great that crack sealing in the manner described previously is impractical, the area shall be squeegee sealed. Areas to be squeegee sealed shall be indicated on the Drawings or established by the Engineer or designated representative. When all cracks in the area have been cleaned, the crack sealing material shall be applied and the excess shall be squeegeed over the area between the cracks. All polymer modified emulsion or hot poured rubber squeegee sealed areas shall be covered immediately after application with a light coating of fine aggregate.

313S.8 Measurement

Accepted work performed under this item shall be included in the unit price bid for other pay items and will not be measured and paid for unless a separate pay item is provided in the contract documents.

If a pay item is included in the contract documents, acceptable work for “Polymer Modified Emulsion”, "Rubber Asphalt Joint and Crack Sealer" or “Self-leveling Low Modulus Silicone” shall be measured by the linear foot (meter: 1 meter equals 3.281 feet) of cracks sealed.

If a pay item is included in the contract documents, acceptable work for “Polymer Modified Emulsion”, "Rubber Asphalt Joint and Crack Sealer" or “Self-leveling Low Modulus Silicone” shall be measured by the pound (kilograms: 1 kilogram equals 2.205 pounds) of crack sealer used.

If a pay item is included in the contract documents, acceptable work for Squeegee seal with “Polymer Modified Emulsion” or "Rubber Asphalt Joint and Crack Sealer" shall be measured by the square yard (square meter: 1 square meter equals 1.196 square yards) of surface area sealed. The square yard (square meter) calculations will be based on neat dimensions of the sealed area

313S.9 Payment

When included as a pay item in the contract documents, the work performed and materials furnished as provided by this item and measured in accordance with Article 313S.8, "Measurement", will be paid for at the appropriate unit bid price bid. The unit bid prices shall include full compensation for cleaning and, if necessary, routing the crack/joint; furnishing, heating, hauling, and placing the crack sealer; all freight involved and all manipulations, labor, tools, equipment and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 313S-A*:* Polymer Modified Emulsion Joint and Crack Sealer Per Lineal Foot.

Pay Item No. 313S-B*:* Rubber Asphalt Joint and Crack Sealer Per Lineal Foot.

Pay Item No. 313S-C*:* Self-leveling Low Modulus Silicone joint and Crack Sealer Per Lineal Foot.

Pay Item No. 313S-D: Polymer Modified Emulsion Joint and Crack Sealer Per Pound of Sealer Used

Pay Item No. 313S-E: Rubber Asphalt Joint and Crack Sealer Per Pound of Sealer Used.

Pay Item No. 313S-F: Self-leveling Low Modulus Silicone joint and Crack Sealer Per Pound of Sealer Used.

Pay Item No. 313S-G*:* Polymer Modified Emulsion Squeegee Sealing Per square yard***.***

Pay Item No. 313S-H: Rubber Asphalt Squeegee Sealing Per square yard***.***

End

SPECIFIC Cross Reference Materials
Item No. 313S, "Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete)"

City of Austin Standard Specifications

Designation	Description
Item No. 301S	Asphalts, Oils and Emulsions

Texas Department of Transportation: Departmental Materials Specifications

Designation	Description
DMS 6310	Joint Sealants and Seals

RELATED Cross Reference Materials
Item No. 313S, "Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete)"

City of Austin Standard Specifications

Designation	Description
Item No. 413S	Cleaning and/or Sealing Joints and Cracks (Portland Cement Concrete)

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 300	Asphalts, Oils and Emulsions
Item No. 352	Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete)
Item No. 433	Joint Sealants and Fillers
Item No. 438	Cleaning and/or Sealing Joints and Cracks (Portland Cement Concrete)

Item No. 315S
Milling Asphaltic Concrete Pavement and Non-Portland Cement Concrete Bases

315S.1 Description

This item shall govern for the planing or the planing and texturing of existing asphaltic concrete pavement, asphalt stabilized and other non Portland cement Concrete base to depths indicated at the locations shown on the Drawings or as directed by the Engineer or designated representative. The item shall also include removal, and disposal or salvage/stockpiling the milled materials at the locations designated by the Engineer or designated representative.

When shown on the Drawings, the salvaged asphaltic concrete pavement and/or stabilized base, including any accompanying surface treatment, plant mix seal and micro-surfacing, may be allowed or required for use in other construction items of this project

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

315S.2 Submittals

The submittal requirements of this specification item include:

A. Characteristics (i.e. manufacturer, power, stability, speed, etc.) and capabilities (depth of cut, dust control, etc.) of the proposed milling equipment.

B. Proposed plan for grade reference, control point spacing and support system.

C. Proposed dust control plans including proposed equipment (type street sweeper, loader, water trucks, sprayers, etc.).

315S.3 Equipment

The equipment for removing the pavement surface shall be a power operated planing machine or grinder with a minimum 2 feet (1.8 meter) cutting width. For detail work and cutting widths less than 2 feet (1.8 meter), equipment with less than 2 feet (1.8 meter) cutting width shall be allowed. The equipment shall be self-propelled with sufficient power, traction and stability to maintain accurate depth of cut and slope. The equipment shall be capable of removing in one pass, asphaltic concrete pavement of a thickness of 1 inch and any required thickness less than 1 inch (25 millimeters) in a minimum 3 foot (0.9 meters) width. Machines capable of removing, in one pass, a depth greater than 1 inch (25 millimeters) will be permitted.

The grade reference used by the Contractor may be of any type approved by the Engineer or designated representative. Control points, if required by the Drawings, shall be set at intervals not to exceed 50 feet (15 meters). The Contractor shall set the grade reference from the control points. The grade reference shall have sufficient support so that the maximum deflection shall not exceed two millimeters (1/16 inch) between supports.

The machine shall have a manual system providing for uniformly varying the depth of cut while the machine is in motion, thereby making it possible to cut flush to all inlets, manholes, or other obstructions within the paved area. The speed of the machine shall be variable in order to leave the desired grid pattern as specified in sections 315S.4 and 315S.5.

The machine shall be equipped with an integral loading and reclaiming means to immediately remove material being cut from the surface of the roadway and discharge the cuttings into a truck, all in one operation. The machine shall be equipped with means to control dust created by the cutting action. Adequate backup equipment (mechanical street sweepers, loaders, water truck, sprayers, brooms etc.) and personnel will also be provided to keep flying dust to a minimum and to insure that all cuttings are removed from the street surface daily. Stockpiling of planed material will not be permitted on the project site.

Various machines may be permitted to make trial runs to demonstrate the capabilities of that machine and to determine the acceptability of that machine to the Engineer or designated representative. Any machine that is incapable, in the opinion of the Engineer or designated representative, of meeting these requirements will not be permitted.

315S.4 Construction Methods

A. General.

The pavement surface shall be removed for the length, depth and width and to the typical section shown on the Drawings, and to the lines and grades established by the Engineer or designated representative. The planed surface shall provide a satisfactory riding surface free from gouges, continuous longitudinal grooves, ridges, oil film and other imperfections and shall have a uniform textured appearance.

When an existing asphaltic concrete pavement overlay is to be removed from an underlying Portland cement concrete pavement, all of the asphaltic concrete pavement shall be removed, leaving a uniform surface of Portland cement concrete, unless otherwise directed by the Engineer or designated representative.

B. Surface Milling.

Surface milling shall be taken to a minimum depth of 2 inches (50 mm) or deeper as may be dictated by delamination of asphalt layers during the milling operation, to a depth of 1 inch (25 millimeters) below the lip gutter transitioning to the existing surface in 3 feet (0.9 meter) or as indicated on the Drawings for resurfacing operations. The pavement surface shall be removed to the appropriate milling depths around all castings within the area to be milled. When milling is used for leveling without the addition of asphalt, the milled surface shall be free of ridges deeper than 3/16 inch (5 millimeters).

Pavement, which is adjacent to steep curbs, inlets, manholes or other obstructions and that is not removed by the planing machine, shall be removed by other methods, acceptable to the Engineer or designated representative.

The pavement and curb surfaces shall be swept with a street sweeper or other sweeping equipment approved by the Engineer or designated representative to remove all debris leaving a clean and presentable condition.

C. Edge Milling.

Edge milling at the gutter lip shall be taken to a minimum depth of 1/4 inch (6 mm) less than the overlay thickness and shall transition to the existing surface in a minimum of 6 feet (1.8 meters).

D. Spot Milling.

Milling for spot repairs shall be completed in successive passes to the depth specified. Ramping for spot repairs shall be minimized. "Transition milling required at the beginning and ending of the overlay shall be taken to a minimum depth of the overlay thickness and transition to the existing surface for the length specified in the plans.

E. Miscellaneous.

Unless otherwise specified, the milling material shall remain the property of the Contractor. Temporary stockpiling shall not be permitted on site. Temporary pavement markings shall conform to Item No. 864S, "Abbreviated Pavement Markings".

315S.5 Surface Texture (Temporary Traffic Only)

In those areas where traffic will temporarily be permitted, the texture produced shall be a grid pattern or any other pattern with discontinuous longitudinal striations that will provide, in the opinion of the Engineer, a satisfactory riding surface.

When the planed pavement will not be overlaid, the minimum texture depth resulting from the number of measurements directed by the Engineer shall not be less than 3/64 inch (1.25 millimeters), unless specified otherwise on the Drawings. When these texture requirements are not met, the Contractor shall cease operations until the Engineer is satisfied that changes in the texturing procedures will produce an acceptable texture.

The Contractor shall take care to prevent damage to armor joints, sealed expansion joints and/or other appurtenances.

The surface of the pavement, after planing, shall have a smooth riding quality and shall be true to the established line, grade and cross section.

315S.6 Measurement

Work prescribed by this item will be measured by the square yard (square meter: 1 square meter equals 1.196 square yards) of surface area for actual quantities based on the neat dimensions indicated for surface and transition milling, spot repairs and edge milling to the specified width. Ramping for spot repairs shall not be measured for payment. Surface milling for spot repairs shall be included in the unit price bid for the spot milling area measured.

Measurement will be made only one time regardless of the number of passes required by the machine to secure the depth desired.

315S.7 Payment

The work performed in accordance with this item and measured as provided under "Measurement", will be paid for at the unit bid price per square yard for "Milling Asphaltic Concrete Paving and Non-Portland Cement Bases". The price shall include full compensation for removal of all materials to the depth shown; minimizing the dust escaping to the atmosphere; loading, hauling, unloading and satisfactorily storing or disposing of the material; and for all labor, tools, equipment, manipulation, temporary pavement markings and incidentals to complete the work, including mobilization of the milling machine.

No payment will be made for work done by any machine on a trial run to demonstrate its ability to meet this specification unless the work performed is acceptable under this specification.

Payment will be made under the following:

Pay Item No. 315S-A:	Surface Milling	Per Square Yard.
Pay Item No. 315S-B:	Profile Milling	Per Square Yard.
Pay Item No. 315S-C:	Transition Milling	Per Square Yard.
Pay Item No. 315S-D:	Edge Milling	Per Square Yard.
Pay Item No. 315S-E:	Spot Milling	Per Square Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 315S "Milling Asphaltic Concrete"

City of Austin Standard Specifications

Designation	Description
Item No. 642S	Silt Fence (SF)
Item No. 864S	Abbreviated Pavement Markings

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Specifications

Designation	Description
Item No. 206S	Asphalt Stabilized Base
Item No. 210S	Flexible Base
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 306S	Prime Coat
Item No. 307S	Tack Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving
Item No. 312S	Seal Coat
Item No. 320S	Two Course Surface Treatment
Item No. 340S	Hot Mix Asphaltic Concrete Pavement
Item No. 341S	Paving Fabric
Item No. 350S	Heating, Scarifying and Repaving

Item No. 351S Recycling Agent

RELATED CROSS REFERENCE MATERIALS (Continued)
Specification Item 315S "Milling Asphaltic Concrete"

City of Austin Standard Details

Designation	Description
1000S-10	Local Street Sections
1000S-11(1)	Residential and Neighborhood collector Street Sections
1000S-11(2)	Industrial and Collector Street Sections
1000S-12(1)	Primary Collector Street Sections
1000S-12(2)	Primary Arterial Street Sections
1000S-13(1)	Minor Arterial Street Sections (4 Lanes)
1000S-13(2)	Minor Arterial Street Sections- (4 Lanes divided)
1000S-14	Major Arterial Street

Texas Department of Transportation: Standard Specifications for Construction And Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 300	Asphalts, Oils and Emulsions
Item 301	Asphalt Antistripping Agents
Item 310	Prime Coat (Cutback Asphaltic Materials)
Item 314	Emulsified Asphalt Treatment
Item 345	Asphalt Stabilized Base (Plant Mixed)
Item 354	Planing and/or Texturing Pavement

Item No. 340S
Hot Mix Asphaltic Concrete Pavement

340S.1 Description

This item shall govern base, level up, and pavement surface courses composed of a compacted mixture of aggregate and asphaltic cement mixed hot in a mixing plant. The hot mix asphaltic (HMA) concrete pavement shall be constructed on a previously completed and approved subgrade, subbase material, base material, concrete slab or existing pavement.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

340S.2 Submittals

The submittal requirements of this specification item may include:

A. A mix design submittal including the plant corrected Job Mix Formula (JMF) for the hot mix asphaltic concrete,
B. Certification that the aggregate materials meet appropriate quality requirements.
C. Particle-size gradation and specific gravity tests on all aggregate materials.
D. Certification that the asphalt cement for paving materials meet appropriate quality requirements.

340S.3 Materials

The Contractor shall furnish materials to meet the requirements specified herein and shall be solely responsible for the quality and consistency of the product delivered to the Project.

A. Aggregate: The aggregate shall be composed of coarse aggregate, a fine aggregate and, if required or allowed, mineral filler and reclaimed asphalt pavement (RAP). RAP use will be allowed in all base course mixtures except as specifically excluded herein, in the Contract Documents or on the Drawings, provided no more than 20% RAP is used.

   RAP use will not be permitted in pavement surface courses.

   Aggregates shall meet the quality requirements of Table 1 and other requirements as specified herein. The aggregate contained in RAP will not be required to meet Table 1 requirements unless indicated otherwise on the Drawings.

   1. Coarse Aggregate: Coarse aggregate is defined as that part of the aggregate retained on the No. 10 (2.00 mm) sieve and shall consist of clean, tough, durable fragments of crushed stone or crushed gravel of uniform quality throughout.

      Gravel from each source shall be crushed to the extent that it has a minimum of 85% of the particles retained on the No. 4 (4.75 mm) sieve with two or more mechanically induced crushed faces as determined by TxDOT Test Method TEX-460-A (Part I). The material passing the No. 4 (4.75 mm) sieve and retained on the No. 10 (2.00 mm) sieve must be the produced from crushing aggregate that was originally retained on the No. 4 (4.75 mm) sieve.

   2. Reclaimed Asphalt Pavement (RAP): RAP is defined as a salvaged, milled, pulverized, broken or crushed asphaltic pavement. The RAP to be used in the mix shall be crushed or broken to the extent that 100 percent will pass the 2-inch (50 mm) sieve.

The RAP shall be stockpiled in such a manner that assures that it will not become contaminated by dirt or other objectionable materials. Unless indicated otherwise on the Drawings, stockpiled, crushed RAP must not exhibit a decantation more than 5 percent or a plasticity index more than 8, when tested in accordance with TxDOT Test Method Tex-406-A, Part I, or Test Method Tex-106-E, respectively.

3. Fine Aggregate: Fine aggregate is defined as that part of the aggregate passing the No. 10 (2.00 mm) sieve and shall be of uniform quality throughout. A maximum of 15 percent of the total aggregate may be field sand or other uncrushed fine aggregate.

   Screenings shall be supplied from sources whose coarse aggregate meets the abrasion and magnesium sulfate soundness loss requirements shown in Table 1.

   a) Unless indicated otherwise on the Drawings, stone screenings, which are the product of a rock crushing operation, are required and shall meet the following gradation requirements when tested in accordance with TxDOT Test Method Tex-200-F, Part I.

Material	Percent by Weight (Mass)
Passing 3/8 inch (9.50 mm) sieve	100
Passing No. 10 (2.00 mm) sieve	70-100
Passing No. 200 (75 µm) sieve	0-15

   b) Crushed gravel screenings may be used with, or in lieu of, stone screenings only when indicated on the Drawings. Crushed gravel screenings must be the product of crushing aggregate that was originally retained on the No. 4 (4.75 mm) sieve and must meet the gradation for stone screenings shown above.

4) Mineral Filler: Mineral filler shall consist of thoroughly dried stone dust, Portland cement, fly ash, lime or other mineral dust approved by the Engineer or designated representative. The mineral filler shall be free from foreign matter.

   Portland cement manufactured in a cement kiln fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Natural Resource Conservation Commission (TNRCC) and the U. S. Environmental Protection Agency (EPA). Supplier shall provide current TNRCC and EPA authorizations to operate the facility.

   Fly ash obtained from a source using a process fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Natural Resource Conservation Commission (TNRCC) and the U. S. Environmental Protection Agency (EPA). Supplier shall provide current TNRCC and EPA authorizations to operate the facility.

   The addition of baghouse fines or other collected fines will be permitted if the mixture quality is not adversely affected in the opinion of the Engineer or designated representative. In no case shall the amount of material passing the No. 200 (75 µm) sieve exceed the tolerances of the job-mix formula or the master gradation limits.

   When tested by TEX-200-F (Part I or Part III, as applicable), the mineral filler shall meet the following gradation requirements. Baghouse fines are not required to meet the gradation requirements.

Material	Percent by Weight (mass)
Passing No. 30 (600 µm) Sieve	95 - 100
Passing No. 80 (187.5 µm) Sieve, not less than	75
Passing No. 200 (75 µm) Sieve, not less than	55

TABLE 1: AGGREGATE QUALITY REQUIREMENTS *

Requirement	Test Method	Amount
COARSE AGGREGATE		
Deleterious Material, percent, maximum	Tex-217-F, I	1.5
Decantation, percent, maximum	Tex-217-F, II	1.5
Los Angeles Abrasion, percent, maximum	Tex-410-A	40
Magnesium Sulfate Soundness Loss 5 cycle, percent, maximum	Tex-410-A	30
FINE AGGREGATE		
Linear Shrinkage, maximum	Tex-107-E, II	3
COMBINED AGGREGATES		
Sand Equivalent Value, minimum	Tex-203-F	45

* - Aggregates, without added mineral filler or additives, combined as used in the job-mix formula (Plant Corrected).

B. Asphaltic Material

1. Paving Mixture. Asphalt cement for the paving mixture shall conform to the requirements of Standard Specification Item No. 301S, “Asphalts, Oils and Emulsions”, for AC-20 or PG64-22, Styrene (SBS) Modified Asphalt Cement, AC-SBS Blend AC-45P or PG76-22S, unless otherwise indicated in the Project Documents.

2. Tack Coat: Tack Coat shall conform to Standard Specification Item No. 307S, “Tack Coat”.

C. Additives: Additives to facilitate mixing and/or improve the quality of the asphaltic mixture or tack coat may be used with the authorization of the Engineer or designated representative. The Contractor may choose to use either lime or a liquid anti-stripping agent to reduce moisture susceptibility of the aggregate.

340S.4 Paving Mixtures

An asphalt mixture design is developed by a laboratory process, which includes the determination of the quality and quantity of the asphalt cement and the individual aggregates, and the testing of the combined mixture (Laboratory Design). The Laboratory Design is subsequently revised to produce an appropriate job mix formula.

The job mix formula (JMF) lists the quantity of each component to be used in the mix after the laboratory design has been adjusted by running it through a particular plant (i.e. the mix design is Plant Corrected). The JMF will be the standard to which the Acceptance Plan will be applied. The JMF of one drum or batching unit shall not be used for another unit.

The Contractor shall submit to the Engineer on forms provided by the Engineer or designated representative, an asphalt mixture design reviewed, signed and sealed by a Registered Professional Engineer licensed in the State of Texas or certified by a TxDOT Level II Certified

Asphalt Technician. An asphalt mixture design shall be submitted for a comprehensive review every two (2) years. Mix designs older than one year will not be accepted without a review of current test data of the proposed materials and current mix design to ensure that the materials meet specification requirements.

The JMF (Plant Corrected) shall be submitted to the Engineer or designated representative on a form provided by the Engineer through the Construction Inspector or Project Manager of the Project for review, for each individual Project, a minimum of three (3) working days before the mixture is to be placed. Under no circumstances will a mixture be placed before its use is reviewed and approved by the Engineer or designated representative.

Performance of the mix design shall remain the responsibility of the Contractor.

A. Mixture Design: The mix shall be designed in accordance with TxDOT Construction Bulletin C-14 and Test Method Tex-204-F to conform with the requirements herein. The master grading limits of the appropriate type and the JMF will be plotted on a graduated chart with sieve sizes raised to the 0.45 power and will be submitted to the Engineer or designated representative with the asphalt mixture design.

   The Bulk Specific Gravity of aggregates in RAP will be determined on extracted aggregates.

B. Types: The blend of coarse aggregate, fine aggregate, and mineral filler, if allowed, that is established by TxDOT Test Method Tex-200-F, Dry Sieve Analysis, shall conform to the master gradation shown in Table 2 for the type of specified mixture. The voids in the mineral aggregate (VMA) will be determined as a mixture design requirement only, in accordance with TxDOT Test Method Tex-207-F, and shall not be less than the value indicated in Table 2.

TABLE 2: Master Grading - Percent Passing by Weight (Mass) or Volume

Sieve Size US (SI)	Type A Coarse Base	Type B Fine Base	Type C Coarse Surface	Type D Fine Surface	Type F Fine Mixture
1-1/2" (37.5 mm)	100				
1-1/4" " (31 mm)	95-100				
1" (25 mm)		100			
7/8" (22 mm)	70-90	95-100	100		
5/8 (15.5 mm)"		75-95	95-100		
1/2" (12.5 mm)	50-70			100	
3/8" (9.5 mm)		60-80	70-85	85-100	100
1/4" (6.25 mm)					95-100
No. 4 (4.75 mm)	30-50	40-60	43-63	50-70	
No. 10 (2.00 mm)	20-34	27-40	30-40	32-42	32-42
No. 40 (425 µm)	5-20	10-25	10-25	11-26	9-24
No. 80 (187.5 µm)	2-12	3-13	3-13	4-14	3-13
No. 200 (75 µm)	1-6*	1-6*	1-6*	1-6*	1-6*
VMA % minimum	11	12	13	14	15
Rec. Min. Lift	3" (75 mm)	2" (50 mm)	1-3/4" (45 mm)	1" (25 mm)	3/4" (20 mm)

C. Tolerances: Fluctuations in the aggregate gradation and asphalt content of the Job Mix Formula (JMF) shall not vary by more than the following criteria but the aggregate gradation shall be limited to the range of the master gradation as established by TEX-210-F.

SIEVES	Percent By Weight (Mass)
2" ” (50 mm) Sieve through No. 10 ” (2.00 mm) Sieve	±5.0
No. 40 (425 µm) through No. 200 (75 µm) Sieve	± 3.0
Asphalt Content	±0.5

D. Stability and Density: The mixture shall be designed at or near optimum density, as indicated on the Drawings, to conform to the following percent of Maximum Theoretical Density as measured by TxDOT Test Method TEX-227-F and Stability conforming to TxDOT Test Method TEX-208-F. The laboratory mixture shall be molded in accordance with TxDOT Test Method TEX-206-F and the Bulk Specific Gravity determined in accordance with TxDOT Test Method TEX-207-F.

	Optimum Laboratory Density (%)	Laboratory Density (%) Min.	Laboratory Density (%) Max.	Stability
Local Streets Surface Courses	96	94.5	97.5	35 Min.
Collectors & Arterials Surface Courses	96	94.5	97.5	40-60
All Base Courses	96	94.5	97.5	35 Min.

E. Job Mix Formula Field Adjustments: The Contractor shall produce a mixture of uniform composition closely conforming to the reviewed JMF, that falls within the limits of the tolerances given above and the Acceptance Plan.

If it is determined by the City of Austin that adjustments to the JMF are necessary to achieve the specified requirements, the Engineer or designated representative may allow adjustments of the JMF within the following limits without a laboratory redesign of the mixture. The adjusted JMF shall not exceed the master grading criteria for the type of mixture specified. The proposed JMF adjustments shall not exceed 5 percent on any one sieve, ½-inch (12.5 mm) size and larger, or 3 percent on the sieve size below the 1/2-inch (12.5 mm) sieve of the JMF (Plant Corrected) reviewed for the Project.

When the proposed adjustments exceed either the 5 or 3 percent limits, and the Engineer or designated representative determines that the impact of these changes may adversely affect pavement performance, a new laboratory mixture design will be required.

The asphalt content may be adjusted with the concurrence of the Engineer or designated representative to maintain desirable laboratory density near the optimum value while achieving other mix requirements. However, increasing the asphalt content of the mixture in order to reduce pavement air voids will not be allowed. Also, if the percent air voids is determined to be less than 4 percent, adjustments shall be made to the plant production by the Contractor, within the tolerances as outlined above, so that an adequate air void level is attained.

340S.5 Equipment

The trucks that deliver the hot mix asphalt concrete material to the project shall be of sufficient number to insure a continuous paving operation. All equipment used for the production, placement and compaction of the mixture shall be maintained in good repair and operating

conditions to the satisfaction of the Engineer or designated representative. All equipment shall be made available for inspection. If the Engineer or designated representative expresses concern about the condition of any equipment, it shall not be used until it is repaired to the satisfaction of the Engineer or designated representative.

A. Mixing Plants: Plants may be of the weigh-batch type, the modified weigh-batch type or drum-mix type equipped with suitable material conveyers, power units, mixing equipment, aggregate proportioning devices, dryers, bins, dust collectors and sensing and recording devices as appropriate for the mixing plant type. The mixing plants shall meet the requirements specified in Section 340.4, 'Equipment' of TxDOT Specification Item No. 340, "Hot Mix Asphaltic Concrete Pavement".

B. Spreading and Finishing Paving Machine: The paving machine shall be self-propelled and equipped with a heated compacting screed capable of producing a finish surface meeting the requirements of the street cross-section indicated on the Drawings and all surface criteria. Extensions to the screed shall have the same heating and compacting capabilities as the primary unit, except for use on variable depth tapered areas and/or as approved by the Engineer or designated representative.

   The paving machine shall be equipped with an approved automatic dual longitudinal screed control system and an automatic transverse screed control system. The longitudinal controls shall be capable of operating from any longitudinal grade reference including a string line, ski, mobile string line or matching shoe. Unless indicated otherwise on the Drawings, the Contractor may use any one of these grade references. The selected grade reference equipment shall be maintained in good operating condition by personnel trained in the use of the specific type of equipment.

   The Contractor shall furnish all labor and equipment required for establishing and maintaining appropriate grade reference.

C. Rollers: The Contractor shall select rollers conforming to Item 230S, "Rolling (Flat Wheel)" and Item 232S, "Rolling (Pneumatic Tire)". Rollers that do not conform to these requirements shall be immediately removed from the Project.

D. Motor Grader: A self-propelled power motor grader may only be used, when its use is approved by the Engineer or designated representative. It shall have a blade of not less than 12 feet (3.66 meters) and a wheelbase of not less than 16 feet (4.88 meters). Smaller graders may be used for small irregular areas when approved by the Engineer or designated representative.

E. Material Transfer Equipment: Equipment for transferring the HMA mixture from the hauling units or the roadbed to the spreading and finishing machine will be allowed unless indicated otherwise on the Drawings.

   Windrow pick-up equipment, if permitted by the Engineer or designated representative, shall be constructed in such a manner that substantially all of the HMA mixture deposited on the roadbed is picked up and loaded into the spreading and finishing machine. The HMA mixture shall not be contaminated with foreign material. The loading equipment shall be designed so that it does not interfere with the spreading and finishing machine in obtaining the required line, grade and surface without resorting to hand finishing.

F. Straightedges and Templates: The Contractor shall provide a ten-foot (3.05 meter) straightedge acceptable to the Engineer or designated representative for surface testing. Satisfactory templates shall be provided as required by the Engineer or designated representative.

340S.6 Stockpiling Aggregates

Aggregates shall be stockpiled to facilitate blending. When the aggregate is not stockpiled on a hard, non-contaminant base, the bottom six-inch (150 mm) depth of the stockpiles shall not be used in asphaltic mixtures. Where space is limited at the plant site, the aggregate stockpiles shall be separated by walls or other appropriate barriers.

Aggregates shall be stockpiled and handled in a manner that will insure minimization of segregation and contamination. Aggregate and RAP stockpiles shall only contain material from a single source.

340S.7 Mixture Temperature

The Contractor shall select a target temperature for discharge of the HMA mixture from the mixer between 250°F (120°C) and 350°F (176°C) that is suitable to weather and Project conditions. The target temperature shall be reported to the Engineer or designated representative daily and recorded in the Daily Progress Report. The HMA mixture temperature shall not vary by more than 25°F (14°C) from the target temperature for discharge from the mixer. HMA mixtures that are discharged from the mixer at a temperature exceeding 360°F (182°C) or a temperature more than 50°F (28°C) below the target temperature shall not be accepted and shall not be placed on the Project.

340S.8 Mixture Storage

A surge-storage system may be used to minimize production interruptions during a normal day of operation. When approved by the Engineer or designated representative, overnight storage of HMA mixture in insulated storage bins may be used provided that material temperature and physical properties of the HMA mixture are not adversely affected. HMA mixtures that include hardened lumps shall not be used. Stored HMA mixtures shall not be exempt from any requirements provided in this specification.

When a surge-storage system is used, it shall be equipped with a device such as a gob hopper or other device approved by the Engineer or designated representative to prevent segregation in the surge-storage bin.

340S.9 Mixture Moisture Content

Hot mix asphalt (HMA) mixtures produced from any plant shall not have a moisture content in excess of 1 percent by weight (mass) when discharged from the mixer. The moisture content shall be determined in accordance with TxDOT Test Method Tex-212-F, Part II, except that the sample shall be left in the oven a total of not less than four (4) hours.

340S10 Construction Methods

A General: The Contractor shall be responsible for the production, transportation, placement and compaction of the specified HMA paving mixture to the requirements of this specification. The Contractor shall also be responsible for providing a safe environment for inspection personnel to inspect the equipment and to acquire samples.

All hot mix asphalt concrete pavement surface courses shall be placed with a spreading and finishing (lay-down) machine only. All hot mix asphalt concrete pavement base layers with the possible exception of the first lift of the base layer shall also be placed with a

spreading and finishing (lay-down) machine. Longitudinal pavement joints shall be located under the proposed lane lines. Density tests shall be taken prior to opening to traffic.

The first lift of a base layer may be placed with a motor grader if approved in advance by the Engineer or designated representative. The loose measure thickness of this first lift shall not exceed 6 inches (150 mm). If placed with a motor grader, the first lift shall achieve a minimum in-place relative density of 89% as determined by TxDOT test procedures TEX-207-F and TEX-227-F. All subsequent lifts should be placed with a spreading and finishing (lay-down) machine and shall be subject to the requirements of Section 340S.12, "Acceptance Plan". Density tests will be taken randomly to confirm compliance with the specification requirements.

For hot mix asphalt overlays, an automatic screed shall be used with outriggers.

Any material delivered to the Project that by visual inspection can reasonably be expected not to meet specification requirements (i.e. segregated or burned material, deficient or excess asphalt, low mixing temperature, visible contaminants, etc.), as determined by the Engineer or designated representative, shall not be used or left in place.

Equipment shall be inspected prior to use and, if found to be defective or in an operating condition that could potentially affect the quality of the finished pavement, as determined by the Engineer or designated representative, its use shall not be allowed. Leakage of fuels, oils, grease, hydraulic or brake fluids or other contaminants onto the prepared surface or newly-laid HMA layer will not be allowed and may require replacement of the affected pavement area.

The HMA paving mixture, when placed with a spreading and finishing machine, shall not be placed when the air temperature is below 50°F (10°C) and is falling, but it may be placed when the air temperature is above 40°F (4°C) and is rising.

The paving mixture, when used as a level-up course or when spread with a motor grader, shall not be placed when the air temperature is below 60°F (15°C) and is falling, but it may be placed when the air temperature is 50°F (10°C) and is rising. An HMA layer with a thickness of 1-1/2 inches (37.5 mm) and less shall not be placed when the temperature of the surface on which the layer is to be placed is below 50°F (10°C). The temperature shall be taken in a shaded area away from artificial heat.

Additional surface temperature requirements may be included in the Contract Documents or indicated on the Drawings.

Surfaces to be paved shall be finished, primed, cured, broomed and tacked, as appropriate, to the satisfaction of the Engineer or designated representative. If the surface on which the first course of the paving mixture is to be placed is a flexible base course, and a cut-back asphalt is to be used as a prime coat, the flexible base shall have been primed and cured a minimum of 24 hours before the paving mixture may be placed. The 24-hour restriction will not apply to a flexible base that has been primed with material other than a cutback. However, the surface on which the tack coat and/or paving mixture are to be placed shall be in a dry condition.

Pavement shall be opened to traffic as soon as possible after temporary pavement markings or permanent markings are in place as indicated on the Drawings) or as directed by the Engineer or designated representative. Construction traffic allowed on pavements open to the public will be subject to all laws governing traffic on streets and highways.

B. Tack Coat: The surface upon which the tack is to be placed shall be cleaned thoroughly to the satisfaction of the Engineer or designated representative. The surface shall be given a

uniform application of tack coat as governed by Standard Specification Item No. 307S, "Tack Coat". The tack coat shall be applied, as directed by the Engineer or designated representative, with an approved sprayer at a rate not to exceed 0.05 gallons per square yard. (0.225 liters per square meter) of surface area. Where the paving mixture will adhere to the surface on which it is to be placed without the use of a tack coat, the tack coat may be eliminated when approved by the Engineer or designated representative. All contact surfaces of curbs, castings and all structures and all joints shall be painted with a thin uniform application of tack coat.

During the application of tack coat, care shall be taken to prevent splattering of adjacent pavement, curb and gutter and structures. Before the Work can be accepted, all splatter shall be removed by the Contractor at the Contractor's expense.

C. Transporting Hot Mix Asphaltic (HMA) Concrete: The HMA mixture shall be hauled to the Work site in tight vehicles that were previously cleaned of all foreign material. Dispatching of the vehicles shall normally be arranged so that all material delivered is placed and all rolling completed during daylight hours. Nighttime paving may be allowed, when approved in advance by the Engineer or designated representative.

In cool weather or for long hauls, truck bodies containing the HMA mixture shall be covered.

If necessary, to prevent the HMA mixture from adhering to the truck body, the inside of the truck may be given a light coating of a release agent satisfactory to the Engineer or designated representative.

D. HMA Placement: The HMA mixture shall be dumped and spread on the approved prepared surface with the spreading and finishing machine. When properly compacted, the finished pavement shall be smooth, of uniform texture and density and shall meet the requirements of the typical cross sections and the surface tests. In addition the placement of the HMA mixture shall be done without tearing, shoving, gouging or segregating the mixture and without producing streaks in the HMA layer.

Discharge of the HMA mixture into the finishing machine shall be controlled so that the spreading and finishing machine is not bounced or jarred and the required lines and grades shall be obtained without resorting to hand finishing except as permitted below in this Section.

Unless indicated otherwise on the Drawings, dumping of the HMA material in a windrow and then placing the HMA mixture in the finishing machine with windrow pick-up equipment will be permitted provided the temperature of the HMA mixture does not drop more than 50°F (28°C) below the target temperature before being placed by the finishing machine.

Under no circumstances will the HMA material be permitted to be dumped on or near the job site and then reloaded for hauling to the site of placement. Exceptions may be allowed if approved by the Engineer or designated representative.

The windrow pick-up equipment shall be operated in such a manner that substantially all the mixture deposited on the roadbed or prepared surface is picked up and loaded into the finishing machine without contamination by foreign material. The windrow pick-up equipment will also be so operated that the finishing machine will obtain the required line, grade and surface without resorting to hand finishing. Any operation of the windrow pick-up equipment resulting in accumulation and subsequent shedding of accumulated material into the HMA mixture will not be permitted.

When approved by the Engineer or designated representative, level-up courses may be spread with a motor grader that meets the requirements of this specification item.

The spreading and finishing machine shall be operated at a uniform forward speed consistent with the plant production rate, hauling capability and roller train capacity to result in a continuous operation. Stopping of the spreading and finishing machine between trucks is to be held to a minimum. If, in the opinion of the Engineer or designated representative, delivery of material is adversely affecting the condition of the HMA layer (excessive stopping of the spreading and finishing machine, loss of mixture temperature, etc.), the Engineer or designated representative may require paving operations to cease until acceptable methods are provided to minimize starting and stopping of the spreading and finishing machine.

The hopper gates of the spreading and finishing machine shall be adjusted to provide an adequate and consistent flow of material. This shall result in enough material being delivered to the augers so that they are operating approximately 85 percent of the time or more. The augers shall provide means to supply adequate flow of material to the center of the paver. Augers shall supply an adequate flow of material for the full width of the mat being placed, as approved by the Engineer or designated representative. Augers should be kept approximately one-half to three-quarters full of HMA mixture at all times during the paving operation.

When the HMA mixture is placed in a narrow strip along the edge of an existing pavement, or is used to level up small areas of an existing pavement or is placed in small irregular areas where the use of a finishing machine is not practical, the finishing machine may be eliminated when permitted by the Engineer or designated representative.

The paving material adjacent to castings and flush curb and gutter and structures shall be finished uniformly high so that when compacted, it will be slightly above but not more than 1/8 inch (3 mm) above the edge of the casting or gutter lip.

Construction joints of successive courses of HMA material shall be offset at least 6 inches (150 mm). Longitudinal joints in the layer shall be placed to coincide with lane lines as directed the Engineer or designated representative. Transverse joints shall be offset a minimum of 5 feet (1.5 meters).

E. Compaction: The pavement layers/lifts shall be compacted thoroughly and uniformly to obtain the compaction and cross section meeting the requirements indicated on the Drawings and this specification item.

Regardless of the method used for compaction, all rolling to achieve specified density shall cease before the temperature of the HMA mixture drops below 175°F (80°C).

Rolling with a pneumatic tire roller shall be used to seal the surface. Rolling with a tandem or other steel-wheel roller shall be provided if required to iron out any roller marks. Surface sealing and removal of roller marks may be accomplished at HMA temperatures below 175°F (80°C).

Vibratory rollers shall not be allowed in the vibrating mode on layers with a plan thickness less than 1-1/2 inches (37.5 mm).

The motion of the rollers shall be slow enough to avoid other than usual initial displacement. If any displacement occurs, it shall be corrected to the satisfaction of the Engineer or designated representative.

The roller shall not be allowed to stand on pavement, which has not been compacted to minimum density requirements. In order to prevent adhesion of the surface mixture to the steel-wheel rollers, the wheels shall be thoroughly moistened with water; however an excess

of water will not be allowed. Necessary precautions shall be taken to prevent the dropping of diesel, gasoline, oil, grease or other foreign matter on the pavement, either when the rollers are in operation or when standing.

The edges of the pavement along curbs, headers and similar structures, and all places not accessible to the roller, or in such positions as will not allow thorough compaction with the rollers, shall be thoroughly compacted with lightly oiled tamps.

Rolling with a trench roller will be required on widened areas, in trenches and other limited areas where satisfactory density cannot be obtained with the approved rollers.

340S.11 Sampling and Testing

The HMA mixture shall be tested daily at the Project site for conformance to specification requirements. The Engineer or designated representative shall utilize a random selection method to determine sample locations based on the Contractor's anticipated production. Each day's anticipated production shall be divided into three (3) essentially equal single-pass, sub-area lots. Each day's sample locations shall be equally distributed over the three (3) sub-areas. If, due to the weather or plant malfunctions, the Contractor’s daily-anticipated production is not attained, the random locations will not be recalculated. Also, no more than one location of the three (3) sub-areas shall be located in an irregular shaped area such as a cul-de-sac.

Unless directed otherwise by the Engineer or designated representative, a minimum of three bag samples and three correlating 6-inch (150-mm) cores will be obtained from each day's production.

Bag samples shall be taken during lay-down operations. The primary sampling point for the bag samples shall be from the windrow if a windrow elevator is used. If a windrow elevator is not used, the sample shall be taken from the middle of the paving machine hopper. This sampling location will require a stoppage in the paving operation in order for the Inspector to safely secure a sample from the hopper.

One core shall be taken for every 2,000 single-pass square yards (1 675 single-pass square meters) with a minimum of three (3) cores for all projects. One core shall be taken at the same station and pass sampled for each of the bag samples. Cores shall be taken by the City’s laboratory within 48 hours of pavement laydown unless otherwise directed by the Engineer or designated representative.

For total areas of less than 500 square yards (420 square meters), a total of only two bag samples and two correlating cores will be obtained. If the Contractor desires additional testing, it shall be at its own entire expense.

The Engineer or designated representative may alter, increase or waive the testing schedule to ensure that the Work performed and the material used meet specification requirements. Acceptability of the completed pavement shall be based on the average of test results for the Project as defined in Section 340S.12, "Acceptance Plan" of this item.

Gradation, asphalt content and stability value of the HMA mixture shall be reported for each of the bag samples. The stability value reported for each of the bag samples shall be the average of three (3) tests per bag.

Pavement thickness and density shall be determined from 6-inch (150 mm) field cores. For each day's placement, density of cores for which no corresponding bag samples were taken shall be determined by using the average Maximum Theoretical Density of the day's three (3) bag samples or as may otherwise be determined by the Engineer or designated representative.

When, in the opinion of the Engineer or designated representative, test results appear unrepresentative, additional testing may be authorized. The retesting will be at the expense of the Contractor and the results of the retesting shall be averaged with the results of the original testing. If the results of retesting indicate that the original test results were erroneous, the original test results will be discarded. In the instance of erroneous original test results the subsequent first set of retests will be at the expense of the City of Austin.

Pavements with low-density results may be recored; but the pavement shall not receive any additional compactive effort.

Pavements that will not or cannot be cored within 48 hours shall be closed to both public and construction traffic.

340S.12 Acceptance Plan

For the purpose of the Acceptance Plan only, the "Paving Project" of each of the specified mixture types shall be defined by the Engineer or designated representative before the paving operation begins

Considerations for defining the Paving Project shall include paving operations staged due to traffic considerations, pavement structural section (i.e. with varying layer thicknesses), time required for paving, changes to the Job Mix Formula, phasing of large projects, or other factors affecting the consistency in the production, lay-down/compaction, use of completed portions, and/or aging of in-place material.

Acceptability of the completed pavement structure for a Paving Project shall be based on all daily averages of three test results and when approved by the Engineer or designated representative the overall average of all test results for each of the mixture/layer types specified on the Drawings.

Pay adjustments for two or more acceptance factors shall be accumulative. Pay adjustments of 100% unit price reduction shall require removal and replacement of the Work. Replacement materials shall be subject to all requirements of this specification. Alternatively, the Engineer or designated representative may allow the Work to remain in place without payment provided that the Work is warranted for an extended period under conditions as determined by the Engineer or designated representative. The decision of the Engineer or designated representative related to the removal and replacement of the Work shall be the final authority.

A. Non-Pay-Adjustment Acceptance Factors:

1 Surface Characteristics: Unless otherwise directed by the Engineer or designated representative, all pavements shall be tested for smoothness. Surfaces shall be tested with a 10-foot (3.05 meter) straightedge parallel to the roadway centerline and perpendicular to the centerline on flat, cross-slope sections. Maximum allowable deviation in 10 feet shall be 1/8 inch (1-mm per meter) parallel to the centerline and 1/4 inch (2-mm per meter) perpendicular to the centerline. Sections exceeding these maximums shall be corrected to the satisfaction of the Engineer or designated representative. The completed surface must meet the approval of the Engineer or designated representative for surface smoothness, finish and appearance.

If the surface ravels, ruts or deteriorates in any manner prior to the end of the warranty period, it will be the Contractor's responsibility to correct this condition at its own entire expense to the satisfaction of the Engineer or designated representative in conformance with the requirements of this specification.

For HMAC rehabilitation and overlay projects, if cracks develop in the pavement surface within the one-year warranty period, the Contractor shall seal the cracks in accordance with Standard Specification Item No. 313S, "Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete). Payment for this work will be measured and paid for as Mobilization (LS) and Crack Sealing (LF).

For new HMAC roadways constructed in accordance with the Drawings and specifications, if cracks less than 1/4 inch (6 mm) in width develop in the pavement surface within the one year warranty period the Contractor shall seal the cracks in accordance with Standard Specification Item No. 313S, "Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete). Payment for this Work will be measured and paid for as Mobilization (LS) and Crack Sealing (LF).

If cracks equal to or greater than 1/4 inch (6 mm) in width develop in the pavement surface within the one-year warranty period, the cracking shall be reviewed and evaluated by the Engineer or designated representative before corrective action is taken.

2. Stability: Stability test results shall be used as indicators of potential problems. Where stability test results fall below the range specified in this specification, additional tests shall be taken as directed by the Engineer or designated representative for further evaluation and monitoring of the paving mixture. This additional stability testing will be at the expense of the Contractor. When, in the opinion of the Engineer or designated representative, the stability is deemed unacceptable for the intended use of the pavement, the paving mixture shall be removed and replaced to the limits indicated by test results or may be left in place on conditions acceptable to the Engineer or designated representative. When the paving mixture is removed and replaced, it shall be at the sole expense of the Contractor.

3. Laboratory Density: Laboratory density results as determined by TxDOT Test Method Tex-207-F shall be used as indicators of potential problems. Where laboratory density test results are less than 94.5% or more than 97.5% of mix design maximum density, additional tests shall be taken as directed by the Engineer or designated representative for further evaluation and monitoring of the paving mixture. This additional laboratory density testing will be at the expense of the Contractor. When, in the opinion of the Engineer or designated representative, the laboratory density is deemed unacceptable for the intended use of the pavement, the paving mixture shall be removed and replaced to the limits indicated by test results.

   The removal and replacement of the paving mixture shall be at the sole expense of the Contractor.

4. Limited Areas: Irrespective of an acceptable overall Paving Project average for any or all of the Pay-Adjustment Acceptance Factors, limited substandard portions of the Work, as determined by the Engineer or designated representative, shall be remedied or removed and replaced to the satisfaction of the Engineer or designated representative at the sole expense of the Contractor.

B. Pay-Adjustment Acceptance Factors: Contract unit prices shall be adjusted for paving mixtures that fail to meet acceptance criteria for gradation, asphalt content, density and mat thickness in accordance with the following:

Gradation Acceptance Schedule (TEX-210-F)

Sieve	Deviation From Job Mix Formula		Percent Contract Unit Price Reduction
	Daily Average	Overall Average	
Total retained on No. 10 (2.00 mm)	± 6.5 6.6±	± 5.0 5.1±	0 10
Passing No. 200 (75 µm)	± 3.9 4.0±	± 3.0 3.1±	0 5

Asphalt Content Acceptance Schedule (TEX-210-F, PartII)

Deviation from the Job Mix Formula		Percent Contract Unit Price Reduction	
Daily Average	Overall Average	Local Streets*	All Others
± 0.5	± 0.4	0	0
±0.51 to ±0.60	±0. 41 to ±0.50	15	25
+0.61 to +0.70	+0.51 to +0.60	25**	100; Remove and Replace
-0.61 to -0.70	-0.51 to -0.60	100: Remove and Replace	100; Remove and Replace
Over ±0.70	Over ±0.60	100: Remove and Replace	100; Remove and Replace

*A local or residential street that serves as access to residence or other abutting property.

**If the street has an ADT of 500, or less, with 1%, or less, of truck traffic, plus a 2 year warranty; otherwise, Remove and Replace

Density Acceptance Schedule (TEX-207-F/TEX-227-F)

*Percent Density		Percent Contract Unit Price Reduction	
Daily Average	Overall Average	1-1/2" (38 mm) Thickness or Greater	Less than 1-1/2" (38 mm) Thickness
Above 96.5	Above 96	100; Remove and Replace	100; Remove and Replace
90.5 to 96.5	91 to 96	0	0
90.5 to 87.6	90.9 to 88.1	0.625 per 0.10% deficiency in density	0.50 per 0.10% deficiency in density
Less than 87.6	Less than 88.1	100: Remove and Replace	100; Remove and Replace

*Core bulk density divided by max. theoretical density

Thickness Acceptance Schedule

Variance Percent of Thickness		Percent Contract Unit Price Reduction
Daily Average	Overall Average	
0 – 15.0	0 - 10	0
15.1 – 20.0	10.1 - 16	20
20.1 – 30.0	16.1 - 25	50
Over 30.0	Over 25	100; Remove and Replace or mill/overlay 1" (25 mm) minimum

The Density Acceptance Schedule For Irregularly Shaped Areas; Hike And Bike Trails And Utility Trenches (see following table) will apply to utility trenches of widths less than 4 feet

(1.2 meter) and to irregular shaped areas and hike and bike trails in which an appropriate rolling pattern cannot be established making it difficult to achieve compaction.

Density Acceptance Schedule For Irregularly Shaped Areas; Hike And Bike Trails and Utility Trenches (TEX-207-F/TEX-227-F)

*Percent Density	Percent Contract Unit Price Reduction	
Daily Average	1-1/2" (38 mm) Thickness or Greater	Less than 1-1/2" (38 mm) Thickness
Above 96.5	100; Remove and Replace	100; Remove and Replace
96.5 to 89.0	0	0
89.0 to 86.1	0.625 per 0.10% deficiency in density	0.50 per 0.10% deficiency in density
Less than 86.1	100: Remove and Replace	100; Remove and Replace
*Core bulk density divided by maximum theoretical density		

The Density Acceptance Schedule will apply to utility trenches 4 feet (1.2 meter) or wider.

Core thicknesses greater than Drawing requirements shall be factored into the average thickness calculation as the Drawing required thickness. If total thickness of lift(s) proves to be less than required, the Contractor may remove and replace the overlay deficient areas as agreed to by the Engineer or designated representative. Overlays to correct thickness deficiencies shall be not less than one (1) inch (25-mm) thick. Overlays shall require milling of the asphalt in order to prevent a “featheredge” of the overlaying pavement.

The extent of the area to be overlaid or removed and replaced shall be determined by additional cores with thicknesses greater than or equal to the required thickness. All additional coring that is necessary to determine the area shall be paid for by the Contractor.

340S.13 Measurement

Work performed and material placed shall be measured under one of the following methods. When Drawing quantity measurement is specified, adjustment of quantity may be made as follows. If the quantity measured as outlined vary from those shown on the Drawings by more than 5%, either party to the Contract may request in writing and adjustment of the quantity by each separate bid item. The party to the Contract which requests the adjustment shall present to the other party one copy of measurements and calculations showing the revised quantity in question. This revised quantity, when approved by the Engineer or designated representative, shall constitute the final quantity for which payment will be made. However, no adjustment will be made for any quantity, which exceeds the Drawing required thickness.

A. Method A: Asphaltic concrete pavement shall be measured by the ton (2,000 pounds) of the type actually used in completed and accepted Work in accordance with the Drawings and specifications.

   The measurement shall be made on approved truck scales that meet the requirements of the National Institute of Standards and Technology Handbooks 44 and 112 except that the required accuracy shall be 0.4 percent of the load being weighed. The Contractor shall furnish a report of calibration from a scale mechanic licensed by the Texas Department of Agriculture certifying that the scales meet this requirement.

B. Method B: Asphaltic concrete pavement shall be measured by the square yard of specified total thickness of the type of paving mixture actually used in completed and accepted Work in

accordance with Drawings and specifications. Multiple lifts of the same type shall be considered as one for square yard measurement purposes.

C. Method C: Asphaltic concrete pavement shall be measured by the lineal foot of specified total thickness of the type of paving mixture actually used in completed and accepted Work in accordance with Drawings and specifications. Multiple lifts of the same type shall be considered as one for linear foot measurement purposes.

340S.14 Payment

Work performed and materials furnished as prescribed by this item and measured as provided under "Measurement" will be paid for at the unit bid prices or pay adjusted unit price for Hot Mix Asphaltic Concrete Pavement, of the types and thicknesses specified. The unit bid prices shall include full compensation for furnishing all labor, equipment, time, materials and incidentals necessary to complete the Work.

Removal of existing hot mix asphalt concrete transition areas prior to overlay, tack coat, saw cutting and temporary pavement markings will not be measured or paid for directly but shall be included in the unit price bid for Standard Specification Item No. 340S, "Hot Mix Asphaltic Concrete Pavement".

Payment for Work meeting these specifications will be made under one of the following:

Pay Item No. 340S-A:	Hot Mix Asphaltic Concrete Pavement, Type ____,	Per Ton.
Pay Item No. 340S-B:	Hot Mix Asphaltic Concrete Pavement, ___Inches, Type ____,	Per Square Yard.
Pay Item No. 340S-C:	Hot Mix Asphaltic Concrete Pavement, ___Inches, Type ____,	Per Lineal Foot.
Pay Item No. 340S-PQ:	Hot Mix Asphaltic Concrete Pavement, ___Inches, Type ____, Plan Quantity,	Per Ton
Pay Item No. 340S-L:	Hot Mix Asphaltic Concrete Pavement, ___In., Type ____, Level-up Course,	Lump Sum.
Pay Item No. 340S-M:	Crack Sealing Mobilization,	Lump Sum.
Pay Item No. 340S-S:	Crack Sealing,	Per Lineal Foot.

End

SPECIFIC CROSS REFERENCE MATERIALS
Special Specification Item 340S "Hot Mix Asphaltic Concrete Pavement"

City of Austin Standard Specifications

Designation	Description
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 307S	Tack Coat
Item No. 313S	Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete)

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-106E	Method of Calculating the Plasticity Index of Soils
Tex-107E	Determination of Bar Linear Shrinkage of Soils
Tex-200-F	Sieve Analysis of Fine and Coarse Aggregates
Tex-203-F	Sand Equivalent Test
Tex-204-F	Design of Bituminous Mixtures
Tex-207-F	Determination of Density of Compacted Bituminous Mixtures
Tex-208-F	Test for Stabilometer Value of Bituminous Mixtures
Tex-210-F	Determination of Asphalt Content of Bituminous Mixtures by Extraction
Tex-212-F, Part II	Determination of Moisture Content of Bituminous Mixtures (by oven drying)
Tex-217-F	Determination of Deleterious Material and Decantation Test For Coarse Aggregates
Tex-227-F	Theoretical Maximum Specific Gravity of Bituminous Mixtures
Tex-410-A	Abrasion of Coarse Aggregate Using the Los Angeles Machine
Tex-460-A	Determination of Crushed Face Particle

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 340	Hot Mix Asphalt Concrete Pavement

RELATED CROSS REFERENCE MATERIALS
Special Specification Item 340S "Hot Mix Asphaltic Concrete Pavement"

City of Austin Standard Specifications

Designation	Description
Item No. 206S	Asphalt Stabilized Base
Item No. 210S	Flexible Base
Item No. 306S	Prime Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving
Item No. 320S	Two Course Surface Treatment

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-215-F	Determination of Asphalt Content of Rock Asphalt By Hot Solvent Method
Tex-224-F	Determination of Flakiness
Tex-400-A	Method of Sampling Stone, Gravel, Sand and Mineral Aggregates

Tex-411-A	Soundness of Aggregate by Use of Sodium Sulfate or magnesium Sulfate
Tex-438-A	Accelerated Polish Test for Aggregate

Item No. 360S
Concrete Pavement

360S.1 Description

This item shall consist of a pavement and/or base of Portland Cement concrete, with or without reinforcement as indicated on the Drawings, with or without monolithic curbs, constructed as herein specified, on prepared subgrade or base course in conformity with the thickness and typical cross sections indicated on the Drawings. Concrete to be considered of satisfactory quality provided it is made (a) of materials accepted for job, (b) in the proportions established by the Contractor and (c) mixed, placed, finished and cured in accordance with the requirements of this specification.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

360S.2 Submittals

The submittal requirements of this specification item may include:

Mix design option(s) of the class of concrete required on the project,

The supplier of the concrete mix design(s) and type of mixing equipment, and

Type of admixtures to be used with the concrete mixes.

360S.3 Materials

A. Cementatious Materials

Portland cement shall conform to ASTM C 150, Type I (General Purpose) and Type III (High Early Strength). Type III cement shall be used when high early strength concrete is indicated on the Drawings. If the use of high early cement is not specified and the Contractor desires to use it, the Contractor shall obtain written permission from the Engineer or designated representative prior to its use and shall assume all additional costs incurred by the use of such cement. All cement shall be of the same type and from the same source for a project unless written permission if first received from the Engineer or designated representative.

Portland cement manufactured in a cement kiln fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Commission on Environmental Quality (TCEQ) and the United States Environmental Protection Agency (USEPA). Supplier shall provide current TCEQ and EPA authorizations to operate the facility.

Bulk or sacked cement may be used and a bag shall contain 94 pounds (42.6 KG) net. All bags shall be in good condition at the time of inspection. Bulk cement shall be weighed on approved scales as herein prescribed.

All cement shall be stored in a suitable weather tight building or bin, which will protect the cement from dampness. The cement shall be so stored as to provide easy access for proper inspection. Any cement, which has become partially set or which contains hard lumps or cakes or cement salvaged from discarded or used bags, shall not be used.

Fly ash (denoted by Texas DOT designations Type A and Type B) may replace 20 to 35 percent of a mix design's Portland cement content by absolute volume. Fly ash shall not be used in mix designs with less that five (5) sacks of Portland cement per cubic yard [six and a half (6.5) sacks of Portland cement per cubic meter] unless specifically permitted by the Contract plans of project manual. Fly ash shall conform to the requirements of Item 405S, "Concrete Admixtures".

B. Admixtures

Concrete admixtures conforming to Item No. 405S, "Concrete Admixtures" may be used when approved by the Engineer or designated representative to minimize segregation, improve workability, reduce the amount of mixing water and to provide normal hot weather concreting provisions. The use of admixtures shall not alter the approved mix designs, except for water content.

C. Coarse Aggregate

Coarse aggregate shall consist of durable particles of gravel, crushed blast furnace slag and/or crushed stone of reasonably uniform quality throughout, free from injurious amounts of salt, alkali, vegetable matter or other objectionable material, either free or as an adherent coating on the aggregate. It shall not contain more than 0.25 percent by weight of clay lumps nor more than 1.0 percent by weight of shale nor more than 5.0 percent by weight of laminated and/or friable particles when tested in accordance with TxDOT Test Method Tex-413-A.

Coarse aggregate shall have a wear of not more than 45 percent when tested according to TxDOT Test Method Tex-410-A and when tested by standard laboratory methods shall meet the following grading requirements:

Retained on 1 3/4 inch (43.75 mm) sieve	0%
Retained on 1 1/2 inch (37.5 mm) sieve	0 to 5%
Retained on 3/4 inch (19.0 mm)sieve	30 to 65%
Retained on 3/8 inch (9.5 mm) sieve	70 to 90%
Retained on No. 4 (4.75 mm) sieve	95 to 100%

Loss by Decantation TxDOT Test Method *Tex-406-A. 1.0% Maximum

* In the case of aggregate made primarily from crushing of stone. If the material finer than the 200 sieve is definitely established to be the dust of fracture

essentially free from clay or shale as established by Part III of TxDOT Test Method Tex-406-A, the percent may be increased to 1.5.

When the plans do not require a monolithic pour of curb or curb and gutter, the Contractor may elect to use the following gradation of coarse aggregate for curb or curb and gutter:

Retained on 1 1/2 inch (37.5 mm) sieve	0%
Retained on 3/8 inch (9.5 mm) sieve	5 to 30%
Retained on No. 4 (4.75 mm) sieve	75 to 100%

Where the coarse aggregate is delivered on the job in 2 or more sizes or types, each type and/or size shall be batched and weighed separately.

All aggregates shall be handled and stored in such a manner as to prevent size segregation and contamination by foreign substances and maintain as nearly as possible in a uniform condition of moisture. When segregation is apparent, the aggregate shall be remixed with suitable equipment as required. At time of its use, the aggregate shall be free from frozen material and aggregate containing foreign materials will be rejected. Coarse aggregate that contains more than 0.5 percent free moisture by weight shall be stockpiled for at least 24 hours prior to use.

Adequate storage facilities shall be provided for approved materials. The intermixing of non-approved materials with approved materials either in stockpiles or in bins will not be permitted. Aggregates from different sources shall be stored in different stockpiles unless otherwise approved by the Engineer or designated representative.

D. Fine Aggregate

Fine aggregate shall be free from injurious materials of salt, alkali or vegetable matter. It shall not contain more than 0.5 percent by weight of clay lumps. When subjected to the color test for organic impurities, TxDOT Test Method Tex-408-A, the fine aggregate shall not show a color darker than standard.

Unless shown otherwise on the drawings, fine aggregate shall have an acid insoluble residue of at least 60% by weight when tested in accordance with Tex 612-J.

Unless specified otherwise, fine aggregate shall meet the following grading requirements:

Retained on 3/8 inch (9.5 mm) sieve	0%
Retained on No. 4 (4.75 mm) sieve	0 to 5%

Retained on No. 8 (2.36 mm) sieve	0 to 20%
Retained on No. 16 (1.185 mm) sieve	15 to 30%
Retained on No. 30 (600 µm) sieve	35 to 75%
Retained on No. 50 (300 µm) sieve	70 to 90%
Retained on No. 100 (150 µm) sieve	90 to 100%
Retained on No. 200 (75 µm) sieve	97 to 100%

Fine aggregate will be subjected to the Sand Equivalent Test, TxDOT Test Method Tex-203-F. The sand equivalent value shall not be less than 80.

E. Mineral Filler

Mineral filler shall consist of clean stone dust, crushed sand, crushed shell or other approved inert material. It shall meet the following requirements when tested in accordance with TxDOT Test Method Tex-401-A:

Retained on No. 30 (600 µm) sieve	0%
Retained on No. 200 (75 µm) sieve	0 to 35%

Where fine aggregate is delivered to the job in 2 or more sizes or types, each type and/or size of material shall be batched and weighed separately. Where mineral filler is used, it shall be batched and weighed separately. At the time of its use the fine aggregate shall be free from frozen material and aggregate containing foreign material will be rejected.

All fine aggregate shall be stockpiled for at least 24 hours prior to use.

F. Mixing Water

Water for use in concrete and for curing shall be free from oils, acids, organic matter or other deleterious substances and shall not contain more than 1,000 parts per million of chlorides as Cl nor more than 1,000 parts per million of sulfates as SO4.

Water from municipal supplies approved by the State Health Department will not require testing. Contractor shall sample and test water from other sources and submit test results to the Engineer or designated representative for approval 10 days prior to proposed use.

Tests shall be made in accordance with "Standard Method of Test for Quality of Water to be used in Concrete", AASHTO Method T-26.

G. Transit-mixed Concrete

The use of transit-mixed (ready-mixed) concrete will be permitted by the Engineer or designated representative provided the batching plant and mixer trucks meet requirements of quality specified herein.

When ready-mixed concrete is used, additional mortar (1 sack cement, 3 parts sand and sufficient water) shall be added to each batch to coat the drum of the mixer or agitator truck. Delivery of concrete to the site of the work and its discharge from the truck mixer, agitator or non-agitating equipment shall be in accordance with the requirements of Item No. 410S, "Concrete Structures".

Ready-mixed concrete, batching plant and mixer truck operation shall include the following:

1) A ticket system will be used that includes a copy for the construction inspector. The ticket will have machine stamped time/date of the concrete batch, weight of cement, sand and aggregates; exact nomenclature and written quantities of admixtures and water. Any item missing or incomplete on the ticket may be cause for rejection of the concrete.

2) Sufficient trucks will be available to support continuous slab placements. The Contractor will satisfy the Engineer or designated representative that adequate standby trucks are available to support monolithic placement requirements.

3) A portion of the mixing water, required by the batch design to produce the specified slump, may be withheld and added at the job site but only with the permission of the Engineer or designated representative and under the Inspector's observation. When water is added under these conditions, it will be thoroughly mixed before any slump or strength samples are taken.

H. Joint Sealer

Unless otherwise shown on the plans, joint sealant for concrete pavement used on airport runways and/or taxiways shall be TxDOT Class 5. All other joint sealant shall be TxDOT Class 2.

As a minimum, the joint sealant shall comply with the following. The manufacturer of the joint sealant shall furnish certification that the product to be supplied meets or exceeds the specification.

1) Class 2 (Hot Poured Rubber-Asphalt). This sealer shall conform to Standard Specification Item No. 313S, “Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete)The sealer must be compatible with asphaltic concrete.

2) Class 5 (Low Modulus Silicone Sealant for Concrete Pavement). This material shall conform to Item 413S, “Cleaning and/or Sealing Joints and Cracks (PCC) and shall be furnished in a one-part silicone formulation, which does not require a primer for bond to concrete. A backer rod shall be

required which will be compatible with the sealant. No bond or reaction shall occur between the rod and sealant. The sealant shall adhere to the sides of the concrete joint. It shall not crack or break when exposed to temperatures below 32°F (0°C).

The sealant material shall have the following properties:

Color	Gray
Flow, MIL-2-8802D, Sec 4.8.4, max	0.2
Working time, minutes	10
Tack-free time at 77° F +/- 2 o F (25°C +/- 1.1^{o}C), MIL-2-8802D,	
Sec 4.8.7, minutes	60
Cure time at 77°F (25oC), days	7-14
Full Adhesion, days	14-21

As Cured - after 7 days at 77°F (25°C), and 40% Relative Humidity

Elongation, minimum percent	1200
Durometer Hardness, Shore A, ASTM D 2240, min	15
Joint movement capability, percent	+100/-50
Tensile Strength, maximum elongation, percent	100
Peal strength, psi	25 (172 kPa)

I. Backer Rod

Backer Rod shall be expanded closed cell polyethylene foam compatible with sealant. No bond or reaction shall occur between rod and sealant. Backer Rod shall be of sufficient width to be in compression after placement.

J. Joint Filler

Boards for expansion joint filler and for contraction and longitudinal joints shall be of the size, shape and type indicated.

Board shall be obtained from Redwood, Cypress, Gum, Southern Yellow Pine or Douglas Fir timber. They shall be solid heartwood and shall be free from sapwood, knots, clustered birdseye, checks and splits. Occasional sound or hollow birdseye, when not in clusters, will be permitted provided the board is free from any other defects that will impair its usefulness as a joint filler. With the exception of Redwood and Cypress, all boards shall have a creosote or pentachlorophenol treatment of 6 pounds per cubic foot (96 kg/m3). When oven dried at 230°F (110oC) to a constant weight, the weight of the board per cubic foot (minus treatment), shall not be less than 20 pounds nor more than 35 pounds (not less than 320 nor more than 561 kgs per cubic meter).

K. Asphalt Board

Asphalt board when used as indicated shall be of required size, full depth of concrete placement and uniform thickness. When used in transverse joints, it shall conform approximately to shape of the pavement crown as indicated. Asphalt board shall consist of 2 liners of 0.016-inch (0.4 mm) asphalt impregnated paper filled with a mastic mixture of asphalt and vegetable fiber and/or mineral filler. Boards shall be smooth, flat and straight throughout and shall be sufficiently rigid to permit easy installation. Boards that crack or shatter during installing and finishing operations will not be acceptable. Board shall be furnished in lengths equal to 1/2 the pavement width or in lengths equal to the width between longitudinal joints and may be furnished in strips or scored sheets of the required shape. When tested in accordance with TxDOT Test Method Tex-524-C the asphalt boards shall not deflect from the horizontal more than 3/4 inch in 3 1/2 inches (19.3 cm in 90 cm). The asphalt board shall be placed such that they will not interfere with the bonding of the joint sealer.

L. Load Transmission Devices for Expansion and Contraction Joints

Approved load transmission devices, when indicated, shall meet the requirements specified herein:

Smooth steel bar dowels, used when indicated, shall be of the size and type indicated and shall be open-hearth, basic oxygen or electric-furnace steel conforming to the properties specified for grade 60 in ASTM A 615. The free end of dowel bars shall be smooth and free of shearing burrs.

When indicated, one end of each dowel bar shall be encased in an approved cap having an inside diameter of 1/16 inch (16 mm) greater than the diameter of the dowel bar. The cap shall be of such strength, durability and design as to provide free movement of the dowel bar and shall be approved by the Engineer or designated representative prior to use. One end of the cap shall be filled with a soft felt plug or shall be void in order to permit free movement of the dowel bar for a distance equivalent to 150 percent of the width of the expansion joint used. The dowel caps and dowel bars shall be held securely in place by bar ties as indicated on the drawings. Mechanical methods of implanting dowel bars in the plastic concrete may be used when approved by the Engineer or designated representative.

Where required, dowel bars shall be coated with a plastic material meeting the requirements indicated.

Where red lead and oil bar coating is indicated, the red lead may be of any standard commercial grade and the oil shall be clean and no lighter than Standard No. 30 SAE grade. Approved thinner and dryer may be added to the red lead, but the material upon application shall be of such consistency that will provide a uniform and heavy coating on the bar. Where asphalt bar coating is indicated, the material may be any standard grade of oil asphalt and shall be applied hot. Cutback asphalt will not be permitted for bar coating.

M. Metal Installing Devices for Joint Assembly

Metal installing devices for expansion and contraction joint assemblies (such as welded wire bar chairs, bar stakes and marker channels, channel caps, etc.) shall be as indicated or may be similar devices of equivalent or greater strength, approved by the Engineer or designated representative, that will secure joint assembly in correct position during the placing and finishing of concrete. Load transmission devices used in joint assemblies shall be secured in position by a transverse metal brace of the type and design indicated or may be secured in position by other approved devices of equivalent or greater strength that will provide positive mechanical connection between the brace and each unit (or than by wire tie) and prevent transverse movement of each load transmission device.

N. Steel Reinforcement

Steel reinforcing bars as required including tie bars shall be open-hearth, basic oxygen or electric-furnace new billet steel of Grade 60 or Grade 40 for concrete reinforcement as indicated. Bars that require bending shall be Grade 40 conforming to the requirements of ASTM A 615.

High yield reinforcing steel shall be either (a) open-hearth, basic oxygen or electric-furnace new billet steel conforming to ASTM A 615 Grade 60 or (b) rail steel bars for concrete reinforcement, conforming to ASTM A 616 Grade 60. Bars produced by piling method will not be accepted. High yield reinforcing steel bars shall be further identified by a special marking rolled into each bar. All reinforcing steel shall be deformed bars conforming to the requirements of pertinent ASTM Specifications.

Where prefabricated deformed wire mats are indicated or permitted, the wire shall be cold worked deformed steel wire conforming to the requirements of ASTM A 496, except that steel shall be made by open-hearth, electric-furnace or basic oxygen processes. The prefabricated deformed wire mats shall conform to the requirements of ASTM A 497, except that wires used shall be deformed and transverse wires shall project beyond the centerline of each edge longitudinal wire as indicated. Mats that have been bent or wires dislocated or parted during shipping or project handling shall be realigned to within 1/2 inch (13 mm) of original horizontal plane of the mat. Mats with any portion of the wires out of vertical alignment more than 1/2 inch (13 mm) after realignment and/or wires dislocated or mutilated so that, in the opinion of the Engineer, they do not represent the original mat, shall be rejected. The reinforcement may be clamped or wired so that the reinforcement will retain the horizontal and vertical alignment as indicated or as approved by the Engineer or designated representative. Deformed wire may be

used for tie bars and load transfer bars that require bending. The nominal size, area and theoretical weight of reinforcing steel wires covered by this provision are as listed in Table II. When fabricated steel bars or rod mats are indicated, the mats shall meet requirements of ASTM A 184.

Steel wire fabric reinforcement shall be of the gage and spacing indicated and shall conform to the requirements of ASTM A 82. Longitudinal and transverse wires shall be electrically welded together at all points of intersection and the welds shall be of sufficient strength that they will not be broken during handling or placing. All welding and fabrication of fabric sheets shall conform to the requirements of ASTM A 185. Welded steel wire fabric shall be furnished in sheets as indicated and steel having been previously bundled into rolls will not be accepted. An approved hinge will be permitted in each sheet to provide for each sheet longitudinally. When wire fabric is used, it will replace only the longitudinal and transverse bars. The tie bars and load transmission units at joints will not be affected.

Table II: DIMENSIONAL REQUIREMENTS FOR DEFORMED STEEL WIRE FOR CONCRETE REINFORCEMENT

Deformed Wire	Unit Weight	Diameter	Cross-Sectional Area,	Perimeter
Size No	Pounds Per Ft. (Kgs per Meter)	Inches (Centimeters)	Sq. inches (Sq, Centimeters)	Inches (Centimeters)
D-1	0.034 (.051)	0.113 (.287)	0.01 (.06)	0.355 (.902)
D-2	0.068 (.101)	0.159 (.404)	0.02 (.13)	0.499 (1.267)
D-3	0.102 (.152)	0.195 (.495)	0.03 (.19)	0.612 (1.554)
D-4	0.136 (.202)	0.225 (.572)	0.04 (.26)	0.706 (1.793)
D-5	0.170 (.253)	0.252 (.640)	0.05 (.32)	0.791 (2.009)
D-6	0.204 (.304)	0.276 (.701)	0.06 (.39)	0.867 (2.202)
D-7	0.238 (.354)	0.296 (.752)	0.07 (.45)	0.936 (2.377)
D-8	0.272 (.405)	0.319 (.810)	0.08 (.52)	1.002 (2.545)
D-9	0.306 (.455)	0.338 (.859)	0.09 (.58)	1.061 (2.695)
D-10	0.340 (.506)	0.356 (.904)	0.10 (.65)	1.118 (2.840)

D-11	0.374 (.557)	0.374 (.950)	0.11 (.71)	1.174 (2.982)
D-12	0.408 (.607)	0.390 (.991)	0.12 (.77)	1.225 (3.112)
D-13	0.442 (.658)	0.406 (1.031)	0.13 (.84)	1.275 (3.239)
D-14	0.476 (.708)	0.422 (1.072)	0.14 (.90)	1.325 (3.366)
D-15	0.510 (.759)	0.437 (1.110)	0.15 (.97)	1.372 (3.485)
D-16	0.544 (.810)	0.451 (1.146)	0.16 (1.03)	1.416 (3.600)
D-17	0.578 (.860)	0.465 (1.181)	0.17 (1.10)	1.460 (3.708)
D-18	0.612 (.911)	0.478 (1.214)	0.18 (1.16)	1.501 (3.813)
D-19	0.646 (.961)	0.491 (1.247)	0.19 (1.23)	1.542 (3.917)
D-20	0.680 (1.012)	0.504 (1.280)	0.20 (1.29)	1.583 (4.021)
D-21	0.714 (1.063)	0.517 (1.313)	0.21 (1.35)	1.624 (4.125)
D-22	0.748 (1.113)	0.529 (1.344)	0.22 (1.42)	1.662 (4.221)
D-23	0.782 (1.164)	0.541 (1.375)	0.23 (1.48)	1.700 (4.318)
D-24	0.816 (1.214)	0.553 (1.405)	0.24 (1.55)	1.737 (4.412)
D-25	0.850 (1.265)	0.564 (1.433)	0.25 (1.61)	1.772 (4.500)
D-26	0.884 (1.316)	0.575 (1.461)	0.26 (1.68)	1.806 (4.587)
D-27	0.918 (1.366)	0.586 (1.488)	0.27 (1.74)	1.841 (4.676)
D-28	0.952 (1.417)	0.597 (1.516)	0.28 (1.81)	1.876 (4.765)
D-29	0.986 (1.467)	0.608 (1.544)	0.29 (1.87)	1.910 (4.851)
D-30	1.020 (1.518)	0.618 (1.570)	0.30 (1.94)	1.942 (4.933)
D-31	1.054 (1.569)	0.628 (1.595)	0.31 (2.00)	1.973 (5.011)

O. Polyethylene Film

Polyethylene film shall be opaque pigmented white in color and shall be manufactured from virgin resin without additives or scrap. It shall be sufficiently strong and tough to permit its use under the conditions existing on street paving work without being torn or otherwise rendered unfit for the purpose during the curing period. The film shall have a minimum thickness of 4 mils (0.004 inch), shall have a minimum tensile strength of 1,700 psi at 77°F (11,720 kPa at 25°C) in the longitudinal direction and 1,200 psi at 77°F (8,275 kPa at 25°C) in the transverse direction and shall have a minimum elongation of 200 percent at 77°F (25°C)in the longitudinal direction and 150 percent at 77°F(25°C) in the transverse direction. The permissible percent moisture loss shall not exceed 2 percent after 24 hours and 4 percent after 72 hours. Tests for tensile strength and elongation will be conducted in accordance with ASTM Designation: D 882, Method A. Tests for moisture retention will be conducted in accordance with ASTM Designation: C 156.

P. Membrane Curing Compound

Membrane curing compound shall conform to Item No. 409S, "Membrane Curing", Type 2 white pigmented.

Q. Asphalt Curing

Where asphalt is to be placed on a concrete base, asphalt shall be used for curing concrete base, the material shall conform to Item No. 301S, "Asphalts, Oils and Emulsions" for RS-2 or RS-2h or as indicated on the drawings.

360S.4 Equipment

A. General

All equipment necessary for construction of this item shall be on the Project and shall be approved by Engineer or designated representative as to conditions before the Contractor will be permitted to begin construction operations on which the equipment is to be used. When approved by the Engineer or designated representative in writing, a commercial or independently operated batching plant for measuring materials outside limits of the project may be used.

B. Mixer

The mixer furnished may be either a paving mixer (operated at site of construction or centrally located), a stationary mixer (central mixer) or a paving mixer (truck mounted) that will produce adequately mixed concrete meeting the specified requirements. The mixer, or mixers, shall conform to the following requirements:

1) Each mixer shall have attached in a prominent place a manufacturer's plate showing rated capacity of the drum in terms of volume of mixed concrete and the recommended speed of rotation of the mixing drum or blades.

2) The stationary mixer (central mixer) or truck mounted paving mixer shall be operated at the manufacturer's recommended speed.

3) The size of the paving mixer shall not be less than that of a 27-E paver, as established by the Mixer Manufacturer's Bureau of Associated General Contractors. The paving mixer shall be operated at a drum speed of not less than 16 revolutions per minute and not more than 22 revolutions per minute. Pickup and throw over blades in the drum of the mixer shall be replaced when worn down 3/4 inch (19 mm) or more.

4) Each truck mounted paving mixer shall be approved by the Engineer or designated representative prior to use on the project. It shall be classified as a "paving mixer" by the manufacturer and shall be so designed that a uniform and low slump concrete (approximately 1 1/2 inch [38 mm] slump) can be mixed without aggregate size segregation. The mixer shall be capable of discharging the low slump concrete at a speed of 10 seconds per cubic yard (13 seconds per cubic meter) or faster.

5) Each mixer shall be equipped with an approved automatic device for satisfactorily timing the mix and locking the discharging device in order to prevent the discharging of the mixer before the end of the required mixing period. This timing device shall operate a sounding device to signal plainly the completion of the mixing time. When permitted by the Engineer a light signal device may be used.

6) Multiple drum mixers will be permitted provided their operation is properly synchronized. The mixing time shall be determined exclusive of the time required to transfer concrete from one drum to the next drum.

7) Each mixer shall be equipped with a water-measuring device so constructed that it will measure the water within 1 percent of the total amount required for each batch. Unless the water is to be weighed, the water measuring equipment shall include an auxiliary tank with a capacity greater than that of the measuring tank and from which the measuring tank will be filled by gravity flow. The measuring tank shall be open to the atmosphere and shall be so placed and constructed that the water for a batch can be discharged into a calibrated tank or weighing device for checking the accuracy of water measurement without seriously delaying the paving operations. The Contractor shall have a calibrated tank or weighing device available at all times at a location satisfactory to the Engineer or designated representative.

8) If a paving mixer is furnished and operated at the site of construction, it shall be equipped with a power controlled boom and bucket, so designed as to permit uniform distribution of the concrete for the full width between pavement forms. Alternate equipment for distributing concrete may be substituted when approved by the Engineer in writing, provided uniform distribution is obtained without segregation.

9) If central mixed concrete is used on the project, the Contractor shall provide equipment designed to provide uniform distribution for the concrete for the full width between pavement forms without segregation.

C. Transit-mix Trucks

When transit-mix (ready-mix) concrete is used, additional mortar (1 sack cement, 3 parts sand and sufficient water) shall be added to the batch to coat the drum of the mixer or agitator truck. This shall be required for every load of concrete. The mixing speed shall be attained as soon as all ingredients are in the mixer. Each complete batch (containing all the required ingredients) shall be mixed not less than 70 nor more than 100 revolutions of the drum at mixing speed.

A portion of the mixing water, required by the batch design to produce the desired slump, may be withheld and added at the job site, but only with permission of the Engineer and under the Engineer's supervision. When water is added at the job site, 25 revolutions (minimum) at mixing speed, will be required to flush down the blades after charging shall be accurately measured and included in the quantity of mixing water. The introduction of the initial mixing water, except blade wash down water and that permitted in this Article shall be prior to or simultaneous with the charging of the aggregates and cementitious material.

Mixing and agitating speed shall be as designated by the mixer manufacturer. All revolutions after prescribed mixing shall be at agitating speed. Except for short periods of time during discharge, the drum shall be kept in continuous motion from the time the mixing is started until the discharge is completed.

Additional mortar, consisting of 1 sack cement, 3 parts sand and sufficient water, shall be added to the batch to coat the drum of the transit mixer or agitator truck. This shall be required for every load of concrete.

The loading of transit-mixers shall not exceed 63 percent of the drum volume. When used as an agitator only, the loading of truck mixers shall not exceed 80 percent of the drum volume.

The batching plant and transit-mix trucks shall operate under the following system:

1) A ticket system will be used that includes a copy for the construction inspector. The ticket will have machine stamped time/date of water/cement batch; weight of cement, fly ash (if applicable), water, sand and aggregates; exact nomenclature and quantities of admixture. Any item missing or incomplete on the ticket will be cause for rejection. Coded readouts may be used if approved in advance by the Engineer.

2) Sufficient trucks will be available to support continuous placements. The Contractor will satisfy the Engineer that adequate standby trucks are available to support monolithic placement when required.

3) A portion of the mixing water, required by the batch design to produce the desired slump, may be withheld and added at the job site, but only with the permission of the Engineer and under the Inspector's observation. When water is added under these conditions, it will be thoroughly mixed before any slump or strength beam samples are taken.

D. Hauling Equipment

Batch hauling equipment for the transportation of measured materials from the batching plant to the mixer shall be equipped with tight covers, which shall be used to prevent excessive evaporation of moisture or any loss of material.

If a central mixer is used, concrete may be transported to the point of delivery in truck agitators or non-agitating trucks.

If a truck mounted paving mixer is used, it may be used to transport the concrete after mixing is complete.

If non-agitator trucks are used they shall conform to the following requirements:

The bed of non-agitating hauling equipment shall be a smooth, mortar-tight, metal container. The hauling equipment shall be capable of delivering the concrete to the work site in a thoroughly mixed and uniform mass and capable of discharging the concrete at a satisfactory controlled rate without segregation. If in the opinion of the Engineer any appreciable segregation or accumulation of excess water and/or mortar occurs on the surface of the concrete, this may be cause for rejection and this method of transporting the concrete to the point of delivery shall be suspended as directed by the Engineer.

E. Subgrade or Subbase Planer and Templates

Unless a stabilized subbase is provided, an approved subbase planer shall be provided, mounted on visible rollers riding on the forms and having adjustable cutting blades which shall trim the subgrade to the exact section as indicated. The planer frame shall be heavy enough to remain on the forms at all times and shall be of such strength and rigidity that, under a test made by changing the support from the wheels to the center, it shall not develop a deflection for more than 1/8 inch (3 mm). Tractive power equipment used to pull the planer shall not be such as to produce ruts or indentations in the subgrade.

When the slip form method of paving is to be used, the subgrade planer will be operated on a prepared track grade or controlled by an electronic sensor system operated from a string line that establishes the horizontal alignment and the elevation of the subbase.

A template for checking the contour of the subbase shall be provided and operated by the Contractor. The template shall rest upon the side forms and shall be of such strength and rigidity that, under a test made by changing the support to the center, it shall not show a deflection of more than 1/8 inch (3 mm). It shall be provided with accurately adjustable rods projecting downward to the subgrade at 1-foot (30 cm) intervals and these rods shall be adjusted to the required cross section of the bottom of the slab when the template is resting upon the side forms. Where stabilized subbase is provided, use of a scratch template will be required.

F. Forms

Side forms shall be of metal of approved cross section. The preferred depth of the form shall be equal to the required edge thickness of the pavement. Forms with depth greater than the required edge thickness of the pavement will be permitted.

The length of form sections shall not be less than 10 feet (0.3 meters) and each section shall provide for staking in position with not less than 3 pins. Flexible or curved forms of wood or metal of proper radius shall be used for curves of 200-foot (61 meter) radius or less. Forms shall be of ample strength and shall be provided with adequate devices for secure setting so that when in place they will withstand, without visible springing or settlement, the impact and vibration of the spreading

and finishing machinery. In no case shall the base be less than 6 inches (15.2 cm) for a form 6 inches (15.2 cm) or more in height. The forms shall be free from warps, bends or kinks and shall be sufficiently true to provide a reasonably straight edge on the concrete. The top of each form section, when tested with a straightedge shall conform to the requirements specified for the surface of the completed pavement. Sufficient forms shall be provided for satisfactory prosecution of the work.

Outside curb forms shall be of wood or metal of a section satisfactory to the Engineer or designated representative, straight, free of warp and shall be in a depth at least equal to the depth of the curb. They shall be mounted on the paving forms and securely attached thereto and maintained in true position during the placing of the concrete. Inside curb forms, if required, shall be of approved material and of such design as to provide the curb required and shall be rigidly attached to the outside forms.

G. Concrete Spreader

Use of concrete spreader shall be required and it shall be a self-propelled machine having sufficient power and traction to spread and strike off concrete without slippage on the forms. It shall be equipped with a power driven device for spreading the concrete uniformly between the forms. The spreading device may be either a reciprocating blade, a screw conveyer or a belt conveyer. The spreader shall be capable of striking off the surface of the concrete between the forms in the longitudinal direction of the slab at any required elevation.

Mechanically operated concrete spreaders of other designs, which uniformly distribute the concrete with a minimum of segregation, may be used when approved by the Engineer.

H. Slipform Paver

With prior approval, the Contractor may place concrete with slip form paver. This paver shall be equipped with a longitudinal trans-angular finishing float adjustable to crown and grade and be satisfactory to the Engineer or designated representatve. The float shall extend across the pavement practically to the side forms and/or the edge of slab. A "string line" shall be used to provide grade control for the paver.

I. Mechanical Vibratory Equipment

All concrete placed for pavement shall be consolidated by approved mechanical vibrators operated ahead of the transverse finishing machine and designed to vibrate the concrete internally and/or from the surface. Vibratory members shall extend across the pavement practically to, but shall not come in contact with the side forms. Mechanically operated vibrators shall be mounted in such manner as not to interfere with transverse or longitudinal joints. The internal-type vibrators shall be spaced at not more than 24 inches (61 cm) and shall be equipped with synchronized vibratory units. Separate vibratory units shall be spaced at sufficiently close intervals to provide uniform vibration and consolidation to the entire width of the pavement. The frequency in air of the interval spud type vibratory units shall be not less than 8,000 cycles per minute and not less than 5,000 cycles per minute for tube types and the method of operation shall be as

directed by the Engineer or designated representative. The Contractor shall have a satisfactory tachometer available for checking vibratory the elements.

The pavement vibrators shall not be used to level or spread the concrete but shall be used only for purposes of consolidation. The vibrators will not be operated where the surface of the concrete, as spread, is below the elevation of the finished surface of the pavement, except for the first lift of concrete where double strike off method of placement is employed and the vibrators shall not be operated for more than 15 seconds while the machine upon which they are installed is standing still.

The pan type vibratory units shall apply the vibrating impulses directly to the surface of the concrete. The operating frequency shall be not less than 3,500 cycles nor more than 4,200 cycles per minute in air. The Contractor shall have a satisfactory tachometer available for checking the speed of the vibratory elements.

Approved hand manipulated mechanical vibrators shall be furnished in the number required for provision of proper consolidation of the concrete along forms, at joints and in areas not covered by mechanically controlled vibrators. These vibrators shall be sufficiently rigid to insure control of the operating position of the vibrating head.

Complete and satisfactory consolidation of the concrete pavement is a most important requirement of this specification. Cores taken shall be carefully examined for voids, honeycombing or other evidence of incomplete consolidation. If such evidence is present, changes in the consolidation procedures and/or equipment will be made to insure satisfactory consolidation.

J. Finishing Equipment

1. Transverse Finishing Machine

The Transverse finishing machine shall be provided with 2 screeds accurately adjusted to the crown of the pavement, shall be self-propelled and mounted in a substantial frame equipped to ride on the forms, or may be slip form finished, and shall be so designed and operated as to strike off and consolidate the concrete.

2. Longitudinal Finishing

A transverse drag float may be used in lieu of the longitudinal finishing machine with the Engineer's approval. Finishing machines shall be maintained in a tight and good operating condition, accurately adjusted to the required crown or profile and free from deflection, wobble or vibration tending to affect the precision of finish. Machines failing to meet these requirements will be rejected by the Engineer or designated representative and the Contractor shall provide approved equipment.

Where hand finishing is permitted under this specification, the Contractor shall provide a strike template and a tamping template both of 4 by 10 inch (10 by 25 cm) lumber or equivalent metal section and at least 2 feet longer than the width of the pavement. Both templates to conform to the crown section of the pavement and the tamp, if of wood, shall have a steel face not less than 3/8 inch (9.5 mm) in thickness. The Contractor shall also provide a

longitudinal float of approved design and not less than 14 feet (4.25 meters) in length.

The Contractor shall furnish and maintain at least two standard 10-foot (3.05 meter) steel straightedges on the work site at all times during the paving operations. The Contractor shall operate same in the presence of the Engineer or designated representative.

The Contractor shall furnish a sufficient number of bridges to ride on the forms and span the pavement for finishing operations and for the installation and finishing of joints. All necessary finishing and edging tools shall be furnished as may be required to complete the pavement as indicated.

360S.5 Proportioning of Concrete

A. Proportions

Concrete shall be composed of Cementitious Materials, fine aggregate, coarse aggregate, mineral filler and/or admixture if used and water, mixed in the proportions designated by the approved Mix Design and in the manner set forth in this specification. On the basis of job and laboratory investigations of the proposed materials, the Contractor will fix proportions by weight of water, coarse aggregate, fine aggregate, cementitious materials, admixture and mineral filler where required, in order to produce concrete of the specified strength and workability for the actual delivery time and site conditions to be encountered. Where curbs are placed separately, the Engineer or designated representative. may allow aggregate gradation conforming to Class A Concrete, Item No. 403S, "Concrete for Structures".

B. Concrete Strength

The concrete mix to be designed to produce a concrete with the following requirements:

Table 1: CONCRETE PAVEMENT		
Item	Test	Value
Entrained Air	Tex-416-A	3 to 6 percent
Water-Cement Ratio gal.(liter)/sack, Maximum		6.25 (23.66)
Sacks Cement, Minimum, 4 pounds (42.6 KG) ea		6 per cubic yard (7.85 per cubic meter)
Coarse Aggregate Factor		0.65 min - 0.85 max.
Compressive Strength after 7 Day, psi	Tex-418-A	4000 (27,600)

(kPa)		
Compressive Strength after 28 day, psi (kPa)	Tex-418-A	4500 (31,000)
Maximum Concrete Mix Temperature ^{o}F (^{o}C)		95 (35)
Retarder: Regular Concrete increase in time over 360S.7(3) , minutes, Maximum		60

Table 2: HIGH EARLY STRENGTH CONCRETE		
Item	Test	Value
Cement Type		III
Entrained Air	Tex-416-A	3 to 6 percent
Water-Cement Ratio gal. .(liter)/sack, Maximum		6.25 (23.66)
Sacks Cement, Minimum, 94 pounds (42.6 KG) ea		7 per (9.16 per cubic meter)
Coarse Aggregate Factor		0.65 min-0.85 max
Slump, inches (Centimeters)	Tex-415-A	1/2 to 2 (1.25 to 5.0)
Compressive Strength, after 24 hours, psi (kPa)	Tex-418-A	2,100 (14,500)
Compressive Strength, after 3 days, psi (kPa)	Tex-418-A	2,750 (19,000)
Compressive Strength, after 7 Days, psi (kPa)	Tex-418-A	4,500 (31,000)
Compressive Strength, after 28 Days,	Tex-418-A	4,925 (34,000)

psi (kPa)		
Maximum Concrete Mix, Temperature oF (oC)		95 (35)

The Contractor may submit a mix design using high range water reducing admixtures conforming to Item No. 405S, "Concrete Admixtures" in lieu of the concrete pavement mix specified and shall meet the following requirements:

Table 3: HIGH RANGE WATER REDUCING ADMIXTURES: SUPERPLASTERSIZER CONFORMING TO SPECIFICATION ITEM NO. 405S, "CONCRETE ADMIXTURES"		
Item	Test	Value
Entrained Air	Tex-416-A	3 to 6 percent
Water-Cement Ratio, (liter)//sack, Maximum		6.25
Sacks Cement, Minimum, 94 pounds (42.6 KG) ea		6 per cubic yard(7.85 per cubic meter)
Coarse Aggregate Factor		0.65 min. - 0.85 max.
Slump, inches (cms) before Admixture	Tex-415-A	1/2 to 2 (1.25 to 5)
Slump, Inches (cms) after Admixture	Tex-415-A	4 to 10 (2.5 to 25)
Compressive Strength, after 3 days, psi (kPa)	Tex-418-A	3,125 (21,500)
Compressive Strength, after 7 days, psi, (kPa)	Tex-418-A	4,500 (31,000)
Compressive l Strength, after 28 days, psi (kPa)	Tex-418-A	4,925 (34,000)
Maximum Concrete Mix, Temperature, ^{o}F (^{o}C)		100 (37.8)
Retarder, Regular Concrete Over 360S.7C, Minutes, Maximum		120

Table 4: Over Design Required to Meet Compressive Strength Requirements1					
Number Of Tests2,3	Standard Deviation, psi (mPa)				
	300 (2.06)	400 (2.75)	500 (3.44)	600 (4.13)	700 (4.82)
15	470 (3.24)	620 (4.27)	850 (5.85)	1,120 (7.71)	1,390 (9.57)
20	430 (2.96)	580 (3.99)	760 (5.23)	1,010 (6.95)	1,260 (8.67)
30 or more	400 (2.75)	530 (3.65)	670 (4.61)	900 (6.20)	1,130 (7.78)

Notes:

1. When designing the mix, add the tabulated amounts to the minimum design strength in Tables 1, 2 or 3.Maximum water-cement or water-cementitious ratio by weight

2. Number of tests of a concrete mixture used to estimate the standard deviation of a concrete production facility. Test of another mix within 1,000 psi (6.88 MPa) of the specified strength may be used.

3. If less than 15 prior tests are available, the overdesign should be 1,200 psi (8.26 MPa) for specified strengths from 3,000 to 5,000 psi (20.65 to 34.42 MPa) and 1,400 psi (9.64 MPa) for specified strengths greater than 5,000 psi (34.42 MPa).

High range water reducing admixtures shall be capable of maintaining the original slump until placement and screeding, which may be 2 hours, without the addition of water, additional admixture or other retempering or remixing techniques.

C. Workability of Concrete

Concrete shall be uniformly plastic, cohesive and workable. Workable concrete is defined as concrete which can be placed without honeycomb and without voids in the surface of the pavement after the specified finishing machine has been over a given area twice. Workability shall be obtained without producing a condition such that free water appears on the surface of the slab when being finished as specified. Where water appears on the surface of the concrete after finishing and this condition cannot be corrected by reasonable adjustment in the batch design, the bleeding to be immediately corrected by one of the following measures or a combination of two or more of the following listed measures:

1. Redesign of the batch.

2. Addition of mineral filler to fine aggregates.

3. Increase of cement content.

4. Use of an approved air entraining agent or approved admixture.

In the event that the measures taken do not eliminate the bleeding immediately, concrete placement operations will be suspended, as directed by the Engineer or designated representative, by placing a bulkhead or "header" as indicated and

according to applicable requirements for intentional stoppage of placement of concrete under Item No. 360S, "Concrete Pavement" and will remain suspended until such time as additional trial mixes demonstrate that a non-bleeding batch design has been achieved. Failing to achieve a satisfactory laboratory batch design the Contractor will be required to use different materials and to submit samples thereof for additional trial mixes and pilot beams.

The mix will be designed with the intention of producing concrete, which will have a slump of 1 1/2 inches (3.8 cms). The slump shall not be less than 1/2 inch (1.25 cms) nor more than 2 inches (5 cms).

D. Mix Design

The Contractor shall be responsible for the design of the concrete mix. The mix design shall be prepared and sealed by a person qualified and experienced in such work. Establish proportions on the basis either of laboratory trial batches or of field experience with the materials to be employed.

When ice is used to lower the concrete temperature during hot weather concrete placement (Section 13 of Standard Specification Item No.410S, “Concrete Structures”), the Contractor shall furnish a mix design (Section 6 of Standard Specification Item No. 403S, “Concrete for Structures”) acceptable to the Engineer or designated representative for class of concrete specified. The addition of ice shall not exceed 50% of the total mix water weight.

Complete concrete mix design data shall be submitted to the Engineer or designated representative for approval at least 10 days before concrete placement begins. Submittal of the mix shall be accompanied by such test data and certifications as may be necessary to demonstrate compliance with specification requirements. Approval of this mix design shall in no way relieve the Contractor of responsibility for the quality of the concrete.

It shall also be the responsibility of the Contractor to determine and measure batch quantity of each ingredient, including water, not only for batch designs but for all concrete produced for the project, so that the mix conforms to these specifications.

Trial batches shall be made and tested using all the proposed ingredients prior to the placing of concrete and also when the aggregate and/or type, brand or source of cement or admixture is changed. When the brand and/or source of cement only is changed, the Engineer or designated representative may waive trial batches only if a prior record of satisfactory performance of the cement has been established.

Mix designs used successfully on previous or concurrent jobs may be approved by the Engineer or designated representative without trial batches if it is shown that there is no substantial change in any of the proposed ingredients.

The Contractor shall prepare a minimum of four concrete test beams of each mix design, cure and test two each at the age of 7 and 28 days. From these preliminary tests the water-cement ratio required to produce concrete of the specified strength will be selected by the Contractor for approval by the Engineer or designated representative. The Contractor may at any time present in writing a suggested mix design and if the Engineer or designated representative concurs with the suggested design, the Contractor shall conduct trial batches necessary to determine its acceptability under these specification requirements.

The Contractor shall furnish and operate the mixer approved for use on this project unless the concrete is to be furnished from a transit mix (ready-mix) plant. For mixing the concrete to be used in making the preliminary test specimens, a minimum 1 cubic yard (1 cubic meter) batch shall be mixed or a batch of sufficient size to afford proper mixing, whichever is the greater. In lieu of the above mixer and procedure, the Contractor may furnish a portable mixer of sufficient rated capacity to mix a minimum 3-sack batch; in which case, the batch mixed for the preliminary test not to be less than the rated capacity of the mixer furnished. A coating batch will be mixed prior to mixing for test beams.

No additional compensation to be allowed for equipment, materials or labor involved in making job mix design test specimens.

After the mix proportions and water-cement ratio required to produce concrete of the specified strength have been determined, placing of the concrete may be started. The strength of the concrete in the completed pavement will be determined by a minimum of four compressive strength test specimens made, cured with a minimum of two each tested at 7 and 28 days as provided in Texas DOT Bulletin C-11. Modifications of the mix design may be requested by the Contractor on basis of conformity of the strength of these test specimens with the requirements and intent of this specification.

Changes in the water-cement ratio and the mix design, including an increase in cement factor if necessary, will be made when the average 7 day and/or 28 day compressive strength of the concrete, as indicated by the last 10 compressive strength values obtained from tests of cylinders made from concrete of the same water-cement ratio, departs from the desired minimum average strength by more than 4 percent.

E. Construction Testing:

Straightedge surface testing to be carried out as prescribed above.

The Engineer shall take test cylinders for compressive strength values on a random basis. The comparative results shall consist of the average of 2 cylinders each at 7 and 28 days for regular concrete, High early strength concrete and high range water reducing admixture concrete. Tests shall be made for each 500 square yards constructed, in accordance with TxDOT Bulletin C-11. Additional tests may be taken as determined by the concrete placement conditions or for adequately determining the strength of concrete where the early opening of the pavement to traffic is dependent upon concrete strength tests. No extra compensation will be allowed for materials and work involved in fulfilling these requirements.

360S.6 Construction Methods

A. Preparation of Subgrade

Where stabilized subbase is not provided, the subgrade shall be excavated as required, all unstable or otherwise objectionable material removed and all holes, ruts and depressions filled with approved material and compacted. Rolling and sprinkling shall be performed when and to the extent required and the roadbed

shall be completed to or above the plane of the typical sections, lines and grades indicated or as established by the Engineer or designated representative. The subgrade shall be proof rolled and any soft areas shall be repaired before the forms are placed. In the event that the proof rolled subgrade is exposed to rainfall or other conditions, which may soften the subgrade, corrective measures shall be taken and the subgrade shall be proof rolled again.

The subgrade planer shall be operated from approved forms immediately ahead of paving operations and the subgrade shall be finished to the exact section of the bottom of the pavement as indicated. Where traveling form pavers are used, the subgrade planer shall operate on a prepared track grade or be controlled by electronic sensors operating from a stringline that establishes line and grade. It shall be tested with the approved template, operated and maintained by the Contractor. The subgrade shall be maintained in a smooth, compacted condition in conformity with the required section and established grade until the pavement is placed and shall be kept thoroughly wetted down sufficiently in advance of placing any pavement to insure its being in a firm and moist condition for at least 2 inches (5 cms) below the prepared surface. Sufficient subgrade shall always be prepared in advance to insure satisfactory prosecution of the work.

No equipment or hauling shall be permitted on the prepared subgrade, except by special permission of the Engineer or designated representative, which will be granted only in exceptional cases and only where suitable protection in the form of 2-ply timber mats or other approved material is provided.

B. Placing and Removing Forms

The subgrade under the forms shall be firm and cut true to grade so that each form section when placed will be firmly in contact for its whole length and base width and exactly at the established grade. Any subgrade under the forms below established grade shall be corrected, using suitable material, placed, sprinkled and rolled as directed. Forms shall be staked with at least 3 pins for each 10-foot (3-meter) section. A pin shall be placed at each side of every joint. Form sections shall be tightly joined and keyed to prevent relative displacement. Forms shall be cleaned and oiled each time they are used.

Forms shall be set for a sufficient distance in advance of the point where concrete is being placed to permit a finished and approved subgrade length of not less than 300 feet (90 meters) ahead of the mixer. Conformity of the grade and alignment of forms shall be checked immediately prior to placing concrete and necessary corrections made by the Contractor. Where any form has been disturbed or any subgrade becomes unstable, the form shall be reset and rechecked. In exceptional cases, the Engineer or designated representative may require suitable stakes driven to the grade of the bottom of the forms to afford additional support. Sufficient stability of forms to support the equipment operated and to withstand its vibration without springing or settlement shall be required. If forms settle and/or deflect over 1/8 inch (3 mm) under finishing operations, paving operations shall be stopped and the forms shall be reset to line and grade.

Forms shall be leveled using cement-stabilized material containing not less than 1 1/2 sacks of cement per ton (1 2/3 sacks of cement per MG) of mix as placed. The aggregate gradation and water content shall be determined by the Contractor. The cement-stabilized material shall be sufficiently plastic to insure filling voids

underneath the paving forms. Paving equipment will not to be permitted on the forms until the cement-stabilized material has cured for at least 12 hours.

Forms shall remain in place for not less than 8 hours after the concrete has been placed. Forms shall be carefully removed in such a manner that little or no damage will be done to the edge of the pavement. Any damage resulting from this operation shall be immediately repaired. After the forms have been removed, the ends of all joints shall be cleaned and any honeycombed areas pointed up with approved mortar and the surfaces protected with curing material conforming to Item No. 409S, "Membrane Curing".

Immediately after pointing is complete, the form trench, if used, shall be filled with granular material or earth from the shoulders in such manner as to shed water from rainfall and prevent curing material from washing away from the edge of pavement. On completion of the required curing, the subgrade or shoulders adjacent to the pavement shall be placed and compacted in condition to maintain drainage.

360S.7 Concrete Mixing and Placing

A. Mixing Methods

The concrete shall be mixed in a mixer conforming to the requirements of this item.

B. Mixing

The aggregates, mineral filler if required, cementitious materials and water shall be measured separately, introduced into the mixer and mixed for a period of not less than 50 seconds nor more than 90 seconds, measured from the time the last aggregate enters the drum to the time discharge of the concrete begins. The required water shall be introduced into the mixing drum during the first 15 seconds of mixing. The entire contents of the drum shall be discharged before any materials of the succeeding batch are introduced.

The Engineer or designated representative may increase the minimum mixing time to that necessary to produce thoroughly mixed concrete based on inspection or appropriate uniformity tests. The mixing time may be varied at any time as necessary to produce acceptable concrete.

If a central mixer is used, the concrete shall be discharged into the specified hauling equipment and delivered to the road site. If truck agitators are used, the concrete shall be continuously agitated at not less than 1 nor more than 6 rpm as directed by the Engineer or designated representative.

The maximum size of the concrete batch, absolute volume, shall not exceed 120 percent of the rated size of the mixer (40.8 cubic feet maximum batch for 34 cubic foot paver-1.2 cubic meter maximum batch for 1 cubic meter paver). Spilling of material from the mixer drum shall be corrected by reducing the size of the batch. Retempering or remixing of concrete will not be permitted.

The initial batch of concrete mixed after each time the mixer is washed out shall be enriched by additional mortar. The additional mortar shall be 1 sack of cement and 3 parts of sand.

When transit-mix (ready-mix) concrete is permitted, the batching plant shall meet the requirements of Item 403S, "Concrete for Structures".

C. Placement

Unless otherwise indicated, the concrete may be placed by using forms or by use of a slipform paver. Any concrete not placed as herein prescribed within 30 minutes after mixing shall be rejected and disposed of as directed except as provided otherwise herein. If in the opinion of the Engineer or designated representative, the temperature, wind and/or humidity conditions are such that the quality of concrete will not be adversely affected, the specified placing time may be extended by a maximum of 45 minutes. Concrete with high range water reducing admixture shall not be placed after the slump has dropped by 3 inches (7.5 cms) or more. Except by specific written authorization of the Engineer or designated representative, concrete shall not be placed when the temperature is below 40oF (4.5oC) and falling but may be placed when the temperature is above 35oF (1.7oC) and rising, the temperature being taken in the shade and away from artificial heat.

When the temperature of the air is above 85oF (29.4oC), an approved retarding agent will be required in concrete. The maximum temperature of all regular concrete placed shall not exceed 95oF (35.0oC), unless otherwise specified.

When concrete is being placed in cold weather, the Contractor shall have available a sufficient supply of an approved covering material to immediately protect concrete if the air temperature falls to 32oF (0oC) or below, before concrete has been placed 4 hours. Such protection shall remain in place during the period the temperature continues below 32oF (0oC) or for a period of not more than 5 days. Neither salt nor other chemical admixtures shall be added to the concrete to prevent freezing. The Contractor shall be responsible for the quality and strength of concrete under cold weather conditions and any concrete damaged by freezing shall be removed and replaced at the Contractor's expense. Concrete shall not be placed before sunrise and shall not be placed later than will permit finishing of the pavement during sufficient natural light.

Concrete shall be placed only on approved subgrade or subbase and unless otherwise indicated on the drawings, the full width of the pavement shall be constructed monolithically. The concrete shall be deposited on the subgrade or subbase in such manner as to require as little rehandling as possible. Where hand spreading is necessary, concrete shall be distributed to the required depth by use of shovels. The use of rakes will not be permitted. Workers will not be permitted to walk in the concrete with any earth or foreign material on their boots or shoes. The placing of concrete shall be rapid and continuous.

When the concrete is to be placed in separate lanes, the junction line shall not deviate from the true line more than 1/2 inch (1.25 cm) at any point and shall be finished as indicated on the drawings.

The mixer shall not be located on completed pavement, except as herein provided, but may be located on the subgrade of that lane of the pavement being constructed, as provided under "Preparation of Subgrade". When limited space, in the opinion of the Engineer or designated representative, requires operation of the mixer on completed pavement, the mixer may be so operated provided the concrete has attained the minimum average compressive strength required and

provided suitable protection to the pavement in the form of 2 ply timber mats or otherwise approved material is provided.

Concrete shall be distributed to such depth that when consolidated and finished, the slab thickness indicated will be obtained at all points and the surface shall not, at any point, be below established grade. Special care shall be exercised in placing and spading concrete against forms and at all joints to prevent the forming of honeycombs and voids.

Concrete for the monolithic curbs shall be the same as for the pavement and if carried back from the paving mixer shall be placed within 20 minutes after being mixed. It may be placed from the separate mixer, if desired, but in any case must be placed while the pavement concrete is still plastic. When sawed joints are used, curbs shall be doweled as indicated and poured after sawing. Curbs doweled on and placed separately may be placed with an extrusion machine.

If a central mixer or batcher is used, the Contractor shall provide a system satisfactory to the Engineer or designated representative for determining that concrete delivered to the road meets the specified requirements for mixing and time of placing.

Unless otherwise indicated, 2 mixers or transit mixers will be required where the double strike off method is employed.

D. Reinforcing Steel and Joint Assemblies

All reinforcing steel, including steel, welded wire fabric reinforcement, tie bars, dowel bars and load transmission devices used in accordance with plan provisions shall be accurately placed and secured in position in accordance with details indicated on the drawings. Reinforcing bars shall be securely wired together at alternate intersections, following a pattern approved by the Engineer or designated representative and at all splices and shall be securely wired to each dowel intersected. When wire fabric is used, it shall replace only the longitudinal and transverse bars and shall be securely wired together at all splices and to each dowel intersected. When welded wire fabric is selected, the Contractor shall pour the lower half of the slab, place the welded wire fabric and place the remaining concrete. Tie bars shall be installed in the required position by the method and device indicated. Bar coating indicated and of material specified, shall be completed and the bars and coating shall be free of dirt or other foreign matter at the time of installation in the concrete.

Tightly adhered scale or rust which resists removal by vigorous wire brushing need not be removed except that excessive loss of section to the reinforcement due to rust shall be cause for rejection. Excessive loss of section shall be defined as loss of section to the extent that the reinforcement will no longer meet the physical requirements for the size and grade of steel specified.

Where indicated on the drawings, an assembly of parts at pavement joints, the assembly shall be completed, placed at required location and elevated and all parts rigidly secured in required position by the method and devices indicated on the drawings. Dowel bars shall be accurately installed in joint assemblies as indicated on the drawings, each parallel to the pavement surface and to the center line of the pavement and shall be rigidly secured in the required position by such

means as indicated that will prevent their displacement during placing and finishing of the concrete. Unless specifically authorized by the Engineer or designated representative in writing, the load transmission devices shall be accurately installed in joint assemblies indicated, each unit vertical with its length parallel to the center line of the pavement and all units shall be rigidly secured in required position by such means as indicated that will prevent their displacement during placing and finishing of the concrete. Header boards, joint filler and other material used for forming joints shall be accurately notched to receive each load transmission device. All load transmission devices shall be free of rust and clean when installed in the concrete.

The Contractor has the option of substituting welded wire fabric in place of reinforcement bars. The welded wire fabric selected shall have an area and distribution of steel at least equal to the plan requirements. The Contractor shall submit their proposed design to the Engineer for approval before any material is ordered.

If welded wire fabric is used, the entire width of the bottom layer of concrete shall be struck off to conform to the cross section and elevation indicated on the drawings. The reinforcement shall then be placed immediately upon the concrete, after which the top layer of concrete shall be placed, struck off and screeded. Any portion of the bottom layer of concrete which has been placed more than 15 minutes without being covered with the top layer of concrete shall be removed and replaced with freshly mixed concrete at the Contractor's expense.

E. Joints

1. General

All transverse and longitudinal joints when required in the pavement shall be of the types indicated and shall be at required location, on required alignment, in required relationship to tie bars and joint assemblies and in accordance with details indicated. When no transverse joints are indicated, joints shall not exceed 40 feet (13.1 meters). Such stakes, braces, brackets or other devices shall be used as necessary to keep the entire joint assembly in true vertical and horizontal position. Where concrete base is overlaid by asphaltic concrete, the joints to be prepared as specified herein, but joint sealing will not be required unless indicated.

If necessary for proper installation of the sealer, excessive spalling of the joint groove shall be repaired to the satisfaction of the Engineer.

Care shall be exercised during the construction of all joints to insure that the concrete sections are completely separated by an open joint or by the joint materials and to insure that the joints will be true to the outline indicated on the drawings. The Contractor shall install joint materials, which will function as a compatible system. Joint sealer shall not be placed where a bond breaker is present.

Green concrete or wet sawed joints are permitted provided the Contractor cleans the joint within 5 minutes after cutting with a 3000 psi (20.7 mPa) water blast followed by a minimum of 7 day cure and sand blast the saw cut immediately prior to placing joint sealer.

Dry sawed joints are permitted provided the Contractor sand blasts the saw cut immediately prior to placing joint sealer.

2. Expansion Joints

Transverse expansion joints shall be formed perpendicular to the centerline and surface of pavement and shall be constructed in accordance with the sequence of operations indicated on the drawings. After the transverse finishing machine and before the longitudinal finishing machine have passed over the joint, the Contractor shall test the joint filler for correctness of position and make any required adjustment in the position of the filler and shall install the joint seal space form as indicated on the drawings. After removal of the joint seal form as indicated on the drawings, the joint seal space above the joint filler shall be thoroughly sandblasted or machine routed to remove all projecting concrete, laitance, dirt or foreign matter. The concrete faces of the joint seal space shall be left true to line and section throughout the entire length of the joint. On completion of curing of the pavement, the joint sealing filler of the type specified shall be placed as indicated. The faces of the joint seal space shall be clean and surface dry at the time joint sealing filler is placed. On completion of the joint seal, the pavement adjacent to the joint shall be left free of joint sealing material. The joint seal space shall be exactly above and not narrower than the joint filler with no concrete overhangings.

3. Weakened Plane Joints

Weakened plane joints shall consist of transverse contraction joints and longitudinal joints and shall be formed or sawed as indicated on the drawings. When the joints are sawed, the saw shall be power driven, shall be manufactured especially for the purpose of sawing concrete and shall be capable of performing the work. Saw blades shall be as indicated. Tracks adequately anchored, the chalk, string line or other approved methods shall be used to provide true alignment of the joints. The concrete saw shall be maintained in good operating condition and the Contractor shall keep a standby power saw on the project at all times when concrete operations are under way.

If membrane curing is used, the portion of the seal, which has been disturbed by sawing operations, shall be restored by the Contractor by spraying the areas with additional curing seal.

Forming, finishing and sealing of the joint seal space shall conform to this item, described above and details indicated on the drawings.

4. Contraction Joints

Transverse contraction joints shall be formed or sawed joints perpendicular to the centerline and surface of the pavement and shall be constructed by the method and in the sequence of operations as indicated. Where sawed joints are used, contraction joints at intervals indicated shall be sawed as soon as sawing can be accomplished without damage to the pavement and before 24

hours after the concrete has been placed, the exact time to be approved by the Engineer or designated representative. The remaining contraction joints shall be sawed in a uniform pattern as directed by the Engineer or designated representative and they shall be completed before uncontrolled cracking of the pavement takes place. All joints shall be completed before placing concrete in succeeding lanes and before permitting traffic to use the pavement.

5. Longitudinal Joints

Longitudinal joints shall be of the type or alternate types indicated and shall be constructed of specified materials in accordance with provisions indicated on the drawings. Longitudinal joints shall be constructed accurately to required lines, shall be perpendicular to the pavement surface at the joint and the pavement surface over and adjacent to the joint shall be finished as specified on the drawings.

Longitudinal joints shall be sawed as soon as sawing can be accomplished without damage to the pavement. Sawing shall not cause damage to the pavement and the groove shall be cut with a minimum of spalling. No traffic (including construction traffic) shall be permitted on pavement until the longitudinal joint is cut.

6. Construction Joints

Intentional stoppage of the placing of the concrete shall be at either an expansion joint or at a weakened plane joint. The following provisions shall govern for each type of joint at which the placing of concrete is stopped:

a) When the placing of concrete is stopped at an expansion joint, the complete joint assembly shall be installed and rigidly secured in required position as indicated. A bulkhead of sufficient cross sectional area to prevent deflection, accurately notched to receive the load transmission devices or dowels, as the case may be, and shaped accurately to the cross section of the pavement shall be provided and installed as a back-up for the joint filler and rigidly secured in required position to permit accurate finishing of the concrete up to the joint. After the concrete has been finished to the joint, formation of the joint seal space and finishing of the joint shall be executed as specified herein and as indicated. The backup bulkhead shall remain in place until immediately prior to the time when concrete placement is resumed, then it shall be carefully removed in such manner that no element of the joint assembly will be disturbed. The exposed portion of the joint assembly shall be free of adherent concrete, dirt or other material at the time placing of concrete is resumed.

b) When placing of concrete is stopped at a weakened plane joint, all applicable provisions of paragraph (a) above shall apply in addition to the following requirement:

The face of the bulkhead adjoining the slab end shall be notched and grooved to fit the exposed half section of the joint assembly and shall be shaped to form the slab end at the center of the joint as indicated on

the drawings. The 1/2 width of joint seal space may be formed by a strip of required section placed and removed as indicated for construction of transverse contraction joints. The Contractor shall have available a bulkhead shaped to section of the pavement. This bulkhead must be drilled to permit the continuation of all longitudinal reinforcing steel through the construction joint and shall be of sufficient section and strength to prevent deflection.

c) When load transmission devices are not provided in the design, intentional stopping of placement of concrete shall occur in the middle of a slab. Provisions shall be made to provide a bulkhead, which will accommodate tie bars of the same length, size and spacing as tie bars used for the longitudinal joints. When the concrete placement is resumed, the bulkhead shall be removed without bending tie bars or damaging the concrete. The joint seal space and sealer shall be the same as for longitudinal joints.

Immediately upon the unintended stoppage of the placing of concrete, the Contractor shall place the available concrete to a line and install the above-described bulkhead at right angles to the centerline of the pavement, perpendicular to the surface and at the required elevation. Concrete shall be placed and finished to this bulkhead. Any concrete remaining on the subgrade ahead shall be removed and disposed of as directed by the Engineer or designated representative. When placing of concrete is resumed before the concrete has set to the extent that the concrete will stand on removal of the bulkhead, the new concrete shall be rodded with the first. An edge created by a construction joint of this type shall have a joint seal space and shall be sealed as required for contraction joints.

F. Joint Sealers

1. Class 2 Material

This material shall conform to Standard Specification Item No. 313S, ""Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete).

For placement in vertical joints (curb faces, etc.) either of the following procedures may be used.

a) An amount of the mixed material may be set aside until partial curing has taken place and carefully trowelled into the joint with a suitable tool.

b) The portion of the joint in the roadway shall be poured and cured. The vertical curb faces shall then be taped or formed and the material poured into the vertical joint from the top.

2. Class 5 Material

This material together with backer rods shall be applied as indicated in accordance with manufacturer's recommendations.

G. Asphalt Board

Premolded materials, wherever used, shall be anchored to the concrete on one side of the joint by means of copper wire or nails not lighter than No. 12 B and S gage. Such anchorage shall be sufficient to overcome the tendency of the material to fall out of the joint. The Contractor shall not contaminate joints to receive Class 5 Joint Material with asphalt from the asphalt board.

H. Curbs

The curb shall be constructed in lengths equal to the adjoining pavement slab lengths and expansion joints shall be provided in the curb opposite each transverse expansion joint in the pavement. Expansion joint material shall be of the same thickness, type and quality as indicated for the pavement and shall be of the section as indicated for the curb. All expansion joints shall be carried through the curb, sidewalk and retaining walls when these items are indicated.

When sawed joints are provided for the pavement, the curb placement shall be delayed until all transverse joints have been sawed. To provide bond for the curb, dowel bars shall be placed as indicated on the drawings, while the pavement concrete is still plastic.

Weakened plane joints shall be formed in monolithic curbs at a spacing to coincide with the joints in the concrete pavement. The joints shall be formed by inserting in the curb an asphaltic board strip cut to conform to the shape of the curb. When the concrete is sufficiently set, the joint on the top and face of curb shall be grooved with an approved type of grooving tool.

A finish coat of mortar shall be applied on the exposed surfaces of the monolithic curbs. The mortar shall be composed of 1 part of Portland Cement and 2 parts of fine aggregate. A mortar coat will not be required for extruded curbs.

The curb face, lower radius and top of curb shall be plastered with the sand-cement mortar. The mortar shall be applied with a template or "mule" made to conform to the curb dimensions as indicated. All exposed surfaces of the curb shall be finished with a steel trowel and brushed to a smooth and uniform surface. The mortar finish as required shall be included in the unit price bid for this item.

I. Machine Finishing

All concrete pavement shall be finished mechanically with approved self-propelled machines, except as herein provided. Hand finishing will be permitted on the transition from a crowned section to a superelevated section without crown on curves, on straight line superelevation sections less than 300 feet (91.4 meters) in length, on that portion of a widened pavement outside normal pavement width and on sections where the pavement width is not uniform, isolated, narrow in width or required monolithic widths are greater than that of available finishing machines.

Machine finishing of pavement shall include the use of power-driven vibrators, power-driven transverse strike off and screed or such alternate equipment as may be substituted and approved under this item.

All concrete pavement shall be consolidated by a mechanical vibrator. As soon as concrete has been spread between the forms, the approved mechanical vibrator

shall be operated to consolidate the concrete and remove all voids. Hand manipulated vibrators shall be used for areas not covered by the mechanical vibratory unit.

The transverse finishing machine shall first be operated to compact and finish pavement to the required section and grade, without surface voids. The machine shall be operated over each area as many times and at such intervals as directed. At least 2 trips will be required and the last trip over a given area shall be a continuous run of not less than 40 feet (12.2 meters). After completion of finishing with the transverse finishing machine, a transverse drag float may be used.

The consistency of the concrete as placed should allow completion of finishing operations without the addition of water to the surface. When field conditions are such that additional moisture is needed for the final concrete surface finishing operation, the required water shall be applied to surface by fog spray only and shall be held to a minimum.

After finishing is complete and the concrete still workable, the surface shall be tested by the Contractor for trueness with an approved 10 foot (3.05 meter) straightedge. The straightedge shall be operated from the side of the pavement, placed parallel to the pavement centerline and passed across the slab to reveal any high spots or depressions. The straightedge shall be advanced along the pavement in successive stages of not more than 1/2 its length. Practically perfect contact of the straightedge with the surface will be required and the pavement shall be leveled to this condition, in order to insure conformity with the surface test required below after the pavement has fully hardened. Any correction of the surface required shall be accomplished by adding concrete if required and by operating the longitudinal float over the area. The surface test with the straightedge shall then be repeated.

For one lane pavement placement and uniform widening, the equipment for machine finishing of concrete pavement shall be as directed by the Engineer or designated representative but shall not exceed requirements of these specifications.

After completion of the straightedge operation, as soon as construction operations permit, texture shall be applied with 1/8 inch (3 mm) wide metal tines with clear spacing between the tines being not less than 1/4 inch (6.3 mm)nor more than 1/2 inch (12.7 mm).

If approved by the Engineer or designated representative, other equipment and methods may be used, provided that a surface texture meeting the specified requirements is obtained. The texture shall be applied transversely. It is the intent that the average depth resulting from the number of tests directed by the Engineer or designated representative be not less than 0.060 inch (1.52 mm) with a minimum texture depth of 0.050 inch (1.27 mm) for any one test when tested in accordance with TxDOT Test Method Tex-436-A. Should the texture depth fall below that intended, the finishing procedures shall be revised to produce the desired texture.

1. Emergency Procedures

The Contractor shall have available at all times hand rakes with tines for the purpose of providing textures in the event of equipment breakdown.

The Contractor also shall have available a conventional garden spray type can containing a commercially available monomolecular film compound. This shall be applied in the case of equipment breakdown or other emergencies to prevent the pavement from drying too rapidly. The use of this product will give the Contractor additional time to provide adequate texturing.

After completion of texturing and about the time the concrete becomes hard, the edge of the slab and joints shall be carefully finished with an edger and the pavement shall be left smooth and true to line.

J. Hand Finishing

Hand finishing shall be resorted to only in those conditions provided for above and upon specific authorization by the Engineer or designated representative. When hand finishing is permitted, concrete shall be struck off with an approved strike off screed to such elevation that when consolidated and finished the surface of the pavement to conform to the required section and grade. The strike template shall be moved forward with a combined transverse and longitudinal motion in the direction work is progressing, maintaining the template in contact with the forms and maintaining a slight excess of material in front of the cutting edge. The Concrete shall then be tamped with an approved tamping template to compact the concrete thoroughly and eliminate surface voids and the surface screed to required section.

After completion of a strike off, consolidation and transverse screeding, a hand-operated longitudinal float shall be operated to test and level the surface to the required grade.

Workers shall operate the float from approved bridges riding on the forms and spanning the pavement. The longitudinal float shall be held in contact with the surface and parallel to the centerline and operated with short longitudinal strokes while being passed from one side of the pavement to the other. If contact with the pavement is not made at all points, additional concrete shall be placed, if required and screed and the float shall be used to produce a satisfactory surface. Care shall be exercised to keep the ends of the float from digging into the surface of the pavement. After a section has been smoothed so that the float maintains contact with the surface at all points in being passed from one side to the other, the bridges may be moved forward half the length of the float and the operations repeated.

Other operations and surface tests shall be as required for machine finishing.

K. Surface Testing:

After the concrete has been placed 12 hours or more, the Engineer or designated representative will test the surface of the pavement with a 10-foot (3.05 meter) straightedge placed parallel to the centerline. Unless specified otherwise, the surface shall not vary from the straightedge by more than 1/16 inch per foot (5 mm per meter) from the nearest point of contact and in no case shall the maximum

ordinate from a straightedge to the pavement be greater than 1/8 inch (3 mm). Any high spots causing a departure from the straightedge in excess of that specified shall be ground down by the Contractor to meet the surface test requirements. Where the texture of the pavement is removed by extensive grinding, the texture shall be restored by grooving the concrete to meet the surface finishing specifications.

L. Curing

All concrete pavement shall be cured by protecting it against loss of moisture for a period of not less than 72 hours from the beginning of the curing operations. Immediately after finishing operations have been completed, the entire surface of the newly laid concrete shall be covered and cured in accordance with the requirements specified for whichever of the following methods the Contractor may elect. Newly laid concrete base to be overlaid by asphaltic concrete shall not be cured by "Membrane Curing" and surfaces not to be overlaid by asphaltic concrete shall not be cured by "Asphalt Curing". In all cases in which curing requires the use of water, the curing shall have prior right to water supply or supplies. Failure to provide sufficient cover material of the type the Contractor elects to use, failure to maintain saturation in wet curing methods, lack of water to adequately take care of both curing and other requirements or other failures to comply with curing requirements shall be cause for immediate suspension of concreting operations. The covering material used in curing shall be removed as necessary to saw joints or to comply with the requirements for "Surface Test". The concrete surface shall be maintained wet with a water spray if indicated and the covering material replaced immediately on completion of sawing and testing and any required surface correction.

1. Waterproofed Paper Curing

Immediately after the finishing of the surface has been completed and the concrete has taken its initial set, it shall be wetted with water applied in the form of a fine spray and covered with waterproofed paper so placed and weighted as to cause it to remain in intimate contact with the surface. Waterproofed paper used for the curing of concrete pavement shall be of a type and quality approved by the Engineer. It shall be sufficiently strong and tough to permit its use under the conditions existing on street paving work without being torn or otherwise rendered unfit for the purpose during the curing period. The paper covering shall be maintained in place continuously for not less than the specified curing period.

The waterproofed paper shall be prepared to form blankets of sufficient width to cover the entire surface and both edges of the pavement slab and such blankets shall not be more than 60 feet in length. All joints in the blankets occasioned by joining paper sheets shall lap not less than 5 inches (12.7 cms) and shall be securely sealed with asphalt cement having a melting point of approximately 180o F (82.2 oC). Blankets shall be placed to secure an overlap of at least 12 inches (30.5 cms) and this lap securely weighted to form a closed joint.

The waterproofed paper blankets shall be adequately weighted to prevent displacement or billowing due to wind and the paper folded down over the

side of the pavement shall be secured by a continuous bank of earth. Plowing of this windrow into place will not be permitted.

All tears or holes appearing in the paper during the curing period shall be immediately repaired by cementing patches over such defects. It shall be the Contractor's responsibility to prevent damage to paper blankets, which would affect their serviceability and effectiveness as a concrete curing method. Blankets may be rejected by the Engineer or designated representative at any time if it appears they do not provide an airtight covering.

Paper blankets rejected on account of pinholes or minor tears may be continued in service by folding the blanket over lengthwise, first thoroughly spraying 1/2 the blanket with the asphalt cement used for seams. The 2 thicknesses shall be firmly pressed together and well cemented. Blankets shall be of a width sufficient to cover the pavement surface and both edges. Doubled blankets may be rejected for the same cause as provided for single blankets. All paper blankets rejected by the

Engineer shall be immediately marked by the Contractor for identification and then destroyed or stored entirely separate from approved blankets.

No walking on paper shall be permitted at any time and, in locations where pedestrian traffic cannot be entirely controlled, the Contractor shall provide walkways and barricades or shall substitute other permissible curing methods on such sections of pavement.

2. Polyethylene Film Curing

Immediately after the finishing of the surface has been completed and the concrete has taken its initial set, it shall be wetted with water applied in the form of a fine spray and covered with the polyethylene film so placed and weighted as to cause it to remain in intimate contact with the surface. The polyethylene film covering shall be maintained in place continuously for not less than the specified curing period.

The film shall be prepared to form blankets of sufficient width to cover the entire surface and both edges of the pavement slab. All joints in the blankets occasioned by joining film sheets shall lap not less than 12 inches (30.5 cms). All joints shall be sealed in a manner acceptable to the Engineer or designated representative to provide a moisture-proof lap.

The polyethylene film blankets shall be adequately weighted to prevent displacement or billowing due to wind and the film folded down over the side of the pavement shall be secured by a continuous bank of earth. Plowing of this windrow into place not to be permitted.

All tears or holes appearing in the polyethylene film during the curing period shall be immediately repaired by placing acceptable moisture proof patches over such defects or by replacing the blankets. It shall be the Contractor's responsibility to prevent damage to the film blankets, which would affect their serviceability and effectiveness as a concrete curing method. Blankets may be rejected by the Engineer at any time if it appears they do not provide an airtight covering.

Polyethylene film blankets rejected on account of pinholes or minor tears may be continued in service when repaired to an airtight condition. All polyethylene film blankets rejected by the Engineer or designated representative shall be immediately marked by the Contractor for identification and then destroyed or stored entirely separate from approved blankets.

Should the film blanket be damaged or torn for any cause during the first 72 hours of the curing period such damage shall be repaired immediately.

3. Membrane Curing

Immediately after the finishing of pavement has been completed and after the free surface moisture has disappeared, the pavement shall be sprayed uniformly with a curing compound. Membrane curing shall conform to Standard Specification Item No. 409S, "Membrane Curing", Type 2 white pigmented. Should the film of compound be damaged from any cause before the expiration of 72 hours after original application, the damaged portions shall be repaired with additional compound. Unless otherwise indicated on the drawings, membrane curing shall be used when the concrete (except that concrete to be used as a base) is placed with a slip form paver.

4. Asphalt Curing

Where emulsified asphalt is used for curing concrete base, the material shall conform to Item No. 301S, "Asphalts, Oils and Emulsions", for the type and grade shown on the drawings. The rate of application may vary between the limits of 1 gallon per 180 square feet and 1 gallon per 90 square feet (1 liter per 4.4 square meters and 1 liter per 2.2 square meters). The rate of application will be determined by the Engineer or designated representative, after observation of sections where amounts varying between the above limits have been applied. If it is found necessary to add water to the emulsion for the proper distribution through the spray, this may be done upon approval of the Engineer or designated representative. When the emulsion is diluted with water the amount of the applied mixture shall be increased to give a coverage of the original emulsion between the limits as set out herein. Care shall be taken to properly mix the emulsion and water and to keep the mixture well agitated during application.

M. Protection of Pavement

The Contractor shall erect and maintain the barricades indicated on the drawings and such other standard and approved devices as will exclude public traffic and traffic of the Contractor's employees and agents from the newly placed pavement for a minimum of 14 days. Portions of the roadway or crossings of the roadbed required to be maintained open for use by traffic shall not be obstructed by above required barricades. Crossings of the pavement indicated on the drawings or by construction sequence, during the period prior to opening to traffic as herein indicated, shall be provided with an adequate and substantial bridge approved by the Engineer or designated representative.

Curb shall be backfilled to the full height of the concrete, tamped and sloped as indicated on the drawings or as directed by the Engineer. The top 4 inches (10

cms) of backfill shall be of clean, friable soil capable of supporting plant life. This material shall also be free of stones and all other debris.

N. Opening Pavement to Traffic

The pavement shall be closed to traffic, including vehicles of the Contractor, until the concrete is at least 14 days old and has attained an average compressive strength acceptable to the Engineer or designated representative. This period of closure to traffic may be extended if, in the opinion of the Engineer or designated representative, weather or other conditions make it advisable to provide an extension of the time of protection.

At the end of the 14 day period and as long thereafter as ordered by the Engineer or designated representative and if so desired by the Contractor, the pavement may be opened for use by vehicles of the Contractor provided the gross weight (vehicle plus load) of such vehicles does not exceed 14,000 pounds (6350 KGs). Such opening, however, shall in no manner relieve the Contractor from responsibility for the Contractor's work. On those sections of the pavement thus opened to traffic, all joints shall first be sealed, the pavement cleaned and topsoil placed against the pavement edges or behind the curb where turf or vegetation is to be established before permitting vehicles thereon.

After the concrete in any section is 14 days old or as long thereafter as ordered by the Engineer, such section of pavement may be opened to all traffic indicated on the drawings or when so directed by the Engineer or designated representative. On those sections of the pavement thus opened to traffic, all joints shall first be sealed, the pavement cleaned and 4 inches (10 cms) of top soil placed against the pavement edges and all other work performed as required for the safety of traffic. Such opening, however, shall in no manner relieve the Contractor from responsibility for the Contractor's work.

When High Early Strength Concrete, resulting from the use of Type III cement as indicated on the drawings is used, the pavement may be opened to all traffic after the concrete is 7 days old or as long thereafter as ordered by the Engineer or designated representative, subject to the same provisions governing the opening after 14 days as above indicated.

Where the Contractor desires to move any equipment not licensed for operation on public streets, on or across any pavement opened to traffic, the Contractor shall protect the pavement from damage by means of 2 ply timber mats of 2 inch (5 cm) stock or runways of heavier material laid on a layer of earth, all as approved by the Engineer or designated representative.

1. Emergency Opening to Traffic

The Engineer or designated representative may require the opening of pavement to traffic prior to the minimum time specified above under conditions of emergency, which in the Engineer's or designated representative's opinion require such action in the interest of the public. In no case will the Engineer or designated representative order opening of the pavement to traffic within less than 72 hours after the last concrete in the section is placed. The Contractor shall remove all obstructing materials, place earth against pavement edges and perform other work involved in

providing for the safety of traffic as required by the Engineer or designated representative in ordering emergency opening. Orders for emergency opening of the pavement to traffic will be issued by the Engineer or designated representative in writing.

360S.8 Penalty for Deficient Pavement Thickness or Strength

The adjustment in unit prices provided for in this item will apply only when measurement for payment is by the square yard.

It is the intent of this specification that the pavement be constructed in strict conformity with the thickness, strength and typical sections indicated on the drawings. Where any pavement is found not so constructed, the following rules relative to adjustment of payment for acceptable pavement and to replacement of faulty pavement shall govern.

A. Pavement

The pavement will be core drilled after any grinding operations have been completed for surface corrections prior to final acceptance. Locations of core tests may be selected by the Engineer or designated representative; however, spacing interval for core tests, as specified herein, shall be maintained. The thickness of the pavement will be determined by measurement of the cores in accordance with TxDOT Test Method Tex-424-A.

For the purpose of establishing an adjusted unit price for pavement, units to be considered separately are defined as 1000 linear feet of pavement in each traffic lane starting at the end of the pavement bearing the smaller station number. The last unit in each lane shall be 1000 feet plus the fractional part of 1000 feet remaining. Traffic lane width will be as shown on typical sections and pavement design standards.

For the purpose of establishing an adjusted unit price for ramps, widening, acceleration and deceleration lanes that are machine placed, isolated pavements of traffic lane width but less than 1000 feet in length and other areas designated by the Engineer or designated representative, units will be considered separately and are defined as 1000 square yards of pavement or fraction thereof.

One core will be taken at the location selected by the Engineer or designated representative or at random in each unit. When the measurement of the core from any unit is not deficient more than 0.2 inches from the plan thickness, full payment will be made. When the measurement of the core from any unit is deficient more than 0.2 inch but not more than 0.75 inch from the plan thickness, 2 additional cores will be taken from the unit and the average of the 3 cores determined. The 2 additional cores from any 1000-foot unit will be taken at intervals of not less than 300 feet. The 2 additional cores from any 1000 square yard unit will be taken at locations such that the pavement in the unit will be well represented. If the average measurement of these 3 cores is not deficient more than 0.2 inches from the plan thickness, full payment will be made. If the average thickness of the 3 cores is deficient by more than 0.2 inch but not more than 0.75 inch from the

indicated thickness, an adjusted unit price as provided below will be paid for the areas represented by these cores.

In calculating the average thickness of the pavement, measurements which are in excess of the specified thickness by more than 0.2 inch will be considered as the specified thickness plus 0.2 inch and measurements which are less than the specified thickness by more than 0.75 inch will be considered as the specified thickness less 0.75 inch.

When the measurement of any core is less than the specified thickness by more than 0.75 inch, the actual thickness of pavement in this area will be determined by taking additional cores at 10 foot intervals parallel to the center line in each direction from the deficient core until, in each direction, a core is taken which is not deficient by more than 0.75 inch. Exploratory cores for deficient thickness will not be used in averages for adjusted unit price. Exploratory cores are to be used only to determine the length of pavement in a unit that is to be left in place without pay and/or removed and replaced as provided herein.

For new Concrete Pavement roadways, and for Concrete Pavement rehabilitation and overlay projects, if cracks develop in the pavement surface within the one year warranty period, the Contractor shall seal the cracks in accordance Standard Specification Item No. 313S, “Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete), or perform other corrective measures as directed by the Engineer. Payment for this work will be included in the unit price bid for Concrete Pavement, unless included as a separate pay item in the Contract.

For new Concrete Pavement roadways constructed in accordance with the plans and specifications, if cracks greater than or equal to 1/4 inch in width develop in the pavement surface within the one year warranty period, complete replacement of pavement sections as directed by the Engineer shall be performed by the Contractor at no additional expense to the City.

Irrespective of an acceptable overall project average for any or all of the Pay-Adjustment Acceptance Factors, limited substandard portions of the work, as determined by the Engineer or designated representative, shall be remedied or removed and replaced to the satisfaction thereof.

B. Price Adjustments

After any grinding or milling operations have been completed to meet the surface-testing requirement of this specification, if average thickness of pavement is deficient in thickness by more than 0.2 inch, but not more than 0.75 inch, payment will be made at an adjusted price as specified in the following table:

Concrete Pavement Deficiency	
Deficiency in Thickness Determined by Cores, Inches	Proportional Part of Contract Price Allowed

0.00 to 0.20	100 percent
0.21 to 0.30	80 percent
0.31 to 0.40	72 percent
0.41 to 0.50	68 percent
0.51 to 0.75	57 percent

Any area of pavement found deficient in thickness by more than 0.75 inch but not more than 1 inch or 1/8 of the indicated thickness, whichever is greater, shall be evaluated by the Engineer. If, in the judgment of the Engineer, the area of such deficiency should not be removed and replaced, there will be no payment for the area retained. If, in the judgment of the Engineer, the area of such deficiency warrants removal, the area shall be removed and replaced at the Contractor's entire expense, with concrete of the thickness indicated on the drawings.

Any area of pavement found deficient in thickness by more than 1 inch or more than 1/8 of the indicated thickness, whichever is greater, shall be removed and replaced, at the Contractor's entire expense, with concrete of the thickness indicated on the drawings.

No additional payment over the Contract unit price will be made for any pavement of a thickness exceeding that indicated on the drawings.

If the average compressive strength based on concrete test cylinders at 28 days is less than the specified minimum strength of the concrete, then payment will be made at an adjusted price as specified in the following table.

Pay Adjustment Factor for Deficient Compressive Strength	
Ratio of Average Strength from Test Cylinders to Specified Minimum Compressive Strength both at 28 Days	Proportional Part of Contract Price Allowed
More then 0.95	100 percent
0.90 to 0.95	85 percent
0.85 to 0.90	70 percent
0.80 to 0.85	60 percent
Less than 0.80	0 percent (Remove & Replace)

When, in the opinion of the Engineer or designated representative, the compressive strength test results appear unrepresentative, additional testing of field cores may be authorized. To be considered acceptable for consideration the

field cores shall be acquired, properly handled and tested in accordance with ASTM C 42/C 42M, "Standard Test Method for Obtaining and Testing Drilled Cores and Sawed Beams of Concrete" within 45 days of the original concrete placement date. The retesting will be at the expense of the Contractor and the results of the retesting shall be averaged with the results of the original testing. If the results of retesting indicate that the original test results were erroneous in the opinion of the Engineer or designated representative, the original test results will be discarded. In the instance of erroneous original test results the subsequent first set of retests will be at the expense of the City of Austin.

When, in the opinion of the Engineer or designated representative, the concrete compressive strength is deemed unacceptable for the intended use of the pavement, the concrete shall be removed and replaced to the limits indicated by test results.

360S.9 Measurement

A. When indicated, concrete pavement will be measured by the square yard of surface area of completed and accepted work. The surface area shall be so measured to also include that portion of pavement slab extending beneath the curb. When concrete pavement is to be measured by the square yard and monolithic curb is required, measurements for "Monolithic Curb" will be by the linear foot complete in place.

B. When indicated on the drawing, concrete pavement, including monolithic curb when required, will be measured by the cubic yard of absolute volume of materials entering the mixture.

360S.10 Payment

The work performed and materials furnished as prescribed by this item and measured as provided under "Measurement" will be paid for at the unit price bid for "Concrete Pavement", of the depth indicated on the drawings, "Concrete Pavement (High Early Strength)" of the depth indicated on the drawings and "Monolithic Curb" of the type indicated on the drawings (when pavement is measured by the square yard), as required or adjusted unit price for pavement of deficient thickness as provided under "Deficient Pavement Thickness", which price shall be full compensation for shaping and fine grading the roadbed, including furnishing and applying all water required; for furnishing, loading and unloading, storing, hauling and handling all concrete ingredients, including all freight and royalty involved; for placing and adjusting forms, including supporting material or preparing track grade; for mixing, placing, finishing, sawing, cleaning and sealing joints and curing all concrete; for furnishing and installing all reinforcing steel; for furnishing all materials for sealing joints and placing longitudinal, expansion and weakened plane joints, including all steel dowel caps and load transmission devices required and wire and devices for placing, holding and supporting steel bars, load transmission devices and joint filler material in proper position, for coating steel bars where complete the work.

Excavation required by this item in the preparation of the subgrade and for completion of the parkway will be measured and paid for in accordance with provisions governing the Items of "Street Excavation" and "Borrow", respectively, with provision that yardage to be measured and paid for once only, regardless of manipulations involved. Measurement of subgrade excavation for payment shall be limited to a total width of that of pavement plus 1 foot on each side.

Sprinkling and rolling required for the compaction of the rough subgrade in advance of fine grading will be measured and paid for as indicated in the governing items of excavation. Maintenance of a moist condition of the subgrade in advance of fine grading and concrete placing will not be paid for directly but shall be included in the unit price bid, as provided above.

Payment will be made under one of the following:

Pay Item No.	360S-A:	__In. Concrete Pavement	Per Square Yard.
Pay Item No.	360S-AH:	__In. Concrete Pavement (High Early Strength)	Per Square Yard.
Pay Item No.	360S-AS:	__In. Concrete Pavement (High Range Water Reducing Admixture)	Per Square Yard.
Pay Item No.	360S-B:	Monolithic Curb	Per Linear Foot.
Pay Item No.	360S-C:	__Concrete Pavement Including Monolithic Curb	Per Cubic Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Standard Specification Item 360S, "Concrete Pavement"

City of Austin Standard Specification Items

Designation	Description
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 313S	Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete)
Item No. 403S	Concrete for Structures
Item No. 405S	Concrete Admixtures
Item No. 410S	Concrete Structures
Item No. 411S	Surface Finishes for Concrete
Item No. 413S	Cleaning and/or Sealing Joints and Cracks (PCC)

American Society for Testing and Materials, ASTM

Designation	Description
ASTM C 42/C 42M	Standard Test Method for Obtaining and Testing Drilled Cores and Sawed Beams of Concrete"
ASTM A 82	Specification for Steel Wire, Plain, for Concrete Reinforcement
ASTM A 184	Specification for Fabricated Deformed Steel Bar Mats for Concrete Reinforcement
ASTM A 185	Specification for Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
ASTM A 496	Specification for Steel Wire, Deformed, for Concrete Reinforcement
ASTM A 497	Specification for Steel Welded Wire Fabric, Deformed, for Concrete Reinforcement

ASTM A 615 Specification for Deformed and Plain Billet-Steel Bars, for Concrete Reinforcement

ASTM A 616 Specification Rail-Steel Deformed and Plain Bars for Concrete Reinforcement

ASTM C 94 Specification for Ready-Mixed Concrete

ASTM C 150 Specification for Portland Cement

ASTM C 156 Test Method for Water Retention by Concrete Curing Materials

ASTM D 2240 Test Method for Rubber Property-Durameter Hardness

ASTM D 882, Method A Test Methods for Tensile Properties of Thin Plastic Sheeting

Texas Department of Transportation: Publications

Designation	Description
Bulletin C-11	Construction Bulletin

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
TEX-203-F	Sand Equivalent Test
TEX-401-A	Sieve Analysis of Fine and Coarse Aggregate
TEX-406-A	Mineral Finer than 75 µm (No. 200) Sieve in Mineral Aggregates (Decantation Test for Concrete Aggregates)
TEX-408-A	Organic Impurities in Fine Aggregate for Concrete
TEX-410-A	Abrasion of Coarse Aggregate Using The Los Angeles Machine
TEX-411-A	Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
TEX-413-A	Determination of Deleterious Materials in Mineral Aggregate

TEX-415-A	Slump of Portland Cement Concrete
TEX-416-A	Air Content of Freshly-Mixed Concrete by the Pressure Method
Tex-424-A	Obtaining and Testing Drilled Cores of Concrete
Tex-436-A	Measurement of Texture Depth by the Sand Patch Method
Tex 418-A	Compressive Strength of Cylindrical Concrete
Tex-524-C	Testing Premolded Joint Filler for Concrete
Tex-612	Acid Insoluble Residue

Texas Department of Transportation: Departmental Material Specifications

Designation	Description
DMS 8900	Fly Ash

American Association of State Highway & Transportation Officials, AASHTO Standard

Designation	Description
Method T 26	Quality of Water to be Used in Concrete

RELATED CROSS REFERENCE MATERIALS
Standard Specification Item 360S, "Concrete Pavement"

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 360	Concrete Pavement
Item 420	Concrete Structures

Item 421	Hydraulic Cement Concrete
Item 427	Surface Finishes for Concrete
Item 431	Pneumatically Placed Concrete
Item 520	Weighing and Measuring Equipment

Texas Department of Transportation: Departmental Material Specifications

Designation	Description
DMS-4650	Hydraulic Cement Concrete Curing Materials and Evaporation Retardants"
DMS-6100	Epoxy and Adhesives

American Society for Testing and Materials, ASTM

Designation	Description
ASTM C 685	Concrete Made By Volumetric Batching and Continuous Mixing
ASTM C-1260	Standard Test Method for Potential Alkali Reactivity of Aggregates
ASTM D-512	Test Methods for Chloride Ion in Water
ASTM D-516	Test Methods for Sulfate Ion in Water
ASTM D-4191	Test Method for Sodium in Water by Atomic Absorption
ASTM D-4192	Test Method for Potassium Water by Atomic Absorption

American Concrete Institute, ACI

Designation	Description
ACI 211.1	Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
TEX-418-A	Compressive Strength of Cylindrical Concrete Specimens

Item No. 402S
Controlled Low Strength Material

402S.1 Description

This item governs Controlled Low Strength Material (CLSM) used for trench backfill and for filling abandoned culverts, pipes, other enclosures, and for other uses as indicated on the drawings, Standard Details or as approved by the Engineer or designated representative. CLSM is a low strength, self-compacting, flowable, cementitious material used in lieu of soil backfill. It is intentionally prepared at low strength to allow for future removal using conventional excavation equipment.

The CLSM shall be composed of Portland cement or fly ash, or both, filler aggregate and water. The CLSM, specified for use in filling abandoned culverts, pipes, or other enclosures, shall contain a settlement compensator, in addition to the other ingredients, to minimize settlement of the CLSM within the enclosure.

Normal Set CLSM shall be specified whenever the material will remain uncovered or will not be subjected to traffic or other loads within 24 hours after placement. Fast Set CLSM shall be specified whenever the material will be covered, subjected to traffic or other loads within 24 hours, or needed to expedite construction.

CLSM can be used for permanent subgrade repairs below the base layer, but shall not be used for permanent pavement repairs. For temporary traffic applications, a minimum 2 inch (50 mm) cap composed of Hot Mix-Cold Laid Asphaltic Concrete (TxDoT Standard Specification Item 334) shall be placed on the CLSM.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

402S.2 Submittals

The submittal requirements of this specification item include:

A. A mix design submittal including the results of unconfined compressive strength tests, air entrainment (if applicable), flow consistency, hardened unit weight, and timed Ball Drop and corresponding Penetrometer tests.
B. Certifications and test results for the cement fly ash, and admixtures.
C. Particle-size gradation and specific gravity tests on the filler aggregate.

402S.3 Materials

A. Cement.

Portland cement shall conform to ASTM C 150, Type I (General Purpose).

Portland cement manufactured in a cement kiln fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Natural Resource Conservation Commission

(TNRCC) and the U. S. Environmental Protection Agency (EPA). Supplier shall provide current TNRCC and EPA authorizations to operate the facility.

B. Fly Ash

Fly ash shall conform to the requirements of Standard Specification Item No. 405, "Concrete Admixtures" and TxDOT Specification Item 437.

C. Filler Aggregate.

Filler aggregate shall consist of sand, stone screenings, pavement milling cuttings or other granular material that is compatible with the other mixture components. The filler aggregate shall be fine enough to stay in suspension to the extent required for proper flow without segregation, and, in the case of filling of enclosures, for minimal settlement. Filler aggregate shall have a Plasticity Index (TxDOT Test Method Tex-106-E) less than 15 and shall conform to the following gradation:

Sieve Designation US	(SI)	Percent Passing
No. 200	(75μm)	0 - 10

D. Mixing Water.

Mixing water shall conform to the requirements of Standard Specification Item No. 403, "Concrete for Structures".

E. Settlement Compensator

An air entraining admixture with a higher than usual dosage, which meets the requirements of Standard Specification Item No. 405, "Concrete Admixtures", shall be used as a settlement compensator. The settlement compensator may be introduced to the CLSM at the job site by placement of prepackaged admixture in capsules or bags in the mixing drum in accordance with the admixture manufacturer's recommendations.

402S.4 Mix Design

The proportioning of CLSM shall be the responsibility of the Contractor. The Contractor shall furnish a mix design conforming to the requirements herein, for review and approval by the Engineer or designated representative. The mix design shall be prepared by a qualified commercial laboratory and then reviewed and signed by a registered Professional Engineer licensed in the State of Texas.

The Mix Design submittal must include:

A. Test results for unconfined compressive strength, air entrainment (if applicable), flow consistency, hardened unit weight, and timed Ball Drop (ASTM C-360) and corresponding Penetrometer tests (with a concrete pocket penetrometer),

B. Certifications and test results for the cement, fly ash, and admixtures, and

C. Results of particle-size gradation and specific gravity tests on the filler aggregate. The submittal shall include Penetrometer tests performed every thirty minutes

until the Ball Drop test shows a 2-inch (50 mm) indentation, as well as the predicted Penetrometer reading that corresponds to a 3-inch (75 mm) Ball Drop indentation. Particle-size gradation shall be determined using a series of sieves that gives no fewer than five uniformly spaced points for graphing the entire range of particle sizes larger than a No. 200 sieve (75-µm).

The Contractor shall perform the work required to substantiate the design at no cost to the City, including all testing. Approved mix designs shall be valid for one year, provided there are no changes in the type, source, or characteristics of the materials during that year.

At the end of one year, the mix design may be submitted for renewal, provided that:

A. field tests of the CLSM during the year have been satisfactory,
B. there have been no changes in type or source of the materials of the mix, and
C. the characteristics of the materials have not changed significantly since the original submittal.

The Contractor shall also submit certifications and test results for the cement, fly ash and admixtures, and particle-size gradation and specific gravity test results for the filler aggregate. The Contractor shall compare results of tests made on the filler aggregate at the end of the year to the results of tests reported in the original submittal. Gradation changes less than ten percent in percent passing any sieve and specific gravity changes less than five percent shall not be considered significant.

402S.5 Strength

The CLSM mix designs shall meet the unconfined compressive strength requirements outlined in the table below. The compression tests shall be conducted in accordance with TxDOT Method Tex-418-A, using approved unbonded caps on specimens with four-inch (100 mm) diameter and eight-inch (200 mm) height [or three-inch (75 mm) diameter by six-inch (150 mm) high specimens if a smaller capacity loading device gives more accurate results].

Unconfined Compressive Strength, psi (mPa)		
Age	Normal Set CLSM	Fast Set CLSM
3 hours	—	35 (0.24) minimum
24 hours	35 (0.24) minimum	—
28 days	300 (2.1) maximum	300 (2.1) maximum

402S.6 Flow Consistency

Flow consistency shall be established in tests involving the use of a six-inch (150 mm) length by three-inch (75 mm) diameter open-ended straight tubing made of steel, plastic or other non-absorbent material that is non-reactive with cement or fly ash. The tube shall be placed with one end on a horizontal flat surface and held in a vertical position. The tube shall then be filled to the top with CLSM. The top surface shall be struck off with a suitable straight edge and any spillage shall be removed from the base of the tube. Within five seconds thereafter the tube shall be raised carefully, using a steady

upward lift with no lateral or torsional motion. The entire test, from the start of filling until removal of the tube, shall be completed within 1½ minutes without interruption.

After removal of the tube, the spread of the CLSM shall be measured immediately along two diameters that are perpendicular to one another. The average of those two measurements is defined as the flow consistency of the mix. The flow consistency of the CLSM shall be considered satisfactory if a circular-type spread of the mix occurs without segregation and a flow consistency (average diameter of spread) of 8 inches (200 mm) or more is achieved.

402S.7 Air Entrainment

Air entraining admixture shall be added as a settlement compensator, whenever the CLSM will be used to fill an enclosure (Section 402S-1). The dosage shall be sufficient to result in an air content of 15 to 25 percent (as determined by TxDOT Method Tex-416-A) at the time of placement of the CLSM.

402S.8 Field Strength Tests

Ball Drop or Penetrometer tests shall be used to determine, when the CLSM has developed sufficient strength to be covered or subjected to traffic or other loads as approved by the Engineer or designated representative.

The Ball Drop test shall be performed according to the latest version of ASTM C-360. An indentation diameter of three inches (75 mm) or less, and the absence of a sheen or any visible surface water in the indentation area shall indicate that the CLSM has achieved the desired strength. Because trench width and depth may affect the test results, the Contractor may perform this test on a control sample of CLSM in a two-foot (600 mm) square by six-inch (150 mm) deep container.

Penetrometer tests using a hand-held, spring reaction-type device commonly called a concrete pocket penetrometer, shall be performed on the surface of the CLMS. A Penetrometer reading, equal to or greater than the value established in the mix design (Section 402S.4) for a Ball Drop test indentation of 3-inches (75 mm), shall indicate that the CLSM has achieved the desired strength.

402S.9 Construction Methods

A. General

The height of free fall placement of the CLSM shall not exceed four feet (1.2 meters). Since CLSM is considered to be self-compacting, a vibrator shall not be allowed. The CLSM shall not be covered with any overlying materials or subjected to traffic or other loads until the Ball Drop test or the Penetrometer test shows acceptable results (Section 402S.8) or until the CLSM has been in place a minimum of 24 hours for Normal Set CLSM and a minimum of 3 hours for Fast Set CLSM. Curing of the CLSM will not be required.

B. Utility Line Backfill

After the utility pipe has been placed and the proper bedding material placed in accordance with the details on the drawings, the trench may be immediately backfilled with the CLSM to the subgrade level shown on the drawings, Standard Details 1100S-6A, B, C & D, 430S-4, 511S-13A and 511S-13B or as directed by the Engineer or designated representative.

C. Culvert Backfill

Care shall be taken to prevent movement of the structure. If the pipe or structure moves either horizontally or vertically, the CLSM and the structure shall be immediately removed and the pipe or structure re-laid to proper line and grade.

D. Other Backfill

CLSM may be used for backfill material in lieu of soil as shown on the drawings, Standard Details or as approved by the Engineer or designated representative.

E. Filling Abandoned Culverts, Pipe, or other Enclosures

The CLSM shall be placed in a manner that allows all air or water, or both, to be displaced readily as the CLSM fills the enclosure.

402S.10 Acceptance Testing During Construction

The Engineer or designated representative may perform flow consistency, air entrainment, and unconfined compressive strength tests to determine if the CLSM meets the specification requirements. The number and frequency of acceptance tests will be determined by the Engineer or designated representative.

402S.11 Measurement and Payment

The work and materials presented herein will generally not be paid for directly, but shall be included in the unit price bid for the item of construction in which this item is used.

When specified in the contract bid form as a separate pay item, the item will be paid for at the contract unit bid price(s) for "Controlled Low Strength Material". The bid prices shall include full compensation for all Work herein specified, including the furnishing of all materials, equipment, tools, labor and incidentals necessary to complete the Work.

Payment will be made under the following:

Pay Item No. 402S-A: Controlled Low Strength Material Per Cubic Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Standard Specification Item 402S, “Controlled Low Strength Material”

City of Austin Standard Details

Designation	Description
430S-4	Concrete Backfill Under Curb & Gutter
506S-14	Control or Mini Manhole
511S-13A	Water Valve Box Adjustment to Grade W/ Full Depth Concrete
511S-13B	Water Valve Box Adjustment to Grade W/ Concrete and H.M.A.C.

1100S-6A	Narrow Excavation Next to C&G - Trench Width 0.3 M (12") & Less
1100S-6B	Narrow Excavations - Trench Width 0.3 M (12") & Less
1100S-6C	Excavation Next to C&G - Trench Width Greater than 0.3 M (12")
1100S-6D	Excavations - Trench Width Greater than 0.3 M (12")

City of Austin Standard Specification Items

Designation	Description
Item No 403S	Concrete for Structures
Item No 405S	Concrete Admixtures

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 334	Hot Mix-Cold Laid Asphaltic Concrete Pavement
Item No. 420	Concrete Structures
Item No. 421	Portland Cement Concrete
Item No. 437	Concrete Admixtures

RELATED CROSS REFERENCE MATERIALS
Standard Specification Item 402S, “Controlled Low Strength Material”

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-106-E	Method Of Calculating the Plasticity Index of Soils
Tex-416-A	Air Content of Freshly Mixed Concrete By The Pressure Method
Tex-418-A	Compressive Strength of Cylindrical Concrete

American Society for Testing and Materials (ASTM)

Designation	Description
ASTM C 150	Portland Cement
ASTM C 360	Ball Penetration in Fresh Portland Cement Concrete
ASTM C 403	Time of Setting of Concrete Mixtures by Penetration Resistance

City of Austin Standard Specification Items

Designation	Description
Item No. 504S	Adjusting Structures
Item No. 506S	Manholes
Item No. 508S	Miscellaneous Structures and Appurtenances
Item No. 510	Pipe

Item No. 403S
Concrete for Structures

403S.1 Description

This item shall govern quality, storage, handling, proportioning and mixing of materials for hydraulic cement concrete construction of buildings, bridges, culverts, slabs, prestressed concrete and incidental appurtenances.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

403S.2 Submittals

The submittal requirements of this specification item may include:

Mix design option(s) of the class of concrete required on the project,

The supplier of the concrete mix design(s) and type of mixing equipment, and

Type of admixtures to be used with the concrete mixes.

403S.3 Materials

Concrete shall be composed of hydraulic cement or hydraulic cement and supplementary cementing materials, water, aggregates (fine and coarse), and admixtures proportioned and mixed as hereinafter provided to achieve specified results.

A. Cementitious Materials

Hydraulic cement shall conform to ASTM C 150, Type I (General Purpose), Type II (General Purpose with Moderate Sulfate Resistance) and Type III (High Early Strength). Type I shall be used when none is specified or indicated on the drawings. Type I and Type III cements shall not be used when a Type II cement is specified or indicated on the drawings. Type III cement may be used in lieu of a Type I cement, when the anticipated air temperature for the succeeding 12 hours will not exceed 60oF (15.6oC). A Type III cement shall only be used in precast concrete or when otherwise specified or allowed. All cement shall be of the same type and from the same source for a monolithic placement.

Unless otherwise specified the cementitious material content shall be limited to no more than 700 lbs. per cubic yard (417 kg per cubic meter). When supplementary cementing materials are used, cement is defined as “cement plus supplementary cementing material.” Supplementary cementing materials include fly ash (DMS 4610), ultra-fine fly ash (DMS-4610), ground granulated blast furnace slag grade 100 or 120 (DMS-4620), silica fume (DMS-4630) and metakaolin (DMS-4635).

Supplementary cementing materials shall not be used when white hydraulic cement is specified.

Class C flyash shall not be used in sulfate-resistant concrete.

Hydraulic cement manufactured in a cement kiln fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Commission on Environmental Quality (TCEQ) and the U. S. Environmental Protection Agency (EPA). Supplier shall provide current TNRCC and EPA authorizations to operate the facility.

When sulfate-resistant concrete is required for a project, mix design options 1, 2, 3 or 4 presented in Section 403S.8, "Mix Design Options" shall be used to develop appropriate mix design utilizing Type I/II, II, V, IP or IS cement.

B. Mixing Water

Water for use in concrete and for curing shall be potable water free of oils, acids, organic matter or other deleterious substances and shall not contain more than 1,000 parts per million of chlorides as Cl or sulfates as SO4.

Water from the City of Austin will not require testing. Contractor may request approval of water from other sources. Contractor shall arrange for samples to be taken from the source and tested at the Contractor's expense. When water from other sources is proposed, test reports shall be provided that indicates compliance with Table 1 before use.

Table 1: Chemical Limits for Mix Water		
Contaminant	Test Method	Maximum Concentration (ppm)
Chloride (CL) Prestressed concrete Bridge decks & superstructure All other concrete	ASTM D-512	 500 500 1,000
Sulfate (SO4)	ASTM D-516	1,000
Alkalies (NA2O + 0.658 K2O)	ASTM D-4191 & D-4192	600
Total Solids	AASHTO T-26	50,000

Water that has an adverse effect on the air-entraining agent or any other chemical admixture or on strength or time of set of the concrete shall not be used. Water used in white Portland cement concrete shall be free from iron and other impurities, which may cause staining, or discoloration.

C. Coarse Aggregate

Coarse aggregate shall consist of durable particles of crushed or uncrushed gravel, crushed blast furnace slag, crushed stone or combinations thereof; free from frozen material or injurious amounts of salt, alkali, vegetable matter or other objectionable material either free or as an adherent coating. When white hydraulic

cement is specified, the coarse aggregates used in the concrete shall be light colored. Quality shall be reasonably uniform throughout.

The coarse aggregate from each source shall not contain more than 0.25 percent by weight of clay lumps, nor more than 1.0 percent by weight of shale nor more than 5 percent by weight of laminated and/or friable particles when tested in accordance with TXDOT Test Method TEX-413-A. The coarse aggregate from each source shall have a wear of not more than 40 percent when tested in accordance with TXDOT Test Method TEX-410-A.

Unless otherwise indicated on the drawings, the coarse aggregate from each source shall be subjected to 5 cycles of the soundness test conforming to TXDOT Test Method TEX-411-A. The loss shall not be greater than 12 percent when sodium sulfate is used or 18 percent when magnesium sulfate is used.

Coarse aggregate shall be washed. The Loss by Decantation (TXDOT Test Method TEX-406-A), plus allowable weight of clay lumps, shall not exceed 1 percent or the value indicated on the drawings or in the project manual, whichever is less. If material finer than the # 200 (75 micrometer) sieve is definitely established to be dust of fracture of aggregates made primarily from crushing of stone, essentially free from clay or shale as established by Part III of TXDOT Test Method TEX-406-A, the percent may be increased to 1.5. When crushed limestone coarse aggregate is used in concrete pavements, the decant may exceed 1% but not more than 3% if the material finer than the # 200 (75 micrometer) sieve is determined to be at least 67% calcium carbonate in accordance with TxDoT Test Method Tex-406-A, Part III.

The coarse aggregate factor may not be more than 0.82; however, when voids in the coarse aggregate exceed 48 percent of the total rodded volume, the coarse aggregate factor shall not exceed 0.85. The coarse aggregate factor may not be less than 0.68 except for a Class I machine extruded mix that shall not have a coarse aggregate factor lower than 0.61.

When exposed aggregate surfaces are required, the coarse aggregate shall consist of particles with at least 40 percent crushed faces. Uncrushed gravel, polished aggregates and clear resilient coatings are not acceptable for exposed aggregate finishes.

When tested by approved methods, the coarse aggregate including combinations of aggregates when used, shall conform to the grading requirements shown in Table 2.

Table 2: Coarse Aggregate Gradation Chart (Percent Passing)

Grade	Nom. Size	2-1/2" (62.5 mm)	2" (50 mm)	1 ½" (37.5 mm)	1" (25 mm)	3/4" (19 mm)	1/2" (12.5 mm)	3/8" (9.5 mm)	No. 4 (4.75 mm)	No. 8 (2.36 mm)
1	2" (50 mm)	100	80-100	50-85		20-40			0-5	
2 (467)*	1 1/2" (37.5 mm)		100	95-100		35-70		10-30	0-5	
3	1" (50 mm)		100	95-100		60-90	25-60		0-5	

4 (57)*	1” (50 mm)			100	95-100		25-60		0-10	0-5
5 (67)*	3/4” (19 mm)				100	90-100		20-55	0-10	0-5
6 (7)*	½" (12.5 mm)					100	90-100	40-70	0-15	0-5
7	3/8" (9.5 mm)						100	70-95	0-25	
8	3/8" (9.5 mm)						100	95-100	20-65	0-10

Notes:

1. Recycled crushed concrete fine aggregate shall be limited to a maximum of 20% of the fine aggregate.

2. The use of recycled crushed hydraulic cement concrete as a coarse aggregate shall be limited to Concrete Classes A, B and D (see Table 5).

D. Fine Aggregate

Fine aggregate shall be washed and consist of clean, hard, durable and uncoated particles of natural or manufactured sand or a combination thereof, with or without a mineral filler. When white hydraulic cement is specified, the fine aggregates used in the concrete shall be light colored. Quality shall be reasonably uniform throughout It shall be free from frozen material or injurious amounts of salt, alkali, vegetable matter or other objectionable material and it shall not contain more than 0.5 percent by weight of clay lumps in accordance with TEX-413-A. When subjected to color test for organic impurities per TXDOT Test Method TEX-408-A, it shall not show a color darker than standard.

Unless indicated otherwise on the drawings the acid insoluble residue of fine aggregate used in slab concrete subject to direct traffic shall not be less than 60 percent by weight (mass) when tested conforming to TXDOT Test Method TEX-612-J.

Unless indicated otherwise on the Drawings, fine aggregate shall be blended, when necessary, to meet the acid insoluble residue requirement.

When blending the following equation shall be used:

Acid Insoluble (%) = {(A1)(P1)+(A2)(P2)}/100

Where:

A1 = acid insoluble (%) of aggregate 1,

A2 = acid insoluble (%) of aggregate 2,

P1 = % by weight of A1 of the fine aggregate blend, and

P2 = % by weight of A2 of the fine aggregate blend.

When tested in accordance with TxDoT Test Method Tex-401-A, the fine aggregate, including mineral filler and combinations of aggregates, when used, shall conform to the grading requirements shown in Table 3.

Table 3: Fine Aggregate Gradation Chart1 (Grade 1 - Percent Passing)

3/8 (9.5 mm)	No. 4 (4.75 mm)	No. 8 (2.36 mm)	No. 16 (1.18 mm)	No. 30 (600 µm)	No. 50 (300 µm)	No. 100 (150 µm)	No. 200 (75 µm)
100	95-100	80-100	50-85	25-65	10-351	0-10	0-32

Notes:

1. Recycled crushed concrete fine aggregate shall be limited to a maximum of 20% of the fine aggregate.

2. The use of recycled crushed hydraulic cement concrete as a fine aggregate shall be limited to Concrete Classes A, B and D (see Table 5).

3. 6 to 35 when sand equivalent value is greater than 85.

4. 0 to 6 for manufactured sand.

   Sand equivalent per TXDOT Test Method TEX-203-F shall not be less than 80 nor less than otherwise indicated on the drawings, whichever is greater.

   The fineness modulus will be determined by adding the percentages by weight retained on sieve Nos. 4, 8, 16, 30, 50 and 100 (4.75 mm, 2.36 mm, 1.18mm, 600 µm, 300 µm, and 150 µm) and dividing the sum of the six sieves by 100. For all classes of concrete except K (see Table 5), the fineness modulus shall be between 2.30 and 3.10. For Class K concrete, the fineness modulus shall be between 2.40 and 2.90, unless indicated otherwise on the Drawings.

E. Mineral Filler

Mineral filler shall consist of stone dust, clean crushed sand or other approved inert material. When tested in accordance with TxDoT Test Method Tex-401-A, it shall conform to the following gradation:

Passing the No. 30 (600 µm) Sieve 100 percent

Passing the No. 200 (75 µm) Sieve 65 to 100 percent

F. Mortar and Grout

Unless otherwise specified, indicated on the drawings or approved by the Engineer or designated representative mortar and grout shall consist of 1 part hydraulic cement, 2 parts finely graded sand and enough water to make the mixture plastic. When required to prevent color difference, white cement shall be added to produce color required. When required by the Engineer or designated representative, approved latex adhesive may be added to the mortar. Mortar shall be provided with a consistency such that the mortar can be easily handled and spread by trowel.

Grout shall be provided of a consistency that will flow into and completely fill all voids.

G. Admixtures

All chemical admixtures including water reducing, placticizers and air entrainment shall conform to TxDoT DMS-4640, “Chemical Admixtures for Concrete”. Calcium chloride-based admixtures shall not be approved. Admixtures shall be included in the prequalified concrete admixtures list maintained by TxDot’s Construction Division. High-range water-reducing admixtures (TxDoT Type F or G) and accelerating admixtures (TxDoT Type C or E) shall not be used in bridge deck concrete.

H. Air Entrainment

Unless indicated otherwise on the drawings, all concrete classes with the exception of Class B shall be air;entained in accordance with Table 8. If the air content is more than 1-1/2 percentage points below or 3 percentage points above the required air, the load of concrete will be rejected. If the air content is more than 1-1/2 but less than 3 percentage points above the required air, the concrete may be accepted based on strength test results.

403S.4 Storage of Materials

A. Cement, Supplementary Cementing Materials and Mineral Filler

All cement, supplementary cementing materials and mineral filler shall be stored in separate and well ventilated, weatherproof buildings or approved bins, which will protect the material from dampness or absorption of moisture. Storage facilities shall be easily accessible and each shipment of packaged cement shall be kept separated to provide for identification and inspection. The Engineer or designated representative may permit small quantities of sacked cement to be stored in the open for a maximum of 48 hours on a raised platform and under waterproof covering.

B. Aggregates

The method of handling and storing concrete aggregates shall prevent contamination with foreign materials. If the aggregates are stored on the ground, the sites for the stockpiles shall be clear of all vegetation and shall be level. Aggregates shall be stockpiled in sizes to facilitate blending. If the aggregate is not stockpiled on a hard, non-contaminant base, the bottom 6-inch (150 mm) layer of the stockpile shall not be used without recleaning the aggregate.

When conditions require the use of 2 or more grades of coarse aggregates, separate stockpiles shall be maintained to prevent intermixing. Where space is limited, stockpiles shall be separated by walls or other appropriate barriers.

Aggregate shall be stockpiled and protected from the weather a minimum of 24 hours prior to use to minimize free moisture content. When stockpiles are too large to protect from the weather, accurate and continuous means acceptable to the Engineer or designated representative shall be provided to monitor aggregate

temperature and moisture. Aggregates shall be stockpiled and handled such that segregation and contamination are minimized.

The stockpiles shall be sprinkled to control moisture and temperature as necessary. A reasonably uniform moisture content shall be maintained in aggregate stockpiles.

C. Admixtures

Admixtures shall be stored in accordance with manufacturer's recommendations and shall be protected against freezing.

D. Hot Weather Concrete Mixes

Ice may be used during hot weather concrete placement (Section 13 of Standard Specification Item No. 410S, "Concrete Structures") to lower the concrete temperature; however, the Contractor shall furnish a mix design acceptable to the Engineer or designated representative for class of concrete specified. The addition of ice shall not exceed 50% of the total mix water weight.

403S.5 Measurement of Materials

Water shall be accurately metered. Fine and coarse aggregates, mineral filler, bulk cement and fly ash shall be weighed separately. Allowances shall be made in the water volume and aggregate weights during batching for moisture content of aggregates and admixtures. Volumetric and weight measuring devices shall be acceptable to the Engineer or designated representative. Measurement of materials in non-volumetric and volumetric mixers shall conform to Section 421.4.D of TxDot Specification Item 421, "Hydraulic Cement Concrete".

Batch weighing of sacked cement is not required; however, bags, individually and entire shipments, may not vary by more than 3 percent from the specified weight of 94 pounds (42.6 kilograms) per bag. The average bag weight of a shipment shall be determined by weighing 50 bags taken at random.

403S.6 Mix Design

The Contractor shall furnish a mix design acceptable to the Engineer or designated representative for the class of concrete required in accordance with Table 5. The mix shall be designed by a qualified commercial laboratory and signed/sealed by a registered Professional Engineer, licensed in the state of Texas to conform with requirements contained herein, to ACI 211.1 or TXDOT Bulletin C-11 (and supplements thereto). The maximum water-to-cementitious material ratio identified in Table 5 for specific classes of concrete shall not be exceeded.

A higher-strength class of concrete with equal or lower water-to-cementituous-material ratio may be substituted for the specified class of concrete.

The mix design shall be over-designed in accordance with Table 5 in order to account for production variability and to ensure minimum compressive strength requirements are met.

Allowable mix design options are presented in Section 403S.8.

The Contractor shall perform, at the Contractor's expense, the work required to substantiate the design, including testing of strength specimens. Complete concrete design data shall be submitted to the Engineer or designated representative for approval. The mix design will be valid for a period of one (1) year provided that there are no changes to the component materials.

When there are changes in aggregates or in type, brand or source of cement, supplementary cementing material or chemical admixtures, the mix shall be evaluated as n new mix design. A change in vendor does not necessarily constitute a change in materials or source. When only the brand or source of cement is changed and there is a prior record of satisfactory performance of the cement with the ingredients, the submittal of new trial batches may be waived by the Engineer or designated representative.

At the end of one (1) year, a previously approved mix may be resubmitted for approval if it can be shown that no substantial change in the component materials has occurred and that test results confirming the adequacy of the mix designs have been acquired during the previous year. The resubmittal analysis must be reviewed, signed and sealed by a registered Professional Engineer, licensed in the state of Texas. This resubmittal shall include a reanalysis of specific gravity, absorption, fineness modulus, sand equivalent, soundness, wear and unit weights of the aggregates. Provided that the fineness modulus did not deviate by more than 0.20 or that the re-proportioned total mixing water, aggregate and cement (or cement plus fly ash) are within 1, 2, and 3 percent, respectively, of pre-approved quantities, a one-year extension on the approval of the mix may be granted by the Engineer or designated representative. Updated cement, fly ash, and admixture certifications shall accompany the resubmittal.

Approved admixtures that are included in the prequalified concrete admixtures list maintained by TxDot's Construction Division may be used with all classes of concrete at the option of the Contractor provided that specific requirements of the governing concrete structure specification are met. Water reducing and retarding agents shall be required for hot weather, large mass, and continuous slab placements. Air entraining agents may be used in all mixes but must be used in the classes indicated on Table 5. Unless approved by the Engineer or designated representative, mix designs shall not exceed air contents for extreme exposure conditions as recommended by ACI 211.1 for the various aggregate grades.

403S.7 Consistency and Quality of Concrete

Concrete shall be workable, cohesive, possess satisfactory finishing qualities and of stiffest consistency that can be placed and vibrated into a homogeneous mass within slump requirements specified in Table 4 without the development of segregation or honeycombing. No concrete will be permitted with a slump in excess of the maximums

shown unless water-reducing admixtures have been previously approved. Concrete that exceeds the maximum acceptable placement slump at time of delivery will be rejected. Slump values shall be conducted in accordance with TXDOT Test Method TEX-415-A.

Consistency and quality of concrete should allow efficient placement and completion of finishing operations before initial set. Re-tempering (i.e. addition of water and reworking concrete after initial set) shall not be allowed. When field conditions are such that additional moisture is needed for final concrete surface finishing operation, the required water shall be applied to surface by fog spray only and shall be held to a minimum. Excessive bleeding shall be avoided and in no case will it be permissible to expedite finishing and drying by sprinkling the surface with cement powder.

Table 4: Slump Requirements

	Slump1, inches (mm)	
Type of Construction	Maximum	Minimum
Cased Drilled Shafts	4 (100)	3 (75)
Reinforced Foundation Caissons and Footings	3 (75)	1 (25)
Reinforced Footings and Substructure Walls	3 (75)	1 (25)
Uncased Drilled Shafts	6 (150)	5 (125)
Thin-walled Sections; 9 inches (225 mm) or less	6 ½ (165)	4 (100)
Prestressed Concrete Members1	6 ½ (165)	4 (100)
Precast Drainage Structures	6 (150)	4 (100)
Wall Sections over 9 inches (225 mm)	5 (125)	3 (75)
Reinforced Building Slabs, Beams, Columns and Walls	4 (100)	1 (25)
Bridge Decks	4 (100)	2 (50)
Pavements, Fixed-form	6 ½ (165)	4 (100)
Pavements, Slip-form	3 (75)	1-½ (37.5)
Sidewalks, Driveways and Slabs on Ground	4 (100)	2 (50)
Curb & Gutter, Hand-vibrated	3 (75)	1 (25)
Curb & Gutter, Hand-tamped or spaded	4 (100)	2 (50)
Curb & Gutter, Slip-form/extrusion machine	2 (50)	½ (12.5)
Heavy Mass Construction	2 (50)	1 (25)
High Strength Concrete	4 (100)	3 (75)
Riprap and Other Miscellaneous Concrete	6 (150)	1 (25)
Under Water or Seal Concrete	8 ½ (213)	6 (150)

1. Slump values when a high range water reducer (HRWR) is not used.

2. When a high range water reducer (HRWR) is used, maximum acceptable placement slump will be 9 in (225 mm)

During progress of the work, the Engineer or designated representative shall cast test cylinders as a check on compressive strength of concrete actually placed. The Engineer or designated representative may also perform slump tests, entrained air tests and temperature checks to ensure compliance with specifications.

Proportioning of all material components shall be checked prior to discharging. Excluding mortar material for pre-coating of the mixer drum [see section 403S.8.B and adjustment for moisture content of admixtures and aggregates, material components shall fall within the range of + 1% for water, + 2% for aggregates, + 3% for cement, +2% for fly ash and within manufacturer recommended dosage rates for admixtures except that air entrainment shall be within + 1-1/2 percentage points of the mix design requirements.

Unless otherwise specified or indicated on the drawings, concrete mix temperature shall not exceed 90°F (32oC) except in mixes with high range water reducers where a maximum mix temperature of 100°F (38oC) will be allowed. Cooling an otherwise acceptable mix by addition of water or ice during agitation will not be allowed.

Test cylinders will be required for small placements such as manholes, inlets, culverts, wing walls, etc. The Engineer or designated representative may vary the number of tests to a minimum of 1 for each 25 cubic yards (1 for each 19 cubic meters) placed over a several day period.

Test cylinders shall be required for each monolithic placement of bridge decks or superstructures, top slabs of direct traffic culverts, cased drilled shafts, structural beams and as otherwise directed by Engineer or designated representative for design strength confirmation or early form removal. Test cylinders made for early form removal or for consideration of use of structure will be at Contractor's expense, except when required by Engineer or designated representative.

A strength test shall be defined as the average breaking strength of 2 cylinders. A minimum of four test cylinders shall be prepared; two each to be tested at 7 and 28 days. Specimens will be tested conforming to TXDOT Test Method TEX-418-A. If required strength or consistency of class of concrete being produced cannot be secured with minimum cementitious material specified or without exceeding maximum water/cementitious material ratio, Contractor will be required to furnish different aggregates, use a water reducing agent, an air entraining agent or increase the cement content in order to provide concrete meeting these specifications.

Slump tests will be performed in accordance with TxDoT Test Method Tex-415-A. Entrained air tests will be performed in accordance with TxDoT Test Method Tex-416-A.

Test specimens shall be cured using the same methods and under the same conditions as the concrete represented. Design strength cylinders shall be cured conforming to TXDOT Bulletin C-11 (and supplements thereto).

When control of concrete quality is by 28-day compressive tests, job control testing will be by 7-day compressive strength tests. The minimum strength requirement for seven (7) day test will be 70 percent of the specified minimum 28-day compressive strength. If the required 7-day strength is not secured with the quantity of cement specified in Table 4, changes in the mix design shall be made and resubmitted for approval. For an occasional failure of the seven-day compressive test, the concrete may be tested at 28 days for final evaluation.

Table 5: Classes of Concrete

Class	Cement Sks Per CY	Minimum Strength, psi (MPa)		Maximum W/C Ratio1	Coarse Aggr. Grade 2,3,4	Air Entrain.
		28 Days	7 Days			
A	5.0 (280 kg/m3)	3000 (20.6)	2100 (14.5)	0.6	1,2,3,4, 8	Yes
B	4.0 (225 kg/m^3)	2000 (13.8)	1400 (9.7)	0.6	2,3,4,5,6,7	No
C5	6.0 (335 kg/m^3)	3600(24.8)	2520 (17.4)	0.45	1,2,3,4,5,6	Yes
D	4.5 (252 kg/m^3)	2500 (17.2)	1750 (12.1)	0.6	2,3,4,5,6,7	No
H5	6.0 (335 kg/m^3)	As indicated	As Indicated	0.45	3,4,5,6	Yes
I	5.5 (308 kg/m^3)	3500 (24.1)	2450 (16.9)	0.45	2,3,4,5	Yes
J	2.0 (112 kg/m^3)	800 (5.5)	560 (3.9)	N/A	2,3,4,5	No
S5	6.0 (335 kg/m^3)	4000 (27.6)	2800 (19.3)	0.45	2,3,4,5	Yes

Notes:

1. Maximum water-cement or water-cementitious ratio by weight

2 Unless otherwise allowed, Grade 1 coarse aggregate shall only be used in massive foundations with 4-in (100-mm) minimum clear spacing between reinforcing steel bars.

3. Grade 1 coarse aggregate grading shall not be used in drilled shafts.

4. Unless otherwise allowed, Grade 8 coarse aggregate shall be used in extruded curbs.

5. Structural concrete classes.

6. When Type II cement is used in Class C, S or A concrete, the 7-day compressive strength requirement will be 2310 psi (15.9 MPa) for Class C, 2570 psi (17.7 MPa) for Class S and 1925 psi (13.3 MPa) for Class A minimum.

Table 6: Over Design Required to Meet Compressive Strength Requirements$_1$

Number Of Tests $_{2,3}$	Standard Deviation, psi (MPa)				
	300 (2.06)	400 (2.75)	500 (3.44)	600 (4.13)	700 (4.82)
15	470 (3.24)	620 (4.27)	850 (5.85)	1,120	1,390

				(7.71)	(9.57)
20	430 (2.96)	580 (3.99)	760 (5.23)	1,010 (6.95)	1,260 (8.67)
30 or more	400 (2.75)	530 (3.65)	670 (4.61)	900 (6.20)	1,130 (7.78)

Notes:

1. When designing the mix, add the tabulated amounts to the minimum design strength in Table 5.Maximum water-cement or water-cementitious ratio by weight

2. Number of tests of a concrete mixture used to estimate the standard deviation of a concrete production facility. Test of another mix within 1,000 psi (6.88 MPa) of the specified strength may be used.

3. If less than 15 prior tests are available, the overdesign should be 1,000 psi (6.88 MPa) for specified strength less than 3,000 psi (20.65 MPa), 1,200 psi (8.26 MPa) for specified strengths from 3,000 to 5,000 psi (20.65 to 34.42 MPa) and 1,400 psi (9.64 MPa) for specified strengths greater than 5,000 psi (34.42 MPa).

Table 7: Expected Usage of Concrete Classes

Class	General Usage
A	Inlets, manholes, curb, gutter, curb & gutter, concrete retards, sidewalks, driveways, backup walls and anchors
B	Riprap, small roadside signs and anchors
C5	Drilled shafts, bridge substructure, bridge railing, culverts except top slab of direct traffic culverts, headwalls, wing walls, approach slabs, and cast-in-place concrete traffic barrier
D	Riprap
H5	Prestressed concrete beams, boxes, piling and precast concrete traffic barrier
J	Utility trench repair
S5	Bridge slabs and top slabs of direct traffic culverts

Table 8: Air Entrainment[1]

Nominal Maximum Aggregate Size In (mm)	% Air Entrainment	
	Moderate Exposure	Severe Exposure
3/8 (9.5)- Grades 7 & 8	6	7-1/2
1/2 (12.5)- Grades 6	5-1/2	7
3/4 (19)- Grades 5	5	6
1 (25)- Grades 4	4-1/2	6
1-1/2 (37.5)- Grades 2 & 3	4-1/2	5-1/2
2 (50)- Grades 2	4	5

1. For specified concrete strengths above 5,000 psi (34.42 MPa) a reduction of 1 percentage point is allowed.

403S.8 Mix Design Options

For the structural concretes identified in Table 5 (Classes C, H and S) and any other class of concrete designed using more than 520 lbs. of cementitious material per cubic yard (310 kgs per cubic meter), one of the mix design options presented below shall be used.

For the non-structural concretes identified in Table 5 (Classes A, B, D and I) and any other class of concrete designed using less than 520 lbs. of cementitious material per cubic yard (310 kgs per cubic meter), one of the mix design options presented below will be used, except that Class C fly ash may be used instead of Class F fly ash for Options 1, 3 and 4 unless a sulfate-resistant concrete is required.

A. Option 1: Twenty (20) to thirty-five (35) percent of the cement may be replaced with Class F fly ash.

B. Option 2: Thirty-five (35) to fifty (50) percent of the cement may be replaced with ground granulated blast-furnace slag.

C. Option 3: Thirty-five (35) to fifty (50) percent of the cement may be replaced with a combination of Class F fly ash, ground granulated blast-furnace slag or silica fume. The combination may not include more than thirty-five (35) percent fly ash and no more than ten (10) percent silica fume.

D. Option 4: Type IP or Type IS will be used and up to ten (10) percent of the cement may be replaced with Class F fly ash, ground granulated blast-furnace slag or silica fume.

E. Option 5: Thirty-five (35) to fifty (50) percent of the cement may be replaced with a combination of Class C fly ash and at least six (6) percent of silica fume, ultra fine fly ash or metakaolin. The combination may not include more than thirty-five (35) percent fly ash and no more than ten (10) percent silica fume.

F. Option 6: A lithium nitrate admixture will be added at a minimum dosage of 0.55 gal. Of thirty (30) percent lithium nitrate solution per pound of alkalis present in the hydraulic cement.

G. Option 7: When hydraulic cement only is used in the design, the total alkali contribution from the cement in the concrete does not exceed 4.0 lbs. Per cubic yard, when calculated as follows:

alkali (lbs. per CY) = .01 (lbs cement/CY) (% Na_2O equivalent in cement)

where (% Na_2O equivalent in cement) is assumed to be the maximum cement alkali content reported on the cement mill certificate.

H. Option 8: When there are deviations from Options 1 through 7, the following shall be performed:

1. Conduct tests on both coarse and fine aggregate separately in accordance with ASTM C-1260, using 440 g of the proposed cementitious in the same proportions of hydraulic cement to supplementary cementing material to be used in the mix.

2. Prior to use of the mix, a certified test report signed and sealed by a Professional Engineer, licensed in the state of Texas shall be submitted that demonstrates that ASTM C 1260 test results for each aggregate do not exceed 0.10 percent expansion.

403S.9 Mixing and Mixing Equipment

All equipment, tools and machinery used for hauling materials and performing any part of the work shall be maintained in such condition to insure completion of the work without excessive delays for repairs and replacement. Mixing shall be done in a mixer of approved type and size that will produce uniform distribution of material throughout the mass and shall be capable of producing concrete meeting requirements of ASTM C 94, Ready-mixed Concrete and these specifications. Mixing equipment shall be capable of producing sufficient concrete to provide required quantities. Entire contents of the drum shall be discharged before any materials are placed therein for a succeeding batch. Improperly mixed concrete shall not be placed in a structure. For all mixers an adequate water supply and an accurate method of measuring the water shall be provided.

The mixer may be batched by either volumetric or weight sensing equipment and shall be equipped with a suitable timing device that will lock the discharging mechanism and signal when specified time of mixing has elapsed.

A. Proportioning and Mixing Equipment

For all miscellaneous concrete placements, a mobile, continuous, volumetric mixer or a volumetric or weight batch mixer of the rotating paddle type may be used.

When approved by Engineer or designated representative in writing or when specified for use in other items, these mixers may be used for other types of concrete construction, including structural concrete, if the number of mixers furnished will supply the amount of concrete required for the particular operation in question.

These mixers shall be designed to receive all the concrete ingredients, including admixtures, required by the mix design in a continuous uniform rate and mix them to the required consistency before discharging.

For continuous volumetric mixers, the materials delivered during a revolution of the driving mechanism or in a selected interval, will be considered a batch and the proportion of each ingredient will be calculated in the same manner as for a batch type plant.

Mixing time shall conform to recommendations of manufacturer of mixer unless otherwise directed by Engineer or designated representative.

B. Ready-mixed Concrete

Use of ready-mixed concrete will be permitted provided the batching plant and mixer trucks meet quality requirements specified herein. When ready-mixed concrete is used, additional mortar (1 sack cement, 3 parts sand and sufficient water) shall be added to each batch to coat the mixer drum. Ready-mixed concrete, batching plant and mixer truck operation shall include the following:

1. A ticket system will be used that includes a copy for the Inspector. Ticket will have machine stamped time/date of concrete batch, a mix design designation, weight of cement, fly ash, sand and aggregates; exact nomenclature and written quantities of admixtures and water. Any item missing or incomplete on ticket may be cause for rejection of concrete.

2. Sufficient trucks will be available to support continuous placements. The Contractor will satisfy the Engineer or designated representative that adequate standby trucks are available to support monolithic concrete placement requirements.

3. A portion of mixing water required by the mix design to produce the specified slump may be withheld and added at the job site, but only with permission of the Engineer or designated representative and under the Inspector's observation. When water is added under these conditions, the concrete batch will be thoroughly mixed before any slump or strength samples are taken. Additional cement shall not be added at the job site to otherwise unacceptable mixes.

4. A metal plate(s) shall be attached in a prominent place on each truck mixer plainly showing the various uses for which it was designed. The data shall include the drum's speed of rotation for mixing and for agitating and the capacity for complete mixing and/or agitating only. A copy of the manufacturer's design, showing dimensions of blades, shall be available for inspection at the plant at all times. Accumulations of hardened concrete shall be removed to the satisfaction of the Engineer or designated representative.

5. The loading of the transit mixers shall not exceed capacity as shown on the manufacturer's plate attached to the mixer or 63 percent of the drum volume, whichever is the lesser volume. The loading of transit mixers to the extent of causing spill-out enroute to delivery will not be acceptable. Consistent spillage will be cause for disqualification of a supplier.

6. Excess concrete remaining in the drum after delivery and wash water after delivery shall not be dumped on the project site unless approval of the dump location is first secured from the Engineer or designated representative.

C. Volumetric Batching

Use of volumetric batched concrete will be permitted provided the batching and continuous mixing operations conform to ASTM C 685, “Concrete Made By Volumetric Batching and Continuous Mixing”. This type concrete shall be made from materials continuously batched by volume, mixed in a continuous mixer and delivered to the site in a freshly mixed and unhardened state. Tests and criteria for batching accuracy and mixing efficiency shall be as specified in ASTM C 685.

A ticket system will be used that includes a copy for the Inspector. The ticket will have machine stamped time/date of concrete batch, a mix design designation, weight of cement, fly ash, sand and aggregates; exact nomenclature and written quantities of admixtures and water. Any item missing or incomplete on ticket may be cause for rejection of concrete.

Each batching or mixing unit, or both, shall carry in a prominent place a metal plate or plates on which are plainly marked the gross volume of the unit in terms of mixed concrete, discharge speed and the weight-calibrated constant of the machine in terms of a revolution counter or other output indicator. The mixer shall produce a thoroughly mixed and uniform concrete.

The batcher-mixer unit shall contain in separate compartments all the necessary ingredients needed for the manufacture of concrete. The unit shall be equipped with calibrated proportioning devices to vary the mix proportions and it shall produce concrete as required by the Work and ASTM C 685.

D. Truck-mixed Concrete

The concrete shall be mixed in a truck mixer from 70 to 100 revolutions at the mixing speed designated by the manufacturer that will produce a uniform concrete mix. The concrete shall be delivered to the project in a thoroughly mixed and uniform mass and shall be discharged with a satisfactory degree of uniformity. Additional mixing at the job site, at the mixing speed designated by the manufacturer, may be allowed by the Engineer or designated representative as long as the concrete is discharged before the drum has revolved a total of 300 revolutions after the introduction of the mixing water to the cement and the aggregates.

Re-tempering or adding concrete chemical admixtures is only permitted at the job site when concrete is delivered in a truck mixer. Water shall not be added after introduction of mixing water at the batch plant except on arrival at the job site with approval of the Engineer or designated representative, in order to adjust the slump of the concrete. When this water is added, the mix design water-cementitious-material ratio shall not be exceeded. The drum or blades shall be turned at least 30 additional revolutions at mixing speed to ensure thorough and uniform mixing of the concrete. Water or chemical admixtures shall not be added to the batch after any concrete has been discharged.

When the concrete contains silica fume, mixing times and batching operations shall be adjusted as necessary to ensure that the material is completely and uniformly dispersed in the mix. The dispersion of the silica fume within the mix shall be verified in trial batches.

E. Hand-mixed Concrete

Hand mixing of concrete may be permitted for small placements or in case of an emergency and then only on authorization of the Engineer or designated representative. Hand-mixed batches shall not exceed a 4 cubic foot (0.113 cubic meters) batch in volume. Material volume ratios shall not be leaner than 1 part cement, 2 parts large aggregate, 1 part fine aggregate and enough water to produce a consistent mix with a slump not to exceed 4 inches (100 mm). Admixtures shall not be used unless specifically approved by the Engineer or designated representative.

403S.10 Excavation, Placing of Concrete, Finishing, Curing and Backfill

Excavation, placing of concrete, finishing, curing and backfill shall conform to Standard Specification Item No. 401S, "Structural Excavation and Backfill", Standard Specification Item No. 410S, "Concrete Structures" and Standard Specification Item No. 411S, "Surface Finishes for Concrete".

403S.11 Measurement

Where measurement of concrete for a structure is not provided by another governing pay item, measurement shall be made under this specification in accordance with the following.

The quantities of concrete of the various classifications which constitute the completed and accepted structure or structures in place will be measured by the cubic yard (cubic meters:1 cubic meter is equal to 1.308 cubic yards), each, square yard (square meter: 1 square yard equals 0.836 square meters) or linear foot as indicated in the Contract Documents. Measurement will be as follows:

A. General

1. Measurement based on dimensions shall be for the completed structure as measured in place. However, field-measured dimensions shall not exceed those indicated on the drawings or as may have been directed by the Engineer or designated representative in writing.

2. No deductions shall be made for chamfers less than 2 inches (50 mm) in depth, embedded portions of structural steel, reinforcing steel, nuts, bolts, conduits less than 5 inches (125 mm) in diameter, pre/post tensioning tendons, keys, water stops, weep holes and expansion joints 2 inches (50 mm) or less in width.

3. No measurement shall be made for concrete keys between adjoining beams or prestressed concrete planks.

4. No measurement shall be made for fill concrete between the ends or adjoining prestressed concrete planks/box beams at bent caps or between the ends of prestressed concrete planks/box beams and abutment end walls.

5. No measurement shall be made for inlet and junction box invert concrete.

6. No measurement shall be made for any additional concrete required above the normal slab thickness for camber or crown.

B. Plan Quantity. For those items measured for plan quantity payment, adequate calculations have been made. If no adjustment is required by Article 403S.12, additional measurements or calculations will not be required or made.

C. Measured in Place. For those items not measured for Plan Quantity payment, measurement will be made in place, subject to the requirements of Article 403S.10.A.1 above.

403S.12 Payment

The work performed and materials furnished as prescribed by this item and measured in accordance with the applicable provisions of "Measurement" above will be paid for as follows.

The quantity to be paid for will be that quantity indicated in the contract documents and/or shown on the drawings, regardless of errors in calculations, except as may be modified by the following.

Plan Quantities will be adjusted:

A. When a complete structure element has been erroneously included or omitted from the drawings, the quantity shown on the drawings for that element will be added to or deducted from the plan quantity and included for payment. A complete structure element will be the smallest portion of a total structure for which a quantity is included on the drawings. Quantities revised in this manner will not be subject to the provisions of the "General Conditions", Article 11.

B. When the plan quantity for a complete structure element is in error by 5 percent or more, a recalculation will be made and the corrected quantity included for payment. Quantities revised in this manner will not be subject to the provisions of the "General Conditions", Article 11

C. When quantities are revised by a change in design, the "plan quantity" will be increased or decreased by the amount involved in the design change. Quantities revised in this manner will be subject to the provisions of the "General Conditions", Article 11.

The party to the contract requesting the adjustment shall present to the other, a copy of the description and location, together with calculations of the quantity for the structure element involved. When this quantity is certified correct by the Engineer or designated representative, it will become the revised plan quantity.

Payment for increased or decreased costs due to a change in design on those items measured as "Cubic Yard", "Each", "Square Foot", "Square Yard" or "Linear

Foot" will be determined by Change Order. Quantities revised in this manner will be subject to the provisions of the "General Conditions", Article 11.

The unit prices bid for the various classes of concrete shown shall include full compensation for furnishing, hauling, and mixing all concrete material; placing, finishing and curing all concrete; all grouting, pointing and finishing; furnishing and placing drains; furnishing and placing metal flashing strips; furnishing and placing expansion joint material required by this item; and for all forms and false work, labor, tools, equipment and incidentals necessary to complete the work.

Pay Item No. 403S-CY:	(Structure or Structural Component) -	Per Cubic Yard.
Pay Item No. 403S-EA:	(Structure or Structural Component) -	Per Each.
Pay Item No. 403S-SY:	(Structure or Structural Component) -	Per Square Yard.
Pay Item No. 403S-LF:	(Structure or Structural Component) -	Per Lineal Foot.

End

SPECIFIC CROSS REFERENCE MATERIALS
Standard Specification Item 403S, "Concrete For Structures"

City of Austin Standard Specification Items

Designation	Description
Item No. 401S	Structural Excavation and Backfill
Item No. 410S	Concrete Structures
Item No. 411S	Surface Finishes for Concrete

Texas Department of Transportation: Departmental Material Specifications

Designation	Description
DMS-4640	Chemical Admixtures for Concrete
DMS-4610	Fly Ash
DMS-4620	Ground Granulated Blast-Furnace Slag
DMS-4630	Silica Fume
DMS-4635	Metakaolin

American Association of State Highway & Transportation Officials,
AASHTO Standard Method of Test for

Designation	Description
Method T 26	Quality of Water to be Used in Concrete

American Concrete Institute, ACI

Designation	Description
ACI 211.1	Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete

American Society for Testing and Materials, ASTM

Designation	Description
ASTM C 94	Specification For Ready-Mixed Concrete
ASTM C 150	Specification For Portland Cement
ASTM C 685	Concrete Made By Volumetric Batching and Continuous Mixing
ASTM C-1260	Standard Test Method for Potential Alkali Reactivity of Aggregates
ASTM D-512	Test Methods for Chloride Ion in Water
ASTM D-516	Test Methods for Sulfate Ion in Water
ASTM D-4191	Test Method for Sodium in Water by Atomic Absorption
ASTM D-4192	Test Method for Potassium Water by Atomic Absorption

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
TEX-203-F	Sand Equivalent Test
TEX-401-A	Sieve Analysis of Fine and Coarse Aggregate
TEX-406-A	Mineral Finer than 75 µm (No. 200) Sieve in Mineral Aggregates (Decantation Test for Concrete Aggregates)
TEX-408-A	Organic Impurities in Fine Aggregate for Concrete
TEX-410-A	Abrasion of Coarse Aggregate Using The Los Angeles Machine

TEX-411-A	Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
TEX-413-A	Determination of Deleterious Materials in Mineral Aggregate
TEX-415-A	Slump of Portland Cement Concrete
TEX-416-A	Air Content of Freshly-Mixed Concrete by the Pressure Method
TEX-418-A	Compressive Strength of Cylindrical Concrete Specimens
TEX-612-J	Acid Insoluble Residue

SPECIFIC CROSS REFERENCE MATERIALS (Continued)
Standard Specification Item 403S, "Concrete For Structures"

Texas Department of Transportation: Publications

Designation	Description
Bulletin C-11	Construction Bulletin

RELATED CROSS REFERENCE MATERIALS
Standard Specification Item 403S, "Concrete For Structures"

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 360	Concrete Pavement
Item 420	Concrete Structures
Item 421	Hydraulic Cement Concrete
Item 427	Surface Finishes for Concrete
Item 431	Pneumatically Placed Concrete

Item 520 Weighing and Measuring Equipment

Texas Department of Transportation: Departmental Material Specifications

Designation	Description
DMS-4650	Hydraulic Cement Concrete Curing Materials and Evaporation Retardants”
DMS-6100	Epoxy and Adhesives
DMS 8900	Fly Ash

Item No. 404S
Pneumatically Placed Concrete

404S.1 Description

This item shall govern furnishing and placing of "Pneumatically Placed Concrete" for riprap, concrete channel, canal lining, tunnel lining, encasement of designated structural steel members, covering of designated portions of concrete structures, repair of deteriorated or damaged concrete and other miscellaneous construction as indicated on the drawings.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

404S.2 Submittals

The submittal requirements of this specification item may include:

A. Mix design of the class (Type I or Type II) of concrete required on the project (encasement, repair, rip-rap, ditch lining),

B. Application process (wet or dry),

C. Work experience of the superintendent and workers performing specialized tasks to be employed on the project, and

D. Type of Expansion joint material to be used on the project.

404S.3 Materials

Unless indicated otherwise on the drawings, Class II Portland cement concrete shall be used for encasement and Class I Portland cement concrete shall be used for repair.

Cement, water and sand shall conform to the requirements of Standard Specification Item No. 403S, "Concrete for Structures". Specifically the fine aggregate shall conform to the requirements of Table 2 and the coarse aggregate shall conform to the requirements of Table 1, Grade 7, unless otherwise indicated on the drawings.

Air entraining admixtures, retarders and water reducing admixtures, if used, shall comply with Standard Specification Item No. 405S, "Concrete Admixtures".

Bar reinforcement and wire fabric reinforcement shall conform to Standard Specification Item No. 406S, "Reinforcing Steel".

Expansion joint material shall conform to the requirements of Standard Specification Item No. 410S, "Concrete Structures".

Steel drive pins, studs or expansion bolts used for the attachment of reinforcing when covering designated portions of concrete structures with pneumatically placed concrete shall be capable of being driven to the specified depth without deforming or otherwise becoming unsuitable for the purpose intended. The pins shall have a minimum diameter of 1/8 inch (3 mm) and a minimum length of 2 inches (50 mm). Size and location of drive pins or studs and method of attachment of reinforcing shall be as indicated on the drawings.

The equipment used for driving the pins or studs shall be of the type, which uses an explosive for the driving force, and shall be capable of inserting the stud or pin to the required depth without

damage to the surrounding concrete. The Engineer or designated representative may require that a test be made of the equipment prior to approving it for use.

Expansion hook bolts, 1/4 inch (6 mm) diameter, shall be placed in a drilled hole of the size and depth recommended by the manufacturer. The Engineer or designated representative may require that a test be made of the driving equipment for steel drive pins and check the pull out quality of the expansion bolts, prior to approving their use.

404S.4 Proportioning and Mixing

The Contractor shall submit a mix design for approval by the Engineer or designated representative. The basic mix design shall conform to the following table:

Table 1 Minimum Requirements

	*Minimum of 1	Minimum 7 Day Compressive
Type	**Part Cement to**	**Strength Cores**
I	4 Parts Aggregate	2520 psi (17 MPa)
II	5 Parts Aggregate	2100 psi (14 MPa)
III	7 Parts Aggregate	1400 psi (10 MPa)

* The Contractor may use a design containing more cement than required by this specification when approved by the Engineer or designated representative.

The cement and aggregates shall be measured by volume with enough water added to bring the materials to the desired consistency. Test panels will be required prior to approval of the mix design. The concrete will be applied to a plywood panel and shall be a minimum size of 18 inches x 18 inches x 3 inches (450 x 450 x 75 mm) in depth. The panel will be shot with the same air pressure and nozzle tip to be used for the production work. The panel will be cured in the same manner required for the particular usage required by the contract.

Three 2-inch (50 mm) diameter cores will be taken from each panel and tested in compression at 7 days. The average strength of the cores shall be the strengths required in Table I. Testing of cores shall conform to TxDoT Test Method Tex-424-A.

The Engineer or designated representative may require additional test panels during the progress of the work if there is any change in materials, equipment or nozzle operator.

If, in the opinion of the Engineer, the cylinder strengths are indicating undesirable variation in the concrete, the Contractor may be required to change the mix design and/or method of placement so as to correct this condition.

Mixing and application may be done by either the dry mix or wet mix process. The materials shall be thoroughly and uniformly mixed using a mixer designed for pneumatic concrete application. It may be either a paddle type or drum type mixer. Transit mix concrete may be used for the wet process. No water shall be added to the mix after mixing and before application. Mixed material that has not been used within 45 minutes shall be rejected and no remixing or tempering will be permitted.

All mixing and placing equipment shall be cleaned at regular intervals and be kept in acceptable working condition. The nozzle liner water and air injection system should be inspected daily and replaced when the parts are worn.

404S.5 Construction Methods

A. Surface Preparation

All surfaces on which pneumatically placed concrete is to be placed shall be cleaned thoroughly of all paint, rust, loose mill, scales, grease and such other foreign materials which are likely to prevent adequate bond. Structural steel to be encased with pneumatically placed concrete shall not be painted. Concrete and reinforcing steel surfaces to be covered with pneumatically placed concrete shall be abrasion blasted clean and then the surface cleaned of loose material with filtered compressed air.

Concrete surfaces on which pneumatically placed Portland cement concrete is to be applied shall be thoroughly moistened by wetting prior to placement. Excess water shall be allowed to drain or shall be removed by filtered air blasting.

Where standing or running water is encountered it shall be removed before applying the Portland cement concrete.

The periphery of repair areas shall be saw cut 1 inch (25 mm) deep and existing concrete removed as necessary to prevent feathered edges.

Concrete adjacent to a crack shall be removed in such a manner as to leave the existing reinforcing steel throughout the repair area as intact as possible.

B. Reinforcement

All reinforcement to be embedded in pneumatically placed concrete shall be clean and free from loose mill scale, rust, oil or other coatings which might prevent adequate bond.

Reinforcement shall be secured rigidly in the position indicated. The clear distance between reinforcing bars shall be at least 2 1/2 inches (65 mm).

Minimum clear distance between forms and reinforcement and for cover shall be as indicated on the drawings. Space shall be provided for splicing bars in the approved manner.

For the covering of designated portions of concrete structures, welded wire fabric shall be held securely about 3/4 inch (20 mm) out from the surface to be covered. Adjacent sheets shall lap at least 6 inches (150 mm) and sheets shall be fastened together securely by tying at intervals not to exceed 18 inches(450 mm). In attaching the wire fabric, steel drive pins spaced at 2 feet (600 mm) on centers each way shall be driven to a penetration of not less than 1 inch (25 mm) or 1/4 inch (6 mm) hook bolts installed conforming to manufacturer's recommendation into the face of the designated portion to be covered or repaired. The wire fabric shall be fastened securely to each pin or bolt. Any pin that does not reach the desired depth or hook bolt that does not anchor properly in its hole may remain in place but must be supplemented by an additional pin or bolt installation meeting specification requirements. The welded wire fabric shall have a minimum of 1 inch (25 mm) cover to the finished concrete surface.

For the encasement of designated portions of steel structures, the welded wire fabric shall be bent to a template to conform as nearly as possible to the outlines of the steel members to be encased. Drilled holes not less than 1/2 inch (13 mm) nor more than 1 inch (25 mm) in diameter shall be provided in the webs of the members as near as practicable to the flanges for the purpose of attaching the reinforcing fabric. These holes shall be spaced approximately 3 feet (1 meter) on center. The welded wire fabric shall be held securely about 3/4 inch (20 mm) out from the surfaces of the members to be encased. Adjacent sheets shall lap at least 6 inches(150 mm) and sheets shall be fastened together securely by tying at intervals not to exceed 18 inches (450 mm). In placing the wire fabric, 3/8 inch (10 mm) round rods shall be

fastened to the structural steel through the holes provided in the webs of the members to be encased and the fabric shall be tied securely outside to rods. Ties shall be spaced approximately 12 inches (300 mm) on centers. The formed fabric shall conform, insofar as possible, to the shape of the structural member with a space of 3/4 inch (20 mm) between the fabric and the faces of the members to be encased.

C. Placing of Pneumatically Placed Concrete

Proper consistency shall be controlled at the nozzle valve by the operator for the dry mix process and a low water-cement ratio must be maintained. The consistency of the mix and the water shall be controlled by the mixer pump or by the transit mix truck when used for the wet mix process. The mix shall be sufficiently wet to adhere properly and sufficiently dry so that it will not sag or fall from vertical or inclined surfaces or separate in horizontal work.

No work shall be done without the permission of the Engineer or designated representative when the temperature is lower than 35°F (2°C). Concrete shall not be applied to a surface containing frost or ice. After placing, the concrete shall be protected from freezing and/or quick drying.

When encasing structural steel members or covering portions of structures the concrete may be applied in 1 coat; however, if the concrete, after being placed, shows any tendency to sag, it shall be applied in 2 or more coats. Pneumatically placed concrete for overhead work shall be placed in 2 or more coats as may be necessary to insure proper bond and to eliminate sag. In covering vertical surfaces, placing of the concrete shall begin at the bottom and be completed at the top.

Any sag or other defects shall be corrected to proper section by the Contractor at the Contractor's expense and as directed by the Engineer or designated representative.

The nozzle shall be held at an approximate distance of 2 to 4 feet (0.6 to 1.2 meters) and positioned so that the stream of flowing concrete shall impinge as nearly as possible at right angles to the surface being covered. Any deposit of loose sand shall be removed prior to placing any initial or succeeding layers of pneumatically placed concrete. When any deposit of loose sand is covered with pneumatically placed concrete, the concrete shall be removed and replaced with a new coat of pneumatically placed concrete after the receiving surface has been properly cleaned.

Before channel or canal lining or riprap is placed, the earth canal or channel slopes shall have been compacted uniformly and thoroughly and brought to a uniform moist condition. The subgrade for lining shall be excavated and fine graded to the required section. The use of forms for lining will not be required. The surfaces of pneumatically placed concrete for both channel lining and riprap shall be finished accurately by hand floating methods before the concrete has attained its initial set.

The original surface and the surface of each layer, which is permitted to harden before applying succeeding layers, shall be washed with water and filtered air blast or a stiff hose stream and loosened material removed. Any material which rebounds and does not fall clear of the work or which collects on horizontal surfaces shall be blown off from time to time to avoid leaving sand pockets.

D. Curing

Encasements shall be water cured for four (4) curing days.

For curing, the repair area shall have a piece of wet cotton mat taped into place over the repaired area followed with a covering of 4 mil (100 micrometers) minimum sheet plastic also

taped into place. The sheet plastic shall be larger than the mat and shall be continuously taped at the edges with 3 inch (75 mm). Reinforcement minimum width tape (air duct tape or better) to completely enclose the mat and hold in the moisture. After 4 days or longer the mat and cover may be removed.

After the curing period the patches will be tested by striking with a hammer to check for soundness and bond to existing concrete.

E. Riprap and Ditch Lining

Pneumatically placed concrete for riprap and for channel or canal linings shall be the type indicated on the drawings. The concrete shall be placed to the limits indicated on the drawings or as designated by the Engineer or designated representative. The surface shall be given a wood float finish or a gun finish as directed by the Engineer or designated representative. Curing of riprap and/or ditch lining shall be by either Type I or II membrane conforming to Standard Specification Item No. 409S, "Membrane Curing".

F. Operating Requirements for the Dry Mix Process

The compressor or blower used to supply air shall be capable of delivering a sufficient volume of oil free air at a pressure range of 40 to 85 psi (276 to 586 kPa) as required by the size of the nozzle employed. Required capacity of compressor and operating pressures are shown in Table 2 for the various nozzle sizes. Steady pressure must be maintained throughout the placing process. The water pump shall be of sufficient size and capacity to deliver the water to the nozzle at a pressure of not less than 15 psi (100 kPa) in excess of the required air pressure.

G. Operating Requirements for the Wet Mix Process

The pump shall operate so that the line pressure is between 100 psi and 300 psi (690 kPa to 2069 kPa) for delivery hoses with 1 1/2 inch to 3 inch (38 to 75 mm) diameters. The mixing equipment shall be capable of thoroughly mixing the materials in sufficient quantity to maintain continuous placement. When transit mix concrete is used, this equipment shall conform to Standard Specification Item No. 403S, "Concrete for Structures".

Table 2 COMPRESSOR CAPACITIES

Compressor Capacity Cubic Feet per Minute (Cubic Meters per Minute)	Hose Diameter Inches (millimeters)	Maximum Size of Nozzle Tip, Inches (millimeters)	Operating Air Pressure Available, Psi (kPa)
250 (7.1)	1 (25.4)	¾ (19.0)	40 (275.8)
315 (8.9)	1 ¼ (31.8)	1 ¼ (31.8)	45 (310.3)
365 (10.3)	1 ½ (38.1)	1 ¼ (31.8)	55 (379.2)
500 (14.2)	1 5/8 (41.3)	1 ½ (38.1)	65 (448.2)
600 (17.0)	1 ¾ (44.4)	1 5/8 (41.3)	75 (517.1)
750 (21.2)	2 (50.8)	1 ¾ (44.4)	85 (586.0)

The values shown in Table 2 are based on a hose length of 150 feet (46 meters) with the nozzle not more than 25 feet (8 meters) above the delivery equipment. Operating pressures shall be increased approximately 5 psi (34 kPa) for each additional 50 feet (15 meters) of hose and approximately 5 psi (34 kPa) for each 25 feet (8 meters) the nozzle is raised.

H. Rebound

Accumulation of loose particles of concrete, which do not adhere to the surface being covered, shall be removed and discarded. Concrete shall not be placed over such material.

I. Construction Joints

Particular care shall be given to the formation of construction joints. Unless otherwise indicated on the drawings, all joints subject to compressive stress or over existing construction joints shall be square butt joints. Tapered joints will be permitted at other locations except the outside 1 inch (25 mm) shall be perpendicular to the surface.

J. Workers

Only experienced superintendents and workers performing specialized tasks shall be employed. Satisfactory written evidence of such experience shall be furnished to the Engineer or designated representative upon demand.

404S.6 Measurement

Measurement of pneumatically placed concrete for encasement of structural steel members, will be by the square foot, in place, of the actual contact area

Measurement of pneumatically placed concrete for repair and restoration of concrete structures, tunnel linings and miscellaneous structures will be by the cubic yard in place using the surface area times the average depth of the patch.

Measurement of pneumatically placed concrete for riprap and ditch lining, shall conform to Standard Specification Item No. 591S, "Riprap for Slope Protection".

404S.7 Payment

Pneumatically placed concrete, measured as provided above, will be paid for at the unit price bid per square foot or cubic yard for "Pneumatically Placed Concrete" of the type specified.

The unit price bid per square foot shall be full compensation for all cement, aggregate, water, reinforcement, furnishing and driving all steel drive pins, for mixing, placing and curing pneumatically placed concrete and for all labor, tools, equipment and incidentals necessary to complete the work. Excavation for channel and canal lining will be paid for conforming to Standard Specification Item No. 120S, "Channel Excavation". Shaping and fine grading of channel or canal slopes and floors and excavation required for shaping slopes for headerbanks will not be paid for directly but shall be included in the unit price bid for "Pneumatically Placed Concrete". When headerbanks upon which "Pneumatically Placed Concrete" is to be placed have been built by prior contract, excavation for shaping or slopes will be paid for conforming to Item No. 401S, "Structural Excavation and Backfill".

Payment will be made under:

Pay Item No. 404S-A:	___Inch Pneumatically Placed Concrete -	Per Square Foot.
Pay Item No. 404S-B:	Pneumatically Placed concrete -	Per Cubic Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 404S, “Pneumatically Placed Concrete”

City of Austin Standard Specifications

Designation	Description
Item No. 120S,	Channel Excavation
Item No. 410S	Structural Excavation and Backfill
Item No. 403S	Concrete for Structures
Item No. 405S	Concrete Admixtures
Item No. 406S	Reinforcing Steel
Item No. 409S	Membrane Curing
Item No. 410S	Concrete Structures
Item No. 591S	Riprap for Slope Protection

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-424-A	Obtaining and Testing Drilled Cores of Concrete

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 404S, “Pneumatically Placed Concrete”

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 360	Concrete Pavement
Item 420	Concrete Structures
Item 421	Portland Cement Concrete
Item 427	Surface Finishes for Concrete
Item 431	Pneumatically Placed Concrete
Item 437	Concrete Admixtures
Item 520	Weighing and Measuring Equipment
Item 522	Portland Cement Concrete Plants
Item 524	Hydraulic Cement

Item No. 405S
Concrete Admixtures

405S.1 Description

This item shall govern material requirements of admixtures for Portland cement concrete.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

405S.2 Submittals

The submittal requirements of this specification item include:

A. Type and manufacturer of any proposed admixture.

B. Certification that proposed admixture meet the requirements of this specification, ASTM C260 and ASTM C494.

C. For a specific mix design, a statement of compatibility of products shall be submitted when admixtures from multiple manufacturers are proposed.

405S.3 Materials

All admixture submittals must be approved by the Engineer or designated representative. No admixture shall be chloride-based or have chloride(s) added in the manufacturing process. Admixtures must be pretested by the Texas Department of Transportation (TXDOT) Materials and Tests Engineer and be included in the State's current approved admixture list. All admixtures must retain an approved status through the duration of a mix design's one-year approval period.

(1) Air Entraining Admixture:

An "Air Entraining Admixture" is defined as a material which, when added to a concrete mixture in the proper quantity, will entrain uniformly dispersed microscopic air bubbles in the concrete mix. The admixture shall meet the requirements of ASTM Designation: C 260 modified as follows:

(a) The cement used in any series of test shall be either the cement proposed for the specific work or a "reference" Type I cement from one mill.

(b) The air entraining admixture used in the reference concrete shall be Neutralized Vinsol Resin.

(2) Water-reducing Admixture:

A "Water-reducing Admixture" is defined as a material which, when added to a concrete mixture in the correct quantity, will reduce the quantity of mixing water required to produce concrete of a given consistency and required strength. This admixture shall conform to ASTM C 494, Type A.

(3) Accelerating Admixture:

An "Accelerating Admixture" is defined as an admixture that accelerates the setting time and the early strength development of concrete. This admixture shall conform to ASTM C 494, Type C. The accelerating admixture will contain no chlorides.

(4) Water-reducing, Retarding Admixture:

A "Water-reducing, Retarding Admixture" is defined as a material which, when added to a concrete mixture in the correct quantity, will reduce the quantity of mixing water required to produce concrete of a given consistency and retard the initial set of the concrete. This admixture shall conform to ASTM C 494, Type D.

(5) High-range Water Reducing Admixtures:

A "High-range Water Reducing Admixture", referred to as a superplasticizer, is defined as a synthetic polymer material which, when added to a low slump concrete mixture increases the slump without adversely affecting segregation, impermeability or durability of the mix. This admixture shall conform to ASTM C 494, Type F or G.

(6) Fly Ash:

Fly ash used in Portland cement concrete as a substitute for Portland cement or as a mineral filler shall comply with TXDOT Materials Specification D-9-8900 and be listed on TXDOT's current list of approved fly ash sources. Fly ash obtained from a source using a process fueled by hazardous waste (30 Texas Administrative Code, Section 335.1) shall be prohibited. This applies to any other specification concerning the use of fly ash. Contractor shall maintain a record of source for each batch. Supplier shall certify that no hazardous waste is used in the fuel mix or raw materials.

405S.4 Certification and Product Information

The Contractor shall submit the name of the admixture proposed and manufacturer's certification that the selected admixtures meet the requirements of this item and of ASTM C 260 and C 494 as applicable. Admixtures for a mix design shall be of the same brand. If more than one admixture is proposed in the concrete mix, a statement of compatibility of components shall accompany certification. Manufacturer's product literature shall specify when in the batching/mixing operation the admixture must be added.

The Engineer or designated representative may request additional information such as infrared spectrophotometry scan, solids content, pH value, etc., for further consideration. Any unreported changes in formulation discovered by any of the tests prescribed herein may be cause to permanently bar the manufacturer from furnishing admixtures for Owner's work.

405S.5 Construction Use of Admixtures

All admixtures used shall be liquid except high-range water reducers which may be a powder. Liquid admixtures shall be agitated as needed to prevent separation or sedimentation of solids; however, air agitation of Neutralized Vinsol Resin will not be allowed.

No admixture shall be dispensed on dry aggregates. Admixtures shall be dispensed at the batching site separately, but at the same time as the mixing water. Only high range water reducers may be introduced into the mix at the job site.

When other admixtures are used with fly ash, the amount of the other admixture to be used shall be based on the amount of Portland cement only and not the amount of Portland cement and fly ash.

When high-range water reducers are to be added at the job site, transit mixers shall be used. Admixture manufacturer literature shall indicate recommended mixing methods and time for the specific equipment and mix design used. The transit mix equipment shall not be loaded in excess of 63 percent of its rated capacity to ensure proper mixing of the admixture at the site. If during discharging of concrete a change in slump in excess of 30% is noted, the remaining concrete shall be rejected unless prior approval was given by the Engineer or designated representative to retemper a load with a second charge of admixture. Retempering with water shall not be allowed.

Accelerating admixtures will not be permitted in combination with Type II cement.

All mixes with air entrainment shall have a minimum relative durability factor of 80 in accordance with ASTM C 260. Dosage of air entrainment admixtures may be adjusted by the Contractor to stay within the specified tolerances for air entrainment of Standard Specification Item No. 403S, "Concrete for Structures".

405S.6 Measurement and Payment

The requirements of this specifications shall not be measured and paid for directly, but shall be included in the unit price bid for the item of construction in which this item is used.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 405S, "Concrete Admixtures"

City of Austin Standard Specifications

Designation	*Description*
Item No. 403S	*Concrete for Structures*

American Society for Testing and Materials, ASTM

Designation	*Description*
ASTM C260	*Air-Entraining Admixtures for Concrete*
ASTM C495	*Chemical Admixtures for Concrete*

Texas Department of Transportation: Department Material Specification

Designation	*Description*
DMS-8900	*Fly Ash*

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 405S, "Concrete Admixtures"

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 360	Concrete Pavement
Item 420	Concrete Structures
Item 421	Portland Cement Concrete
Item 427	Surface Finishes for Concrete
Item 431	Pneumatically Placed Concrete
Item 437	Concrete Admixtures
Item 520	Weighing and Measuring Equipment
Item 522	Portland Cement Concrete Plants
Item 524	Hydraulic Cement

Item No. 406S
Reinforcing Steel

406S.1 Description

This item shall govern furnishing and placement of reinforcing steel, deformed and smooth, of the size and quantity indicated on the drawings and in accordance with these specifications.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

406S.2 Submittals

The submittal requirements of this specification item may include:

A. Evidence that the steel reinforcement producer is included on the TxDoT list of approved producing mills

B. Listing of the size, grade, type and quantity of reinforcing steel proposed for the project.

C. If welding of reinforcing steel is proposed, evidence that carbon equivalent (C.E.) of the proposed steel is at least 0.55% with a report of chemical analysis showing the percentages of elements necessary to establish C.E.

D. If epoxy coated steel is proposed, evidence that the steel reinforcement producer is included on the TxDoT list of approved epoxy coating applicators

E. If epoxy coated steel is proposed, written certification that the epoxy-coated reinforcing steel meets the requirements of this Item with a copy of the manufacturer's control tests.

F. When mechanical splices are proposed, the types of couplers proposed for use.

406S.3 Materials

A. Approved Mills

Prior to furnishing reinforcing steel, the producing mills must be included on the list of approved producing mills that is maintained by the Construction Division of the State of Texas Department of Transportation

B. Deformed Bars and Wire Reinforcement

Unless indicated otherwise on the drawings, Bar reinforcement shall be Grade 60 and deformed. Reinforcing steel must conform to one of the following:

ASTM A615/ 615M, Grades 40 or 60 (300 or 420)

ASTM A996/ 996M, Type A, Grades 40 or 60 (300 or 420)

ASTM A996/996M, Type R, Grade 60 (420), permitted in concrete pavement only (furnished as straight bars only without bends. Bend tests are not required)

ASTM A706/706M

In cases where the provisions of this item are in conflict with the provisions of the ASTM Designation to which reference is made, the provisions of this item shall govern.

The nominal size, area and weight (mass) of reinforcing steel bars covered by these specifications are as follows:

Bar Size Number 1/8th ins (mm)	Nominal Diameter, inches (mm)	Nominal Area, Sq. ins. (mm2)	Weight/Linear Foot Lbs. (kg)
2 (6)	0.250 (6.6)	0.05 (32)	0.167 (.075)
3 (10)	0.375 (9.5)	0.11 (71)	0.376 (.171)
4 (13)	0.500 (12.5)	0.20 (127)	0.668 (.303)
5 (16)	0.625 (15.5)	0.31 (198)	1.043 (.473)
6 (19)	0.750 (19.0)	0.44 (285)	1.502 (.681)
7 (22)	0.875 (22.0)	0.60 (388)	2.044 (.927)
8 (25)	1.000 (25.5)	0.79 (507)	2.670 (2.211)
9 (29)	1.128 (28.5)	1.00 (641)	3.400 (1.542)
10 (32)	1.270 (32.0)	1.27 (792)	4.303 (1.952)
11 (36)	1.410 (36.0)	1.56 (958)	5.313 (2.410)
14 (43)	1.693 (43.0)	2.25 (1552)	7.65 (3.470)

18 (57)	2.257 (57.5)	4.00 (2565)	13.60 (6.169)

Smooth, round bars shall be designated by size number through a No. 4. Smooth bars above No. 4 shall be designated by diameter in inches.

C. Smooth Bar and Spiral Reinforcement

Smooth bars and dowels for concrete pavement must have a minimum yield strength of 60 ksi (414 MPa) and meet ASTM A615/615M. Smooth bars that are greater in diameter than a No. 3 (10 mm) designation shall conform to ASTM A615 or meet the physical requirements of ASTM A36.

Spiral reinforcement shall be either smooth or deformed bars or wire of the minimum size or gauge indicated on the drawings. Bars for spiral reinforcement shall comply with ASTM A615 Grade 40(300), ASTM A996, Type A, Grade 40 (300); or ASTM A675, Grade 80(550), meeting dimensional requirements of ASTM A615. Smooth wire shall comply with ASTM A82, and deformed wire shall comply with ASTM A496.

D. Weldable Reinforcing Steel

Reinforcing steel to be welded must comply with ASTM A706 or have a carbon equivalent (C.E.) of at most 0.55%. A report of chemical analysis showing the percentages of elements necessary to establish C.E. is required for reinforcing steel that does not meet ASTM A706 to be structurally welded. No tack welding will be allowed. All welding shall conform to the requirements of AWS D1.1/D1.1M.

The requirements above do not apply to the following miscellaneous welding applications:

Splicing reinforcing steel to extend bars in the bottom of a drilled shaft;

Attaching chairs to the reinforcing steel cage of a drilled shaft;

Armor joints and their supports;

Screed rail and form hanger supports where permitted on steel units;

Reinforcing steel to R-bars for lateral stability between prestressed beams, spirals, or bands of reinforcing bars in drilled shaft cages;

Permanent bridge deck forms;

Steel added in railing when slip-form construction is used; and

Other similar miscellaneous members that have no load carrying capacity in the completed structure.

E. Welded Wire Fabric

Wire shall conform to the requirements of the Standard Specifications for Cold-Drawn Steel Wire for Concrete Reinforcement, ASTM A 82 or A 496. Wire fabric, when used as reinforcement, shall conform to ASTM A 185 or A 497.

When wire is ordered by size numbers, the following relation between size number, diameter in inches and area shall apply unless otherwise indicated on the drawings:

Size, W Number 1/100 in^2 (mm2)	Nominal Diameter inch (mm)	Nominal Area, sq. inches (mm^2)
31 (200)	0.628 (16.0)	0.310 (200)
30 (194)	0.618 (15.7)	0.300 (194)
28 (181)	0.597 (15.2)	0.280 (181)
26 (168)	0.575 (14.6)	0.260 (168)
24 (155)	0.553 (14.0)	0.240 (155)
22 (142)	0.529 (13.4)	0.220 (142)
20 (129)	0.505 (12.8)	0.200 (129)
18 (116)	0.479 (12.2)	0.180 (116)
16 (103)	0.451 (11.5)	0.160 (103)
14 (90)	0.422 (10.7)	0.140 (90)
12 (77)	0.391 (9.9)	0.120 (77)
10 (65)	0.357 (9.1)	0.100 (65)
8 (52)	0.319 (8.1)	0.080 (52)
7 (45)	0.299 (7.6)	0.070 (45)
6 (39)	0.276 (7.0)	0.060 (39)
5.5 (35)	0.265 (6.7)	0.055 (35)
5 (32)	0.252 (6.4)	0.050 (32)
4.5 (29)	0.239 (6.1)	0.045 (29)

4 (26)	0.226 (5.7)	0.040 (26)
3.5 (23)	0.211 (5.4)	0.035 (23)
3 (19)	0.195 (5.0)	0.030 (19)
2.5 (16)	0.178 (4.5)	0.025 (16)
2 (13)	0.160 (4.1)	0.020 (13)
1.5 (9)	0.138 (3.5)	0.015 (9.7)
1.2 (8)	0.124 (3.1)	0.012 (7.7)
1 (6)	0.113 (2.9)	0.010 (6.5)
0.5 (3)	0.080 (2.0)	0.005 (3.2)

Where deformed wire is required, the size number shall be preceded by D and for smooth wire the prefix W shall be shown.

Welded wire fabric shall be designated as follows: 6 x 12 – W16 x W8, which indicates a 6 in. (150 mm) longitudinal wire spacing and 12-in (300 mm) transverse wire spacing with smooth No. 16 (103) wire longitudinally and smooth no. 8 (52) wire transversely.

F. Epoxy Coating

Epoxy coating shall be required as indicated on the drawings. Prior to furnishing epoxy-coated reinforcing steel, the epoxy applicator must be included on the list of approved applicators that is maintained by the Construction Division of the State of Texas Department of Transportation.

The reinforcing steel shall be epoxy coated in accordance with the following.

Epoxy Coating Requirements for Reinforcing Steel

Material	Specification
Bar	ASTM A775 or A934
Wire or Fabric	ASTM A884 Class A or B
Mechanical Coupler	As indicated on the drawings

Hardware	As indicated on the drawings

The epoxy coating material and coating repair material shall comply with TxDoT's DMS-8130, "Epoxy Powder Coating for Reinforcing Steel". The applicator shall not patch more than ¼ inch total length in any foot (20 mm total length in any meter) at the applicator's plant.

The epoxy-coated reinforcing steel shall be sampled and tested in accordance with TxDoT Test Method Tex-739-I, "Sampling and Testing Epoxy Coated Reinforcing Steel".

The identification of all reinforcing steel shall be maintained throughout the epoxy coating and fabrication and until delivery to the project site.

Written certification that the epoxy-coated reinforcing steel meets the requirements of this Item shall be provided along with a copy of the manufacturer's control tests.

G. Mechanical Couplers

When mechanical splices in reinforcing steel bars are indicated on the drawings, the following types of couplers may be used:

Sleeve-filler

Sleeve-threaded

Sleeve-swaged, or

Sleeve-wedge.

H. Chairs and Supports

Chairs and Supports shall be steel, precast mortar or concrete blocks cast in molds meeting the approval of the Engineer or designated representative of sufficient strength to position the reinforcement as indicated on the drawings when supporting the dead load of the reinforcement, the weight of the workers placing concrete and the weight of the concrete bearing on the steel. Chairs shall be plastic coated when indicated on the drawings.

Chair Types and Applicable Uses	
Structural or Architectural Elements (columns, beams, walls, slabs) exposed to weather, not subjected to sand blasting, water blasting or grinding.	Galvanized steel or steel chairs with plastic coated feet.

Structural or Architectural Elements exposed to weather and subject to sand blasting, water blasting or grinding.	Stainless steel chairs.
Structural or Architectural Elements not exposed to weather or corrosive conditions.	Uncoated steel chairs
Slabs and grade beams cast on grade.	Steel chairs with a base with 9 inch² (58 cm^2) minimum area or sufficient area to prevent the chair from sinking into fill or subgrade. Precast mortar or concrete blocks meeting the requirements of this item may be used.

406S.4 Bending

The reinforcement shall be bent cold, true to the shapes indicated on the drawings. Bending shall preferably be done in the shop. Irregularities in bending shall be cause for rejection. Improperly fabricated, damaged or broken bars shall be replaced at no additional expense to the City. Damaged or broken bars embedded in a previous concrete placement shall be repaired using a method approved by the Engineer or designated representative.

Unless otherwise indicated on the drawings, the inside diameter of bar bends, in terms of the nominal bar diameter (d), shall be as follows:

Bends of 90 degrees and greater in stirrups, ties and other secondary bars that enclose another bar in the bend.

Bar Number in 1/8th inches (mm)	Diameter
3, 4, 5 (10, 13, 16)	4d
6, 7, 8	6d

All bends in main bars and in secondary bars not covered above.

Bar Number in 1/8th inches (mm)	Diameter
3 thru 8 (10 thru 25)	6d
9, 10, 11 (29, 32, 36)	8d
14, 18 (43, 57)	10d

406S.5 Tolerances

Fabricating tolerances for bars shall not be greater than shown on Standard (Detail) 406S-1.

406S.6 Storing

Steel reinforcement shall be stored above the surface of the ground upon platforms, skids or other supports and shall be protected as far as practicable from mechanical injury and surface deterioration caused by exposure to conditions producing rust. When placed in the work, reinforcement shall be free from dirt, paint, grease, oil or other foreign materials. Reinforcement shall be free from injurious defects such as cracks and laminations. Rust, surface seams, surface irregularities or mill scale will not be cause for rejection, provided the minimum dimensions, cross sectional area and tensile properties of a hand wire brushed specimen meets the physical requirements for the size and grade of steel indicated on the drawings.

406S.7 Splices

Splicing of bars, except when indicated on the drawings or specified herein, will not be permitted without written approval of the Engineer or designated representative. No substitution of bars will be allowed without the approval of the Engineer or designated representative. Any splicing of substituted bars shall conform to the requirements in the Table below.

Splices not indicated on the drawings will be permitted in slabs not more than 15 inches (380 mm) in thickness, columns, walls and parapets.

Splices will not be permitted in bars 30 feet (9.1 meters) or less in plan length unless otherwise approved. For bars exceeding 30 feet (9.1 meters) in plan length, the distance center to center of splices shall not be less than 30 feet (9.1 meters) minus 1 splice length, with no more than 1 individual bar length less than 10 feet (3 meters). Splices not indicated on the drawings, but permitted hereby, shall conform to the Table

below. The specified concrete cover shall be maintained at such splices and the bars placed in contact and securely tied together.

Minimum Lap Requirements		
Bar Number in 1/8th inches (mm)	Uncoated Lap Length	Coated Lap Length
3 (10)	1 foot 4 inches (0.4 meters)	2 foot 0 inches (0.610 meters)
4 (13)	1 foot 9 inches (0.533 meters)	2 foot 8 inches (0.813 meters)
5 (16)	2 foot 2 inches (0.660 meters)	3 feet 3 inches (0.991meters)
6 (19)	2 foot 7 inches (0.787 meters)	3 feet 11 inches (1.194 meters)
7 (22)	3 feet 5 inches (1.041 meters)	5 feet 2 inches (1.575 meters)
No. 8 (25)	4 feet 6 inches (1.372 meters)	6 feet 9 inches (2.057 meters)
No. 9 (29)	5 feet 8 inches (1.727 meters)	8 feet 6 inches (2.591 meters)
No. 10 (32)	7 feet 3 inches (2.210 meters)	10 feet 11 inches (3.327 meters)
No. 11 (36)	8 feet 11 inches (2.718 meters)	13 feet 5 inches (4.089 meters)

Spiral steel shall be lapped a minimum of 1 turn. Bar No. 14 and No. 18 may not be lapped.

Welded wire fabric shall be spliced using a lap length that includes an overlap of at least 2 cross wires plus 2 inches (50 mm) on each sheet or roll.

Splices using bars that develop equivalent strength and are lapped in accordance with the table above are permitted.

Welding of reinforcing bars may be used only where indicated on the drawings or as permitted herein. All welding operations, processes, equipment, materials, quality of work and inspection shall conform to the requirements indicated on the drawings. All

splices shall be of such dimension and character as to develop the full strength of the bar being spliced.

End preparation for butt-welding reinforcing bars shall be done in the field, except Bar No. 6 and larger shall be done in the shop. Delivered bars shall be of sufficient length to permit this practice.

For box culvert extensions with less than 1 foot (0.3 meters) of fill, the existing longitudinal bars shall have a lap with the new bars as shown in the table above. For box culvert extensions with more than 1 foot (0.3 meters) of fill, a minimum lap of 12 inches (300 mm) will be required.

Unless otherwise indicated on the drawings, dowel bars transferring tensile stresses shall have a minimum embedment equal to the minimum lap requirements shown in the table above. Shear transfer dowels shall have a minimum embedment of 12 inches (300 mm).

406S.8 Placement

Reinforcement shall be placed as near as possible in the position indicated on the drawings. Unless otherwise indicated on the drawings, dimensions shown for reinforcement are to the centers of the bars. In the plane of the steel parallel to the nearest surface of concrete, bars shall not vary from plan placement by more than 1/12 of the spacing between bars. In the plane of the steel perpendicular to the nearest surface of concrete, bars shall not vary from plan placement by more than 1/4 inch (6 mm). Cover of concrete to the nearest surface of steel shall be as follows:

	Minimum Cover, Inches (mm)
(a) Concrete cast against and permanently exposed to earth	3 (76 mm)
(b) Concrete exposed to earth or weather:	
Bar No. 6 (19) through No. 18 bars (57)	2 (51 mm)
Bar No. 5 (16), W31 (W200) or D31 (D200) wire and smaller	1 ½ (38 mm)
(c) Concrete not exposed to weather or in contact with ground:	

Slabs, walls, joists:	
Bar No. 14 (43) and 18 (57)	1 ½ (38mm)
Bar No. 11 (36) and smaller	1 (25 mm)
Beams, columns:	
Primary reinforcement, ties, stirrups, spirals	1 ½ (38 mm)
Shells, folded plate members:	
Bar No. 6 (19) and larger	1 (25 mm)
Bar No. 5 (16), W31 (W200) or D31 (D200) wire, and smaller	1 (25 mm)

Vertical stirrups shall always pass around the main tension members and be attached securely thereto.

The reinforcing steel shall be located accurately in the forms and held firmly in place before and during concrete placement by means of bar supports that are adequate in strength and number to prevent displacement and to keep the steel at the required distance from the form surface. Bars shall be supported by means of approved galvanized metal spacers, metal spacers with plastic coated tips, stainless steel spacers, plastic spacers or approved precast mortar or concrete blocks when supports are in contact with removable or stay-in-place forms. Bright basic bar supports shall be used to support reinforcing steel placed in slab overlays on concrete panels or on existing concrete slabs. Bar supports in contact with soil or subgrade shall be approved.

For bar supports with plastic tips, the plastic protection must be at least 3/32 in. (2.4 mm) thick and extend upward on the wire to a point at least ½ in. (12.5 mm) above the formwork.

For approval of plastic spacers on a project, representative samples of the plastic shall show no visible indications of deterioration after immersion in a 5 percent solution of sodium hydroxide for 120 hours.

All accessories such as tie wires, bar chairs, supports, or clips used with epoxy-coated reinforcement shall be of steel, fully coated with epoxy or plastic. When approved by the Engineer or designated representative, plastic supports may also be used with epoxy-coated reinforcement.

All reinforcing steel shall be tied at all intersections, except that where spacing is less than 1 foot (300 mm) in each direction, alternate intersections only need be tied. For reinforcing steel cages for other structural members, the steel shall be tied at enough intersections to provide a rigid cage of steel. Mats of wire fabric shall overlap each other 1 full space as a minimum to maintain a uniform strength and shall be tied at the ends and edges.

Where prefabricated deformed wire mats are specified or if the Contractor requests, welded wire fabric may be substituted for a comparable area of steel reinforcing bar plan, subject to the approval of the Engineer or designated representative.

Mortar or concrete blocks shall be cast to uniform dimensions with adequate bearing area. A suitable tie wire shall be provided in each block, to be used for anchoring to the steel. Except in unusual cases and when specifically authorized by the Engineer, the size of the surface to be placed adjacent to the forms shall not exceed 2 1/2 inches (63.5 mm) square or the equivalent thereof in cases where circular or rectangular areas are provided. Blocks shall be cast accurately to the thickness required and the surface to be placed adjacent to the forms shall be a true plane, free of surface imperfections. The blocks shall be cured by covering them with wet burlap or mats for a period of 72 hours. Mortar for blocks should contain approximately 1 part hydraulic cement to three parts sand. Concrete for blocks should contain 850 pounds of hydraulic cement per cubic yard (500 kilograms per cubic meter) of concrete

Individual bar supports shall be placed in rows at 4-ft (1.22 meters) maximum spacing in each direction. Continuous type bar supports shall be placed at 4-ft (1.22 meters) maximum spacing. Continuous bar supports shall be used with permanent metal deck forms.

The exposure of the ends of longitudinals, stirrups and spacers used to position the reinforcement in concrete pipe and in precast box culverts or storm drains is not a cause for rejection.

Reinforcing steel for bridge slabs, top slabs of direct traffic culverts, and top slabs of prestressed box beams at all intersections, except tie only alternate intersections where spacing is less than 1 ft. (300 mm) in each direction.

For steel reinforcing cages for other structural members, reinforcement shall be supported and tied in such a manner that a sufficiently rigid cage of steel is provided. Fasten mats of wire fabric securely at the ends and edges. If the cage is not adequately supported to resist settlement or floating upward of the steel, overturning of truss bars or movement in any direction during concrete placement, permission to continue concrete placement will be withheld until corrective measures are taken. Sufficient measurements shall be made during concrete placement to insure compliance with the above.

No concrete shall be deposited until the Engineer or designated representative has reviewed the placement of the reinforcing steel and all mortar, mud, dirt, etc, shall be cleaned from the reinforcement, forms, workers' boots and tools. Do not place concrete until authorized by the Engineer or designated representative

406S.9 Handling, Placement and Repair of Epoxy-coated Reinforcement Steel

A. Handling

Systems for handling coated-reinforcement with padded contact areas shall be provided. Handling bands shall be padded to prevent damage to the coating. Bundles of coated reinforcement shall be lifted with a strongback, spreader bar, multiple supports or a platform bridge. The bundled reinforcement shall be carefully transported and stored on protective cribbing. The coated reinforcement should not be dropped or drug during handling.

B. Construction Methods

Coated reinforcement shall not be flame-cut but shall be sawn or shear-cut only when approved. Cut ends shall be coated as specified in Section C, “Repair of Coating”.

Coated reinforcement steel shall not be welded or mechanically coupled except where specifically indicated on the drawings. When welding or coupling is indicated on the drawing, the epoxy coating shall be removed at least 6 in. (150 mm) beyond the weld limits before welding and 2 in. (50 mm) beyond the limits of the mechanical coupler before assembly. After the welding or coupling operation is completed the steel shall be cleaned of oil, grease, moisture, dirt, welding contamination (slag or acid residue) and rust to a near-white finish. The existing epoxy coating shall be examined for damage and any damaged or loose epoxy shall be removed to expose sound epoxy coating.

After cleaning the coated-steel, the splice area shall be coated with epoxy repair material to a thickness of 7 to 17 mils (0.18 to 0.43 mm) after curing. A second application of the repair material shall be applied to the bar and coupler interface to ensure complete sealing of the joint.

C. Repair of Coating

The material used for coating repair shall comply with the requirements of this Item and ASTM D3963/D3963M, “Specification for Fabrication and Jobsite Handling of Epoxy-coated Reinforcing Steel Bars”. Repairs shall be made in accordance with procedures recommended by the manufacturer of the epoxy coating powder. For areas to be patched, a minimum coating thickness as required for the original coating shall be applied. All visible damage to the coating shall be repaired.

Sawed and sheared ends, cuts, breaks and other damage shall be promptly repaired before additional oxidation occurs. The areas to be repaired shall be cleaned to ensure that they free from surface contaminants. Repairs shall be made in the shop or in the field as required.

406S.10 Measurement

The measurement of quantities of reinforcement furnished and placed will be based on the calculated weight of the steel actually placed as indicated on the drawings, with no allowance made for added bar lengths for splices requested by the Contractor nor for

extra steel used when bars larger than those indicated on the drawings are used or for a higher grade of steel that is substituted with the permission of the Engineer or designated representative. Tie wires and supporting devices will not be included in the calculated weights. The calculated weight of bar reinforcement will be determined using the theoretical bar weight set forth in this item.

Measurement required by a change in design will be computed as described above for the actual steel required to complete the work.

406S.11 Payment

Reinforcing steel will generally not be paid for directly, but shall be included in the unit price bid for the items of construction in which the reinforcing steel is used.

When specified in the contract bid form as a separate pay item, this item shall be paid for at the contract unit price bid per pound of "Reinforcing Steel". The unit bid price shall include full compensation for all work specified herein including furnishing, bending, fabricating, welding and placing reinforcement, for all clips, blocks, metal spacers, ties, chairs, wire or other materials used for fastening reinforcement in place and for all tools, labor, equipment and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 406S-RC:	Reinforcing Steel -	Per Pound.
Pay Item No. 406S-ERC:	Epoxy-Coated Reinforcing Steel -	Per Pound.

END

SPECIFIC CROSS REFERENCE MATERIALS
Standard Specification Item 406S, "Reinforcing Steel"

American Society for Testing and Materials, ASTM

Designation	Description
ASTM A 36/A 36M	Carbon Structural Steel
ASTM A 82	Steel Wire, Plain, for Concrete Reinforcement
ASTM A 185	Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
ASTM A 496	Steel Wire, Deformed, for Concrete Reinforcement
ASTM A 497	Steel Welded Wire Fabric, Deformed, for Concrete Reinforcement
ASTM A 615/A 615M	Deformed and Plain Billet-steel Bars for Concrete Reinforcement
ASTM A 675/A 675M	Steel Bars, Carbon, Hot-Wrought, Special Quality, Mechanical Properties
ASTM A 706/A 706M	Low- Alloy Steel Deformed and Plain Bars for Concrete Reinforcement
ASTM A 775/A 775M	Epoxy-Coated Reinforcing Steel Bars
ASTM A 884/A 884M	Epoxy-Coated Steel Wire and Welded Wire Fabric For Reinforcement
ASTM A 934/A 934M	Epoxy-Coated Prefabricated Reinforcing Steel Bars
ASTM A 996/A 996M	Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement
ASTM D3963/D3963M	Fabrication and Jobsite Handling of Epoxy-coated Reinforcing Steel Bars

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-739-I	Sampling and Testing Epoxy Coated Reinforcing Steel

City of Austin Standard (Details)

Designation	Description
Standard 406S-1	Reinforced Steel Tolerances

Texas Department of Transportation: Departmental Material Specifications

Designation	Description
DMS 8130	Epoxy Powder Coating for Reinforcing Steel

American Welding Society

Designation	Description
AWS D1.1/D1.1M	Structural Welding Code

RELATED CROSS REFERENCE MATERIALS
Standard Specification Item 406S, "Reinforcing Steel"

City of Austin Standard Specification Items

Designation	Description
Item No. 360	Concrete Pavement
Item No. 403S	Concrete for Structures
Item No. 410S	Concrete Structures
Item No. 414S	Concrete Retaining Walls

Item No. 420S	Drilled Shaft Foundations
Item No. 830S	Traffic Signal Controller Foundation
Item No. 831S	Traffic Signal Drilled Shaft Foundation

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 360	Concrete Pavement
Item No. 420	Concrete Structures
Item No. 421	Hydraulic Cement Concrete
Item No. 422	Reinforced Concrete Slab
Item No. 423	Retaining Walls
Item No. 440	Reinforcing Steel

Item No. 408S
Concrete Joint Materials

408S.1 Description

This item shall govern the furnishing and placing of all longitudinal, transverse contraction and expansion joint material in concrete work as herein specified in the various items of these specifications as indicated or as directed by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

408S.2 Submittals

The submittal requirements of this specification item include:

A. Type and manufacturer of all joint materials proposed for use.

B. Technical data indicating that proposed products meet the requirements specified herein.

408S.3 Materials

(1) Preformed Asphalt Board

Preformed asphalt board formed from cane or other suitable fibers of a cellular nature securely bound together and uniformly impregnated with a suitable asphaltic binder and meeting the requirements of the Standard Specifications for Preformed Expansion Joint Filler for Concrete (Bituminous Type), ASTM D 994.

(2) Preformed Nonbituminous Fiber Material

Preformed nonbituminous fiber material shall meet the requirements of the Standard Specifications for the Preformed Expansion Joint Filler for Concrete Paving and Structural Construction, ASTM D 1751, except that the requirements pertaining to bitumen content, density and water absorption shall be voided.

(3) Boards

Boards obtained from Redwood timber, of sound heartwood, free from sapwood, knots, clustered birdseye, checks and splits. Occasional sound or hollow birdseye, when not in clusters, will be permitted provided the board is free from any other defects that will impair its usefulness as a joint filler.

(4) Joint Sealer (Concrete Pavement)

This material shall be a one part low modulus silicone especially designed to cure at ambient temperatures by reacting with moisture in the air and shall have the following properties:

As Supplied	
Color	Gray
Flow, MIL-2-8802D Sec. 4.8.4	0.2 maximum

Working Time, minutes	10
Tack-Free Time at 77°F ± 2F (25°C ± -1.66°C) Min. MIL-2-8802D Sec.4.8.7	60
Cure time, at 77°F (25°C), days	7-14
Full Adhesion, days	14-21
As Cured---after 7 days at 77°F (25°C) and 40% RH	
Elongation, percent minimum	1200
Durometer Hardness, Shore A, points ASTM 2240	15
Joint Movement Capability, percent	+100/-50
Tensile Strength, maximum elongation,psi (kPa)	100 (689)
Peel Strength, psi (kPa)	25 (172)

The joint sealer shall adhere to the sides of the concrete joint or crack and shall be an effective seal against infiltration of water and incompressibles. The material shall not crack or break when exposed to low temperature.

(5) Backer Rod

Backer Rod shall be expanded closed cell polyethylene foam compatible with sealant. No bond or reaction shall occur between rod and sealant. Backer Rod shall be of sufficient width to be in compression after placement and shall be used with joint sealer.

(6) Joint Sealing Material

Joint Sealing Material for other than pavement use may be a two-component, synthetic polymer or cold-pourable, self leveling type meeting the following requirements:

The material shall adhere to the sides of the concrete joint or crack and shall form an effective seal against infiltration of water and incompressibles. The material shall not crack or break when exposed to low temperatures. Curing is to be by polymerization and not by evaporation of solvent or fluxing of harder particles. It shall cure sufficiently at an average temperature of 77°F± 3°F (25°C ± -1.66°C) so as not to pick up under wheels of traffic in a maximum of 3 hours.

Performance Requirements:

When tested in accordance with Test Method Tex-525-C, the joint sealing material shall meet the above curing times and the requirements as follows:

It shall be of such consistency that it can be mixed and poured or mixed and extruded into joints at temperatures above 60°F (1.66°C).

Penetration 77°F (25°C), 150 gm. Cone, 5 sec., max.-cm	0.90
Bond and Extension 75%, 0F, 5 cycles:	
Dry Concrete Blocks	Pass
Wet Concrete Blocks	Pass
Steel Blocks (Primed if specified by manufacturer)	Pass
Flow at 200 °F (93°C)	None
Water content % by weight, max.	5.0

Resilience:	
Original sample min. % (cured)	50
Oven-aged at 158°F (70°C) min. %	50
For Class 1-a material only, Cold Flow (10 minute)	None

(7) Rebonded Recycled Tire Rubber

This material consists of granular particles of rubber, made by grinding automobile and truck tires, securely bound together by a synthetic resin or plastic binder. The filler must be molded into sheets of the required dimensions, which meet the testing requirements of both ASTM D 1751 and ASTM D 1752, except that the requirements for asphalt content and expansion are waived. The density of the material must be at least 30 lb/ft ^{3} (440kg/m^3).

408S.4 Construction Methods

The Contractor shall install "Concrete Joint Materials" which will function as a compatible system. Joint sealer shall not be placed where a bond braker is present.

Asphalt, Redwood board or other materials used shall extend the full depth of the concrete and shall be perpendicular to the exposed face. All joints shall be shaped to conform to the contour of the finished section in which they are installed. All material shall be a minimum of 1/2 inch (12.5 mm) thick or as indicated. Wood materials shall be anchored to the adjacent concrete to permanently hold them in place. Joint sealer shall be installed in accordance with the manufacturer's recommendations.

The material used for side walk expansion joints shall conform to No. 3 above, unless otherwise indicated.

The material used for curb and gutter expansion joints filler shall conform to any of the above, except when placed adjacent to concrete pavement, the joint material shall match the pavement joint material.

408S.5 Measurement and Payment

No additional compensation will be made for materials, equipment or labor required by this item, but shall be included in the unit price bid for the item of construction in which this item is used.

End

SPECIFIC Cross Reference Materials
Standard Specification Item No. 408S, " Concrete Joint Materials”

American Society for Testing and Materials (ASTM)

Designation	Description
D 994	Specification for Preformed Expansion Joint Filler for Concrete

	(Bituminous Type)
D 1751	Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
D 1752	Specification for Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction
D 2240	Standard Test Method for Rubber Property-Durameter Hardness

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-525-C	Tests for Asphalt and Concrete Joint Sealers

Item No. 409S
Membrane Curing

409S.1 Description

This item shall govern curing concrete pavement, concrete base, pavement, curbs, gutters, retards, sidewalks, driveways, medians, islands, concrete riprap, cement stabilized riprap, concrete structures and other concrete as indicated by applying an impervious liquid membrane forming material.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

409S.2 Submittals

The submittal requirements of this specification item include:

A. Type and manufacturer for all membrane curing materials proposed.

B. Proposed curing procedures.

409S.3 Material

The liquid forming membrane curing compound shall comply with the "Standard Specification for Liquid Membrane-forming Compounds for Curing Concrete", ASTM C 309, Type 1-D clear or translucent, with fugitive dye or Type 2 white pigmented. The material shall have a minimum flash point of 80°F (26.7°C) when tested by the "Pensky-Martin Closed Cup Tester", ASTM D 93.

It shall be of such consistency that it can be satisfactorily applied as a fine mist through an atomizing nozzle by means of approved pressure spraying equipment at atmospheric temperatures above 40° F (4.4°C).

It shall be of such nature that it will not produce permanent discoloration of concrete surfaces nor react deleteriously with the concrete or its components. Type 1 compound shall contain a fugitive dye that will be distinctly visible not less than 4 hours nor more than 7 days after application.

Type 2 compound shall not settle out excessively or cake in the container and shall be capable of being mixed to a uniform consistency by moderate stirring and shall exhibit a daylight reflectance of not less than 60 percent of that of magnesium oxide when tested as indicated.

The compound shall produce a firm, continuous, uniform moisture impermeable film, free from pinholes and shall adhere satisfactorily to the surfaces of damp concrete. When applied to the damp concrete surface at the rate of coverage indicated, the compound shall dry to the touch in not more than 4 hours and shall not be tacky or track off concrete after 12 hours.

It shall adhere to horizontal and vertical surfaces in a tenacious film and shall not run off or show an appreciable sag, disintegrate, check, peel or crack during the required curing period.

Under traffic, the compound shall not pick up or peel and shall gradually disintegrate from the surface.

The compound shall be delivered to the job only in the manufacturer's original containers, which shall be clearly labeled with the manufacturer's name, the trade name of the material and a batch number or symbol with which test samples may be correlated.

The water retention test shall be in accordance with the following:

Percentage loss shall be defined as the water lost after the application of the curing material was applied. The permissible percentage moisture loss (at the rate of coverage specified herein) shall not exceed the following:

24 hours after application	2 percent
72 hours after application	4 percent

409S.4 Construction Methods

The membrane curing compound shall be applied after the surface finishing has been completed and immediately after the free surface moisture has disappeared. The surface shall be sealed with a single uniform coating of the specified type of curing compound applied at the rate of coverage recommended by the manufacturer and directed by the Engineer or designated representative, but not less than 1 gallon per 180 square feet (3.8 liters per 16.7 square meters) of area. The Contractor shall provide satisfactory means and facilities to properly control and check the rate of application of the compound.

The compounds shall not be applied before the surface has become dry, but shall be applied just after free moisture has disappeared.

The compound shall be thoroughly agitated during its use and shall be applied by means of approved mechanical power pressure sprayers for street and bridge applications. The sprayers used to apply the membrane to concrete exposed surfaces shall travel at a uniform speed along the forms and be mechanically driven. The equipment shall be of such design that it will insure uniform and even application of the membrane material. The sprayers shall be equipped with satisfactory atomizing nozzles. On small miscellaneous items or on interim bridge deck curing will the Contractor be permitted to use hand-powered spray equipment. For all spraying equipment, the Contractor shall provide facilities to prevent the loss of the compound between the nozzle and the concrete surface during the spraying operations.

At locations where the coating shows discontinuities, pinholes or other defects or if rain falls on the newly coated surface before the film has dried sufficiently to resist damage, an additional coat of the compound shall be applied immediately at the same rate of coverage specified herein.

To insure proper coverage, the Engineer or designated representative shall inspect all treated areas after application of the compound for the period of time designated in the specification for curing, either for membrane curing or for other methods. Dry areas are identifiable because of the lighter color of dry concrete as compared to damp concrete. All suspected areas shall be tested by placing a few drops of water on the suspected areas. If the water stands in rounded beads or small pools which can be blown along the surface of the concrete without wetting the surface, the water impervious film is present. If the water wets the surface of the concrete as determined by obvious darkening of the surface or by visible soaking into the surface, no water-impervious film is present. Should the foregoing test indicate that any area during the curing period is not protected by the required water-impervious film an additional coat or coats of the compound shall be applied immediately and the rate of application of the membrane compound shall be increased until all areas are uniformly covered by the required water-impervious film.

The compounds shall not be applied to a dry surface and if the surface of the concrete has become dry, it shall be thoroughly moistened prior to the application of the membrane by fogging or mist application. Sprinkling or coarse spraying will not be allowed.

When temperatures are such as to warrant protection against freezing, curing by this method shall be supplemented with an approved insulating material capable of protecting the concrete for the specified curing period.

If at any time there is reason to believe that this method of curing is unsatisfactory or is detrimental to the work, the Contractor, when notified, shall immediately cease the use of this method and shall change to curing by one of the other methods specified under this contract.

Curing compounds shall be compatible with the adhesion of toppings or overlays where curing has been applied to the concrete base surface in order to assure adequate bond.

When forms are stripped before the 4 minimum curing days have passed, curing shall continue by an approved method.

409S.5 Measurement and Payment

Membrane curing will not be measured for payment. The work and materials prescribed herein will not be paid for directly, but shall be included in the unit price bid for the item of construction in which these materials are used.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 409S, “Membrane Curing”

American Society for Testing and Materials (ASTM)

Designation	Description
C 309	Liquid Membrane-forming Compounds for Curing Concrete
D 93	Pensky-Martin Closed Cup Tester

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 409S, “Membrane Curing”

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 360	Concrete Pavement
Item 420	Concrete Structures
Item 421	Portland Cement Concrete
Item 427	Surface Finishes for Concrete
Item 431	Pneumatically Placed Concrete
Item 437	Concrete Admixtures
Item 520	Weighing and Measuring Equipment
Item 522	Portland Cement Concrete Plants
Item 524	Hydraulic Cement

Item No. 410S
Concrete Structures

410S.1 Description

This item shall govern the construction of all types of structures involving the use of structural concrete, except where the requirements are waived or revised by other governing specifications.

All concrete structures shall be constructed in accordance with the design requirements and details indicated on the drawings, in conformity with the pertinent provisions of the items contracted for, the incidental items referred to and in conformity with the requirements herein.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

410S.2 Submittals

The submittal requirements of this specification item may include:

Appropriate mix designs for class of concrete for each type of structure or unit;

Appropriate mortar and grout mix designs;

Product name, description, technical information and supplier of any acrylic-polymer latex admixture;

Type, supplier and certified test results for expansion joint materials;

Type of waterstop and confirmation that the product conforms to TxDoT DMS-6160;

Type and manufacturer of proposed evaporation retardant and confirmation that it meets the requirements of test results for TxDoT DMS-4650;

Type and manufacturer of proposed chemical admixtures and confirmation that it meets the requirements of test results for TxDoT DMS-4640;

Type and manufacturer of proposed curing admixtures and confirmation that it meets the requirements of test results for TxDoT DMS-4640;

Type and manufacturer of proposed chemical admixtures and confirmation that it meets the requirements of test results for TxDoT DMS-4640;

Type and manufacturer of proposed epoxy and/or adhesives and confirmation that it meets the requirements of test results for TxDoT DMS-6100;

Reinforcing steel shall conform to Standard Specification Item No. 406S, “Reinforcing Steel”.

Contractors formwork plan for placing and consolidating concrete around wall penetrations and at locations designated as having congested reinforcing steel.

410S.3 Materials

A. Concrete

Concrete shall conform to Item No. 403S, "Concrete for Structures".

The class of concrete for each type of structure or unit shall be as indicated on the drawings or by pertinent governing specifications.

B. Grout or Mortar

When required or shown on the drawings, mortar and grout consisting of 1 part hydraulic cement and 2 parts sand with sufficient water to provide the desired consistency shall be provided. Mortar shall be provided with a consistency that can be handled easily and spread by a trowel. Grout shall be provided with a consistency that will flow into and completely fill all voids.

C. Latex

When required an acrylic-polymer latex admixture (acrylic resin emulsion in accordance with TxDoT DMS-4640, “Chemical Admixtures for Concrete”) suitable for producing polymer-modified concrete or mortar shall be provided. The latex shall not be allowed to freeze.

The following information shall be submitted for latex:

Name and information of company contact personnel,

Product name and polymer description, and

The latex shall meet the following requirements.

Table 1: LATEX ADDITIVE REQUIREMENTS

Property	Value
Total Solids, minimum, percent	47
PH	9.0 to 11.0
Brookfield viscosity (# 1 spindle @ 10 rpm), mPas, maximum	60
Butadiene Content, percent	30 to 40
Freeze-thaw stability, 2 cycles. maximum	0.1

Specification targets and production tolerances shall also be provided for the following properties.

1. viscosity (including test method and temperature reference),
2. percent solids,
3. pH,
4. specific gravity, and
5. styrene/butadiene ratio.

D. Reinforcing Steel

Reinforcing steel shall conform to Standard Specification Item No. 406S, “Reinforcing Steel”.

E. Expansion Joint Material

The expansion joint material shall conform to the requirements of TxDoT DMS-6310, “Joint Materials and Fillers”.

1. Preformed Fiber Sheets

Unless otherwise indicated on the drawings preformed bituminous fiber material shall be provided. The preformed fiber material shall conform to the dimensions indicated on the drawings. Preformed fiber sheets shall meet the requirements of ASTM D-1751, "Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types). The requirements related to bitumen content, density and water absorption shall not apply to nonbituminous materials.

2. Joint Sealing Material

Unless otherwise indicated on the drawings a Class 4, 5 or 7 low-modulus silicone sealant shall be provided that conforms to the requirements of TxDoT DMS-6310, "Joint Sealants and Fillers".

3. Timber Boards

Timber boards shall be made from redwood or cypress and must be free from sapwood, knots, clustered bird's eye, checks and splits. When oven dried at 230°F (110°C) to a constant weight (mass), the density of the board shall be between 20 and 35 lbs. Per cubic foot (between 320 and 560 kgs per cubic meter)

4. Asphalt Board

Asphalt Board shall conform to the dimensions indicated on the drawings and shall meet the description, general requirements and distortion testing of ASTM D-994, "Preformed Expansion Joint Filler for Concrete (bituminous Type)".

5. Rebonded Neoprene Filler Sheet

Rebonded neoprene filler shall consist of ground closed cell neoprene particles, rebonded and molded into sheets of uniform thickness of the dimensions indicated on the drawings. These sheets shall meet the requirements of ASTM D-1752, Type I.

The manufacturer shall furnish the Engineer or designated representative with certified test results as to the compliance with the above requirements.

F. Waterstop

Unless otherwise indicated on the drawings, rubber waterstops or Polyvinyl Chloride (PVC) waterstops that conform to TxDoT DMS-6160, "Waterstops, Nylon Reinforced Neoprene Sheet, and Elastomeric Pads" shall be provided.

G. Evaporation Retardants

Evaporation retardants shall conform to the requirements of TxDoT DMS-4650, "Hydraulic Cement Concrete Curing Materials and Evaporation Retardants". The evaporation retardant must be a commercially available monomolecular film compound. The evaporation retardant shall have no adverse effect on the cement hydration process or the concrete and shall reduce surface moisture evaporation from the concrete when performing concrete operations in direct sun, wind, high temperatures, or low relative humidity. The producer of the evaporation retardant shall certify that it meets these specified requirements.

H. Curing Materials

1. Liquid Membrane Forming compounds

Liquid Membrane Forming compounds shall conform to the requirements of TxDoT DMS-4650, “Hydraulic Cement Concrete Curing Materials and Evaporation Retardants”. The compound shall be applied to damp concrete as a fine mist through atomizing nozzles at a wet film thickness of 8 to 9 mils (200 to 230 µm). The liquid membrane-forming compound must not react deleteriously with concrete or its components. It must produce a firm, continuous, uniform moisture-impermeable film that is free of pinholes, cracks, or other film defects. It must also exhibit satisfactory adhesion.

The consistency must be such that the compound can be applied satisfactorily by conventional or airless spray at atmospheric and material temperatures above 40°F (5°C) without thinning. When applied at the manufacturer's recommended thickness, not less than 8 mils (200 µm) wet, to vertical surfaces of damp concrete, the compound must not run off or appreciably sag. The liquid membrane-forming compound must not disintegrate, check, peel, or crack during the required curing period. It must not peel or pick up under traffic, and must disappear from the surface of the cured concrete by gradual disintegration.

2. Cotton Mats

Cotton mats shall consist of a filling material of cotton “bat” or “bats” [at least 12 oz. Per square yard (400 grams per square meter)] completely covered with unsized cloth [at least 6 oz. Per square yard (200 grams per square meter)] stitched longitudinally with continuous parallel rows of stitching spaced at less than 4 in. (100 mm), or tuft both longitudinally and transversely at intervals less than 3 in. (75 mm).

The cotton mats shall be free from tears and in good general condition. A flap at least 6 in. (150 mm) wide with two (2) thicknesses of the covering that extends along one side of the mat shall be provided.

3. Polyethylene Sheeting

The polyethylene sheeting shall be at least 4 mils thick (0.1 mm) and free from visible defects. Clear or opaque white sheeting shall be provided when the ambient temperature during curing exceeds 60°F (15°C) or when applicable to control temperature during mass pours.

4. Burlap-Polyethylene Mats

The burlap-polyethylene mats shall be made from burlap impregnated on 1 side with a film of opaque white-pigmented polyethylene, free from visible defects. The laminated mats shall have at least 1 layer of an impervious material such as polyethylene, vinyl plastic, or other acceptable material (either as a solid sheet or impregnated into another fabric) and shall be free of visible defects.

I. Chemical Admixtures

Chemical admixtures including water reducing, placticizers and air entrainment shall conform to TxDoT DMS-4640, “Chemical Admixtures for Concrete” Calcium chloride shall not be used. Admixtures shall be included in the prequalified concrete admixtures list maintained by TxDot’s Construction Division.

J. City of Austin Survey Monuments

The Public Works Department may furnish permanent survey monuments to be cast in concrete as indicated on the drawings or as directed by the Engineer or designated representative.

K. Epoxy

Unless indicated otherwise on the drawings, epoxy materials shall conform to TxDoT DMS-6100, “Epoxy and Adhesives”.

410S.4 General Requirements

Before starting work, the Contractor shall inform the Engineer or designated representative fully of the construction methods the Contractor proposes to use, the adequacy of which shall be subject to the review by the Engineer or designated representative. Drawings for forms and falsework for piers and superstructure spans over 20 feet (6 meters) long, bracing systems for girders when the overhang exceeds 3 ft. 6 in. (1 meter) and for all bridge widening details shall be submitted to the Engineer or designated representative for review, if requested. Similar drawings shall be submitted for other units of the structure, if requested by the Engineer or designated representative. The drawings shall be prepared on standard 22 inch by 36-inch (550mm by 900 mm) sheets and shall show all essential details of the proposed forms, falsework and bracing to permit a structural analysis. Four sets of such drawings will be required.

Concurrence on the part of the Engineer or designated representative in any proposed construction methods, approval of equipment or of form and falsework drawings does not relieve the Contractor of the responsibility for the safety or correctness of the Contractor’s methods, adequacy of equipment or from carrying out the work in full accordance with the contract.

Unless otherwise indicated on the drawings, the requirements in the succeeding paragraphs shall govern the time sequence in which construction operations may be carried on and for the opening of completed structures to traffic:

Superstructure members, forms, falsework or erection equipment shall not be placed on the substructure before the concrete therein has attained a 3000 psi (20.7 MPa) compressive strength.

Storage of materials on completed portions of a structure will not be permitted until all curing requirements for those particular portions have been met.

No forms shall be erected on concrete footings supported by piling or drilled shafts until the concrete therein has attained a minimum compressive strength of 2500 psi (17.2 MPa). Such work may begin on spread footings after the therein has aged at least 2 curing days. Concrete may be placed as soon as the forms and reinforcing steel are approved by the Engineer or designated representative.

The support of tie beam and/or forms by falsework placed on previously placed tie beams is permissible provided such beams have attained 3000 psi (20.7 MPa) compressive strength, curing requirements are completed and the beams are properly supported to eliminate stresses not provided for in the design.

Bridges and direct traffic culverts shall not be opened to construction traffic or to the traveling public until authorized by the Engineer or designated representative in accordance with the following:

Authorization may be given after the last slab concrete has been in place at least 14 days for light construction traffic not to exceed a 3/4-ton (0.68 Mg) vehicle.

Authorization to place embankments to allow normal construction traffic and when necessary to the traveling public, may be given after the last slab concrete has been in place 30 days or when the minimum compressive strength (f_c') has reached the 28 day strength conforming to Item No. 403S, "Concrete for Structures" or as indicated on the drawings.

410S.5 Drains

Weep holes and roadway drains shall be installed and constructed as indicated on the drawings.

410S.6 Expansion Joints

Joints and devices shall be used to provide for expansion and contraction of concrete slabs and shall be constructed as indicated on the drawings.

The bearing area under the expansion ends of concrete slabs and slab and girder spans shall be given a steel trowel finish and finished to the exact grades required on the drawings. The material used to separate expansion surfaces shall be as indicated on the drawings and placed so that concrete or mortar cannot be subsequently worked around or under it. The bridging of concrete or mortar around expansion joint material in bearings and expansion joints shall be prevented.

Concrete adjacent to armor joints and finger joints shall be placed carefully to avoid defective anchorage and porous or honeycombed concrete in such areas.

All open joints and joints to be filled with expansion joint material shall be constructed using forms adaptable to loosening or early removal. To avoid expansion or contraction damage to the adjacent concrete, these forms shall be loosened as soon as possible after final concrete set to permit free movement of the span without requiring full form removal.

Preformed fiber joint material or other material indicated shall be used in the vertical joints of the roadway slab, curb, median or sidewalk. The top 1-inch (25 mm) thereof shall be filled with joint sealing material, as specified herein. The sealer shall be installed in accordance with Standard Specification Item No. 413S, “Cleaning and/or Sealing Joints and Cracks (PC Concrete)” and the manufacturer’s recommendations.

Prior to placing the sealing material, the vertical faces of the joint shall be cleaned of all laitance by sandblasting or by mechanical routing. Cracked or spalled edges shall be repaired. The joint shall be blown clean of all foreign material and sealed.

Where preformed fiber joint material is used, it shall be anchored to the concrete on one side of the joint by light wire or nails to prevent the material from falling out.

Finished joints shall conform to the drawing details with the concrete sections completely separated by the specified opening or joint material.

Soon after form removal and where necessary after surface finishing, all projecting concrete shall be removed along exposed edges to secure full effectiveness of the expansion joints.

410S.7 Construction Joints

The joint formed by placing plastic concrete in direct contact with concrete that has attained its initial set shall be deemed a construction joint. The term monolithic placement shall be interpreted to mean that the manner and sequence of concrete placing shall not create construction joints.

Construction joints shall be of the type and at the locations indicated on the drawings. Additional joints will not be permitted without written authorization from the Engineer or designated representative and when authorized, shall have details equivalent to those indicated for joints in similar locations.

Unless otherwise provided, construction joints shall be square and normal to the forms. Bulkheads shall be provided in the forms for all joints, except when horizontal. All vertical construction joints shall be chamfered. All horizontal construction joints shall be routed or grooved.

Construction joints requiring the use of joint sealing material shall be as indicated on the drawings or as directed by the Engineer or designated representative. The material will be indicated on the drawings without reference to joint type.

A concrete placement terminating at a horizontal construction joint shall have the top surface roughened thoroughly as soon as practicable after initial set is attained. The surfaces at bulkheads shall be roughened as soon as the forms are removed.

The hardened concrete surface shall be thoroughly cleaned of all loose material, laitance, dirt or foreign matter and saturated with water so it is moist when placing fresh concrete against it. Remove all free water and moisten the surface before concrete or bonding grout is placed against it. Forms shall be drawn tight against the existing concrete and the joint surface flushed with grout just prior to placing the fresh concrete.

The joint surface shall be coated with bonding mortar, grout, epoxy or other material as indicated on the drawings or other items. A Type V epoxy shall be provided in accordance with TxDoT DMS-6100, “Epoxies and Adhesives” for bonding fresh concrete to hardened concrete. The epoxy shall be placed on a clean dry surface and the fresh concrete shall be placed while the epoxy is still tacky. Bonding mortar or grout shall be placed on a surface that is saturated surface dry and the concrete shall be placed before the bonding mortar or grout dries. Other bonding agents shall be placed in accordance with the manufacturer’s recommendations.

410S.8 Foundation and Substructure

Excavation for foundations and substructure shall conform to Standard Specification Item No. 401S, "Structural Excavation and Backfill".

Concrete for foundation seals, unless otherwise indicated on the drawings, shall be Class C Concrete with a coarse aggregate grade of 2, 3, 4 or 5 and placed in accordance with the requirements herein. The top of the completed seal shall not vary from plan grade or the grade established by the Engineer or designated representative.

Where a concrete seal is indicated on the Drawings, the design will be based on the normal water elevation as indicated on the Drawings. If the foundation concrete can be placed in the dry at the time of construction, the seal will not be required. If additional seal is necessary for the conditions existing during the time of construction, its thickness shall be increased as deemed necessary by the Contractor and at the Contractor's expense. If the conditions existing at the time of construction require a seal for placing the foundation concrete in the dry and none is indicated on the Drawings, the Contractor shall place an adequate seal at the Contractor's expense.

The seal shall be allowed to set for at least 36 hours before the caisson or cofferdam is dewatered, after which the top of the seal shall be cleaned of all laitance or other soft material and all high spots exceeding the above limitation shall be cut off and removed.

410S.9 Falsework

The Contractor is totally responsible for all falsework. The Contractor shall design and construct it to safely carry the maximum anticipated loads and to provide the necessary rigidity. Details of falsework construction shall be subject to review by the Engineer or designated representative, but Engineer's review shall in no way relieve the Contractor of responsibility of the adequacy and safety of the falsework design.

All timber used in falsework centering shall be sound, in good condition and free from defects which will impair its strength. When wedges are used to adjust falsework to desired elevations, they shall be used in pairs to insure even bearing.

Sills or grillages shall be large enough to support the superimposed load without settlement and unless founded on solid rock, shale or other hard materials, precautions shall be taken to prevent yielding of the supporting material.

Falsework, which cannot be founded on a satisfactory spread footing, shall be placed on piling driven to a bearing capacity sufficient to support the superimposed load without settlement. The safe bearing capacity of piling shall be determined by test loads or by such other methods that may be required or acceptable to the Engineer or designated representative.

In general, each falsework bent shall be capped transversely by a member of proper size. A short cap section forming a T-head may be substituted to permit the removal of portions of the forms without disturbing the falsework. Caps shall be securely fastened to each pile or column in the bent and set at the proper elevation to produce, in conjunction with the use of approved wedges or jacks, permanent camber indicated on the Drawings, plus a construction camber covering allowance for deformation of the forms and falsework. The use of wedges to compensate for incorrectly cut bearing surfaces will not be permitted. Each falsework bent shall be securely braced to provide the stiffness required with the bracing securely fastened to each pile or column it crosses.

In setting falsework for arches, allowances shall be made for settlement of falsework, deflection of the arch and permanent camber. Provision shall be made by suitable wedges, sand jacks or other acceptable devices for the controlled lowering of falsework when the arch is swung. Falsework may be required to be placed on jacks to provide for settlement correction during concrete placement.

When the falsework is no longer required, it shall be removed. Falsework piling shall be pulled or cut off not less than 2 feet (0.6 meter) below finished ground level. Falsework and piling in a stream, lake or bay shall be completely removed to a point specified by the Engineer or designated representative to prevent any obstruction to the waterway.

410S.10 Forms

Forms for precast prestressed concrete members and for prestressed piling shall be constructed conforming to Item No. 425S, "Prestressed Concrete Structures".

A. General

Except where otherwise indicated on the drawings, forms may be of either timber or metal.

Forms for round columns exposed to view shall be of steel, except that other materials will be allowed with written permission of the Engineer or designated representative.

Forming plans shall be submitted for approval by the Engineer or designated representative. Forms shall be designed for the pressure exerted by a liquid weighing 150 pounds per cubic foot (2.4 Mega grams per cubic meter). The rate of placing the concrete shall be taken into consideration in determining the depth of the equivalent liquid. For job-fabricated forms an additional live load of 50 pounds per square foot (1.675 MPa) shall be allowed on horizontal surfaces. The maximum unit stresses shall not exceed 125 percent of the allowable stresses used by the Engineer or designated representative for the design of structures.

Formwork for wall and/or column pours equal or exceeding 8 feet (2.44 meters) shall be designed in accordance with ACI 347, “Guide to Formwork for Concrete” and sealed by a Registered Civil Engineer Licensed in the State of Texas, who is experienced in formwork design.

Commercially produced structural units used in formwork shall not exceed the manufacturer's maximum allowable working load for moment, shear or end reaction. The maximum working load shall include a live load of 35 pounds per square foot (1.175 MPa) of horizontal form surface and sufficient details and data shall be submitted for use in checking formwork details for approval.

Forms shall be practically mortar-tight, rigidly braced and strong enough to prevent bulging between supports and maintained to the proper line and grade during concrete placement. Forms shall be maintained in a manner that will prevent warping and shrinkage.

Deflections due to cast-in-place slab concrete and railing shown in the dead load deflection diagram shall be taken into account in the setting of slab forms.

All forms and footing areas shall be cleaned of any extraneous matter before placing concrete.

Permission to place concrete will not be given until all of such work is complete to the satisfaction of the Engineer or designated representative.

If, at any stage of the work, the forms show signs of bulging or sagging, the portion of the concrete causing such condition shall be removed immediately, if necessary and the forms shall be reset and securely braced against further movement.

B. Timber Forms

Lumber for forms shall be properly seasoned, of good quality and free from imperfections, which would affect its strength or impair the finished surface of the concrete. The lumber used for facing or sheathing shall be finished on at least 1 side and 2 edges and shall be sized to uniform thickness.

Form or form lumber that will be reused shall be maintained clean and in good condition. Lumber that is split, warped, bulged, or marred or that has defects that will produce inferior forms shall not be used but shall be removed from the work.

Form lining will be required for all formed surfaces, except for the inside of culvert barrels, inlets, manholes and box girders, the bottom of bridge decks between beams or girders, surfaces that are subsequently covered by backfill material or are completely enclosed and any surface formed by a single finished board. Lining will not be required when plywood forms are used.

Form lining shall be of an approved type such as masonite or plywood. Thin membrane sheeting such as polyethylene sheets shall not be used for form lining.

Forms may be constructed of plywood not less than ¾ inch (19 mm) in thickness, with no form lining required. The grain of the face plies on plywood forms shall be placed parallel to the span between the supporting studs or joists.

Plywood used for forming surfaces, which remain exposed, shall be equal to that specified as B-B Plyform Class I or Class II Exterior of the U.S. Department of Commerce Voluntary Product Standard, PS 1.

Studs and joists shall be spaced so that the facing form material remains in true alignment under the imposed loads.

Wales shall be spaced close enough to hold forms securely to the designated lines and scabbed at least 4 feet (1.22 meters) on each side of joints to provide continuity. A row of wales shall be placed near the bottom of each placement.

Facing material shall be placed with parallel and square joints and securely fastened to supporting studs.

Forms for surfaces receiving only an ordinary finish and exposed to view shall be placed with the form panels symmetrical, i.e., long dimensions set in the same direction. Horizontal joints shall be continuous.

Molding specified for chamfer strips or other uses shall be made of materials of a grade that will not split when nailed and which can be maintained to a true line without warping. Wood molding shall be mill cut and dressed on all faces. Unless indicated otherwise on the drawings, forms shall be filleted at all sharp corners and edges with triangular chamfer strips measuring 3/4 inch (19 mm) on the sides.

Forms for railings and ornamental work shall be constructed to standards equivalent to first class millwork. All moldings, panel work and bevel strips shall be straight and true with neatly mitered joints designed so the finish work is true, sharp and clean cut. All forms shall be constructed to permit their removal without marring or damaging the concrete. The forms may be given a slight draft to permit ease of removal.

Metal form ties of an approved type or a satisfactory substitute shall be used to hold forms in place and shall be of a type that permits ease of removal of the metal as hereinafter specified.

All metal appliances used inside of forms for alignment purposes shall be removed to a depth of at least 1/2 inch (13 mm) from the concrete surface. They shall be made so the metal may be removed without undue chipping or spalling and when removed, shall leave a smooth opening in the concrete surface. Burning off of rods, bolts or ties will not be permitted.

Any wire ties used shall be cut back at least 1/2 inch (13 mm) from the face of the concrete and properly patched.

Devices holding metal ties in place shall be capable of developing the strength of the tie and adjustable to allow for proper alignment.

Metal and wooden spreaders, which are separate from the forms, shall be removed entirely as the concrete is being placed.

Adequate clean-out openings shall be provided for narrow walls and other locations where access to the bottom of the forms is not readily attainable.

Prior to placing concrete, the facing of all forms shall be treated with oil or other bond breaking coating of such composition that it will not discolor or otherwise injuriously affect the concrete surface. Care shall be exercised to prevent coating of the reinforcing steel.

C. Metal Forms

The foregoing requirements for timber forms as regards design, mortar-tightness, filleted corners, beveled projections, bracing, alignment, removal, reuse and wetting shall also apply to metal forms, except that these will not require lining, unless specifically indicated on the drawings.

The thickness of form metal shall be as required to maintain the true shape without warping or bulging. All bolt and rivet heads on the facing sides shall be countersunk. Clamps, pins or other connecting devices shall be designed to hold the forms rigidly together and to allow removal without injury to the concrete. Metal forms, which do not present a smooth surface or line up properly, shall not be used. Metal shall be kept free from rust, grease or other foreign materials.

D. Form Supports for Overhang Slabs

Form supports which transmit a horizontal force to a steel girder or beam or to a prestressed concrete beam will be permitted, but shall not be used unless a structural analysis has been made of the affect on the girder or beam and approval is granted by the Engineer or designated representative.

In normal or skewed spans with standard overhangs not exceeding 3 feet, 1 1/2 inches (0.95 meter), beam bracing as shown in the drawings shall be used.

Spans in which the overhang width exceeds 3 feet, 1 1/2 inches (0.95 meter) will require additional support for the outside beams to resist torsion. Details of the Contractor's proposed method of providing additional support shall be included with the slab forming plans submitted to the Engineer or designated representative for review and approval.

Holes in steel members for support of overhang brackets may be punched or drilled full size or may be torch cut to 1/4 inch (6 mm) under size and reamed full size. In no case shall the holes be burned full size. The hole shall be left open unless indicated to be filled with a button head bolt. They shall never be filled by welding.

410S.11 Placing Reinforcement

Reinforcement in concrete structures shall be placed carefully and accurately and rigidly supported as provided in Standard Specification Item No. 406S, "Reinforcing Steel". Reinforcing steel supports shall not be welded to I-beams or girders or stirrups of prestressed concrete beams.

410S.12 Placing Concrete

A. General

Concrete shall not be placed when impending weather conditions would impair the quality of the finished work. If conditions of wind, humidity and temperature are such that concrete cannot be placed without the potential for shrinkage cracking, the concrete should be placed in early morning, at night or on a schedule with more favorable weather. When mixing, placing and finishing concrete is scheduled during non-daylight hours; the entire placement site should be illuminated to the satisfaction of the Engineer or designated representative.

If changes in weather conditions require protective measures after work starts, adequate shelter shall be provided to protect the concrete against damage from rainfall or from freezing temperatures as outlined in this Item. Operations during rainfall shall only be continued if approved by the Engineer or designated representative. Aggregate stockpiles shall be covered to the extent necessary to control the moisture conditions in the aggregates.

Slab concrete shall be mixed in a plant located off the structure. Carting or wheeling concrete batches over completed slabs will not be permitted until they have aged at least 4 full curing days or timber planking placed on top of the slab for the carts to traverse along. Carts shall be equipped with pneumatic tires. Curing operations shall not be interrupted for the purpose of wheeling concrete over finished slabs.

Exposed concrete surfaces, while still plastic, shall be stamped with an impression having the Contractor's name, the month and year. The stamp shall be of an approved design.

At least 1 day of curing shall be allowed after the concrete has achieved initial set before placing strain on projecting reinforcement to prevent damage to the concrete.

The storing of reinforcing or structural steel on completed roadway slabs generally shall be avoided and when permitted, shall be limited to quantities and distribution that will not induce excessive stresses.

B. Preparation of Surfaces

All forms, prestressed concrete panels, T-beams and concrete box beams on which concrete will be placed shall be thoroughly wetted before the placement of concrete. Puddles of excess water shall be removed before placing the concrete. The various surfaces shall be in a moist, saturated surface dry condition when concrete is placed on or against them.

The subgrade or foundation shall be moist before placing concrete for bridge approach slabs or other concrete placed on grade. If dry the subgrade shall be lightly sprinkled.

C. Placing Temperature

The minimum temperature of all concrete at the time of placement shall not be less than 50°F (10°C). The maximum temperature of any concrete, unless otherwise indicated on the drawings, shall not exceed 95°F (35°C) when placed. The maximum temperature of cast-in-place concrete in bridge superstructures, diaphragms, parapets, concrete portions of railing, curbs and sidewalks and direct traffic box culverts shall not exceed 85°F (30°C) when placed. Other portions of structures, when indicated on the drawings, shall require the temperature control specified.

For continuous placement of the deck on continuous steel units, the initial set of the concrete shall be retarded sufficiently to insure that it remains plastic in not less than 3 spans immediately preceding the one being placed. For simple spans, retardation shall be required only if necessary to complete finishing operations.

The consistency of the concrete as placed should allow the completion of all finishing operations without the addition of water to the surface. When conditions are such that additional moisture is needed for finishing, the required water shall be applied to the surface by fog spray only and shall be held to a minimum amount. Fog spray for this purpose may be applied with hand operated fogging equipment.

The height of free fall of concrete shall be limited to 5 feet (1.575 meters) to prevent segregation.

D. Transporting Time

The maximum time interval between the addition of cement to the batch and the placing of concrete in the forms shall not exceed the following:

Table 2: Allowable Transportation Times			
Air or ConcreteTemperature whichever is higher	Maximum Time w/o Retarder	Maximum Time with Retarder	
		*Specific Applications	All others
Non-agitated Concrete			
35°F to 79°F (2°C to 26°C)	45 minutes	45 minutes	45 minutes
Over 80°F (Over 25°C)	30 minutes	45 minutes	45 minutes
Agitated Concrete			
90°F (32°C) or above	45 minutes	75 minutes	105 minutes
75°F to 89°F (24°C to 32°C)	60 minutes	90 minutes	120 minutes
35°F to 74°F (2°C to 23°C)	90 minutes	120 minutes	150 minutes

* Specific applications include Bridge decks, cased drilled shafts and slabs of direct traffic culverts

The use of an approved retarding agent in the concrete will permit the extension of each of the above temperature-time maximums by 30 minutes for bridge decks, top slabs of direct traffic culverts and cased drilled shafts and 1 hour for all other concrete except that the maximum time shall not exceed 45 minutes for non-agitated concrete.

E. Handling and Placing

The Contractor shall give the Engineer or designated representative sufficient advance notice before placing concrete in any unit of the structure to permit the review of forms, reinforcing steel placement and other preparations. Concrete shall not be placed in any unit prior to the completion of formwork and placement of reinforcement therein.

The sequence for placing concrete shall be as indicated on the drawings or as required herein. The placing shall be regulated so the pressures caused by the plastic concrete shall not exceed the loads used in the form design.

The method of handling, placing and consolidation of concrete shall minimize segregation and displacement of the reinforcement and produce a uniformly dense and compact mass. Concrete shall not have a free fall of more than 5 feet (1.5 meters), except in the case of drilled shafts, thin wall sections such as in culverts, or as allowed by other Items. Any hardened concrete spatter ahead of the plastic concrete shall be removed.

Each part of the forms shall be filled by depositing concrete as near its final position as possible. The coarse aggregate shall be worked back from the face and the concrete forced under and around the reinforcement bars without displacing them. Depositing large quantities at one point and running or working it along the forms will not be allowed.

Concrete shall be deposited in the forms in layers of suitable depth but not more than 36 inches (0.9 meter) in thickness, unless otherwise directed by the Engineer or designated representative.

Cold joints in a monolithic placement shall be avoided. The sequence of successive layers or adjacent portions of concrete shall be such that they can be vibrated into a homogeneous mass with the previously placed concrete without a cold joint. Not more than 1 hour (1 ½ hours if a normal dosage of retarding admixture is used) shall elapse between adjacent or successive placements of concrete. Unauthorized construction joints shall be avoided by placing all concrete between the authorized joints in one continuous operation.

An approved retarding agent shall be used to control stress cracks and/or authorized cold joints in mass placements where differential settlement and/or setting time may induce stress cracking, such as on false work, in deep girder stems, etc.

Openings in forms shall be provided, if needed, for the removal of laitance or foreign matter of any kind.

All forms shall be wetted thoroughly before the concrete is placed therein.

F. Consolidation

All concrete shall be carefully consolidated and the mortar flushed to the form surfaces by continuous working with immersion type vibrators. Vibrators which operate by attachment to forms or reinforcement will not be permitted, except on steel forms. At least 1 standby vibrator shall be provided for emergency use in addition to the ones required for placement. For lightweight concrete, vibrators of the high frequency type, which produce a minimum of 7000 impulses per minute, will be required.

The concrete shall be vibrated immediately after deposition. Prior to the beginning of work, a systematic spacing of the points of vibration shall be established to insure complete consolidation and thorough working of the concrete around the reinforcement, embedded fixtures and into the corners and angles of the forms. Immersion type vibrators shall be inserted vertically, at points 18 to 30 inches (450 to 750 mm) apart and slowly withdrawn. The vibrator may only be inserted in a sloping or horizontal position in shallow slabs. The entire depth of each lift shall be vibrated, allowing the vibrator to penetrate several inches (several cms) into the preceding lift. The vibrator shall not be used to move the concrete to other locations. In addition the vibrator shall not be dragged through the concrete. Concrete along construction joints shall be thoroughly consolidated by operating the vibrator along and close to but not against the joint surface. The vibration shall continue until thorough consolidation and complete embedment of reinforcement and fixtures is produced, but not long enough to cause segregation. Vibration may be supplemented by hand spading or rodding, if necessary, to insure the flushing of mortar to the surface of all forms.

G. Finishing

From the time of initial strike off until final finish is completed and required interim curing is in place, the unformed surfaces of slab concrete in bridge decks and top slab of direct traffic culverts and concrete slabs, shall be kept damp, not wet, to offset the effects of rapid evaporation of mixing water from the concrete due to wind, temperature, low humidity or combinations thereof. Fogging equipment capable of applying water in the form of a fine fog mist, not a spray, will be required. Fogging will be applied at the times and in the manner directed by the Engineer or designated representative.

Fogging equipment may be either water pumped under high pressure or a combination of air and water, either system in combination with a proper atomizing nozzle. The equipment shall be sufficiently portable for use in the direction of any prevailing winds. The equipment shall be adapted for intermittent use to prevent excessive wetting of the surfaces.

Upon completion of the final finish, interim curing will be required for slab concrete in bridge decks and top slabs of direct traffic culverts as follows:

(1) Required water curing shall begin as soon as it can be done without damaging the concrete finish.

(2) Unless otherwise indicated on the Drawings, Type 1-D membrane curing compound that conforms to TxDoT DMS-4650, "Hydraulic Cement Concrete Curing Materials and Evaporation Retardants" shall be applied to the slab surface.

H. Installation of Dowels and Anchor Bolts

Dowels and anchor bolts shall be installed by casting them in place or by grouting with grout, epoxy, or epoxy mortar unless indicated otherwise on the drawings.

Holes for grouting shall be formed or drilled. Holes for anchor bolts shall be drilled to accommodate the bolt embedment required on the drawings. Holes for dowels shall be made at least 12 in. (300 mm) deep unless indicated otherwise on the drawings. When grout or epoxy mortar is specified the diameter of the hole shall be at least twice the dowel or bolt diameter but shall not exceed the dowel or bolt diameter plus 1 ½ in (38 mm). When epoxy is specified the hole diameter should be 1/16 to ¼ in. (1.6 to 6.35 mm) greater than the dowel or bolt diameter.

Holes for anchor bolts in piers, abutments, bents or pedestals may be drilled or formed by the insertion of oiled wooden plugs or metal sleeves in the plastic concrete. Formed holes shall be large enough to permit horizontal adjustments of the bolts. The bolts shall be carefully set in mortar. In lieu of the above, anchor bolts may be set to exact locations when the concrete is placed.

The holes shall be thoroughly cleaned of all loose material, oil, grease or other bond-breaking substance and blow them clean with filtered compressed air. When an epoxy type material is used the holes shall be in a surface dry condition. When hydraulic cement grout is used the holes shall be in a surface moist condition. The void space between the hole and the dowel or bolt shall be completely filled with grouting material. The requirements for cleaning outlined in the product specification for prepackaged systems shall be followed exactly.

The following should be used as a guide in selection of an appropriate grout, mortar, epoxy or epoxy grout.

Table 3: Guide for Selection of Epoxy, Epoxy Mortar, Grout and Epoxy Grout

Material Type	Recommendation
Epoxy, Epoxy Mortar or other prepackaged Mortar	As Approved
Cast-in-place or Grouted system	1 part hydraulic cement, 2 parts sand and

	sufficient water for desired consistency
Neat Epoxy	Type III epoxy per TxDoT DMS-6100, "Epoxies and Adhesives"
Epoxy Grout	Type III epoxy per TxDoT DMS-6100, "Epoxies and Adhesives"
Provide grout, epoxy or epoxy mortar as the binding agent unless otherwise indicated on the drawings	

410S.13 Placing Concrete in Cold Weather

A. General

The Contractor is responsible for the protection of concrete placed under any and all weather conditions and is responsible for producing concrete equal in quality to that placed under normal conditions. Permission given by the Engineer or designated representative to allow placement of the concrete during cold weather does not relieve the Contractor of the responsibility for producing concrete equal in quality to that placed under normal conditions. Concrete placed under adverse weather conditions that proves to be unsatisfactory shall be removed and replaced at Contractor' expense.

B. Cast-in-Place Concrete

Concrete may be placed when the ambient temperature is not less than 35°F (2°C) in the shade and rising or above 40°F (4°C). Concrete shall not be placed when the ambient temperature in the shade is below 40°F (4°C) and falling unless approved by the Engineer or designated representative. Concrete shall not be placed in contact with any material coated with frost or having a temperature less than 32°F (0°C).

Aggregates shall be free from ice, frost and frozen lumps. When required, in order to produce the minimum specified concrete temperature; the aggregate and/or the water shall be heated uniformly, in accordance with the following:

The water temperature shall not exceed 180°F(82°C) and/or the aggregate temperature shall not exceed 150°F(66°C). The heating apparatus shall heat the mass of aggregate uniformly. The temperature of the mixture of aggregates and water shall be between 50°F(10°C) and 85°F(29°C) before introduction of the cement.

All concrete shall be effectively protected as follows:

1. The temperature of slab concrete of all unformed surfaces shall be maintained at 50°F(10°C) or above for a period of 72 hours from time of placement and above 40°F(4°C) for an additional 72 hours.
2. The temperature at the surface of all concrete in bents, piers, culvert walls, retaining walls, parapets, wingwalls, bottom of slabs and other similar forms shall be maintained at 40°F(4°C) or above for a period of 72 hours from time of placement.
3. The temperature of all concrete, including the bottom slabs of culverts placed on or in the ground, shall be maintained above 32°F(0°C) for a period of 72 hours from time of placement.

Protection shall consist of providing additional covering, insulated forms or other means and if necessary, supplementing such covering with artificial heating. Avoid applying heat directly to concrete surfaces. Curing shall be provided during this period until all requirements for curing have been satisfied.

When impending weather conditions indicate the possibility of the need for such temperature protection, all necessary heating and covering material shall be on hand ready for use before permission is granted to begin placement.

Sufficient extra test specimens will be made and cured with the placement to ascertain the condition of the concrete as placed prior to form removal and acceptance.

C. Precast Concrete

A fabricating plant for precast products which has adequate protection from cold weather in the form of permanent or portable framework and covering, which protects the concrete when placed the forms and is equipped with approved steam curing facilities may place concrete under any low temperature conditions provided:

1. The framework and covering are placed and heat is provided for the concrete and the forms within 1 hour after the concrete is placed. This shall not be construed to be 1 hour after the last concrete is placed, but that no concrete shall remain unprotected longer than 1 hour.
2. Steam heat shall keep the air surrounding the concrete between 50°F (10°C) and 85°F(29°C) for a minimum of 3 hours prior to beginning the temperature rise, which is required for steam curing.

410S.14 Placing Concrete in Hot Weather

When the temperature of the air is above 85ºF (29°C), an approved retarding agent will be required in all exposed concrete, concrete used in superstructures, top slabs of direct traffic culverts and all cased drilled shafts regardless of temperatures. Concrete mix temperatures shall not exceed 90ºF (32°C) except for mixes that include high range water reducers where a maximum mix temperature of 100ºF (38°C) will be allowed.

If the concrete mix temperature is expected to exceed 90ºF (32°C) (or 100ºF (38°C) in mixes with high range water reducers) ice may be utilized to lower the concrete mix temperature. Ice may be added to the concrete mix as a portion by weight of the mix water. However the addition of ice shall not exceed 50% of the total mix water weight.

When weather conditions are such that the addition of ice at 50% of the mix water is not sufficient to reduce the concrete mix temperature to an acceptable temperature, concrete work shall not be allowed.

When ice is to be used in hot weather concrete placement, the Contractor shall furnish a mix design (Section 4.4 of Standard Specification Item 360S, “Concrete Pavement” and Section 6 of Standard Specification Item No. 403S, “Concrete for Structures”) acceptable to the Engineer or designated representative for class of concrete specified on the drawings.

410S.15 Placing Concrete in Water

Concrete shall be deposited in water only when indicated on the drawings or with written permission of the Engineer or designated representative. The forms, cofferdams or caissons shall be sufficiently tight to prevent any water current passing through the space in which the concrete is being deposited. Pumping will not be permitted during the concrete placing nor until it has set for at least 36 hours.

The concrete shall be placed with a tremie, pump or other approved method and shall not be permitted to fall freely through the water nor shall it be disturbed after it has been placed. Its surface shall be kept approximately level during placement.

The tremie shall be supported or the pump operated so that it can be easily moved horizontally to cover all the work area and vertically to control the concrete flow. The lower end of the tremie or pump hose shall be submerged in the concrete at all times.

The placing operations shall be continuous until the work is complete.

For concrete to be placed under water, the concrete mix shall be designed in accordance with Standard Specification Item No. 403S, “Concrete For Structures” with a minimum cement content of 650 lb. Per cubic yard (10.4 Mg per cubic meter). An anti-wash admixture may be included in the mix design as necessary to produce a satisfactory finished product.

410S.16 Placing Concrete in Superstructure

A. General

Unless otherwise indicated on the drawings, simple span roadway slabs shall be placed without transverse construction joints by using a mechanical longitudinal screed or a self-propelled transverse finishing machine or a mechanical longitudinal screed. For small placements or unusual conditions such as narrow widening, variable cross-slopes, or transitions, manually operated screeding equipment may be used if approved by the Engineer or designated representative.

B. Transverse Screeding

Unless otherwise indicated on the drawings, slabs on continuous units shall be placed in one continuous operation without transverse construction joints using a longitudinal screed or a self-propelled transverse finishing machine. Rails for transverse finishing machines supported from the beams or girders shall be installed so they may be removed without damage to the slab. Bond between removable supports and the concrete shall be prevented in a manner acceptable to the Engineer or designated representative. Rail support parts, which remain embedded in the slab, shall not project above the upper mat of reinforcing steel. Rail or screed supports attached to I-beams or girders shall be subject to "General Requirements" stated above. Unless indicated otherwise on the drawings, the minimum rate of concrete placement is 30 lineal feet (9.144 lineal meters) of bridge slab per hour. The concrete shall be deposited parallel to the skew of the bridge so that all girders are loaded uniformly along their length. Slab concrete shall be deposited between the exterior beam and the adjacent beam before placing concrete in the overhang portion of the slab. Personnel and equipment shall be furnished that is capable of placing, finishing and curing the slab at an acceptable rate to ensure compliance with this Item. Concrete shall be placed in transverse strips. On profile grades greater than 1.5 %, placement shall be started at the lower end.

C. Longitudinal Screeding

The screed shall be adequately supported on a header or rail system sufficiently stable to withstand the longitudinal or lateral thrust of the equipment. Unless otherwise indicated on the drawings, temporary intermediate headers will be permitted for placements exceeding 50 feet (15.24 meters) in length for the longitudinal screed, provided the rate of placement is rapid enough to prevent a cold joint and these headers are designed for early removal to permit satisfactory consolidation and finish of the concrete at their locations. The slab concrete shall be deposited between the exterior beam and the adjacent beam before placing concrete in the overhang portion of the slab.

For longitudinal screeding, concrete shall be placed in longitudinal strips starting at a point in the center of the segment adjacent to one side, except as provided herein and the strip completed by placing uniformly in both directions toward the ends except that for spans on a grade of 1.5 percent or more, placing shall start at the lower end. The width of strips shall be such that the concrete therein will remain plastic until the adjacent strip is placed. Where monolithic curb construction is specified, the concrete shall be placed therein in proper sequence to be monolithic with the adjacent longitudinal strips of the slabs.

D. Placements on Continuous Steel Units

Unless otherwise indicated on the drawings, slabs on continuous steel units shall be placed in a single continuous operation without transverse construction joints using a mechanical longitudinal screed or a self-propelled transverse finishing machine. The initial set of the concrete shall be retarded sufficiently to ensure that concrete remains plastic in at least 3 spans immediately preceding the slab being placed. Construction joints shall be used, when required for slab placements on steel beams or girders, as shown on the drawings. When staged placement of a slab is specified in the drawings, it shall be necessary to ensure that the previously placed concrete attains a compressive strength of 3000 psi (20.7 MPa) before placing the next stage concrete. Multiple stages may be placed in a single day if approved by the Engineer or designated representative. When drawings permit staged concrete placement without specifying a particular order of placement, a placing sequence that will not overstress any of the supporting members shall be submitted for the approval of the Engineer or designated representative.

E. Slab and Girder Units

Unless indicated otherwise on the drawings, girders, slab and curbs of slab and girder spans shall be placed monolithically. Concrete girders shall be filled first, and the slab concrete placed within the time limits specified in this Item. If a transverse screed is used, the concrete shall be placed in the stem for a short distance and then the concrete placed in transverse strips. If a longitudinal screed is used, the concrete shall be placed in the outside girder stem first beginning at the low end or side, and then continue the concrete placed in longitudinal strips.

410S.17 Placing Concrete in Concrete Arches

Concrete shall be placed in arch rings so the loading is kept symmetrical on the falsework. The arch rings and ribs shall be placed in one continuous operation unless otherwise

indicated on the drawings or permitted by the Engineer or designated representative. The spandrel walls or columns and the beams shall not be placed until the arch is swung. Floor slab, railing, parapet walls, etc., shall not be placed until all spandrels are complete. Slab placement shall be symmetrical about the transverse centerline so the loading of the arch is kept approximately symmetrical.

The placing sequence shall be as indicated on the drawings.

410S.18 Placing Concrete in Box Culverts

In general, construction joints will be permitted only where indicated on the drawings.

Where the top slab and walls are placed monolithically in culverts more than 4 feet (1.22 meters) in clear height, an interval of not less than 1 nor more than 2 hours shall elapse before placing the top slab to allow for settlement and shrinkage in the concrete wall.

The base slab shall be trowel finished accurately at the proper time to provide a smooth uniform surface. Top slabs, which carry traffic, shall be finished as specified for roadway slabs in "Finish of Roadway Slabs", below. Top slabs of fill type culverts shall be given a reasonably smooth float finish.

410S.19 Placing Concrete in Foundations and Substructure

Concrete shall not be placed in footings until the depth and character of the foundation has been inspected by the Engineer or designated representative and permission has been given to proceed.

Placing of concrete footings upon seal courses will be permitted after the caissons or cofferdams are free from water and the seal course cleaned. Any necessary pumping or bailing during the concrete placement shall be done from a suitable sump located outside the forms.

All temporary wales or braces inside cofferdams or caissons shall be constructed or adjusted as the work proceeds to prevent unauthorized construction joints in footings or shafts.

When footings can be placed in a dry excavation without the use of cofferdams or caissons, forms may be omitted if desired by the Contractor and approved by the Engineer or designated representative and the entire excavation filled with concrete to the elevation of the top of footing.

Concrete in columns shall be placed monolithically unless otherwise indicated on the drawings. Columns and caps and/or tie beams supported thereon may be placed in the same operation or separately. To allow for settlement and shrinkage of the column concrete, it shall be placed o the lower level of the cap or tie beam and placement delayed for not less than 1 hour nor more than 2 before proceeding with the cap or tie beam placement.

410S.20 Treatment and Finishing of Horizontal Surfaces Except Bridge Slabs

All unformed upper surfaces shall be struck off to grade and finished. The use of mortar topping for surfaces under this classification will not be permitted.

After the concrete has been struck off, the surface shall be floated with a suitable float. Bridge sidewalks shall be given a wood float or broom finish or may be striped with a brush as specified by the Engineer or designated representative.

The tops of caps and piers between bearing areas shall be sloped slightly from the center toward the edge and the tops of abutments and transition bents sloped from the back wall to the edge, as directed by the Engineer or designated representative, so that water will drain from the surface. The concrete shall be given a smooth trowel finish. Bearing areas for steel units shall be constructed in such a manner to have a full and even bearing upon the concrete. When the concrete is placed below grade, bearing areas may be raised to grade on beds of Portland cement mortar consisting of 1 part cement, 2 parts sand and a minimum amount of water.

Bearing seat buildups or pedestals for concrete units shall be cast integrally with the cap or with a construction joint. The construction joint area under the bearing shall have the surface roughened thoroughly as soon as practical after initial set is obtained. The bearing seat buildups shall be placed using a latex based grout, an epoxy grout, or an approved proprietary bearing mortar, mixed in accordance with the manufacturer's recommendation. Pedestals shall be placed using Class C concrete, reinforced as indicated on the drawings.

The bearing area under the expansion end of concrete slabs and slab and girder spans shall be given a steel-trowel finish to the exact grades required on the drawings. Bearing areas under elastomeric bearing pads or nonreinforced bearing seat buildups shall be given a textured wood float finish. The bearing area shall not vary from a level plane more than 1/16 in. (1.6 mm) in all directions.

410S.21 Finish of Bridge Slabs

In all roadway slab-finishing operations, camber for specified vertical curvature and transverse slopes shall be provided.

For concrete flat slab and concrete slab and girder spans cast in place on falsework, an additional amount of camber shall be provided to offset the initial and final deflections of the span indicated in the drawings. For concrete slab and girder spans using pan forms, a camber of approximately 3/8 in. for 30 ft. (9.5 mm for 9.14 meter) spans and ½ in. for 40 ft. (12.7 mm for 12.19 meter) spans shall be provided to offset initial and final deflections unless otherwise directed by the Engineer or designated representative. When dead load deflection requirements for concrete flat slab and concrete slab and girder spans not using pan forms is not indicated on the drawings, the additional amount of camber shall be 1/8 inch per 10 foot (3.2 mm per 3 meter) of span length but not to exceed 1/2 inch (12.7 mm).

Bridge slabs supported on prestressed concrete beams, steel beams or girders shall receive no additional camber, except that for slabs without vertical curvature, the longitudinal camber shall be approximately 1/4 inch (6.35 mm).

Work bridges or other suitable facilities shall be provided from which to perform all finishing operations and to provide access, if necessary, for the Engineer or designated representative to check measurements for slab thickness and reinforcement cover.

As soon as the concrete has been placed and vibrated in a section of sufficient width to permit working, the surface shall be struck off, leveled and screeded, carrying a slight excess of concrete ahead of the screed to insure filling of all low spots. The screed shall be designed rigid enough to hold true to shape and shall have sufficient adjustments to provide for the required camber. A vibrating screed shall be used in all slabs more than 20 feet (6.1 meters) in width. A vibrating screed may be used if heavy enough to prevent undue distortion. The screeds shall be provided with a metal edge.

Longitudinal screeds shall be moved across the concrete with a saw like motion while their ends rest on headers or templates set true to the roadway grade or on the adjacent finished slab. The transverse screeds shall be moved longitudinally approximately 1/5 of the drum length for each complete out-and-back pass of the carriage.

The surface of the concrete shall be screeded a sufficient number of times and at such intervals to produce a uniform surface, true to grade and free of voids. If necessary, the screeded surface shall be worked to a smooth finish with a long handled wood or metal float of the proper size or hand floated from bridges over the slab. Floating may not be necessary if the pan float attached to a transverse screed produces an acceptable finish. Overworking the concrete surface and overuse of finish water shall be avoided.

The Contractor shall perform in the presence of the Engineer or designated representative sufficient checks with a long handled 16-foot (5 meter) straightedge on the plastic concrete to insure that the final surface will be within the specified tolerances. The check shall be made with the straightedge parallel to the centerline. Each pass thereof shall lap half of the preceding pass. All high spots shall be removed and all depressions over 1/16 inch (1.6 mm) in depth shall be filled with fresh concrete and floated. The checking and floating shall be continued until the surface is true to grade and free of depressions, high spots, voids or rough spots.

Screed-rail support holes shall be filled with concrete and finished to match the top of the slab.

The concrete surface shall be finished to a uniform texture using a carpet drag, burlap drag or broom finish. The surface shall be finished to a smooth sandy texture without blemishes, marks or scratches deeper than 1/16 inch (1.6 mm). The surface texturing shall be applied using a work bridge or platform immediately after completing the straightedge checks. The carpet or burlap drag shall be drug longitudinally along the concrete surface, adjusting the surface contact area or pressure to provide a satisfactory coarsely textured surface. A broom finish may be performed using a fine bristle broom transversely.

The concrete surface shall be coated immediately after the carpet or burlay drag, or broom finish with a single application of evaporation retardant at a rate recommended by the manufacturer. The time between the texturing at any location and subsequent application of evaporation retardant shall not exceed 10 minutes. The evaporation retardant may be applied using the same workbridge used for surface texturing. The concrete surface shall not be worked once the evaporation retardant has been applied.

Interim and final curing shall be applied in accordance with Section P410S.23, “Curing Concrete”.

The Contractor is responsible for the ride quality of the finished bridge slab. The Engineer or designated representative will use a 10-ft. (3.05 meter) straightedge to verify ride quality [1/8 in. or less in 10 ft (3.2 mm or less in 3.05 meters)] and to determine locations where

corrections are needed. If the Engineer or designated representative determines that the ride quality is unacceptable, then the Contractor shall submit to the Engineer or designated representative for approval a plan to produce a ride of acceptable quality. All corrections for ride-quality shall be made before saw-cutting grooves.

At the option of the Contractor or when indicated on the drawings, the hardened concrete surface of bridge slabs, bridge approach slabs and direct-traffic culverts shall be given its final texture by saw grooving to meet the above requirements after completion of the required curing period. Grooves shall be cut perpendicular to the structure centerline. The grooves shall be cut continuously across the slab to within 18 in. (450 mm) of the barrier rail, curb or median divider. At skewed metal expansion joints in bridge slabs, groove cutting shall be adjusted by using narrow-width cutting heads so that all grooves end within 6 in. (150 mm) of the joint, measured perpendicular to the centerline of the metal joint. There should not be any ungrooved surface wider than 6 in. (150 mm) adjacent to either side of the joint. The minimum distance to the first groove, measured perpendicular to the edge of the concrete joint or from the junction between the concrete and the metal leg of the joint shall be 1 in. (25 mm), Grooves shall be continuously cut across construction joints or other joints in the concrete that are less than ½ in. (13 mm) wide. The same procedure described above shall be used where barrier rails, curbs or median dividers are not parallel to the structure centerline in order to maintain the 18-in. (450-mm) maximum dimension from the end of the grooves to the gutter line. The grooves shall be cut continuously across formed concrete joints.

When the plans require that a concrete overlay be placed on the slab (new construction) or on prestressed concrete box beams or other precast elements, a carpet drag, burlap drag or broom finish shall be given to all concrete surfaces to be overlaid. Saw grooving is not necessary in this case. An average texture depth for the finish of approximately 0.035 in. (0.9 mm) shall be provided with no individual test falling below 0.020 in. (0.5 mm), unless otherwise indicated on the drawings, when tested in accordance with TxDoT's Tex-436-A, "Measurement of Texture Depth by the Sand Patch Method". If the texture depth falls below what is specified, the finishing procedure shall be revised to produce the desired texture.

When the drawings require an asphalt seal with or without overlay on the slab (new construction), on prestressed concrete box beams or on other precast elements, all concrete surfaces to be covered shall be given a lightly textured broom or carpet drag finish, similar to a sidewalk finish having an average texture depth of approximately 0.025 inch (0.635 mm), when tested in accordance with TxDoT's Tex-436-A, ".

410S.22 Placing Survey Monuments

The Contractor shall obtain City Survey Monuments, for a fee of 10 dollars, from the Department of Public Works, Construction Inspection Division. Monuments shall be embedded in freshly poured concrete at locations indicated on the drawings and accessible to survey equipment at the completion of the project. The monuments shall be installed flush with the adjacent concrete.

410S.23 Curing Concrete

The Contractor shall inform the Engineer or designated representative fully of the methods and procedures proposed for curing, shall provide the proper equipment and material in adequate amounts and shall have the proposed method, equipment and material approved by the Engineer or designated representative prior to placing concrete.

Inadequate curing and/or facilities therefore shall be cause for the Engineer or designated representative to notify the Contractor, in writing, that the work is unsatisfactory and the concrete will have to be removed and replaced.

All concrete shall be cured for a period of 4 curing days except as noted herein. A curing day is a calendar day when the temperature, taken in the shade away from artificial heat is above 50°F (10°C) for at least 19 hours or on colder days if the temperature of all surfaces of the concrete is maintained above 40°F (4°C) for the entire 24 hours. The required curing shall begin when all concrete has attained its initial set. TxDoT's Tex-440-A, "Initial Time-of-Set of Fresh Concrete" may be used to establish when the concrete has attained its initial set.

Table 4: Exceptions to 4-Day Curing

Description	Type of Cement	Required Curing Days
Upper Surfaces of Bridge Slabs, Top Slabs of Direct Traffic Culverts and Concrete Overlays	I or II	8
	II or I/II	10
	All types with supplementary cementing materials	10
Concrete Piling buildups		6

For upper surfaces of bridge slabs, bridge support slabs, median and sidewalk slabs and culvert top slabs constructed using Class S Concrete (Standard Specification Item No. 403S, "Concrete for Structures") interim curing using a Type 1-D curing compound shall be applied as soon as possible after application of the evaporation retardant and after the water sheen has disappeared, but no more than 45 minutes after application of the evaporation retardant. Membrane interim curing shall be applied using a work bridge or other approved apparatus to ensure a uniform application. Final curing with water cure in accordance with this section shall start as soon as possible without damaging the surface finish. Water curing shall be maintained for the duration noted in the table above. Polyethylene sheeting, burlap-polyethylene blankets, laminated mats or insulating curing mats shall be placed in direct contact with the slab when the ambient temperature is expected to drop below 40°F (4°C) during the first 72 hours of the curing period. The curing materials will be weighed down with dry mats to maintain direct contact with the concrete and to provide insulation against cold weather. Supplemental heating or insulation may be required in cold and wet weather if the insulating cotton mats become wet or if the concrete temperature drops below the specified curing temperature. Application of heat directly to concrete surfaces shall be avoided.

For the top surface of any concrete unit upon which concrete is to be placed and bonded at a later date (i.e. stub walls, risers, etc.), only water-cure in accordance with this Section shall be used.

All other concrete shall be cured as specified in pertinent Items.

The following methods are permitted for curing concrete subject to the restrictions of this Item .

A. Form Curing

When forms are left in intimate contact with the concrete, other curing methods will not be required except for exposed surfaces and for cold weather protection.

When forms are striped before the 4-day minimum curing time has elapsed, curing shall continue by an approved method.

B. Water Curing

All exposed surfaces of the concrete shall be kept wet continuously for the required curing time. The water used for curing shall meet the requirements for concrete mixing water as indicated in Item No. 403S, "Concrete for Structures". Seawater will not be permitted. Water, which stains or leaves an unsightly residue, shall not be used.

1. Wet Mats

Wet cotton mats placed in direct contact with the slab shall be maintained for the required curing time. If needed damp burlap blankets made from 9-ounce (255 gm) stock may be placed on the damp concrete surface for temporary protection prior to the application of the cotton mats, which may be placed dry and wetted down after placement.

The mats shall be weighted down adequately to provide continuous contact with all concrete surfaces where possible. The surfaces of the concrete shall be kept wet for the required curing time. Surfaces, which cannot be cured by contact, shall be enclosed with mats, anchored positively to the forms or to the ground, so that outside air cannot enter the enclosure. Sufficient moisture shall be provided inside the enclosure to keep all surfaces of the concrete wet.

2. Water Spray

This method shall consist of overlapping sprays or sprinklers that keep all unformed surfaces continuously wet.

3. Ponding

This method requires the covering of the surfaces with a minimum of 2 inches (50 mm) of clean granular material, kept wet at all times or a minimum of 1 inch (25 mm) depth of water. Satisfactory provisions shall be made to provide a dam to retain the water or saturated granular material.

C. Membrane Curing

Unless otherwise indicated on the drawings, either Type 1-D or Type 2 membrane curing compound may be used where permitted except that Type 1-D (Resin Base Only) will be permitted for slab concrete in bridge decks and top slabs of direct traffic culverts and all other surfaces that require a higher grade of surface finish. For substructure concrete, only one Type of curing compound will be permitted on any one structure.

TABLE 5

	REQUIRED		PERMITTED	
STRUCTURE UNIT DESCRIPTION	**Water for Complete Curing**	**Membrane for Interim Curing**	**Water for Complete Curing**	**Membrane for Complete Curing**
1. Upper surfaces of Bridge Roadway, Median and Side walk Slabs, Top Slabs of Direct Traffic, and Culverts.	X	X (resin base)		
2. Top Surface of any Concrete Unit upon which Concrete is to be placed and bonded at a later interval (Stub Walls, Risers, etc.). Other Super-structure Concrete (curbs, wing-walls, Parapet Walls, etc.).	X		*X	*X
3. Top Surface of Precast and/or Pre-stressed Piling.	X	X		
4. All Substructure Concrete Culverts. Box Sewers, Inlets, Manholes, Retaining Walls, Riprap.			*X	*X

* Polyethylene Sheeting, Burlap-Polyethylene Mats or Laminated Mats in close intimate contact with the concrete surfaces, will be considered equivalent to water or membrane curing for items under 4.

The membrane curing shall be applied just after free moisture has disappeared in a single, uniform coating at the rate of coverage recommended by the manufacturer and as approved by the Engineer or designated representative, but not less than 1 gallon per 180 square feet (1 liter per 4.4 square meters) of area. Tests for acceptance shall be at this specified rate.

Membrane curing shall not be applied to dry surfaces, but shall be applied just after free moisture has disappeared. Formed surfaces and surfaces which have given a first rub shall be dampened and shall be moist at the time of application of the membrane.

When membrane is used for complete curing, the film shall remain unbroken for the minimum curing period specified. Membrane, which is damaged, shall be corrected immediately by reapplication of membrane. Polyethylene sheeting, burlap-polyethylene mats or laminated mats in close intimate contact with the concrete surfaces, will be considered equivalent to membrane curing. Unless otherwise indicated on the drawing, the choice of membrane type shall be at the option of the Contractor, except that the Engineer or designated representative may require the same curing method for like portions of a single structure.

410S.24 Removal of Forms and Falsework

Unless otherwise indicated on the drawing, forms for vertical surfaces may be removed when the concrete has aged 12 hours after initial set, provided it can be done without damage to the concrete. Forms for mass concrete placements shall be maintained in place for 4-days following concrete placement. Mass placements are defined as concrete placements with a least dimension greater than equal to 5 ft. (1.575 meters), or those designated as such on the drawings.

Forms for inside curb faces may be removed in approximately 3 hours provided it can be done without damage to the curb.

Unless indicated otherwise on the drawings weight supporting forms and falsework spanning more than 1 ft. (300 mm) for structures, bridge components and culvert slabs shall remain in place until the concrete has attained a minimum compressive strength of 2500 psi (17.25 MPa). Forms for other structural components may be removed as specified by the Engineer or designated representative.

Inside forms (walls and top slabs) for inlets, box culverts and sewers may be removed after the concrete has attained a minimum compressive strength of 1800 psi (12.4 MPa), provided an overhead support system, approved by the Engineer or designated representative, is used to transfer the weight (mass) of the top slab to the walls of the box culvert or sewer before the support provided by the forms is removed.

If all test cylinders made for the purpose of form removal have been broken without attaining the required strength, forms shall remain in place for a total of 14 curing days.

The above provisions relative to form removal shall apply only to forms or parts thereof which are constructed to permit removal without disturbing forms or falsework required to be left in place for a longer period on other portions of the structure.

Remove all metal appliances used inside forms for alignment shall be removed to a depth of at least ½ in. (13 mm) from the concrete surface. The appliances shall be manufactured to allow the removal without undue chipping or spalling of the concrete, and so that it leaves a smooth opening in the concrete surface when removed. Rods, bolts and ties shall not be burned-off.

Backfilling against walls of Type I or Type II cement shall not take place for a minimum of 7 days. Backfilling against walls of Type III cement shall not take place until the cylinder compressive strength has reached 3000 psi (20.7 MPa) or the wall has cured for 5 days.

All forms and falsework shall be removed unless indicated otherwise on the drawings.

410S.25 Defective Work

Any defective work discovered after the forms have been removed shall be repaired as soon as possible in accordance with "Finishing Exposed Surfaces", below.

If the surface of the concrete is bulged, uneven or shows excess honeycombing or form marks, which in the opinion of the Engineer or designated representative, cannot be repaired satisfactorily, the entire section shall be removed and replaced at the expense of the Contractor.

410S.26 Finishing Exposed Surfaces

A. Ordinary Surface Finish

An Ordinary Surface Finish shall be applied to all concrete surfaces either as a final finish or preparatory to a higher grade or class of finish. Higher grades and classes of finish shall conform to Item No. 411S, "Surface Finishes for Concrete". Where neither a grade or class of finish is specified, an Ordinary Surface Finish only, will be required.

Ordinary Surface Finish shall be provided as follows:

1. After formal removal, all porous, honeycombed areas and spalled areas shall be corrected by chipping away all loose or broken material to sound concrete.
2. Featheredges shall be eliminated by saw-cutting and chipping spalled areas to a depth at least ½ in. (13 mm) deep perpendicular to the surface. Shallow cavities shall be repaired using a latex adhesive grout, cement mortar or epoxy grout approved by the Engineer or designated representative. If judged repairable by the Engineer or designated representative, large defective areas shall be corrected using concrete or other material approved by the Engineer or designated representative.
3. Holes and spalls caused by removal of form ties, etc., shall be cleaned and filled with latex adhesive grout, cement mortar or epoxy grout approved by the Engineer or designated representative. Only the holes shall be filled. The patch shall not be blended with the surrounding concrete. On surfaces to receive a rub finish in accordance with Standard Specification Item No. 411S, “Surface Finishes for Concrete” the exposed parts of metal chairs shall be chipped out to a depth of 1/2 inch (13 mm) and the surface repaired.
4. All fins, runs, drips or mortar that will be exposed shall be removed from surfaces. Form marks and chamfer edges shall be smoothed by grinding and/or dry rubbing.
5. Grease, oil, dirt, curing compound, etc., shall be removed from surfaces requiring a higher grade of finish. Discolorations resulting from spillage or splashing of asphalt, paint or other similar material shall be removed.
6. Repairs shall be dense, well bonded and properly cured and when made on surfaces, which remain exposed and do not require a higher finish, shall be finished to blend with the surrounding concrete.

Unless otherwise indicated on the drawings Ordinary Surface Finish shall be the final finish for the following exposed surfaces:

1. inside and top of inlets,
2. inside and top of manholes,
3. inside of sewer appurtenances,
4. inside of culvert barrels,
5. bottom of bridge decks between beams or girders,
6. vertical and bottom surfaces of interior concrete beams or girders.

B. Rubbed Finish

In general, the following areas shall require a rubbed finish and shall receive a first and second rubbing:

1. The top, exterior and roadway facia of curbs and parapet walls.
2. All concrete surfaces of railing.
3. The exterior vertical facia of slab spans, rigid frames, arches and box girders.
4. The outside and bottom surfaces of facia beams or girders (except precast concrete beams).

5. The underside of overhanging slabs to the point of juncture of the supporting beams.
6. All vertical surfaces of piers, columns, bent caps, abutments, wing walls and retaining walls which are exposed to view after all backfill and embankments is placed.
7. Exposed formed surfaces of inlet and outlet structures on culverts, transition structures, headwalls and inlets.
8. Such other surfaces specified elsewhere to receive a rubbed finish and such additional surfaces required by the Engineer or designated representative to receive a rubbed finish.

After removal of forms and as soon as the mortar used in pointing has set sufficiently, surfaces to be rubbed shall be wet with a brush and given a first surface rubbing with a medium coarse carborundum stone. This rubbing shall be done before the concrete has cured more than 48 hours.

The second rubbing shall present a cleaned uniform appearance free from drip marks and discoloration. It shall be given with a No.30 carborundum stone or an abrasive of equal quality.

If the Contractor elects to use epoxy paint in lieu of the second rubbings the Contractor may do so upon approval of the Engineer or designated representative.

C. Special Surface Finishes

Striated, exposed aggregate and other special surface finishes shall conform to Standard Specification Item No. 411S, "Surface Finishes for Concrete" and/or with the requirements indicated on the drawings.

410S.27 Measurement and Payment

No direct measurement or payment will be made for the work to be done or the equipment to be furnished under this item, but shall be included in the unit price bid for the item of construction in which this item is used.

End

SPECIFIC CROSS REFERENCE MATERIALS
Standard Specification Item 410S, “Concrete Structures”

City of Austin Standard Specification Items

Designation	Description
Item No. 360S	Concrete Pavement
Item No. 401S	Structural Excavation and Backfill
Item No. 403S	Concrete for Structures
Item No. 406S	Reinforcing Steel
Item No. 411S	Surface Finishes for Concrete
Item No. 413S	Cleaning and/or Sealing Joints and Cracks (PC Concrete)
Item No. 425S	Prestressed Concrete Structures

U.S. Department of Commerce Voluntary Product Standard, PS 1

American Concrete Institute

Designation	Description
ACI 347	Guide to Formwork for Concrete

American Society for Testing and Materials (ASTM)

Designation	Description
ASTM D-994	Preformed Expansion Joint Filler for Concrete (bituminous Type)
ASTM D-1751	Prefprmed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
ASTM D-1752	Prefprmed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction

Texas Department of Transportation: Departmental Material Specifications

Designation	Description
DMS-4640	Chemical Admixtures for Concrete
DMS-4650	Hydraulic Cement Concrete Curing Materials and Evaporation Retardants"
DMS-6100	Epoxy and Adhesives
DMS-6160	Waterstops, Nylon Reinforced Neoprene Sheet, and Elastomeric Pads
DMS-6310	Joint Materials and Fillers

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-436-A	Measurement of Texture Depth by the Sand Patch Method
Tex-440-A	Initial Time-of-Set of Fresh Concrete

RELATED CROSS REFERENCE MATERIALS
Standard Specification Item 410S, "Concrete Structures"

American Society for Testing and Materials, ASTM

Designation	Description
A 36/A 36M	Carbon Structural Steel
A 82	Steel Wire, Plain, for Concrete Reinforcement
A 185	Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
A 496	Steel Wire, Deformed, for Concrete Reinforcement
A 497	Steel Welded Wire Fabric, Deformed, for Concrete Reinforcement
A 615/A 615M	Deformed and Plain Billet-steel Bars for Concrete Reinforcement
A 675/A 675M	Steel Bars, Carbon, Hot-Wrought, Special Quality, Mechanical Properties
A 706/A 706M	Low- Alloy Steel Deformed and Plain Bars for Concrete Reinforcement
A 775/A 775M	Epoxy-Coated Reinforcing Steel Bars
A 884/A 884M	Epoxy-Coated Steel Wire and Welded Wire Fabric For Reinforcement
A 934/A 934M	Epoxy-Coated Prefabricated Reinforcing Steel Bars
A 996/A 996M	Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement
D3963/D3963M	Fabrication and Jobsite Handling of Epoxy-coated Reinforcing Steel Bars

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-739-I	Sampling and Testing Epoxy Coated Reinforcing Steel

City of Austin Standard (Details)

Designation	Description
Standard 406S-1	Reinforced Steel Tolerances

Texas Department of Transportation: Departmental Material Specifications

Designation	Description
DMS 8130	Epoxy Powder Coating for Reinforcing Steel

City of Austin Standard Specification Items

Designation	Description
Item No. 404S	Pneumatically Placed Concrete
Item No. 407S	Fibrous Concrete
Item No. 414S	Concrete Retaining Walls
Item No. 420S	Drilled Shaft Foundations

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 360	Concrete Pavement
Item No. 420	Concrete Structures
Item No. 421	Hydraulic Cement Concrete
Item No. 422	Reinforced Concrete Slab
Item No. 423	Retaining Walls
Item No. 440	Reinforcing Steels

Item No. 411S
Surface Finishes for Concrete

411S.1 Description

This item shall govern the furnishing of all materials and the application by the methods of construction indicated on the Drawings for the application of a surface finish to concrete.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

411S.2 Submittals

The submittal requirements of this specification item include:

A. Type and manufacturer of cement(s).

B. Type and manufacturer of membrane curing compound.

C. Type and manufacturer of adhesive grout.

D. Type and manufacturer of resin paint.

E. Samples as requested.

F. Locations of proposed grade/class of finishes.

411S.3 Materials

(1) Masonry Sand

Masonry sand shall conform to ASTM C 144.

(2) White Cement

White cement shall conform to ASTM C 150.

(3) Portland Cement

All cement unless otherwise indicated shall be Portland cement conforming to ASTM C 150.

Portland cement manufactured in a cement kiln fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Natural Resource Conservation Commission (TNRCC) and the U. S. Environmental Protection Agency (EPA). Supplier shall provide current TNRCC and EPA authorizations to operate the facility.

(4) Membrane Curing

Membrane curing shall conform to Item No. 409S, "Membrane Curing".

(5) Adhesive Grout

This subsection sets forth the requirements for three epoxy adhesives with different viscosities designed to bond fresh Portland Cement concrete to existing Portland Cement concrete, hardened concrete to hardened concrete and steel to fresh or hardened concrete. These adhesives are as follows:

Type V: Standard (medium viscosity) for applying to horizontal and vertical surfaces. This material is suitable for surface sealing of fine cracks in concrete.

Type VI: Low viscosity for application with spray equipment to horizontal surfaces.

Type VII: Paste consistency for overhead application and where a high buildup is required. This material is suitable for surface sealing of cracks in concrete, which are veed out prior to sealing, and for grouting of dowel bars where clearance is 1/16 inch (1.6 mm) or less.

(a) Mixing Ratio: The ratio of resin and hardener components to be mixed together to form the finished adhesive shall be either 1 to 1 or 2 to 1 by volume.

Any specific coloring of resin and/or hardener components desired will be stated by the Engineer or designated representative.

Fillers, pigments and thixotropic agents. All fillers, pigments and/or thixotropic agents in either the epoxy resin or hardener component must be of sufficiently fine particle size and dispersed so that no appreciable separation or settling will occur during storage.

Any fillers present in the low viscosity version must be of such a nature that they will not interfere with application by spray equipment or abrade or damage such equipment.

The concrete adhesive shall contain no volatile solvents.

(b) Consistency: The adhesives shall comply with the following:

	Type V	Type VI	Type VII
Viscosity of mixed adhesive 77° ± 1°F, (25° ± -17°C) Poises	400 Maximum	150 Maximum	must be sufficiently fluid to apply by trowel or spatula without difficulty
Pot Life at 77°F (25°C), minutes minimum - 30			
Set Time at 77°F (25°C) (Time required to attain 180 psi (1.3 mPa), hours maximum - 12			

Thixotropy test shall be performed at both 77° and 120° F (25° and 49° C). Average thickness of cured adhesive remaining on test panel, mils minimum.

Type V	Type VII
30	45

Samples of the individual components in sealed containers shall be maintained at 115° + 3° F (46° + -16° C) for 2 weeks. The mixed adhesive prepared from these samples must still comply with the minimum thixotropy requirements.

The viscosity of the Type V and Type VI versions must not show an increase of more than 20 percent compared with the viscosity prior to the stability test. The

Type VII adhesive must still be sufficiently fluid to apply by trowel or spatula without difficulty.

(c) Physical Properties of the Cured Adhesive

Property	**Requirements**
Adhesive Shear Strength, psi, (mPa), minimum	2200 (15)
Water Gain, percent by weight, maximum	0.20
Ability to bond fresh Portland cement concrete to cured Portland cement concrete psi, (mPa), minimum (7 days cure time)	400 (2.8)

(6) Synthetic Resin Paint

Type X Epoxy: This is a high solids epoxy coating designed for application by brush or roller. The materials can also be applied by airless spray by addition of a maximum of 5 percent toluene solvent at the direction of the Engineer or designated representative.

Raw Materials: The basic raw materials to be incorporated into this coating are listed below, along with the specific requirements for each material. The final decision as to the quality of materials shall be made by the Engineer or designated representative. After the Engineer or designated representative has approved the brand names of raw materials proposed by the Contractor, no substitution will be allowed during the manufacture without prior approval of the Engineer or designated representative.

Epoxy Resin: The basic epoxy resin used in the formulation shall be an unmodified liquid resin conforming to the following chemical and physical requirements:

Viscosity at 25.0 + 0.1 C, cps	7,000 to 10,000
Weight per epoxy equivalent, gms per gm - mole	175 to 195
Color (Gardner Number), maximum	5
Hydrolyzable chlorine, maximum % by weight	0.2
Specific gravity, 25/25 degrees	1.14. to 1.18

Test methods to be used in determining these qualities are listed below:

(a) Viscosity - Test for Kinematic Viscosity (ASTM Designation: D 445).

(b) Weight per Epoxy Equivalent - Test for Epoxy Content of Epoxy Resins (ASTM Designation: D 1652).

(c) Color - Test for Color of Transparent Liquids (Gardner Color Scale) (ASTM Designation: D 1544).

(d) Hydrolyzable Chlorine - Test for Hydrolyzable Chlorine Content of Liquid Epoxy Resins (ASTM Designation D: 1726).

(e) Specific Gravity - Method of Test for Density of Paint, Varnish, Lacquer and Related Products (ASTM Designation: D 1475).

Pigment

Titanium Dioxide: The titanium dioxide used in this formulation shall be equivalent to DuPont R-900. This shall be a pure, chalk-resistant, rutile titanium dioxide meeting the requirements of ASTM D 476, Type III.

Extender: The extender used in this formulation shall be Nyad 400, manufactured by Interpace Pigments. Specific requirements are as follows:

Particle size distribution	Minimum	Maximum
Minus 20 microns, percent by weight	95	
Minus 10 microns, percent by weight	70	80
Minus 5 microns, percent by weight	40	50
Minus 3 microns, percent by weight	30	40
Minus 1 micron, percent by weight	14	20
Oil Absorption (rub out, lbs/100 lbs)		25 maximum
Brightness (G.E.)	92.5 minimum	

411S.4 Grade of Finish

(1) General

The grade and/or class of finish shall be as described herein and as indicated.

"Grade" of finish designates the areas to which a higher finish is to be applied beyond the requirements of an Ordinary Surface Finish. Four grades of finish are included herein.

"Class" of finish designates the materials or the process to be used in providing the grade of finish. Three classes of finish are included herein.

For structures and surfaces not described herein under grade of finish, a class of finish only may be indicated. Where neither a grade nor class is specified, an Ordinary Surface Finish only will be required as specified in Item No. 410S, "Concrete Structures".

Where the plans specify a grade and class of finish, i.e., Grade II, Class C, only that type of finish shall be furnished.

Where the plans specify a grade of finish only, i.e., Grade I Finish, any of the classes of finish may be furnished. Only one class of finish shall be furnished on any individual structure, twin structures or on structures in close proximity to each other, except as specified for prestressed concrete members below.

(2) Grade I

The following areas shall receive a Class A, B or C (two rub) Finish, except that prestressed members shall receive either a Class A or B Finish only.

All concrete surfaces of railing, including the parapet types; exterior vertical faces of slabs, slab spans, arches and box girders; the outside and bottom surfaces of fascia beams or girders (including prestressed members); the underside of overhanging slabs to the point of juncture of the supporting beam; all exposed vertical surfaces of

bents and piers and bottom surfaces of bent caps; all exposed surfaces of tie beams, abutments, bridge wingwalls, culvert headwalls and wingwalls and retaining walls exposed to view after all backfill and is placed.

Unless otherwise indicated, the underside of the slab of slab spans shall be finished its entire width.

Unless otherwise indicated, exposed surfaces of pump houses and other miscellaneous concrete surfaces shall receive a Class A, B or C (one rub) Finish.

(3) Grade II

All concrete surfaces of railing, including the parapet types, all exposed surfaces of bridge wingwalls and the exterior vertical faces of slabs and slab spans shall receive a Class A, B or C (two rub) Finish. All other surfaces described under Grade I Finish shall receive a Class A or B finish only. The underside of slab spans shall receive an Ordinary Surface Finish only.

(4) Grade III

All concrete surfaces of railing, including the parapet types, all exposed surfaces of bridge wingwalls and the exterior vertical faces of slabs shall receive a Class A, B or C (two rub) Finish. All other surfaces described under Grade I Finish shall receive an Ordinary Surface Finish.

(5) Grade IV

The top and roadway faces only of all concrete railing, including the parapet types and bridge wingwalls shall receive a Class A, B or C (one rub) Finish. All other surfaces described under Grade I shall receive an Ordinary Surface Finish.

411S.5 Class of Finish

The Class of Finish designates either an adhesive grout material, a paint-type material or a rubbing process applied to surfaces specified in "Grade of Finish", as required above and/or as indicated.

Unless otherwise indicated the color shall be concrete gray.

(1) Class A

This finish shall consist of an adhesive grout textured coating with a minimum 1/16 inch thickness, composed of 1 part white cement, 1 part natural (gray) cement, 2 parts masonry sand, 1 part (latex) emulsion and enough water to form a viscous slurry of a consistency that may be applied by spray gun, brush or roller without appreciable running or sagging. The proportions of white and gray cement may be varied slightly to obtain the desired color.

Gradation of the masonry sand shall be as required to produce a texture satisfactory to the Engineer or designated representative.

Prepackaged materials meeting these requirements and acceptable to the Engineer or designated representative as to color, texture and appearance will be permitted.

(2) Class B

The finish shall be a paint-type material, consisting of a synthetic resin, containing fibrous as well as texturing pigments, which when applied by a 1 coat spray application at the rate of 45 + 5 square feet per gallon (15.9 + 1.9 square meters per liter) will yield an acceptable textured coating. Certification by the manufacturer of the above materials will be required.

(3) Class C

This finish shall consist of a one rub or two rub system, as the case may be, meeting the requirements set forth below under "Construction Methods".

411S.6 Approval of Surface Finishing Materials

The material to be furnished shall meet the requirements of TxDoT Specification DMS-8110, Structural Coatings, latest revision.

In addition to the above, the manufacturer shall furnish the following:

(1) At the time of original request for approval of the surface furnishing material, the manufacturer shall supply a 1-gallon (3.8 L) sample of the material to the Engineer or designated representative, if requested.

(2) Each 6 months after approval of the material, the manufacturer shall furnish a notarized certification indicating that the material originally approved has not been changed or altered in any way. Any change in formulation of a surface finish shall require retesting prior to use.

The Engineer or designated representative may request additional information to be submitted such as infrared spectophotometry scan, solids content, etc., for further identification. A change in formula discovered by any of the tests prescribed herein or by other means and not reported and retested, may be cause to permanently bar the manufacturer from furnishing surface finish materials for City work.

The City reserves the right to perform any or all of the tests required by this specification as a check on the tests reported by the manufacturer. In case of any variance the City tests will govern.

411S.7 Construction Methods

Prior to application of any of the finishes required herein, concrete surfaces shall be given an Ordinary Surface Finish. For Class A and B materials, concrete surfaces shall be clean and free of dirt, grease, curing compound or any other bond breaking substance. Class A shall be applied on moistened surfaces but Class B requires a dry surface. The temperature of the atmosphere, concrete and compound shall be above 50°F (10°C) for Classes A and B at the time of application. The finished surfaces shall be protected against rain or freezing for a period of 24 hours after application.

Class A materials shall be applied by spraying, by roller or by brush. Class B materials shall be applied by spraying only. All applications shall provide an acceptable texture of the proper coverage.

The Class A and B material shall be applied after all preparation work required by Ordinary Surface Finish has been completed.

The Class C Finish shall be performed with a carborundum stone as follows, after all preparatory work required by Ordinary Surface Finish has been completed:

For a two-rub system, the first rubbing shall bring the wetted concrete face to a paste and produce a smooth dense surface without pits, form marks or other irregularities. The use of cement or grout to form the paste will not be permitted. Striping with a brush and washing after the first rubbing will not be required. Chamfer lines shall be finished during the second rubbing.

The first rubbing shall be done soon after form removal. Membrane curing, if used, shall be applied after the first rub is complete. Prior to the second rubbing, any remaining curing membrane shall be removed from the surface by brushing, buffing or other satisfactory methods.

The second rubbing shall be performed when conditioning the structure for final acceptance. The specified surfaces shall be cleaned of drip marks and discolorations and given a final rubbing. The surface shall be striped neatly with a brush and the paste allowed to take a reset, after which the surfaces shall be washed with clean water leaving them with a neat and uniform appearance and texture.

For a one rub system, the rubbing requirements shall be the same as for the first rub above, except chamfer lines shall be finished and the paste spread uniformly, striped with a brush and allowed to take a reset after which the surfaces shall be washed with clean water leaving them with a neat and uniform appearance and texture.

411S.8 Special Surfaces Finishes

(1) General

When special surface finishes are required for retaining walls, panels, copings or similar construction, the Contractor shall prepare sample panels for approval of the finish and the method of application. Unless otherwise indicated, panel or pattern arrangement and dimensions may be varied to achieve a more pleasing appearance or to utilize forming material more efficiently when approved by the Engineer or designated representative. Aggregates, materials, variation of panel or pattern arrangement, dimensions and other features affecting the work shall be approved prior to start of the work.

(2) Striated Finish

The striated (grooved) pattern shall be as indicated or as approved by the Engineer or designated representative.

The finish shall be made by lining the forms with striated sheets of plywood, plastic, fiberglass, metal or other material acceptable to the Engineer or designated representative. The striations on the panels shall be of a smooth, wide pattern, not sharp or angular.

A chamfer groove shall be used along all edges of each panel. All ties, bolts or other forming accessories shall be located along the chamfer grooves or panel edges.

(3) Exposed Aggregate Finish

(a) Structural Concrete

Exposed aggregate panels may be either raised, recessed or as indicated with the sides of each panel chamfered as directed by the Engineer or designated representative.

The aggregate used for this finish shall be approved by the Engineer or designated representative. Unless otherwise indicated, aggregate shall conform to the grading requirements of Grade 2 aggregate except that a minimum of 50 percent shall be retained on the ¾-inch (19 mm) sieve. Gravel of predominately rounded particles shall be used, except that when indicated or approved by the Engineer or designated representative in writing, crushed stone may be used. The aggregate shall be large enough to remain firmly anchored in the face of the final product. The depth shall be 1/4-inch (6.4 mm) minimum to 1/2-inch (12.7 mm), unless otherwise indicated or directed by the Engineer or designated representative.

A surface retarder that penetrates the concrete approximately 1/4 inch (6.4 mm) shall be applied to the forms or concrete surface as an aid in achieving the desired finish. Wood forms may require 2 or 3 coatings to compensate for absorption. Form joints shall be taped or caulked to prevent escape of the retarder during placing operations.

Treated form surfaces shall be protected from sun and rain while exposed to the atmosphere. In case of high humidity or if rain has dampened the forms prior to placing concrete, a reapplication of the surface retarder may be required to provide uniform coverage of the retarder on the forms.

Adjacent areas of fresh concrete not requiring exposed aggregate finish shall be protected when the retarder is applied.

The finish shall be obtained by sandblasting, bush hammering, water blasting or other methods, as approved by the Engineer or designated representative. Horizontal surfaces may be finished by a combination of brushing and washing, but only after the concrete has set sufficiently to prevent loosening of the aggregate.

Unless otherwise directed by the Engineer or designated representative, forms for surface requiring exposed aggregate finish shall be removed 12 to 15 hours after concrete placement. The exposed aggregate operation shall be accomplished immediately after form removal. Except for the time required for obtaining the exposed aggregate finish, curing of all surfaces shall be maintained for the minimum 4 day curing time. All surfaces shall be either water cured or may be cured with an approved clean membrane compound. If water curing is used, it shall be followed by a clear membrane curing compound conforming to Item No. 409S, "Membrane Curing".

Care shall be taken to ensure proper vibration at all points of concrete placement to prevent honeycomb or segregation of the materials. Vibration shall be done in such a manner as to provide adequate penetration of previously placed concrete lifts. Care shall be taken to prevent contact of the vibrator with the face form.

(b) Sidewalks

When exposed aggregate surfaces are required for sidewalks, driveways and/or medians, the coarse aggregate shall consist of particles with at least 40 percent crushed faces. Uncrushed gravel, polished aggregates and clear resilient

coatings are not acceptable. Grade 5 coarse aggregates shall be used for exposed aggregate finishes for sidewalks, driveways and/or medians.

411S.9 Measurement and Payment

No direct measurement or payment will be made for the work to be done, the equipment or materials to be furnished under this item, but shall be included in the unit price bid for the item of construction in which this item is used.

End

SPECIFIC Cross Reference Materials
Standard Specification Item No. 411S, " Surface Finishes for Concrete"

City of Austin Standard Specification Items

Designation	Description
Item No. 410S	Concrete Structures

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
DMS-8110	Coatings for Concrete

American Society for Testing and Materials (ASTM)

Designation	Description
C 144	Aggregate for Masonry Mortar
C 150	Portland Cement
D 445	Kinematic Viscosity of Transparent and Opaque Liquids
D 476	Standard Classification for Dry Pigmentary Titanium Dioxide Products
D 1475	Standard Test Method for Density of Liquid Coatings, Inks and Related Products
D 1544	Standard Test Method for Color of Transparent Liquids (Gardner Color Scale)
D 1652	Standard Test Method for Epoxy Content of Epoxy Resins
D 1726	Standard Test Method for Hydrolyzable Chloride Content of Liquid Epoxy Resins

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 411S, " Surface Finishes for Concrete"

City of Austin Standard Specification Items

Designation	Description
Item No. 403S	Concrete for Structures
Item No. 410S	Concrete Structures
Item No. 411S	Surface Finished for Concrete

Item No. 413S
Cleaning and/or Sealing Joints and Cracks (Portland Cement Concrete)

413S.1 Description

This item shall govern the cleaning and/or sealing of joints and cracks in either new or existing Portland cement concrete pavements and bridge decks in conformance with the requirements herein and the details indicated on the Drawings or as established by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

413S.2 Submittals

The submittal requirements of this specification item include:

A. Sealant Type (Rubber-Asphalt, Polymer Modified Emulsion, Low Modulus Silicone or Polyurethane), Class and method of application (crack sealing, joint sealing, etc),
B. Manufacturer recommendations concerning the use of primer and backer rod
C. Manufacturer recommended equipment and procedures for preparation, dispensing, application, curing etc of the sealant, and
D. Manufacturer certification that the product to be supplied meets or exceeds the specifications,
E. Listing of the equipment proposed for the Work.

413S.3 Materials

Joints and/or cracks shall be sealed with the type and/or class of materials indicated on the Drawings. The materials shall conform to the requirements of TxDoT Specification Item No. 433S, “Joint Sealants and Fillers” and TxDoT Departmental Materials Specification No. DMS 6310, “Joint Sealants and Seals”.

Primers, if required, shall be as recommended by the manufacturer of the sealant. Backer rods, when required, shall be compatible with the sealant and shall not react with or bond to the sealant.

The sealing compound shall be delivered in the manufacturer's original sealed containers. Each container shall be legibly marked with the name of the manufacturer, the trade name of the sealer, the manufacturer's batch number or lot, the pouring temperature, and the safe heating temperature.

413S.4 Equipment

All equipment shall be in accordance with the sealant manufacturer’s recommendations. Air compressors shall be equipped with appropriate filters for removing oil and water from the air.

Any equipment, that damages dowels, reinforcing steel, Portland cement concrete, base, subbase or subgrade in the process of cleaning the joints and/or cracks, shall be discontinued and the joint and/or crack shall be cleaned by other methods approved by the Engineer or designated representative, which do not cause such damage.

413S.5 Construction Methods

Equipment, tools and machinery recommended for proper prosecution of the Work shall be on the project and shall be approved by the Engineer or designated representative prior to the initiation of the joint and/or crack cleaning and sealing operations.

A. Joint and Crack Preparation.

The bonding surface of cracks and joints shall be cleaned of infiltrated material, saw cuttings or other foreign material. All material removed from joints and cracks shall be removed from the paved surface of the roadway.

No sealing of any joints or cracks shall be done when the joints or cracks are damp, unless drying of the joints and cracks with compressed air can be demonstrated and meets with the approval of the Engineer or designated representative.

1. Joint Preparation.

The joints shall be cleaned with filtered compressed air or other methods approved by the Engineer or designated representative. Unless noted otherwise on the Drawings, hand tools, air guns, power routers, abrasive equipment or other equipment may be used to clean the joints. Where indicated on the Drawings, the joint sealant space shall be resized by sawing to the width and depth shown on the Drawings to accommodate the type of sealant specified.

2. Crack Preparation.

Unless indicated otherwise on the Drawings, the crack shall be grooved initially at the surface so that a reservoir of rectangular cross section is provided for the sealant. The grooves shall be cut to the dimensions shown on the Drawings. The devices that are used for grooving, such as diamond blade random cut saws, random-crack grinders, etc., shall be capable of following the path of the crack without causing excessive spalling or other damage to the concrete.

B. Joint and Crack Sealing

The sealant shall be installed in accordance with the manufacturer's recommended procedure. The joint and/or crack surfaces shall be surface dry unless recommended otherwise by the manufacturer of the sealant.

The surface temperature at the time of the sealing operation shall not be less than 40°F (4.5^{o}C).

The minimum depth of sealant shall be ½ inch (12.5 mm) or a depth recommended by the sealant manufacturer and the top of the sealant shall be located 1/8 to ¼ inch (3 to 6.5 mm) below the adjacent pavement surface.

1. Primer.

If required, the primer shall be applied as soon as possible after cleaning is accomplished. The primer shall be applied uniformly at the rate recommended by the sealant manufacturer. The primer shall be applied to exposed metal surfaces before new corrosion begins and shall be allowed to cure for a minimum of thirty (30) minutes, but no longer than eight (8) hours prior to the application of the sealant, unless sealant manufacturer recommendations indicate otherwise.

2. Backer Rods.

   Backer rods shall be used to pr4event a fluid type sealant from flowing through the joint and crack and to retain the sealant at its required elevation. The application and use of backer rod shall be as recommended by the sealant manufacturer and approved by the Engineer or designated representative.

413S.6 Measurement

Accepted work performed under this item shall be included in other pay items and will not be measured and paid for unless a separate pay item is provided in the contract bid form documents.

If a pay item is included in the contract documents, acceptable work for "Cleaning and/or Sealing Joints and Cracks" shall be measured by the lineal foot (meter: 1 meter equals 3.281 feet) of sealant in place.

If a pay item is included in the contract documents, acceptable work "Cleaning and/or Sealing Joints and Cracks" shall be measured by the pound (kilograms: 1 kilogram equals 2.205 pounds).

413S.7 Payment

When included as a pay item in the contract documents, the work performed and materials furnished as provided by this item and measured in accordance with Article 413S.6, "Measurement", will be paid for at the appropriate unit bid price bid. The unit bid prices shall include full compensation for cleaning and, if necessary, grooving and/or sawing the crack/joint; furnishing, hauling and placing primer and backer rod, if necessary; furnishing, heating, hauling, and placing the crack/joint sealer; all freight involved and all manipulations, labor, tools, equipment and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 413S-A: _____	Sealer	Per Lineal Foot.
Pay Item No. 413S-B: _____	Sealer	Per Pound of Sealer Used.

End

SPECIFIC Cross Reference Materials
Item No. 413S, "Cleaning and/or Sealing Joints and Cracks (Portland Cement Concrete)"

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 433S	Joint Sealants and Fillers
Item No. 438	Cleaning and/or Sealing Joints and Cracks (Portland Cement Concrete)

Texas Department of Transportation: Departmental Materials Specifications

Designation	Description
DMS 6310	Joint Sealants and Seals

RELATED Cross Reference Materials

City of Austin Standard Specifications

Designation	Description

Item No. 301S Asphalts, Oils and Emulsions
Item No. 313S Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete)

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 300	Asphalts, Oils and Emulsions
Item No. 352	Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete)

Item No. 420S
Drilled Shaft Foundations

420S.1 Description

This item shall govern the construction of foundations consisting of "Reinforced Concrete Drilled Shafts" and/or "Non-reinforced Concrete Drilled Shafts", with or without concrete bell footings. Concrete shafts shall be placed in a drilled excavation when the shafts are without bell footings and in a drilled and underreamed excavation when shafts are with bell footings. Foundations shall be constructed in accordance with this item and in conformance with the details and dimensions indicated on the Drawings. Any required test loading of shafts shall be in accordance with standard foundation test loading procedures used by the TXDOT or by other procedures approved by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

420S.2 Submittals

The submittal requirements of this specification item may include:

A. The foundation Drawing and drilling/excavation details;
B. Class A p.c. concrete mix design;
C. Anchor bolt Drawing and details;
D. Reinforcing steel details and placement Drawings and
E. Casing Drawing and details (if required).

420S.3 Materials

All concrete and materials shall conform to Item No. 403S, "Concrete for Structures" and the requirements herein. Concrete shall be Class A. The maximum size coarse aggregate shall be 1-1/2 inches (38 mm) for cased shafts. A retarder or water reducing agent will be required in all concrete when casing is used. Reinforcing steel shall conform to Item No. 406S, "Reinforcing Steel".

420S.4 Construction Methods

(1) Excavation

The Contractor shall perform the excavation required for the shafts and bell footings, through whatever materials encountered, to the dimensions and elevations indicated or required by the site conditions.

Shaft alignment shall be within a tolerance of 1 inch (25 mm) per 10 feet (3 m) of depth.

Bells shall be excavated to form a bearing area of the size and shape indicated. Bell outlines varying slightly from those indicated are permissible provided the bottom bearing area equals that specified.

Bells may be excavated either by hand or by mechanical methods. Blasting will not be used except with written permission of the Engineer or designated representative and shall be controlled to avoid disturbance of the formations below or outside the limits of the proposed shaft.

The plans indicate the expected depths and elevations where satisfactory bearing material will be encountered. This information will be used as a basis for the contract. If satisfactory material is not encountered at plan elevation, the footing may be raised or lowered as determined by the Engineer or designated representative. Alteration of plan depth shall be made to satisfactorily comply with the design requirements. Casing will be required when necessary to prevent caving of the material or when necessary to exclude seepage water. Casing shall be metal of ample strength to withstand handling stresses, the pressure of concrete and of the surrounding earth or backfill materials and shall be watertight. The outside diameter of casing shall not be less than the specified size of shaft; otherwise, the size of casing and the size of drilled excavation in which it is to be placed will be left to the discretion of the Contractor, except as noted below. No extra compensation will be allowed for concrete required to fill an oversize casing or oversize excavation.

Where caving conditions and/or excessive ground water is encountered, no further drilling will be allowed until a construction method is employed which will prevent excessive caving that will make the excavation appreciably larger than the size of casing to be used. Drilling in a mud slurry or other method which will control the size of excavation, will be required.

If the elevation of the top of shaft is below ground level at the time of concrete placement, an oversize casing from ground elevation to a point below the top of the shaft will be required to control caving of any material into the freshly placed concrete.

Where casing is not required, any excavation for the bells or shafts beyond the lines indicated shall be filled with Class A concrete at the Contractor's expense. Where casings are used, the Contractor will be permitted to backfill around the upper portions of the casing with pea gravel or other granular material, but space shall be provided to allow for escape of muck, slurry or water displaced by the concrete.

When casing is used, it shall be smooth and well oiled and shall extend approximately to the top of the shaft.

Under normal operations, the removal of the casing shall not be started, until all concrete placement is completed in the shaft. Movement of the casing for short pulls of a few inches, rotating, exerting downward pressure and tapping it to facilitate extraction will be permitted. When unusual conditions warrant, the casing may be pulled in partial stages. A sufficient head of concrete shall be maintained above the bottom of the casing to overcome hydrostatic pressure. Casing extraction shall be at a slow uniform rate with the pull in line with the center of the shaft.

The elevation of the top of the steel cage shall be carefully checked before and after casing extraction. Generally any upward movement of the steel not exceeding 2 inches (50 mm) or any downward movement thereof not exceeding 6 inches (150 mm) per 20 feet (6 m) of shaft length will be acceptable. Any upward movement of the concrete or displacement of the steel beyond the above limits will be cause for rejection.

The minimum length of steel required for lap with column steel shall be maintained. Dowel bars may be used if the proper lap length is provided both into the shaft and into the column.

Placing of drilled shaft concrete under water shall not be done without the permission of the Engineer or designated representative. If permission is granted,

the concrete shall be placed conforming to Item No. 410S, "Concrete Structures" and shall be placed with a closed tremie. Provisions shall be made for a sump or other approved method to channel displaced water away from the shaft.

Material excavated from shafts and bells, including drilling mud and not used in the backfill around the completed bents or piers shall be disposed of as directed by the Engineer or designated representative and shall not be placed in the stream or otherwise impair the efficiency or appearance of the structure or other parts of the work.

At the time concrete is placed, the excavation shall be free from accumulated seepage water. All loose material shall be removed from the bottom of the excavation prior to placing concrete.

The Contractor shall provide suitable access and lighting for proper inspection of the completed excavation, to check the dimensions and alignment of shafts and underreamed excavation.

Any required lighting shall be electric. Any mechanical equipment used within the excavation shall be operated by air or electricity. The use of gasoline driven engines within the excavation for pumping or drilling will not be permitted.

In order that the Engineer or designated representative may judge the adequacy of a proposed foundation, the Contractor, if requested, shall make soundings or take cores at the Contractor's expense to determine the character of the supporting materials. The depth of such soundings or cores will not be required to exceed 5 feet (1.5 m) below the proposed footing grade. It is the intent of this provision that soundings shall be made or cores taken at the time the excavation in each foundation is approximately complete.

When shafts in abutment bents are indicated, the embankment at the bridge ends shall be completed to grade and thoroughly compacted prior to drilling.

(2) Reinforcing Steel

The cage of reinforcing steel, consisting of longitudinal bars and spiral reinforcement, lateral ties or horizontal bands, shall be completely assembled and placed as a unit immediately prior to concrete pavement.

If the shaft is lengthened and the plans require full depth reinforcement, a minimum of 1/2 the longitudinal bars required in the upper portion of the shaft shall be extended to the bottom, with proper lateral reinforcement. These bars may be lap spliced, spliced by welding or unspliced bars of the proper length. Any splices required shall be in the lower portion of the shaft.

Where spiral reinforcement is used, it shall be tied or tack welded to the longitudinal bars at a spacing not to exceed 12 inches (300 mm). Unless otherwise indicated welding will not be permitted within the top 15 feet (4.5 m) of the steel cage.

Horizontal steel bands shall be placed and welded as indicated.

The cage shall be supported from the top by some positive method, to minimize its slumping downward during concrete placement and/or extraction of the casing. The support shall be concentric with the cage to prevent racking and distortion of the steel. A minimum of 1/2 of the vertical bars shall be supported.

In uncased shafts, concrete spacer blocks or steel chairs shall be used at sufficient intervals to insure concentric spacing for the entire length of the cage. In cased shafts,

concrete spacer blocks shall not be used. Metal "chair" type spacers or bent pieces of steel bars shall be placed at sufficient intervals around the steel cage to insure concentric spacing inside the casing.

(3) Concrete

The work shall be performed conforming to Item No. 410S, "Concrete Structures", details indicated and with the requirements herein.

Concrete shall be placed as soon as possible after all excavation is complete and reinforcing steel placed and shall be of such workability that vibrating or rodding will not be required. Reinforcing steel and concrete shall be placed during the same work day that the drilled shaft is excavated. Drilled shafts that cannot be completed the same work day as they are excavated shall be backfilled that same day with material removed from the excavation, subject to the approval of the Engineer or designated representative.

Concrete placing shall be continuous in the shaft to the construction joint indicated. The height of free fall of concrete shall be limited to 3 to 4 feet (900 to 1,200 mm), preventing segregation.

Concrete shall be placed through a suitable tube or tremie to prevent segregation of materials. The tube or tremie shall be made in sections to provide proper discharge and permit raising it as the placement progresses. A non-jointed pipe may be used if sufficient openings of the proper size are provided to allow for the flow of concrete into the shaft.

The elapsed time from the beginning of concrete placement in the cased portion of the shaft, until extraction of the casing is begun, shall not exceed 1 hour.

Where a cap or tie beam is required to be placed monolithically with the shaft, a time interval will be allowed for placing the required form and reinforcing after casing removal.

A riser block of equal diameter as the column and of a maximum height of 6 inches (150 mm) may be cast at the top of the completed shaft.

The top surface shall be cured and any construction joint area shall be treated as prescribed in Item No. 410S, "Concrete Structures".

420S.5 Test Holes

When indicated or when ordered by the Engineer or designated representative in writing, test holes will be required to establish elevations for "belling", to determine elevation of ground water or other soil characteristics.

The diameter and depth of test hole or holes shall be as indicated or as directed by the Engineer or designated representative.

420S.6 Test Bells

When indicated or when ordered by the Engineer or designated representative in writing, the reaming of bells on specified test holes will be required to establish the feasibility of belling in a specific soil strata.

The diameter and shape of the test bell shall be as indicated or as approved by the Engineer or designated representative in writing.

420S.7 Measurement

Acceptable drilled shafts (of the specified diameter), complete in place, will be measured by the linear foot. Shafts for interior bents and piers will be measured from a point approximately 6 inches (150 mm) below the ground elevation at the center of shaft unless specific elevations or dimensions are indicated or unless the Engineer or designated representative directs otherwise to meet unusual conditions. (The bent height indicated is for estimating purposes only and does not control the top of shaft measurement.) For grade separations and railroad underpasses, the ground elevation used will be the completed subgrade section under the structure. At stream crossings and at railroad overpasses, the existing ground elevation at the time drilling begins will be used. For abutment bents and retaining walls, the length of shaft shall be measured from the bottom of footing or cap elevation. For sign structures and illumination towers, the elevation of top of shaft will be shown either as a dimension above ground or as a dimension to the bottom of footing.

Drilled shafts used with commercial designs of overhead sign bridges will not be measured for payment but will be included in the unit price bid for the item of construction in which this item is used.

The quantity for acceptable bell footings placed will be measured by the cubic yard, computed by using dimensions and shape indicated or as revised in diameter by the Engineer or designated representative. The bell shall consist of the volume outside the plan or authorized dimensions of the shaft, which will extend to the bottom of the bell for the purpose of measurement.

Test holes of the specified diameter will be measured from the elevation of the ground at the time drilling begins, by the linear foot of acceptable test hole drilled.

Test bells will be measured by the cubic yard of material excavated, computed from the dimensions indicated or those authorized by the Engineer or designated representative in writing.

420S.8 Payment

Drilled shafts will be paid for at the unit price bid per linear foot of "Drilled Shaft" or "Drilled Shaft (Non-reinforced)", of the specified diameter, subject to the following limitations for overruns authorized by the Engineer or designated representative.

(1) Payment for individual completed shaft lengths up to and including 5 feet (1.5 m) in excess of the maximum plan length shaft, as defined herein, will be made at the unit price bid per linear foot of the specified diameter of "Drilled Shaft".

(2) Payment for that portion of individual completed shaft length in excess of 5 feet (1.5 m) and up to and including 15 feet (4.5 m) more than the maximum plan length shaft, as defined herein, will be made at a unit price equal to 115 percent of the unit price bid per linear foot of the specified diameter of "Drilled Shaft".

(3) Payment for that portion of individual completed shaft length in excess of 15 feet (4.5 m) and up to and including, 25 feet (7.5 m) more than the maximum plan length shaft, as defined herein, will be made at a unit price equal to 125 percent of the unit price bid per linear foot of the specified diameter of "Drilled Shaft".

(4) Payment for that portion of individual completed shaft length, over 25 feet (7.5 m) in excess of the maximum plan length shaft, as defined herein, will be made at a unit price equal to 150 percent of the unit price bid per linear foot of the specified diameter of "Drilled Shaft".

(5) For extra depth drilling at interior bents and piers, the maximum plan length shaft shall be the maximum length shaft, regardless of diameter, for any interior pier or bent of any bridge included in the contract.

(6) For extra depth drilling for abutment bents and retaining walls, the maximum plan length shaft shall be the maximum length shaft, regardless of diameter, for any abutment bent of any bridge or of any retaining wall included in the contract.

(7) For extra depth drilling for sign structures, the maximum plan length shaft shall be the maximum length shaft, regardless of diameter, for any sign structures included in the contract.

(8) For extra depth drilling for illumination towers, the maximum plan length shaft shall be the maximum length shaft, regardless of diameter, for any illumination tower included in the contract.

The 20 percent limitation referred to in the "General Conditions", Section 11.6.5, will not apply to overruns due to extra depth of drilled shafts.

Bell footings, constructed to the specified dimensions or to the altered dimensions authorized by the Engineer or designated representative, will be paid for at the contract unit price bid per cubic yard for "Bell Footings". Authorized increase in bell footing diameter beyond 3 times the specified shaft diameter, unless indicated, shall be considered as beyond the scope and intent of these specifications. Payment for such increased bell footing quantity shall conform to the "General Conditions":

Test holes, of the specified diameter, when included in the contract as a bid item, will be paid for at the contract unit price bid per linear foot for "Test Hole".

Test bells of the diameter and shape specified, when included in the contract as a bid item or authorized by the Engineer or designated representative, will be paid for at the contract unit price bid per cubic yard of "Test Bells".

The foregoing unit prices shall be full compensation for making all excavations, for drilling all test holes and test bells, for doing any necessary pumping; for furnishing, placing and removing any required casings, for furnishing and placing all concrete and reinforcing steel, for all backfilling and for furnishing all tools, labor, equipment and incidentals necessary to complete the work. When the bottom of any drilled shaft is ordered to be placed at an elevation below plan grade and a splice of reinforcement is required, no payment will be made for the extra reinforcement required, but it shall be included in the unit price bid for the item of construction in which this item is used. No extra payment will be made for casings left in place.

No partial estimates will be allowed for "Bell Footing" or for "Drilled Shaft" until the concrete has been placed, except that partial payments will be made for reinforcing steel materials delivered on the job conforming to the "General Conditions".

Payment will be made under one of the following:

Pay Item No. 420S-A:	Drilled Shaft, ___ Dia. -	Per Linear Foot.
Pay Item No. 420S -B:	Drilled Shaft, Non-reinforced, ___ Dia. -	Per Linear Foot.
Pay Item No. 420S -C:	Bell Footings -	Per Cubic Yard.
Pay Item No. 420S -TB:	Test Bells, ___ Dia. -	Per Cubic Yard.
Pay Item No. 420S -TH:	Test Holes, ___ Dia. -	Per Linear Foot.

End

SPECIFIC Cross Reference Materials
Standard Specification Item No. 420S, " Drilled Shaft Foundations"

City of Austin Standard Specifications

Designation	Description
Item No. 403S	Concrete for Structures
Item No. 406S	Reinforcing Steel
Item No. 410S	Concrete Structures

RELATED Cross Reference Materials
Standard Specification Item No. 420S, " Drilled Shaft Foundations"

City of Austin Standard Specifications

Designation	Description
Item No. 104S	Removing Portland Cement Concrete
Item No. 111S	Excavation
Item No. 130S	Borrow
Item No. 132S	Embankment
Item No. 201S	Subgrade Preparation
Item No. 401S	Structural Excavation and Backfill

Texas Department of Transportation: Standard Specifications for Construction, Maintenance of Highways, Streets and Bridges

Designation	Description
Item No. 420	Concrete Structures
Item No. 421	Portland Cement Concrete
Item No. 440	Reinforcing Steel
Item No. 449	Anchor Bolts
Item No. 618	Conduit

Item No. 432S
Portland Cement Concrete Sidewalks

432S.1 Description

This item shall govern the construction of Portland cement concrete sidewalks (Standard Detail No. 432S-1), as herein specified, on an approved subgrade and in conformance with the lines, grades and details indicated on the Drawings or as established by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text inch-pound units are given preference followed by SI units shown within parentheses.

432S.2 Submittals

The submittal requirements of this specification item include:

A. Class A portland cement (p.c). concrete mix design,

B. Type of Installation (i.e. Type I, Type II, etc.) and construction details (i.e. cushion layer, base, reinforcing steel, joints, curing membrane),

C. Identification of the type, source, mixture, Pure Live Seed (PLS) and rate of application of the seeding.

D. Number, manufacturer, model, construction, finish and installation details of streetscape appurtenances of bicycle racks, benches, chairs, trash receptacles, streetlights, tree wells and above grade tree planters [for sidewalks, 12 feet (3.66 meters) or wider].

432S.3 Materials

A. Portland Cement Concrete

Portland cement concrete shall be Class A conforming to Specification Item No. 403S, "Concrete for Structures" or Specification Item No. 407S, "Fibrous Concrete".

B. Reinforcement

Reinforcement shall conform to Specification Item No. 406S, "Reinforcing Steel" or Specification Item No. 407S, "Fibrous Concrete".

C. Expansion Joint Materials

Expansion joint materials shall conform to Specification Item No. 408S, "Expansion Joint Materials".

D. Membrane Curing Compound

Membrane curing compound shall conform to Specification Item No. 409S, "Membrane Curing".

432S.4 Construction Methods

The subgrade shall be excavated in accordance with Specification Item No. 111S, “Excavation”, prepared in accordance with Specification Item No. 201S, “Subgrade Preparation”, shaped to the lines, grades and cross section as indicated on the Drawings or as directed by the Engineer or designated representative and thoroughly compacted in accordance with Specification Item No. 201S. A granular cushion of a minimum thickness of 2 inches (50 mm) but maximum thickness of 5 inches (125 mm), composed of crusher screenings, gravel and sand, crushed rock or coarse sand,

shall be spread, wetted thoroughly, tamped and leveled. The granular cushion shall be moist at the time the Portland cement concrete is placed.

If the subgrade is undercut by more than 4 inches (100 mm) or the elevation of the natural ground is more than 4 inches (100 mm) below "top of subgrade", then a necessary backfill/embankment layer of an approved material shall be placed and compacted with a mechanical tamper. Hand tamping will not be permitted.

Where the subgrade is rock or gravel, 70 percent of which is rock; the 2-inch (50 mm) cushion need not be used. The Engineer or designated representative will determine if the subgrade meets the above requirements.

Sidewalk forms shall be constructed of metal or well-seasoned wood not less than 2 inches (50 mm) in thickness, with a section satisfactory to the Engineer or designated representative. The forms shall be clean, straight, and free from warp with a depth equal to the thickness of the finished work. All forms shall be securely staked to line and grade and maintained in a true position during the deposition of Portland cement concrete. Before p.c. concrete is placed, the forms shall be thoroughly oiled with a light form oil.

Expansion joint material 3/4 inch (19 mm) thick, shall be provided where the new construction abuts an existing structure, sidewalk or driveway. Similar expansion material shall be placed around all obstructions protruding through the sidewalk. The expansion joint material shall be placed vertically and shall extend the full depth of the p.c. concrete. Maximum spacing of expansion joints shall be 40 feet (12 meters) as indicated on the Drawings or as directed by the Engineer or designated representative. Weakened plane joints shall be spaced at 5 feet (1.5 meters) on center. Normal dimensions of the weakened plane joints shall be 1/4 inch wide and 3/4 inch deep (6 mm wide and 19 mm deep). All joints shall be constructed perpendicular (90 degrees) to the centerline of walk and shall match any previously placed concrete joints. For sidewalks with widths exceeding 6 feet (1.83 meters) longitudinal weakened-plane tooled joints shall be provided as indicated on the Drawings or as directed by the Engineer or designated representative.

Reinforcement for sidewalks shall consist either of polypropylene fibrillated fibers or 6” x 6” x W1.4 x W1.4 (150mm x 150mm x MW9 x MW9) welded wire fabric or one layer #3 (10M) reinforcing bars, placed no more than 18 inches (450 mm) on center both directions. All reinforcement shall be accurately placed at slab mid-depth, equidistant from the top and bottom of the p.c. concrete and held firmly in place by means of bar supports of adequate strength and number that will prevent displacement and keep the steel at its proper position during the placement of the p.c concrete. In no instance shall the steel be placed directly on the subgrade or sand cushion layer.

Prior to placement of the concrete, the reinforcement installation shall be inspected by the Engineer or designated representative to insure conformance with the drawings, specifications and this item. In addition care shall be exercised to keep all steel in its proper position during placement of the p.c. concrete. If during placement of the concrete, the reinforcement is observed to loose bar support, float upward or move in any direction, the placement shall be stopped until corrective action is taken.

Splices in wire fabric shall overlap sufficiently to allow two pairs of transverse wires to be tied together and no splice of less than 6 inches (150 mm) will be permitted. Splices in the #3 (10M) bars shall have a minimum lap of 12 inches (300 mm).

Where driveways cross sidewalks, additional reinforcing shall be placed in the sidewalk as indicated on the Drawings.

Portland cement concrete shall be placed in the forms and spaded, tamped and thoroughly consolidated until it covers the entire surface with a monolithic finish. The top surface shall be floated and troweled to a uniform smooth surface; then finished with a broom or wood float to a gritty texture unless indicated otherwise on the Drawings or as directed by the Engineer or designated representative. The outer edges and joints shall be rounded with approved tools to a

1/4-inch (6 mm) radius. Care will be exercised to prevent loss of dummy joints or rounded edges when applying the brush finish.

Portland cement concrete sidewalk ramps shall be formed to produce a finished surface with detectable warnings (Standard Detail 432S-2A) in accordance with the requirements of the American Disabilities Act and Texas Accessibility Standards (TAS), including Sections 4.29.2 and A4.29.2. The p.c. concrete sidewalk ramps shall be constructed in accordance with appropriate City of Austin Standard Details (Standard Details 432S-3, 432S-3A through 432S-3H, 432S-5, 432S-5A, 432S-5B, etc.).

Detectable warning for the ramps shall consist of raised truncated domes with a diameter of nominal 0.9 inch (23 mm), a height of nominal 0.2 inch (5 mm) and center-to-center spacing of nominal 2.35 inches (60 mm) and shall contrast visually with adjoining surfaces, either light on dark or dark-on-light. The material used to provide contrast shall be an integral part of the walking surface.

When indicated on the Drawings or as directed by the Engineer or designated representative, the construction of the sidewalk ramp shall include the installation of interlocking concrete paving units (Standard Specification Item No. 480S, "Concrete Paving Units"). The concrete paving units shall be constructed in accordance in accordance with Standard Specification Item No. 485S, "Concrete Paving Units for Sidewalk Ramps) and appropriate City of Austin Standard Details (Standard Details 432S-2A, 432S-3, 432S-3A through 432S-3H, 432S-5, 432S-5A and 432S-5B).

At the proper time after finishing, the surface shall be protected by a membrane, compound curing agent or by wetted cotton or burlap mats, conforming to Item No.409S, "Membrane Curing". The sides of the p.c. concrete shall be cured in the forms. If the forms are removed during the curing process, the curing shall be continued by the placement of fill against the exposed concrete edges or by other procedures conforming to Item No. 410S, "Concrete Structures". The top 4 inches (100 mm) of fill shall be clean topsoil conforming to Item No. 604S, "Seeding for Erosion Control".

Existing sidewalk that is scheduled for removal and replacement shall be removed and the underlying material shaped to the lines, grades and cross section as indicated in the drawings or as directed by the Engineer or designated representative. The removal and/or relocation of obstructions, including but not limited to signs, trash cans and benches on concrete pads, abandoned manholes, sprinkler control valves and landscaping, shall be performed, as indicated on the drawings, in a manner acceptable to the Engineer or designated representative. Removal and/or relocation of obstructions will be considered incidental work to this item and will not be paid for directly.

Existing PVC pipe drains in and behind curb shall be removed and replaced as required in new sidewalk and/or curb and gutter. In areas of proposed sidewalk construction, where curb and gutter is to remain in place, existing PVC pipe shall be cut far enough behind the back of curb to allow sufficient room for joint fittings to connect to new or salvaged PVC pipe.

The Contractor shall be responsible for removing and replacing mailboxes that are located in the construction area, while assuring that mail delivery will not be interrupted as a result of the construction activities. Mailboxes shall not be laid on the ground.

All necessary excavation, filling and grading of the slopes adjacent to the completed concrete sidewalks will be considered incidental work pertaining to this item and will not be paid for directly. The adjacent excavation and grading of the slopes shall be done in a manner acceptable to the Engineer or designated representative.

432S.5 Streetscape Furniture Installation Requirements

A. General General

Bicycle racks, benches and chairs, trash receptacles, tree wells and above grade tree wells and planters shall only be installed in sidewalks that are 12 feet (3.66 meters) or wider. When installation is indicated on the Drawings or directed by the Engineer or designated representative, these items shall be permanently installed as indicated in Standard Details 710S-4 and 710S-5; 432S-9B; 432S-7C, and 432S-7F; and 432S-8B. Above grade tree wells shall be installed in conformance with Standard Detail 432S-7E, while above grade tree planters shall be installed in conformance with Standard Detail Nos. 432S-7D and 432S-7G.

B. Location Requirements

1. Benches.

   Benches shall be placed either perpendicular to the curb with the center of the bench on line with trees and light poles and facing toward the building entry, or parallel to the building and within 6” (150 mm) of the building wall, facing out to the street.

   Bench siting shall be in conformance with Standard Detail No. 432S-9C in 12’ (3.6 M) or wider sidewalks and Standard Detail No. 432S-9D in sidewalks of width between 12’ (3.6 M) and 18’ (5.4 M).

2. Bike Racks.

   Bike racks are to be placed perpendicular to the curb with the centerline of the rack on line with trees and light poles.

   Bike rack siting shall be in conformance with Standard Detail No. 710S-6A in 12’ (3.6 M) or wider sidewalks and Standard Detail No. 710S-6B in sidewalks of width between 12’ (3.6 M) and 18’ (5.4 M).

3. Trash Receptacles.

   Trash receptacles shall either be placed along the curb, with the center line of the receptacle on line with the trees and light poles, or shall be located at the building entry in alignment with the structural bay system of the building. If located at the entry there shall be no more than 1 foot (300 mm) clearance between the receptacle and the building wall.

   Trash receptacle siting adjacent to curb ramps within an intersection shall be in conformance with Standard Detail No. 432S-8C in 12’ (3.6 M) or wider sidewalks.

P432S.6 Pedestrian Railing

When a pedestrian railing installation is required along sidewalks for pedestrian protection as indicated on the Drawings or directed by the Engineer or designated representative, this type of pedestrian railing shall be permanently installed in conformance with one of the following designated Standard Details: 707S-1, 707S-2, 707S-3 or 707S-4.

When a pedestrian railing installation is required along portions of sidewalks identified as ‘ramps’ for ADA accessibility purposes as indicated on the Drawings or directed by the Engineer or designated representative, this type of pedestrian railing shall be permanently installed in conformance with one of the following designated Standard Details: 707S-2, 707S-3 or 707S-4.

432S.7 Measurement

Accepted work performed as prescribed by this item will be measured by the square foot (square meter: 1 square meter is equal to 10.764 square feet) of surface area of "Concrete Sidewalk".

Accepted work performed as prescribed by "Sidewalk Ramps" will be measured per each for the type of ramp indicated on the Drawings.

Accepted work performed as prescribed by "Streetscape Appurtenances" will be measured per each for the type of appurtenance indicated on the Drawings.

Accepted work performed as prescribed by "Pedestrian Railing" will be measured per lineal foot of the type of railing indicated on the Drawings.

432S.8 Payment

The work performed as prescribed by this item for concrete sidewalk will be paid for at the unit bid price per square foot for "Concrete Sidewalk" and/or "Sidewalks Reconstruction"; per each for "Concrete Sidewalk Ramps" and "Streetscape Appurtenances" or per lineal foot for "Pedestrian Railing".

The unit bid price for new sidewalk shall include full compensation for excavating and/or removal and/or relocating obstructions, vegetating adjacent areas disturbed by sidewalk construction, preparing the subgrade; for furnishing and placing all materials including cushion material, all reinforcement, bar supports, joints, expansion joint materials, and for any other materials, manipulations, labor, tools, equipment, finishing, curing and incidentals necessary to complete the work.

The unit bid price for sidewalk reconstruction shall include full compensation for excavating and/or removal of existing sidewalk and other obstructions, relocating obstructions, replacing PVC drain pipe, re-vegetating adjacent areas disturbed by sidewalk construction, preparing the subgrade; for furnishing and placing all materials including cushion material, all reinforcement, bar supports, joints, expansion joint materials, and for any other materials, manipulations, labor, tools, equipment, finishing, curing and incidentals necessary to complete the work.

The unit bid price for ramps shall include full compensation for preparing the subgrade when not included as a separate item; for furnishing and placing all materials, manipulation, labor, tools, equipment and incidentals necessary to complete the work. All necessary excavation, filling and grading of the slopes adjacent to the completed concrete paver units will be included in the unit price bid for the item of construction in which this item is used, unless included as a separate pay item in the Contract bid form.

The unit bid price for streetscape appurtenances shall include full compensation for the individual item (i.e. bench, chair, bicycle rack, trash receptacle, street light or above grade tree planter), as well as the removal of existing sidewalk, preparation of footings, furnishing and placing all materials, manipulation and finishing, labor, tools, equipment and incidentals necessary to complete the work.

The unit bid price for pedestrian railing shall include full compensation for the complete installation of the specific pedestrian railing including but not limited to preparation of footings or curb, furnishing and placing all materials, manipulation and finishing, labor, tools, equipment and incidentals necessary to complete the work.

Payment will be made under one of the following:

New Sidewalks

Pay Item 432S-4:	New P.C. Concrete Sidewalks, 4 Inch thickness	Per Square Foot.
Pay Item 432S-5:	New P.C. Concrete Sidewalks, 5 Inch thickness	Per Square Foot.
Pay Item 432S-6:	New P.C. Concrete Sidewalks, 6 Inch thickness	Per Square Foot.
Pay Item 432S-7:	New P.C. Concrete Sidewalks, 7 Inch thickness	Per Square Foot.

Sidewalks Reconstruction

Pay Item 432SR-4:	Reconstruct Concrete Sidewalks to 4 Inch thickness, including removal of existing sidewalk	Per Square Foot.
Pay Item 432SR-5:	Reconstruct Concrete Sidewalks to 5 Inch thickness, including removal of existing sidewalk	Per Square Foot.
Pay Item 432SR-6:	Reconstruct Concrete Sidewalks to 6 Inch thickness, including removal of existing sidewalk	Per Square Foot.
Pay Item 432SR-7:	Reconstruct Concrete Sidewalks to 7 Inch thickness, including removal of existing sidewalk	Per Square Foot.

Ramps

Pay Item 432S - RP-1:	P.C. Sidewalk Curb Ramp with Pavers (Type I)	Per Each.
Pay Item 432S-RP-1A:	P.C. Sidewalk Curb Ramp with Pavers (Type IA)	Per Each.
Pay Item 432S-RP-1B:	P.C. Sidewalk Curb Ramp with Pavers (Type IB)	Per Each.

Streetscape Appurtenances

Pay Item 432S-SAC-1	Streetscape Bench (____ inches in length)	Per Each.
Pay Item 432S-SAC-2	Streetscape Chair	Per Each.
Pay Item 432S-SAC-3	Streetscape Bicycle Rack	Per Each.
Pay Item 432S-SAC-4	Streetscape Trash Receptacle	Per Each.
Pay Item 432S-SAC-5	Streetscape Street Light	Per Each.
Pay Item 432S-SAC-7C	Streetscape Tree Well for Concrete Sidewalks	Per Each.
Pay Item 432S-SAC-7D	Streetscape Above Grade Tree Planters with Bench	Per Each.
Pay Item 432S-SAC-7E	Streetscape Above Grade Tree Well with Seat	Per Each.
Pay Item 432S-SAC-7F	Streetscape Tree Well without Grate	Per Each.
Pay Item 432S-SAC-7G	Streetscape Above Grade Galvanized Steel Tree Planters	Per Each

Pedestrian Railing

Pay Item 432S-PRC-1	Pedestrian Railing (Standard 707S-1)	Per LF.
Pay Item 432S-PRC-2	Pedestrian ADA Railing – Option 1 (Standard 707S-2)	Per LF.
Pay Item 432S-PRC-3	Pedestrian ADA Railing – Option 2 (Standard 707S-3)	Per LF.
Pay Item 432S-PRC-4	Pedestrian ADA Railing – Option 3 (Standard 707S-4)	Per LF.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 432S, “P. C. Concrete Sidewalks”

City of Austin Standard Specifications

Designation	Description
Item No. 111S	Excavation
Item No. 201S	Subgrade Preparation
Item No. 403S	Concrete for Structures
Item No. 406S	Reinforcing Steel
Item No. 407S	Fibrous Concrete
Item No. 408S	Expansion Joint Materials
Item No. 409S	Membrane Curing
Item No. 410S	Concrete Structures
Item No. 480S	Concrete Paving Unit
Item No. 485S	Concrete Paving Units for Sidewalk Ramps
Item No. 604S	Seeding for Erosion Control

City of Austin Standard Details

Designation	Description
432S-1	Sidewalk
432S-2A	Detectable Warning-Paver
432S-3	Type I Curb Ramps-Full Intersection
432S-3A	Type I Curb Ramps-T Intersection
432S-3B	Type IA/IB Curb Ramps-Full Intersection
432S-3C	Type IA/IB Curb Ramps-T Intersection
432S-3D	Combined Curb Ramps-Full Intersection
432S-3E	Combined Curb Ramps-T Intersection
432S-3F	Combined Sidewalk Curb Ramp with Pavers
432S-3G	Combined Sidewalk Curb Ramp with Pavers within Limited ROW
432S-3H	Type I Curb Ramps within PC/PT of Curb and Gutter
432S-5	Type I Sidewalk Curb Ramp
432S-5A	Type IA Sidewalk Curb Ramp
432S-7C	Tree Well for New Trees Planted Within Concrete Sidewalk 3.6 M (12') or Greater
432S-7D	Above Grade Tree Planters
432S-7E	Above Grade Tree Well with Bench
432S-7F	Tree Well Without Grate
432S-7G	Above Grade Galvanized Steel Tree Planters
432S-8B	Trash Receptacle Installation in Concrete Sidewalk
432A-8C	Furnishing Location in 12' (3.6 M) or greater Trash Receptacle Siting
432S-9B	Bench/Chair Installation in Sidewalks
432S-9C	Furnishing Location in 12' (3.6 M) or greater Sidewalks-Bench Siting
432S-9D	Furnishing Location in Greater than 12' (3.6 M) or Less than 18' (5.4 M) Sidewalks-Bench Siting
707S-1	Pedestrian Railing
707S-2	Pedestrian ADA Railing – Option 1
707S-3	Pedestrian ADA Railing – Option 2
707S-4	Pedestrian ADA Railing – Option 3
710S-4	Bicycle Rack Installation in Concrete Sidewalks (Alternate 1)
710S-5	Bicycle Rack Installation in Concrete Sidewalks (Alternate 2)

710S-6A	Furnishing Location in 12' (3.6 M) or greater Sidewalks-Bicycle Rack Siting
710S-6B	Furnishing Location in Greater than 12' (3.6 M) or Less than 18' (5.4 M) Sidewalks-Bicycle Rack Siting

American Disabilities Act, Federal Register; Volume 56, No. 144; July 26, 1991
ADA Accessibility Guidelines For Building And Facilities

Designation	Description
Section 4.29	Detectable Warnings on Walking Surfaces
Section A4.29.2	Detectable Warnings on Walking Surfaces

Architectural Barriers; Texas Civil Statutes, Article 9102; June 14, 1995
Texas Accessibility Standards (TAS)

Designation	Description
Section 4.29	Detectable Warnings on Walking Surfaces
Section A4.29.2	Detectable Warnings on Walking Surfaces

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Contract Documents

Designation	Description
00700	General Conditions
01500	Temporary Facilities
01550	Public Safety and Convenience

City of Austin Utilities Criteria Manual

Designation	Description
Section 5.2.3	Utility Adjustments For Roadway Construction Projects

City of Austin Standard Specifications

Designation	Description
Item No. 102S	Clearing and Grubbing
Item No. 104S	Removing Portland Cement Concrete
Item No. 110S	Street Excavation
Item No. 132S	Embankment
Item No. 203S	Lime Treatment for Materials In Place
Item No. 204S	Portland Cement Treatment for Materials In Place
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 234S	Rolling (Tamping)
Item No. 236S	Rolling (Proof)
Item No. 360S	Concrete Pavement
Item No. 402S	Controlled Low Strength Material
Item No. 404S	Pneumatically Placed Concrete
Item No. 405S	Concrete Admixtures
Item No. 411S	Surface Finishes for Concrete

433S.1 Description

This item shall govern construction of Portland Cement (p.c.) concrete driveways, as herein specified, on an approved subgrade, in conformity with the lines, grades and cross section indicated on the Drawings, identified in Standard Detail Series 433S, or as established by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

433S.2 Submittals

The submittal requirements of this specification item include:

A. Class A and/or Item 360S p.c. concrete mix design,

B. Type of Installation (i.e. Type I, Flared Type I, Type II, etc.) and construction details (i.e. cushion layer, base, reinforcing steel, joints, curing membrane),

C. Identification of the type, source, mixture, Pure Live Seed (PLS) and rate of application of the seeding.

433S.3 Materials

A. Concrete

The Portland Cement Concrete for a Type I driveway (Standards 433S-1 and 433S-1A shall conform to Class A, Section 403S.7 (Table 4) of Standard Specification Item No. 403S, "Concrete for Structures." The Portland Cement Concrete for a Type II driveway (Standard 433S-2) shall conform to a normal concrete mix design for concrete pavement, Section 360S.4(2) of Standard Specification Item No. 360S, "Concrete Pavement".

B. Reinforcing Steel

Reinforcing steel and welded wire fabric shall conform to Standard Specification Item No. 406S, "Reinforcing Steel".

C. Expansion Joint Materials

Expansion joint materials shall conform to Standard Specification Item No. 408S, "Expansion Joint Materials".

D. Membrane Curing Compound

Membrane curing compound shall conform to Standard Specification Item No. 409S, "Membrane Curing".

E. Cushion Layer

The Cushion layer shall consist of crusher screenings, gravel or coarse sand.

433S.4 Construction Methods

All forms and forming, placement of reinforcement, placement of concrete, form removal, finishing and curing shall conform to Standard Specification Item No. 410S, "Concrete Structures".

A. Subgrade Preparation

The subgrade shall be excavated, prepared and shaped to the lines, grades and cross sections indicated on the Drawings or as directed by the Engineer or designated representative. The subgrade shall be thoroughly compacted in accordance with Standard Specification Item No. 201S, "Subgrade Preparation". A 2-inch (50-mm) minimum compacted thickness cushion shall be spread, wetted thoroughly, tamped and leveled. The cushion shall be moist at the time the p.c. concrete is placed.

If the subgrade is undercut or natural ground is located below the top of subgrade, the necessary backfill material shall conform with Standard Specification Item 130S, "Borrow" and shall be compacted with a mechanical tamper. Hand tamping will not be permitted.

Where the subgrade material consists of gravel or includes 70 percent of rock, the 2-inch (50-mm) cushion layer may not be required. The Engineer or designated representative will determine if the subgrade meets the above requirements.

B. Forms

Forms shall be of metal, well-seasoned wood or other approved material of a section satisfactory to the Engineer or designated representative. Wood forms shall not be less than 2 inches (50 mm) nominal thickness for straight runs and 1-inch (25-mm) nominal thickness for curved runs. Forms shall be a section satisfactory to the Engineer or designated representative and clean, straight, free from warp and of a depth equal to the thickness of the finished work.

All forms shall be securely staked to line and grade and maintained in a true position during the placement of p.c. concrete.

C. Joints

Joints shall be of the type and spacing shown on the Drawings. Expansion joint material, 3/4 inch (19 mm) thick, shall be provided where the new construction abuts the existing sidewalks or driveways or as directed by the Engineer or designated representative. The expansion joint material shall be placed vertically and shall extend the full depth of the p.c. concrete. Similar expansion material shall be placed around all obstructions protruding through the driveway. Weakened plane joints shall be located on 10-foot (3-meter) centers or as directed by the Engineer or designated representative. Normal dimensions of the weakened plane groove joints shall be 1/4-inch (6.25-mm) wide and 3/4 inch (19 mm) deep.

D. Reinforcement

Reinforcement for Type I driveways shall consist of 1 layer of 6 x 6 by W 1.4 x W 1.4 (150 x 150 by MW9 x MW9) wire fabric or No. 3 (10 M) bars placed not more than 18 inches (450 mm) on center, both directions. Reinforcement for Type II driveways shall consist of 1 layer of layer of No. 4 (13M) bars placed no more than 18 inches (450 mm) on center, both directions.

All reinforcements shall be accurately placed equidistant from the top and bottom of the p.c. concrete slab and held firmly in place by means of bar supports of adequate strength and number that will prevent displacement and keep the steel at its proper position. In no instance shall the steel be placed directly on the subgrade or sand cushion layer.

Prior to placement of the concrete, the reinforcement installation shall be inspected by the Engineer or designated representative to insure conformance with the drawings, specifications and this item. In addition, care shall be exercised to keep all steel in its proper position during the placement of p.c. concrete. If during placement of the concrete, the reinforcement is observed to loose bar support, float upward or move in any direction, the placement shall be stopped until corrective action is taken.

Splices in wire fabric shall overlap sufficiently to allow two pairs of transverse wires to be tied together and no splice of less than 6 inches (150 mm) will be permitted. Splices in the No. 3 (10 M) and No. 4 (13M) bars shall have a minimum lap of 12 inches (300 mm).

E. P.C. Concrete Placement and Finishing

The p.c. concrete shall be placed in the forms and spaced, tamped and thoroughly compacted until it entirely covers the surface and has a monolithic finish. The top surface shall be floated and troweled to a uniform smooth surface, then finished with a broom or wood float to a gritty texture unless otherwise indicated on the Drawings. The outer edges and joints shall be rounded with approved tools to a 1/4-inch (6.3 mm) radius. Care shall be exercised to prevent loss of dummy joints or rounded edges when applying the broom finish.

F. Curing

At the proper time after finishing, the surface shall be protected by a membrane compound curing agent in conformance with Standard Specification Item No. 409S, "Membrane Curing" or by wetting cotton or burlap mats. Either method shall be subject to approval by the Engineer or designated representative.

Traffic shall be barricaded from using the driveway for a minimum of 4 days after initial placing and may be opened to traffic only with approval of the Engineer or designated representative.

G. Incidental Work

All necessary excavation, filling and grading of the slopes, adjacent to the completed pcc driveways, will be considered incidental work pertaining to this item and will not be paid for directly.

The adjacent excavation and grading of the slopes shall be done with topsoil conforming to Standard Specification Item No. 130S, "Borrow". When turf is to be established, the preparation of the seedbed shall conform to Standard Specification Item No. 604S, "Seeding for Erosion Control", in a manner acceptable to the Engineer or designated representative.

433S.5 Measurement

Accepted work performed as prescribed by this item will be measured by the square foot (square meters: 1 square meter equals 10.764 square feet) of surface area of the specific type of p.c. concrete driveway.

433S.6 Payment

The work performed as prescribed by this item will be paid for at the unit bid price per square foot for "Concrete Driveways". The unit bid price shall include full compensation for preparation of the subgrade; furnishing and placing all materials, including cushion layer, all reinforcing steel, bar supports and expansion joint materials; and any other materials, manipulations, labor, tools, equipment and incidentals necessary to complete the work.

Payment will be made under:

Pay Item No. 433S-A:	Type I P.C. Concrete Driveway	Per Square Foot.
Pay Item No. 433S-B:	Flared Type I P.C. Concrete Driveway	Per Square Foot.
Pay Item No. 433S-C:	Type II P.C. Concrete Driveway	Per Square Foot.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 433S, "P.C. Concrete Driveways"

City of Austin Standard Specifications

Designation	Description
Item No. 130S	Borrow
Item No. 201S	Subgrade Preparation
Item No. 360S	Concrete Pavement
Item No. 403S	Concrete for Structures, Section 403S.7
Item No. 403S	Concrete for Structures, Table 4: Classes of Concrete
Item No. 406S	Reinforcing Steel
Item No. 408S	Expansion Joint Materials
Item No. 409S	Membrane Curing
Item No. 410S	Concrete Structures
Item No. 604S	Seeding for Erosion Control

City of Austin Standard Details

Designation	Description
No. 433S-1	Type I Driveway (1 & 2 Family Residential Use Only)
No. 433S-1A	Flared Type I Driveway (1 & 2 Family Residential Use Only)
No. 433S-2	Type II Driveway

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 433S, "P.C. Concrete Driveways"

City of Austin Standard Specifications

Designation	Description
Item No. 430S	P.C. Concrete Curb and Gutter
Item No. 431S	Machine Laid PCC Curb and Gutter
Item No. 432S	Concrete Sidewalks
Item No. 434S	P.C. Concrete Medians and Islands
Item No. 436S	P.C. Concrete Valley Gutters
Item No. 470S	Curb Cuts for Sidewalk Ramps and Driveways
Item No. 606S	Fertilizer

Item No. 503S
Frames, Grates, Rings and Covers

503S.1 Description

This item shall govern furnishing and installation of frames, grates, rings and covers for inlets, manholes and other structures indicated on the Drawings.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

503S.2 Submittals

The submittal requirements of this specification item include manufacturer, model number, description, painting requirements and characteristics of frames, grates, rings, covers, height adjustment insert and nuts and bolts required for completion of the work.

503S.3 Materials

The Contractor shall submit descriptive information and evidence that the materials and equipment the Contractor proposes for incorporation in the Work is the kind and quality that satisfies the specified functions and quality. The City of Austin Water and Wastewater Utility Standard Products Lists (SPLs) form a part of these Specifications. Contractors may, when appropriate, elect to use products from the SPLs; however, submittal to the Engineer or designated representative is still required. If the Contractor elects to use any materials from these lists, each product shall be completely and clearly identified by its corresponding SPL number when making the product submittal.

The purpose of the SPLs is to expedite the review by the Engineer or designated representative and, if necessary, the City of Austin Water and Wastewater Utility Standard Products Committee of Contractor product submittals. The SPL's should not be interpreted as being a pre-approved list of products necessarily meeting the requirements for a given construction Project. Items contained in the SPL cannot be substituted for items that are shown on the Drawings, called for in the specifications, or specified in the Bidding Requirements, Contract Forms and Conditions of Contract, unless approved by the Engineer or designated representative in conjunction with the Water and Wastewater Utility Standard Products Committee. The Standard Product List current at the time of plan approval will govern.

A. Welded Steel

Welded steel grates and frames shall conform to the number; size, dimensions and details indicated on the Drawings and shall be welded into an assembly in accordance with those details. Steel shall conform to the requirements of ASTM A 36/A 36M, "Specification for Structural Steel".

B. Castings

Castings, whether Carbon-Steel, Gray Cast Iron or Ductile Iron shall conform to the shape and dimensions indicated on the Drawings and shall be clean substantial castings, free from sand or blowholes or other defects. Surfaces of the castings shall be free from burnt on sand and shall be reasonably smooth. Runners, risers, fins and other cast on pieces shall be removed from the castings and such areas ground smooth. Bearing surfaces between manhole rings and covers or grates and frames shall be cast or machined with such precision that uniform bearing shall be provided throughout the perimeter area of contact. Pairs of machined castings shall be matchmarked to facilitate subsequent identification at installation with the exception of water and wastewater manhole and valve castings. These manhole and valve castings shall be fabricated with such draft, tolerances, bolt hole spacing, etc., that all rings and covers of a particular type or class are interchangeable and match-marking will not be required.

Steel castings shall conform to ASTM A 27/27M, “Specifications for Steel Castings, Carbon, for General Application”. Grade 70-36 (480-250) shall be furnished unless otherwise specified on the Drawings.

Cast iron castings shall conform to ASTM A 48, “Specification for Gray Iron Castings”, Class 30.

Ductile Iron castings shall conform to ASTM A 536, “Specification for Ductile Iron Castings”. Grade 60-40-18 (415-275-125) shall be used unless otherwise indicated on the Drawings.

C. Manhole Cover Riser Rings

Height-adjustment inserts for wastewater manhole rings, which are used for raising standard manhole covers, shall be those models listed in Water and Wastewater Standard Products List item QPL WW-330.

D. Nuts and Bolts

Nuts and bolts shall be hex head 5/8” x 2.5” (16 mm x 63.5 mm) #11 National Coarse Thread, Type 316 stainless steel. For bolted manhole covers, a thin film of an approved "Anti-freeze" compound, approved by the Engineer or designated representative, shall be applied to all bolts.

E. Mortar

Unless otherwise specified or approved by the Engineer or designated representative, the mortar for bedding castings shall consist of one (1) part Portland cement and three (3) parts sand and sufficient water to provide the desired consistency. The gradation of the fine aggregate shall meet the requirements for Grade No. 1, Item No. 403, "Concrete for Structures".

503S.4 Construction Methods

Frames, grates, rings and covers shall be constructed of the specified materials in accordance with the details indicated on the Drawings or in the City of Austin Standard

Details. The Frames, grates, rings and covers shall be placed carefully to the lines or grades indicated on the Drawings or as directed by the Engineer or designated representative.

All welding shall conform to the requirements of the ANSI/AWS Structural Welding Code D1.1. Welded frames, grates, rings and covers shall be given 1 coat of a commercial grade red lead oil paint and 2 coats of commercial grade aluminum paint. All coats shall be a minimum of 1.5 mils (0.4 mm), dry.

Painting of gray iron castings will not be required, except when used in conjunction with structural steel shapes.

503S.5 Measurement and Payment

Frames, grates, rings and covers will not be measured and payment for furnishing all materials, tools, equipment, labor and incidentals to complete the Work will be included in the Bid Items which constitute the complete structures.

End

SPECIFIED Cross Reference Materials
Standard Specification Item Number 503S, "Frames, Grates, Rings and Covers"

City of Austin Standard Specifications

Designation	Description
Item No. 403S	Concrete for Structures

City of Austin Water and Wastewater Standard Products List

Designation	Description
QPL WW-330	Manhole Cover Riser Rings for raising City of Austin Standard Manhole Covers

American Society for Testing Materials (ASTM)

Designation	Description
A36/A36M	Specification for Structural Steel
A27/A27M	Specification for Steel Castings, Carbon, for General Application
A48	Specification for Gray Iron Castings
A536	Specification for Ductile Iron Castings

ANSI/AWS

Designation	Description
Code D 1.1	Structural Welding Code

RELATED Cross Reference Materials
Standard Specification Item Number 503S, "Frames, Grates, Rings and Covers"

City of Austin Standard Specifications

Designation	Description
Item No. 504S	Adjusting Structures
Item No. 510	Pipe

City of Austin Standard Details

Designation	Description
No. 503S-1	457mm (18") Cover and Frame
No. 503S-2S	Storm Sewer Manhole Ring and 610 mm (24") Cover
No. 503S-2W	Sanitary Sewer Manhole Ring and 610 mm (24") Cover
No. 503S-3S	Bolted Storm Sewer Manhole Ring and 610 mm (24") Cover
No. 503S-3W	Bolted Sanitary Sewer Manhole Ring and 610 mm (24") Cover
No. 503S-4S	Storm Sewer Manhole Ring and 813 mm (32") Cover
No. 503S-4W	Sanitary Sewer Manhole Ring and 813 mm (32") Cover
No. 503S-5S	Bolted Storm Sewer Manhole Ring and 813 mm (32") Cover
No. 503S-5W	Watertight Manhole Ring and 813 mm (32") Cover
No. 506S-2	Major Manhole Adjustment
No. 506S-11	Storm Sewer Manhole Details

TxDOT Specifications

Designation	Description
Item 421	Portland Cement Concrete

Item No. 506
Manholes

506.1 Description

This item governs construction of pre-cast and cast-in-place wastewater manholes, storm water manholes, storm water junction boxes and cast-in-place wastewater junction boxes, complete in place, including excavation, installation, backfilling and surface restoration; required items including rings, covers, coatings, and appurtenances; and incidental work such as pumping and drainage necessary to complete the work. Contractor-performed acceptance testing is required for wastewater manholes.

506.2 Qualifications

Applicators of coatings to the interior surfaces of wastewater manholes, as specified in 506S.4.R and 506S.5.J, shall be listed on Standard Products List WW-511.

506.3 Project Submittals

A. Products and Materials

The Contractor shall submit descriptive information and evidence that the materials the Contractor proposes for incorporation in the Work are of the kind and quality that satisfy the requirements in the Contract Documents. The City of Austin Water Utility Standard Products Lists are considered a part of the Specifications for the Work. The Contractor shall use products from the SPLs for all water and wastewater construction unless alternative products are shown on the Drawings; called for in the specifications; or specified in the Bidding Requirements, Contract Forms and Conditions of the Contract.

The products included in the Standard Products Lists current at the time of plan approval shall govern; unless a specific product or products on the lists have subsequently been removed from those SPLs because of quality or performance issues. Products and materials that are not covered by SPLs shall meet the requirements in the contract documents.

Submittals for the products and materials covered by this specification shall include manufacturer catalog sheets, technical data sheets, shop drawings, product or material test results, requirements listed below, and any other information needed to adequately describe the product or material. For products covered by SPLs, the submittal shall include a copy of the applicable SPL with the proposed product identified. An SPL by itself is not considered an adequate submittal.

The submittal requirements of this specification item include:

1. For pre-cast manholes and junction boxes: shop drawings for each structure showing, at a minimum, the Project and Contractor's name: manufacturer's name and plant location; applicable specifications; list of materials (such as adjusting rings, boots, gaskets, and pre-cast sections) by type and quantity; elevation view showing diameter or size, ring and cover size and elevation, ring type (bolted or unbolted, flared top or flared bottom) wall thickness,

elevations of transitions from large diameter sections to smaller diameter sections, base width and thickness, total depth, size of openings, reinforcement, and length of each pre-cast section; structure identification number and station location; pipe line identification; pipe material and size; pipe flowline elevations; plan view showing azimuthal orientation (based on 360 degrees clockwise) of the pipes relative to the outflow pipe; technical data sheets covering pipe-to-manhole or pipe-to-junction box connectors, and gaskets

2. For cast-in-place manholes and junction boxes: formwork drawings sealed by a registered Professional Engineer licensed in the State of Texas with documented experience in formwork design for wall pours that exceed 4 feet in height and slabs that are not ground supported

3. For hydraulic cement concrete; mix components and proportions, material sources, materials test results

4. For mortar: mix components and proportions, material sources, materials test results

5. For non-shrink grout: technical data sheet indicating ASTM type and containing instructions on surface preparation, mixing, placing, and curing procedures

6. For wastewater manhole coatings and linings: technical data sheets that include instructions on surface preparation, mixing, placing, and curing procedures

B. Acceptance Test Records

Submittal of acceptance test records is required for wastewater manholes and shall include as a minimum the following items:

Name of the manhole manufacturer

Interior surface coating type and application method

Model and manufacturer of vacuum tester

Date tested/date re-tested

Indication of whether test passed or failed and statement of corrective action taken if test failed

Test Method Used

Location/station of manhole

Type of base: Precast/cast-in-place

Type of repairs made to the joints

The test records shall also be included as part of the Project records turned in with the acceptance package.

506.4 Materials

A. Concrete

All cast-in-place concrete shall conform to City of Austin Standard Specification Item No. 403S, "Concrete for Structures." Cast in place concrete shall be Class A or as specified on the Drawings. Concrete used in precast concrete manhole base sections, riser sections and appurtenances shall conform to the requirements of Texas Department of Transportation Item 421, Hydraulic Cement Concrete. Concrete for backfill of over-excavated areas shall be City of Austin Class A, or Class J (City of Austin Standard Specification Item 403S, Concrete For Structures) or Controlled Low Strength Material (City of Austin Standard Specification Item 402S) as indicated on the Drawings.

B. Mortar

Mortar shall be composed of one part Portland cement, one part masonry cement (or 1/4 part hydrated lime), and sand equal to 2-1/2 to 3 times the sum of the volumes of the cements and lime used. The sand shall meet the requirements for "Fine Aggregate" as given in Standard Specification Item No. 403S "Concrete For Structures." Mortar shall not be used for any purpose on the inside of wastewater manholes.

C. Grout

Grout shall be the non-shrink type conforming to ASTM C 1107, Packaged, Dry, Hydraulic Cement Grout (Nonshrink), Grade C. Grout shall be used as packaged, with the mixed ingredients requiring only the addition of water.

D. Reinforcement

The reinforcing steel shall conform to the requirements of Standard Specification Item No. 406S, "Reinforcing Steel." Secondary, non-structural steel in cast-in-place stormwater manholes may be replaced by collated fibrillated polypropylene fibers, if approved by the Engineer or designated representative.

E. Brick

The brick for ring adjustment courses and for stormwater manholes shall be of first quality, sound, hard burned, perfectly shaped brick conforming to the requirements of ASTM C 62, Grade SW, or concrete brick meeting the requirements of ASTM C 55, Grade N-1.

F. Rings and Covers

Rings and covers shall conform to the requirements of City of Austin Standard Specification Item No. 503S, "Frames, Grates, Rings and Covers."

1. Replacement Rings and Covers, 24 in Diameter Lids

   This ring and cover shall be used for the replacement of broken rings and covers, minor manhole adjustment, or as otherwise directed by the Engineer or designated representative.

2. Rings and Covers, 32 in. Diameter Lids

This ring and cover shall be used for all new manhole construction, except as otherwise directed by the Engineer or designated representative.

G. Bulkheads

Bulkheads shall meet the requirements of City of Austin Standard Specification Item No. 507S "Bulkheads."

H. Precast Base Sections, Riser Sections, Flat-top Slabs and Cones

Precast concrete base sections, riser sections, flat-top slabs, and cones shall conform to the requirements of ASTM C 478. The width of the invert shall be specifically sized for the connecting pipes. Inverts shall be "U" shaped channels. The channel depth at the point where a pipe connects to the manhole wall, for pipes 24 inches in diameter and smaller, shall be a minimum of three fourths of the diameter of the pipe, with the top of the channel being a smooth transition between the inlet and outlet pipe connection points. For manholes connecting to pipes larger than 24 inches in diameter, the channel depth at the point where a pipe connects to the manhole wall shall be at least equal to the full pipe diameter. Changes in flow direction in the inverts of manholes shall be made by constructing smooth, long-radius sweeps to minimize splashing, turbulence, and eddies. The manhole invert grade shall 1) be a continuation of the inlet and outlet pipe grades carried through to the centerline of the manhole, or 2) have a minimum slope of 2.5 percent between the inlet and outlet pipe inverts, or 3) have a minimum difference of 0.10 feet between the inlet and outlet pipe inverts, whichever provides the maximum difference in invert elevation between the inlet and outlet pipes. In all cases, the bottom(s) of the channel(s) shall provide a smooth transition between the inlet and outlet pipes. Where wastewater lines enter a manhole above the flowline of the outlet, the invert shall be filleted to prevent splashing and solids deposition.

Joints for wastewater base sections, riser sections, and cones shall conform to the requirements of ASTM C 443. Additionally, joint dimensions for 48-inch inside diameter wastewater manhole sections and cones shall comply with City of Austin Standard No. 506S-13, "Wedge Seal Joint Detail, Precast Manhole Section." Joint dimensions for wastewater manhole sections and cones larger than 48-inch inside diameter shall comply with City of Austin Standard No. 506S-12, " O-Ring Joint Detail Precast Manhole Section" or City of Austin Standard No. 506S-13, "Wedge Seal Joint Detail, Precast Manhole Section". Precast bases for 48 inch inside diameter manholes shall have preformed inverts. Inserts acceptable to the Engineer or designated representative shall be embedded in the concrete wall of the manhole sections to facilitate handling; however, through-wall holes for lifting will not be permitted.

I. Precast Junction Boxes

Precast junction boxes shall be allowed only where indicated on the Drawings or acceptable to the Engineer or designated representative.

J. Pipe-to-Manhole and Pipe-to-Junction-Box Connectors

Resilient connectors, ring waterstops, and seals at connections of wastewater pipes to pre-cast and cast-in-place manholes and junction boxes shall be watertight, flexible, resilient and non-corrosive, conforming to ASTM C 923.

Metallic mechanical devices for securing the connectors, ring waterstops, and seals in place shall be Type 304 stainless steel.

K. Precast Flat-Slab Transition/Junction Box Lids

Precast slab transitions and lids shall be designed to safely resist pressures resulting from loads which might result from any combination of forces imposed by an HS-20 loading as defined by the American Association of State Highway and Transportation Officials (AASHTO). The joints of precast slab transitions and of lids for wastewater applications shall conform to the requirements of ASTM C443.

L. Precast-Prefabricated Tee Manholes

Tee manholes shall be allowed only where indicated on the Drawings or as directed by the Engineer or designated representative. The main pipe section shall conform to the requirements of City of Austin Standard Specification Item No. 510, "Pipe." The vertical manhole portion (tee) above the main pipe shall conform to the requirements of the precast components.

The manhole tee shall have a minimum inside diameter of 48 inches and shall rise vertically centered or tangent to the main pipe, as indicated on the Drawings or as directed by the Engineer or designated representative. An access hole less than 48-inches in diameter shall be cut into the main pipe to allow a ledge for support of access ladders. Unless otherwise specified on the Drawings, the main pipe portion of the tee manhole shall be included in the unit price bid for the unit tee manhole price.

M. Precast Grade Rings

Rings shall be reinforced Class A concrete

1. Precast Grade Rings, 24-1/2 inches Inside Diameter

   This adjustment ring shall be used only for adjusting existing manholes with 24 inch diameter lids and for Wastewater Access Device. Inside to outside diameter dimension of ring shall be 6 inches with a thickness of 3 inches to 6 inches.

2. Precast Grade Rings, 35 inches Inside Diameter

   This adjustment ring shall be used for all new manhole construction with 32 inch diameter lids. Inside to outside diameter dimension of ring shall be 6 inches with a thickness of 2 inches to 6 inches.

N. High Density Polyethylene Grade Rings

Plastic grade (adjusting) rings shall be injection molded from high density polyethylene identified according to ASTM D4976. Reprocessable and recyclable ethylene plastic materials are allowed. Manufacturers of HDPE adjusting rings shall be listed on SPL WW-703.

O. Controlled Low Strength Material

Controlled low strength material (CLSM) shall meet Standard Specification Item 402S, Controlled Low Strength Material.

P. Cement Stabilized Sand

Cement stabilized sand for bedding or backfilling shall contain 2 bags of Portland cement per cubic yard. The sand shall meet the requirements for "Fine Aggregate" in Standard Specification Item 403S, Concrete for Structures.

Q. Waterproofing Joint Materials

O-rings and wedge seals for the joints of all wastewater manholes, and for stormwater manholes when indicated on the Drawings, shall conform to the requirements of ASTM C443. Cold applied preformed plastic gaskets for stormwater manholes shall be as specified in City of Austin Standard Specification Item No. 510, “Pipe.” Plastic seals wrapped around manholes at joints, and hydrophillic waterstops installed in joints, shall be listed on SPL WW-146A. PVC waterstops installed in joints and waterproofing compounds applied to the exterior surfaces of manholes and junction boxes shall be as specified in the Contract Documents.

R. Interior Surface Coatings for Wastewater Manholes

Interior surface coatings for wastewater manholes shall be either: as specified on the Drawings, as designated in writing by the Engineer or designated representative, or as included on SPL WW-511, which lists acceptable products, uses and applicators.

S. Structural Lining Systems for Wastewater Manholes

Structural lining systems for wastewater manholes shall be either: as specified on the Drawings, as designated in writing by the Engineer or designated representative, or as included on SPL WW-511A.

506.5 Construction

A. General

A minimum horizontal separation of 12 inches shall be maintained between adjacent pipes inside and outside a manhole or junction box. Pipe ends within the base section or junction box walls shall not be relied upon to support overlying manhole dead and live load weights. All wastewater branch connections to new or existing mains shall be made at manholes, with the branch pipe crown installed at an elevation no lower than the elevation of the effluent pipe crown. Changes in flow direction in the inverts shall be made by constructing smooth, long-radius sweeps to minimize splashing, turbulence, and eddies. Where wastewater lines enter the manhole up to 24 inches above the flowline of the outlet, the invert shall be sloped upward in a U-shaped channel three-fourths of the diameter of the incoming pipe to receive the flow, thus preventing splashing or solids deposition. A drop pipe shall be provided for a wastewater pipe entering a manhole whenever the invert cannot be constructed to prevent splashing and solids deposition. Construction of extensions to existing systems shall require placement of bulkheads at locations indicated or directed by the Engineer or designated representative.

Unless otherwise indicated on the Drawings, stormwater manholes shall have eccentric cones and wastewater manholes shall have concentric cones, except on manholes over large mains where an eccentric cone shall be situated to provide access to an invert ledge. Eccentric cones may be used where conflicts with other

utilities dictate. Flat-slab tops may be used only where clearance problems are encountered or where specified on the Drawings. Cast-in-place wastewater junction boxes shall be allowed only where indicated on the Drawings or where accepted by the Engineer or designated representative.

B. Foundation Support

Manholes shall be founded at the established elevations on uniformly stable subgrade. Unstable subgrade shall be over-excavated a minimum of 12 inches and replaced with a material acceptable to the Engineer or designated representative. Precast base units shall be founded and leveled on a 6 inch thick layer of coarse aggregate bedding. A pipe section with a prefabricated tee manhole and half the length of the adjoining pipe sections on each side shall be founded on a minimum of 6 inch thick layer of unreinforced Class A concrete (City of Austin Standard Specification Item No. 403S, “Concrete For Structures”). The cast-in-place concrete cradle shall be placed against undisturbed trench walls up to the pipe’s springline.

C. Cast-in-Place Concrete

Structural concrete work shall conform to Standard Specification Item No. 410S, Concrete for Structures. Forms shall be used for all slabs that are not ground supported and for all vertical surfaces above the foundation level. Formwork shall be designed according to American Concrete Institute ACI 347, Guide to Formwork for Concrete. Outside forms on vertical surfaces may be omitted where concrete can be cast against the surrounding earthen material that can be trimmed to a smooth vertical face.

D. Manhole Bases

Pre-cast bases shall conform to requirements in 506.4.H.

Cast-in-place bases shall have a minimum thickness of 12 inches at the invert flowline. The widths of all manhole inverts shall be specifically sized for the connecting pipes. Inverts shall be “U” shaped channels. The channel depth at the point where a pipe connects to the manhole wall, for pipes 24 inches in diameter and smaller, shall be a minimum of three-fourths of the pipe diameter, with the top of the channel being a smooth transition between the inlet and outlet pipe connection points. For manholes connecting to pipes greater than 24 inches in diameter, the channel depth at the point where a pipe connects to the manhole wall shall be equal to the full pipe diameter. The manhole invert grade shall

1) be a continuation of the inlet and outlet pipe grades carried through to the centerline of the manhole, or
2) have a minimum slope of 2.5 percent between the inlet and outlet pipe inverts, or
3) have a minimum difference of 0.10 feet between the inlet and outlet pipe inverts,

whichever provides the maximum difference in invert elevation between the inlet and outlet pipes. In all cases, the bottom(s) of the channel(s) shall provide a smooth transition between the inlet and outlet pipes. Changes in flow direction in the inverts of manholes shall be made by constructing smooth, large-radius sweeps to prevent splashing, turbulence, and eddies. The lowermost riser section

may be set in the Portland cement concrete, while still plastic, after which the base shall be cured a minimum of 24 hours prior to proceeding with construction of the manhole up to 12 feet in depth. The base shall be cured an additional 24 hours prior to continuing construction above the 12-foot level.

Wastewater manholes having cast-in-place bases may be constructed over existing wastewater pipes and the top half of the pipe removed to facilitate invert construction, except where the existing pipe is PVC, in which case, the entire pipe shall be removed from inside the manhole. The manhole floor shall rise outwardly from the springline elevation of the pipe, approximately one inch for each 12 inch of run (8 percent slope). The floors of stormwater manholes, also, shall rise outwardly from the springline elevation of the pipe, approximately one inch for each 12 inches of run (8 percent slope).

Wastewater manholes with lines larger than 18 inches shall require pre-cast bases; manholes constructed over in-service mains however, may be built on cast-in-place bases if the flow cannot be interrupted.

E. Pipe Connections to Manholes and Junctions Boxes

Wastewater pipe connections to manholes and junction boxes shall be made using flexible, resilient, and non-corrosive watertight boot connectors or ring waterstops acceptable to the Engineer and conforming to the requirements of ASTM C-923. Any voids in the annular space between the pipe and boot connector or ring waterstop and the inside of the manhole wall shall be filled with non-shrink grout to prevent solids collection.

F. Pipe Connections to Existing Manholes and Junction Boxes

Wastewater pipe connections to existing manholes and junction boxes shall be made by removing the wall section by coring or alternative method approved by the Engineer or designated representative; installing flexible, resilient, and non-corrosive boot connectors or ring waterstops acceptable to the Engineer or designated representative and conforming to the requirements of ASTM C-923; filling any voids in the annular space between the pipe and boot connector or ring waterstop and the inside of the manhole or junction box wall with non-shrink grout; rebuilding the invert to conform to Section 506S.5.D; rehabilitating the interior walls with structural lining material listed on SPL WW-511A, and coating the interior of the manhole with material listed on SPL WW-511.

G. Waterproofing

PVC waterstops, hydrophillic waterstops, joint wrapping, and waterproofing compounds shall be installed as specified. Material wrapped around manholes at joints shall be listed on SPL WW-146A regardless of whether installation of the material is required by the Contract for waterproofing or is volunteered by the Contractor for ensuring acceptance of the manhole joints.

H. Backfilling

Backfilling of manholes shall conform to the density requirements of City of Austin Standard Specification Item No.510, Pipe. Manhole construction in roadways may be staged to facilitate pavement base construction. Manholes constructed to interim elevations to facilitate interim construction shall be covered with steel plates

that conform to the requirements of City of Austin Standard 804S-4, sheets 5, 6 and 7, Steel Plating. Steel plates on wastewater manholes shall be set in mortar to minimize inflow of storm water runoff. Manholes shall be completed to finish elevation prior to placement of the roadway's finish surface except on pavement reconstruction projects, where castings may be adjusted after paving is completed. The excavation for completion of manhole construction shall be backfilled in accordance with City of Austin Standards for Trench Repair.

I. Height Adjustment of Manholes

1. General

All adjustments shall be completed prior to the placement of the final roadway surface except on pavement reconstruction projects, where castings may be adjusted after paving is completed.

Brick shall not be used in making height adjustments to wastewater manholes. Mortar shall not be used for any purpose on the inside of wastewater manholes.

Manhole components to be reused shall be carefully removed and the contact areas shall be cleaned of all mortar, concrete, grease and sealing compounds. Any items broken in the process of removal and cleaning shall be replaced in kind by the Contractor at its expense.

If the adjustment involves lowering the top of a manhole, a sufficient depth of pre-cast concrete rings or brick courses shall be removed to permit reconstruction. Existing mortar shall be cleaned from the top surface remaining in place and from all brick or concrete rings to be reused and the manhole rebuilt to the required elevation. The manhole ring and cover shall then be installed with the top surface conforming to the proposed grade.

If the adjustment involves raising the elevation of the top of the manhole in accordance with Minor Manhole Height Adjustment," the top of brick or concrete ring shall be cleaned and built up vertically to the new elevation, using new or salvaged concrete rings or bricks and the ring and cover installed with the top surface conforming to the proposed grade.

After rings and covers are set to grade, the inside and outside of the precast concrete grade rings shall be wiped with non-shrink grout to form a durable surface and water-tight joints. The grouted surface shall be smooth and even with the manhole cone section. Grout shall not be placed when the atmospheric temperature is at or below 40F. If a sudden drop in temperature below 40F occurs or tempartures below 40F are predicted, the grouted surfaces shall be protected against freezing for at least 24 hours.

2. Minor Manhole Height Adjustment (New and Existing Manholes)

Minor manhole height adjustments shall be performed as indicated on City of Austin Standard 506S-4, "Minor Manhole Height Adjustment", and shall consist of adding precast reinforced concrete rings to adjust new and existing manholes to final grade. Brick shall not be used in making height adjustments to wastewater manholes.

If the adjustment involves raising the elevation of the top of the manhole, the top of brick or concrete ring shall be cleaned and built up vertically to the new elevation, using new or salvaged concrete rings or bricks and the ring and cover installed with the top surface conforming to the proposed grade.

For new manhole construction, the maximum allowable throat or chimney height, including the depth of the ring casting, shall be limited to 21 inches of vertical face on the interior surface. For adjustments of existing manholes that fall within the limits of overlay and street reconstruction projects, the maximum vertical allowable height, including the depth of the ring casting, shall be limited to 27 inches of vertical face on the interior surface. All other existing manholes shall have a maximum allowable throat or chimney height adjustment, including the depth of the ring casting, of 12 inches of vertical face on the interior surface. Any adjustment that will exceed these requirements shall be accomplished as indicated on City of Austin Standard 506S-2, Major Manhole Height Adjustment and as described below. Manholes not located in paved areas shall have bolted covers. Manholes located within paved areas (street right of way only) shall be standard non-bolted unless otherwise noted on the drawings.

3. Major Manhole Height Adjustment (Existing Manholes Only)

Any adjustment that exceeds the requirements of Minor Manhole Adjustments, shall be accomplished as indicated on City of Austin Standard 506S-2, Major Manhole Height Adjustment, and shall consist of any combination of removing the concrete rings, and/or the manhole cone section, and/or the straight riser section of the manhole in order to bring the manhole to final grade. Major manhole adjustments shall apply only to existing manholes. Manholes not located in paved areas shall have bolted covers. Manholes located within paved areas (street right of way only) shall be standard non-bolted unless otherwise noted on the drawings.

J. Interior Coatings of Wastewater Manholes and Junction Boxes

The interior surfaces of all Portland cement concrete wastewater manholes and junction boxes shall be coated with products specified either on the Drawings, designated in writing by the Engineer or representative, or listed on SPL WW-511. Product selection shall conform to usage described in that SPL. Surface preparation shall follow the product manufacturer's recommended procedures contained in technical data sheets unless otherwise specified in the contract documents. The Contractor shall measure the coating thickness according to ASTM D 6132, Nondestructive Measurement of Dry Film Thickness of Applied Organic Coatings Over Concrete Using an Ultrasonic Gage. Thickness measures shall be made at locations designated by the Engineer or designated representative. All thickness measurements shall be witnessed by the Engineer or designated representative.

K. Structural Linings of Existing Wastewater Manholes

The interior surfaces of existing wastewater manholes and junction boxes at locations shown in the Drawings or as designated by the Engineer shall be strengthened by application of structural lining systems either as specified on the Drawings, directed in writing by the Engineer or designated representative, or listed

on SPL WW-511A. Selection of products for coating the interior of existing manholes shall be based on the condition of the manholes. Surface preparation shall follow the product manufacturer's recommended procedures contained in technical data sheets unless otherwise specified in the contract documents.

L. Abandonment of Existing Manholes

Manholes designated on the Drawings for abandonment, shall be removed to a level not less than four feet below grade. Two-foot long sections of the inlet and outlet pipes shall be cut and removed on the outside of the manhole, the ends of the remaining pipe and the pipe sections penetrating the manhole wall shall be securely plugged, and the structure filled with material in accordance with Standard 506S-15 or as directed by the Engineer or designated representative.

506.6 Acceptance Testing of Wastewater Manholes

Manholes shall be tested separately and independently of the wastewater lines.

A. Test by the Vacuum Method

A vacuum test shall be performed by the Contractor prior to backfilling those manholes that fall within the right-of-way that require detouring of vehicular traffic. A second vacuum test will not be required after backfilling and compaction is complete unless there is evidence that the manhole has been damaged or disturbed subsequent to the initial vacuum test.

For manhole installations which do not require detouring of vehicular traffic, the vacuum method is recommended and may be used by the Contractor prior to backfilling the manhole to insure proper installation so that defects may be located and repaired; however, a vacuum test shall be performed after backfilling, and compaction are complete. Testing after backfill and compaction are complete will be the basis for acceptance of the manhole.

1. Equipment

   a) The manhole vacuum tester shall be a device approved for use by the Engineer or designated representative.

   b) Pipe sealing plugs shall have a load resisting capacity equal to or greater than that required for the size of the connected pipe to be sealed.

2. Procedures - applicable to new 48-inch diameter manholes

   a) Manhole section interiors shall be carefully inspected; units found to have through-wall lift holes, or any penetration of the interior surface by inserts provided to facilitate handling, will not be accepted. Coating shall be applied after the testing unless coating is applied before installation or unless it is applied at the factory. All lift holes and exterior joints shall be plugged with an acceptable non-shrink grout. No grout shall be placed in horizontal joints. Tests shall be performed before grouting the invert or around pipe penetrations and before coating the interior surfaces of the manhole or junction box.

b) After cleaning the interior surfaces of the manhole, the Contractor shall place and inflate pneumatic plugs in all of the connecting pipes to isolate the manhole; sealing pressure within the plugs shall be as recommended by the plug manufacturer. Plugs and the ends of pipes connected by flexible boots shall be blocked to prevent their movement during the vacuum test.

c) The vacuum test head shall be placed on the top of the cone section or, inside of the top of the manhole cone section, and the compression seal band inflated to the pressure recommended by its manufacturer. The vacuum pump shall be connected to the outlet port with the valve open. When a vacuum of 10 inches of mercury (-5 psig) has been attained, the valve shall be closed and the time noted. Tampering with the test equipment will not be allowed.

d) The manhole shall have passed the test if the vacuum does not drop below 9 inches of mercury (-4.5 psig) within 3 minutes of the time the valve was closed. The actual vacuum shall be recorded at the end of the 3 minutes during which the valve was closed.

e) When the standard vacuum test cannot be performed because of design or material constraints (examples: T-Type manholes, T-Lock Liners, or other reasons acceptable to the Engineer or designated representative), testing of individual joints shall be performed as directed by the Engineer or designated representative.

B. Test by the Exfiltration Method

At the discretion of the Engineer or designated representative, the Contractor may substitute the Exfiltration Method of testing for the Vacuum test described in Section 506.6. A. above. This method may only be used when ground water is not present. If ground water is present a Vacuum Test shall be used unless otherwise directed by the Engineer or designated representative. All backfilling and compaction shall be completed prior to the commencement of testing.

The procedures for the test shall include the following:

1. Manhole section interiors shall be carefully inspected; units found to have through-wall lift holes, or any penetration of the interior surface by inserts provided to facilitate handling, will not be accepted. Coating shall be applied after the testing unless coating is applied before field assembly, or at the factory. All lift holes and exterior joints shall be plugged with an acceptable non-shrink grout. No grout shall be placed in horizontal joints. Tests shall be performed before grouting the invert or around pipe penetrations and before coating the interior surfaces of the manhole or junction box.

2. After cleaning the interior surface of the manhole, the Contractor shall place and inflate pneumatic plugs in all of the connecting pipes to isolate the manhole; sealing pressure within the plugs shall be as recommended by the plug manufacturer.

3. Concrete manholes shall be filled with water or otherwise thoroughly wetted for a period of 24 hours prior to testing.

4. At the start of the test, the manhole shall be filled to the top with water. The test time shall be 1 hour. The Construction Inspector must be present for observation during the entire time of the test. Permissible loss of water in the 1-hour test time is 0.025 gallons per diameter foot, per foot of manhole depth. For a 4-foot diameter manhole, this quantity converts to a maximum permissible drop in the water level (from the top of the manhole cone) of 0.1 inches per foot of manhole depth or 1.0 inches for a 10-foot deep manhole.

C. Failure to Pass the Test – Records of Tests

If the manhole fails to pass the initial test method as described in (A) Test by the Vacuum Method and, if allowed, (B) Test by the Exfiltration Method, or if visible groundwater leakage into the manhole is observed, the Contractor shall locate the leak, if necessary by disassembly of the manhole. The Contractor shall check the gaskets and replace them if necessary. The Contractor may re-lubricate the joints and re-assemble the manhole, or the Contractor may install an acceptable exterior joint sealing product (see City of Austin Standard Products List Item SPL WW-146A) on all joints and then retest the manhole. If any manhole fails the vacuum and/or exfiltration test twice, the Contractor shall consider replacing that manhole. If the Contractor chooses to attempt to repair that manhole, the manhole must be retested until it passes. In no case shall cold applied preformed plastic gaskets be used for repair. Records of all manhole testing shall be made available to the Engineer or designated representative at the close of each working day, or as otherwise directed by the Engineer or designated representative. Any damaged or visually defective products, or any products out of acceptable tolerance shall be removed from the site.

D. Inspection

The Engineer or designated representative shall make a visual inspection of each manhole after it has passed the testing requirements and is considered to be in its final condition. The inspection shall determine the completeness of the manhole; any defects shall be corrected to the satisfaction of Engineer or designated representative.

506.7 Measurement

A "Junction Box" and "Box Manholes" will be measured by each structure of the indicated size regardless of depth.

A "Standard Pre-cast Manhole with Pre-cast Base", "Standard Pre-cast Manhole with Cast-in-Place (CIP) Base", “Special Manhole", "Drop Manhole with Pre-cast Base", "Drop Manhole with Cast-in-Place (CIP) Base”, "Centered Tee Manhole", or "Tangent Tee Manhole" will be measured by each structure of the indicated size for the first 8 feet of depth.

An "Extra Depth Manhole" will be measured by linear vertical foot of Standard Pre-cast Manhole with Pre-cast Base, Standard Pre-cast Manhole with CIP Base, Drop Manhole with Pre-cast Base, Drop Manhole with CIP Base, Special Manhole, Centered Tee Manhole, or Tangent Tee Manhole of the indicated size in excess of eight feet of depth.

Manhole depth will be measured from the invert flow line to the finished surface elevation.

"Minor Manhole Height Adjustment" and "Major Manhole Height Adjustment" will be measured by each unit for the indicated size. Only existing manholes will be measured for minor or major manhole height adjustment.

"Connection to Existing Manhole or Junction Box" will be measured per each for the indicated type of structure and location.

"Structural Lining" will be measured by the linear vertical foot for the indicated structure.

New manholes constructed to interim elevations to facilitate stage construction shall be measured as one unit regardless of the number of interim elevations constructed. All labor, materials and other expenses necessary for the stage construction shall be included in the unit price bid for the completed unit. Cost of abandonment of existing manholes shall be included in the unit price bid for the completed unit, unless Pay Item No. 506 AB is indicated on the Drawings and identified in Standard Contract Bid Form 00300U.

506.8 Payment

Payment for completed junction boxes and manholes of the type indicated on the Drawings shall be made at the appropriate unit bid price. The unit bid price shall include all labor, equipment, materials, (including but not limited to frames and grates, rings and covers, adjusting rings, cone sections, riser sections, gaskets, drop piping and fittings, bases, pipe-to-manhole connectors, concrete, reinforcing steel, non-shrink grout, mortar, joint wrap where specified, and, for wastewater manholes, interior coatings), time and incidentals necessary to complete the work.

Payment for a "Junction Box" and "Box Manhole" will be made at the unit price bid for the indicated size, complete in place.

Payment for the first 8 feet of a "Standard Pre-cast Manhole with Pre-cast Base", "Standard Pre-cast Manhole with Cast-in-Place (CIP) Base", "Special Manhole", "Drop Manhole with Pre-cast Base", "Drop Manhole with Cast-in-Place (CIP) Base","Centered Tee Manhole", or "Tangent Tee Manhole" will be made at the unit price bid for the indicated type and size, complete in place.

Payment for that portion of a Standard Pre-cast Manhole with Pre-cast Base, Standard Pre-cast Manhole with CIP Base, Drop Manhole with Pre-cast Base, Drop Manhole with CIP Base, Special Manhole, Centered Tee Manhole, or Tangent Tee Manhole in excess of 8 feet in depth will be made at the unit price bid for "Extra Depth Manhole" of the indicated type and size, complete in place.

Payment for "Minor Manhole Height Adjustment" and "Major Manhole Height Adjustment" will be made at the unit bid price, complete in place.

Payment for "Structural Lining" will be made at the unit price per linear vertical foot, which will include surface preparation, environmental adjustments, lining application, and curing, as required.

Payment for "Connection to Existing Manhole or Junction Box" shall be made at the unit price per connection and will include removing the wall section by coring or alternative method approved by the Engineer or designated representative, rehabilitating the interior walls, rebuilding the invert, and preparing and coating the interior surfaces of the structure.

When indicated in the Drawings, abandonment of existing manholes shall be made at the unit price for abandonment.

The intended use of each item shall be designated by a two-letter code (Wastewater = WW; Stormwater = SW) in the spaces provided after the pay item number:

Pay Item No. 506S M__:	Standard Pre-cast Manhole w/Pre-cast Base, ___ Dia.	Per Each.
Pay Item No. 506S M1__:	Standard Pre-Cast Manhole w/CIP Base, ___ Dia.	Per Each.
Pay Item No. 506S S__:	Special Manhole, ___ Dia.	Per Each.
Pay Item No. 506S D__:	Drop Manhole w/Pre-cast Base, ___ Dia.	Per Each.
Pay Item No. 506S D1__:	Drop Manhole w/CIP Base, ___ Dia.	Per Each.
Pay Item No. 506S C__:	Centered Tee Manhole, __ Dia. x ___ Dia.	Per Each.
Pay Item No. 506S T__:	Tangent Tee Manhole, ___ Dia. x ___ Dia.	Per Each.
Pay Item No. 506S J__:	Junction Box, ___ Ft. x ___ Ft.	Per Each.
Pay Item No. 506S B__:	Box Manhole ___ Ft. x ___ Ft.	Per Each.
Pay Item No. 506S 2__:	Major Manhole Height Adjustment, ___ Dia.	Per Each.
Pay Item No. 506S 4__:	Minor Manhole Height Adjustment, ___ Dia.	Per Each.
Pay Item No. 506S AB__:	Abandonment of existing Manholes:	Per Each.
Pay Item No. 506S EDM__	Extra Depth of Manhole, ___ Dia.	Per Linear Vert. Foot.
Pay Item No. 506S SL__:	Structural Lining of _____:	Per Linear Vert. Foot.
Pay Item No. 506S CN__:	Connection to Existing _____:	Per Each.

End

***SPECIFIC* CROSS REFERENCE MATERIALS**
Standard Specification Item No. 506, "Manholes"

City of Austin Standard Specifications

Designation	Description
Item 403S	Concrete For Structures
Item 406S	Reinforcing Steel
Item 402S	Controlled Low Strength Material
Item 410S	Concrete Structures
Item 503S	Frames, Grates, Rings and Covers
Item 504S	Adjusting Structures
Item 507S	Bulkheads
Item 510	Pipe

Texas Department of Transportation Standard Specifications
For Construction and Maintenance of Highways, Streets and Bridges

Designation	Description
Item 421	Hydraulic Cement Concrete

City of Austin Utilities Criteria Manual

Designation	Description
Section 2.8.0	Abandonment of Facilities
Subsection 2.8.2	Manholes

City of Austin Water Utility Documents

Designation	Description
SPL WW-146A	Manhole Seals, Plastic, Watertight
SPL WW-511	Lining System for Wastewater Manholes
SPL WW-511A	Structural Lining System for Wastewater Manholes
SPL WW-703	Adjusting (grade) rings for manhole chimney sections

City of Austin Standard

Designation	Description
506S-2	Major Manhole Height Adjustment
506S-4	Minor Manhole Height Adjustment
506S-15	Abandoned Manhole
506S-12	O-Ring Joint Detail, Precast Manhole Section
506S-13	Wedge Seal Joint Detail, Precast Manhole Section Adjustment
506S-15	Abandoned Manhole
804S-4, 5, 6 and 7 of 9	Steel Plating

City of Austin Standard Contract

Designation	Description
00300U	Bid Form (Unit Prices)

American Society for Testing and Materials (ASTM)

Designation	Description
ASTM C 55	Specification for Concrete Building Brick
ASTM C 62	Specification for Building Brick Solid Masonry Units Made from Clay of Shale
ASTM C478/C478M	Standard Specification for Precast Concrete Manhole
ASTM C443/C443M	Specification for Joints for Circular Concrete Sewer and Culvert Pipe, Using Rubber Gaskets
ASTM C923/C923M	Specification for Resilient Connectors Between Reinforced Concrete Manhole Structures Pipes
ASTM C1107	Specification for Packaged Dry, Hydraulic-Cement Grout (Nonshrink)
ASTM D6132	Specification for Polyethylene Plastics Molding and Extrusion Materials
D4976	Test Method for Nondestructive Measurement of Dry Film Thickness of Applied Organic Coating Over Concrete Using an Ultrasonic Gage

American Concrete Institute

Designation	Description

Item 347	Guide to Formwork for Concrete

***RELATED* CROSS REFERENCE MATERIALS**
Standard Specification Item No. 506, "Manholes"

City of Austin Utilities Criteria Manual

Designation	Description
Section 2	Water and Wastewater Design Criteria

City of Austin Standards

Designation	Description
1100S-1	Casting Adjustments
503S-4S	Storm Sewer Manhole Ring and 32" Cover
503S-4W	Sanitary Sewer Manhole Ring and 32" Cover
503S-5S	Bolted Storm Sewer Manhole Ring and 32" Cover
503S-5W	Watertight Manhole Ring and 32" Cover (W&WW)
506S-1	Manhole Invert Plan
506S-5	Typical Box Manhole 30" and Larger Pipe
506S-7	Precast Manhole with Drop Inlet on Cast in Place Foundation
506S-8	Precast Manhole with Drop Inlet on Precast Base
506S-9	Precast Manhole On Cast-In-Place Foundation
506S-10	Wastewater Manhole on Precast Base
506S-11	Storm Sewer Manhole Details

American Association of State Highway and Transportation Officials (AASHTO)

Designation	Description
M306	Standard Specifications for Drainage Structure Castings

Item No. 508S
Miscellaneous Structures and Appurtenances

508S.1 Description

This item governs the construction of miscellaneous structures and appurtenances, complete in place or to the stage detailed and/or indicated in the Drawings, using the materials specified herein, including the excavation, installation, backfilling, placement of the concrete and when required, the furnishing and installation of frames, grates, rings, covers, safety end treatment and any concrete curb and gutter indicated on the Drawings.

This specification is applicable for projects or work involving either SI or inch-pound units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses

508S.2 Submittals

The submittal requirements of this specification item include:

A. Type of structure and appurtenances (inlets, headwalls, frames, grates, energy dissipators, etc.), construction methods and sequence (precast, cast in place), materials (bolts, nuts, plates, angles, etc.)

B. Aggregate types, gradations and physical characteristics for the Portland cement concrete mix.

C. Proposed proportioning of materials for the mortar mix.

D. Analysis and thickness calculations for temporary steel covers.

508S.3 Types

The various types of structures and appurtenances such as inlets, headwalls, energy dissipators, etc., are designated on the Drawings by letter or by number for the particular design of structure to be constructed in accordance with the details indicated on the Drawings. Unless otherwise indicated on the Drawings, the Contractor may have the option of furnishing cast in place or precast structures.

508S.4 Materials

A. Portland Cement Concrete

The Portland cement concrete shall conform to Item No. 403S, "Concrete For Structures", with the following classes:

Cast in Place Concrete	Class A
Precast Concrete	Class C

B. Mortar

Mortar shall be composed of 1 part Portland cement and 2 parts clean, sharp mortar sand suitably graded for the purpose by conforming in other respects to the provisions

of Standard Specification Item No. 403S, "Concrete for Structures" for fine aggregate. Hydrated lime or lime putty may be added to the mix, but in no case shall it exceed 10 percent by weight (mass) of the total dry mix.

C. Reinforcement and Steel

Reinforcing Steel shall conform to Standard Specification Item No. 406S,"Reinforcing Steel".

Structural Steel shall conform to Standard Specification Item No. 720S, "Metal for Structures".

D. Frames, Grates, Rings and Covers

Frames, grates, rings and covers shall conform to City of Austin Standard Specification Item No. 503S, “Frames, Grates, Rings and Covers".

E. Safety End Treatment for Structures

The safety end treatment for structures shall conform to TxDOT Specification Item No. 467, “Safety End Treatment”.

1. Bolts and Nuts. All bolts, nuts and associated hardware shall meet the specifications of ASTM A 307.
2. Plates and Angles. All plates and similar angles and brackets shall meet the specifications of ASTM A 36.
3. Pipe Runners. Pipe Runners shall conform to the requirements of ASTM A53, Grade B.
4. Galvanizing. All hardware including nuts, bolts and plates listed above shall be galvanized conforming to ASTM A 123 or A 153.

F. Miscellaneous Items

Cast iron for supports, steps and inlet units shall conform to the shape and dimensions indicated on the Drawings. The casting shall be clean and perfect, free from sand or blowholes or other defects. Cast iron castings shall meet the requirements of ASTM A 48, Class 30. Steel for temporary covers when used with stage construction shall be adequate for the loads imposed.

508S.5 Construction Methods

All concrete work shall be performed in accordance with Standard Specification Item No.410S, "Concrete Structures". Forms will be required for all cast-in-place concrete walls, except where the nature of the surrounding material is such that it can be trimmed to a smooth vertical face (the outside form for concrete bases). Where cast in place concrete is used in wall construction of storm sewers, the steps shall be cast into the wall when the concrete is placed.

The construction inlets shall be completed, as soon as is practicable after installation is complete of the sewer lines in the inlet. All sewer line shall be cut neatly at the inside face of the walls of the inlet and pointed up with mortar.

Bases for cast in place inlets may be placed prior to or at the Contractor's option after the sewer is constructed.

Bases for box sewers shall be cast as an integral part of the sewer. The manholes may be constructed prior to backfilling or if the Contractor so elects, the manhole opening may be covered temporarily with a steel plate to facilitate the compaction of backfill for the sewer as a whole. Thereafter, required excavation for the inlet shall be made and the inlet constructed and backfilled.

The inverts passing out or through an inlet shall be shaped and grouted across the floor of the inlet as indicated on the Drawings. This shaping may be accomplished by adding shaping mortar or concrete after the base is cast or by placing the required additional material with the base.

All miscellaneous structures shall be completed in accordance with the details indicated on the Drawings. Backfilling to original ground elevation shall be in accordance with the provisions of the appropriate items and as directed by the Engineer or designated representative.

Energy dissipators and headwalls shall be constructed in accordance with City of Austin Standard Detail 508S-13.

508S.6 Measurement

All miscellaneous structures and safety end treatments satisfactorily completed as indicated on the Drawings will be measured as completed units per each.

Concrete removal, excavation and backfill, riprap, pipe, headwalls, wing walls, collars and apron slabs will not be measured under this item but will be included in the unit price bid for the item of construction in which this item is used.

Frames, grates, rings, covers, safety end treatment and any concrete curb and gutter indicated will not be measured and paid for but shall be included in the unit price bid of one of the pay items identified in the contract bid form.

508S.7 Payment

A . Inlets

Payment for Inlets of the type indicated in place in accordance with these specifications and measured as prescribed above will be made at the unit bid price for each Inlet, of the type specified.

B. Energy Dissipators and Headwalls

Payment for special complete structures will be made at the unit price bid per each.

C Safety End Treatment

Payment for Safety End Treatment, complete in place, will be made at the unit bid price for each unit of the type indicated on the Drawings.

Payment will be made under one of the following:

Pay Item No. 508S-E:	Energy Dissipators, _____ In. Dia. -	Per Each.
Pay Item No. 508S-H:	Headwalls, Type _____, ___ In. Dia. Pipe -	Per Each.
Pay Item No. 508S-IG:	Inlet, Grated -	Per Each.
Pay Item No. 508S-SET	Safety End Treatment, Type ___ Size ___	Per Each
Pay Item No. 508S-I5R:	Inlet, Recessed -	Per Each.
Pay Item No. 508S-I10R:	Inlet, Recessed -	Per Each.
Pay Item No. 508S-I15R:	Inlet, Recessed -	Per Each.
Pay Item No. 508S-I20R:	Inlet, Recessed -	Per Each.
Pay Item No. 508S-I5S:	Inlet, Recessed -	Per Each.
Pay Item No. 508S-I10S:	Inlet, Standard -	Per Each.
Pay Item No. 508S-I15S:	Inlet, Standard -	Per Each.
Pay Item No. 508S-I20S:	Inlet, Standard -	Per Each.

End

SPECIFIED Cross Reference Materials
Standard Specification Item No. 508S, "Miscellaneous Structures and Appurtenances"

City of Austin Standard Specification Items

Designation	Description
Item No. 403S	Concrete For Structures
Item No. 406	Reinforcing Steel
Item No. 410	Concrete Structures
Item No. 720	Structural Steel
Item No. 503S	Frames, Grates, Rings and Covers

TxDOT Standard Specifications For Construction And Maintenance Of Highways, Streets, And Bridges

Designation	Description
Item 467	Safety End Treatment

American Society for Testing and Materials (ASTM)

Designation	Description
ASTM A36/36M	Specification for Structural Steel
ASTM A48	Specification for Gray Iron Castings
ASTM A53	Specification for Pipe, Steel, Black and Hot-Dipped, Zinc Coated Welded and Seamless
ASTM A123	Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A153	Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A307	Specifications for Carbon Steel Externally Threaded Standard Fasteners
ASTM C913	Specifications for Precast Concrete Water and Wastewater Structures

RELATED Cross Reference Materials

City of Austin Drainage Criteria Manual

Designation	Description
Section 6.6.0	Energy Dissipators

City of Austin Standard Specification Items

Designation	Description
Item No. 501S	Jacking or Boring Pipe
Item No. 504S	Adjusting Structures
Item No. 506	Manholes
Item No. 507S	Bulkheads
Item No. 510	Pipe

City of Austin Standard Details

Designation	Description
508S-13	Standard Headwall and Energy Dissipators
510S-1	Concrete Trench Cap

TxDOT Specifications

Designation	Description
Item 420	Concrete Structures
Item 421	Portland Cement Concrete
Section 421.2(5)	Fine Aggregate
Item 424	Precast Concrete Structures (Fabrication)
Item 440	Reinforcing Steel
Item 466	Headwalls and Wingwalls
Item 467	Safety End Treatment
Item 471	Frames, Grates, Rings and Covers
Item 529	Concrete Curb, Gutter and Combined Curb and Gutter

509S.1 Description

This item shall govern the designing, furnishing, installing, maintaining and removing or abandoning of temporary Excavation Safety Systems consisting of trench shields, aluminum hydraulic shoring, timber shoring, trench jacks, tieback or braced sheeting, tieback slurry walls, soil nailing, rock bolting, tieback or braced soldier piles and lagging, and other systems for protecting workers in excavations. This item shall also govern the designing and constructing of sloping and benching systems for protecting workers in excavations.

At a minimum, the Excavation Safety Systems shall conform to United States Department of Labor Rules 29 CFR, Occupational Safety and Health Administration, Part 1926 Safety and Health Regulations for Construction, Subpart P, Excavation (hereinafter called OSHA).

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

509S.2 Definitions

"Competent Person" shall mean one who is capable of identifying existing and predictable hazards in the surroundings, or working conditions which are unsanitary, hazardous, or dangerous to employees, and who has authorization to take prompt corrective measures to eliminate them. The competent person shall be capable of interpreting the manufacturer's data sheets and interpreting and implementing the Excavation Safety System Plan.

An "Excavation" shall mean any cut, cavity, trench, or depression in an earth surface, formed by earth removed by the Contractor. The Contractor shall provide an Excavation Safety System for all excavations except when 1) the excavation is in stable rock as determined by the Texas-licensed Professional Engineer who prepared the Contractor's Excavation Safety System Plan or 2) the excavation is less than 5 feet (1.52 m) in depth and examination of the ground by the Contractor's competent person provides no indication of a potential cave-in.

"Trench" (trench excavation) shall mean any narrow excavation (in relation to its length) made below the surface of the ground. In general, the depth shall be greater than the width, but the width of a trench (measured at the bottom) shall not be greater than 15 feet (4.56 m). Excavation Safety Systems for such trenches shall be defined as "Trench Excavation Safety Protective Systems".

If the Contractor installs or constructs forms or other structures in an excavation such that the dimension measured from the forms or structures to the sides of the excavation is reduced to 15 feet (4.6 m) or less (measured at the bottom of the excavation), those excavations shall also be defined as a Trench if workers must enter it. Excavation Safety Systems for such trenches shall also be defined as "Trench Excavation Safety Protective Systems".

509S.3 Excavation Safety System Submittals

A. The Notice to Proceed with construction may be issued by the Owner before the Contractor has submitted the necessary Excavation Safety Plan(s); however, excavation shall not proceed until the Owner has received the Contractor's Excavation Safety Plan(s) for the Project.

B. Prior to Starting Excavation

Prior to starting any Excavation, the Contractor shall submit to the Owner:

1. A certificate indicating that the Contractor's Competent Person(s) has completed training in an excavation safety program based on OSHA regulations within the past 5 years.
2. Manufacturer's tabulated data or other tabulated data for Excavation Safety Systems consisting of pre-engineered protective systems such as trench shields, aluminum hydraulic shoring, timber shoring, pneumatic shoring, or trench jacks, or benching or sloping or other protective systems that are not designed specifically for the Project.

   Manufacturer's tabulated data shall meet the requirements in OSHA and shall describe the specific equipment to be used on the Project. Tabulated data must bear the seal of the licensed professional engineer who approved the data. Manufacturer's tabulated data shall be an attachment to the Contractor's Excavation Safety System Plan described below.

509S.4 Excavation Safety System Plan

The Contractor shall prepare an Excavation Safety System Plan (hereafter called the "Plan") specifically for the Project. The Contractor shall retain a Texas-licensed Professional Engineer to prepare the Plan. On City-funded projects, the Contractor must follow qualifications-based procedures to procure the required Professional Engineering services, according to Chapter 2254 of the Texas Government Code.

The Contractor shall be responsible for obtaining geotechnical information necessary for design of the Excavation Safety System. If geotechnical information for design of the Project has been acquired by the Owner or designated representative, it shall be provided to the Contractor for information purposes subject to the provisions of City of Austin Standard Contract Section 00220, "Geotechnical Data."

A. The Plan for Excavation Safety Systems consisting of pre-engineered protective systems such as trench shields, aluminum hydraulic shoring, timber shoring, pneumatic shoring, or trench jacks, or benching or sloping or other protective systems that are not designed specifically for the Project shall include:

   1. Detailed Drawings of the Excavation Safety System(s) that will provide worker protection conforming to OSHA. The Drawings shall note the required load carrying capacity, dimensions, materials, and other physical properties or characteristics in sufficient detail to describe thoroughly and completely the Excavation Safety System(s).
   2. Drawings, notes, or tables clearly detailing the specific areas of the Project in which each Excavation Safety System shall be used, the permissible size of the excavation, the length of time that the excavation shall remain open, the means of egress from the excavation, the location of material storage sites in relation to the excavation, the methods for placing/compacting bedding/backfill within the safety of the system, any excavation safety equipment restrictions and subsequent removal of the system.
   3. Recommendations and limitations for using the Excavation Safety Systems.
   4. A Certificate of Insurance of the Excavation Safety System Engineer's Professional Liability Insurance coverage. For City-funded projects, coverage meeting the requirements of Standard Contact Documents Section 00810 shall be provided. For privately funded projects the coverage shall be at least $1,000,000.

B. The Plan for Excavation Safety Systems consisting of tieback or braced sheeting, tieback or braced soldier piles and lagging, slurry walls, soil nailing, rock bolting or other protective systems that are designed specifically for the Project shall include:

1. Detailed Drawings of the Excavation Safety System(s) that will provide worker protection conforming to OSHA. The Drawings shall note the design assumptions, design criteria, factors of safety, applicable codes, dimensions, components, types of materials, and other physical properties or characteristics in sufficient detail to describe thoroughly and completely the Excavation Safety System(s).
2. Detailed technical specifications for the Excavation Safety System addressing the properties of the materials, construction means and methods, quality control and quality assurance testing, performance monitoring, and monitoring of adjacent features, as appropriate.
3. Drawings that clearly detail the specific areas of the Project in which each type of system shall be used and showing the plan and elevation (vertical profile) views.
4. Drawings, notes or tables clearly detailing the length of time that the excavation shall remain open, the means of egress from the excavation, the location of material storage sites in relation to the excavation, the methods for placing/compacting bedding/backfill within the safety of the system, any excavation safety equipment restrictions and subsequent removal or abandonment of the system or parts thereof.
5. Recommendations and limitations for using the Excavation Safety Systems.
6. A Certificate of Insurance of the Excavation Safety System Engineer's Professional Liability Insurance coverage. For City-funded projects, coverage meeting the requirements of Standard Contract Documents Section 00810 shall be provided. For privately funded projects the coverage shall be at least $1,000,000.

509S.5 Excavation Safety System Submittal Review

Review of the Excavation Safety System submittal conducted by the Owner or designated representative shall only relate to conformance with the requirements herein. The Owner's failure to note exceptions to the submittal shall not relieve the Contractor of any or all responsibility or liability for the adequacy of the Excavation Safety System. The Contractor shall remain solely and completely responsible for all Excavation Safety Systems and for the associated means, methods, procedures, and materials.

509S.6 Contractor’s Responsibility

The Contractor shall be responsible for implementing the Excavation Safety System Plan and for confirming that the Excavation Safety System(s) used on the Project meets the requirements of the Plan.

The Contractor’s Competent Person(s) shall be on the Project whenever workers are in an excavation meeting the definitions of a Trench given in 509S.2.

509S.7 Construction Methods

The Contractor's Competent Person(s) shall maintain a copy of appropriate OSHA regulations onsite and shall implement OSHA excavation safety regulations at the work site. The Contractor shall perform all excavation in a safe manner and shall maintain the Excavation Safety Systems to prevent death or injury to personnel or damage to structures, utilities or property in or near excavation.

If evidence of possible cave-ins or earthen slides is apparent or an installed Excavation Safety System is damaged, the Contractor shall immediately cease work in the excavation, evacuate

personnel from any potentially hazardous areas and notify the Owner. Personnel shall not be allowed to re-enter the excavation until necessary repairs or replacements are completed and are inspected and approved by the Contractor's Competent Person(s). Repair and replacement of damaged Excavation Safety System shall be at the Contractor's sole expense.

509S.8 Changed Conditions

When changed conditions require modifications to the Excavation Safety System, the Contractor shall provide to the Owner or designated representative a new design or an alternate Excavation Safety System Plan that is proposed by the Contractor's Excavation Safety System Engineer to address the changed conditions. Copies of the new design or alternate system shall be provided to the Owner or designated representative in accordance with the requirements of section 509S.3, "Excavation Safety System Plan Submittals". A copy of the most current Excavation Safety System Plan shall be maintained on site and made available to inspection and enforcement officials at all times.

Any changes to the Excavation Safety System Plan that are initiated by the Contractor for operational efficiency or as a result of changed conditions, that could be reasonably anticipated, will not be cause for contract time extension or cost adjustment. When changes to the Excavation Safety System Plan are necessitated by severe and uncharacteristic natural conditions or other conditions not reasonably within the control of the Contractor, the Contractor may make a written request to the Owner for a Change Order to address the anticipated work. The Contractor shall notify the Owner in writing within 24 hours of the occurrence of changed conditions that the Contractor anticipates the submittal of a claim for additional compensation. Under 'Changed Conditions" the work deemed immediately necessary by the Contractor to protect the safety of workers and public, equipment or materials may only be accomplished until the Owner or designated representative has a reasonable opportunity to investigate the Contractor's written request for a Change Order and respond in writing to the request.

509S.9 Measurement

Trench Excavation Safety Protective Systems will only be measured and paid for those trenches that workers would reasonably be expected to enter.

Trench Excavation Safety Protective Systems for Trenches excavated to a final width (measured at the bottom of the excavation) not exceeding 15 feet (4.56 m) shall be measured by the linear foot (meter: 1 meter equals 3.281 feet) through manholes, bore pits, receiving pits, and other appurtenances along the centerline of the trench. This method of measurement shall apply to any and all protective systems, including but not limited to tieback or braced sheeting, tieback or braced soldier piles and lagging, slurry walls, soil nails, rock bolts, shoring, trench boxes, and sloping or benching as used to provide a Trench Excavation Safety Protective System in accordance with the Excavation Safety System Plan.

Trench Excavation Safety Protective Systems for Trenches created by installation or construction of forms or other structures in an excavation whose width is greater than 15 feet (4.56 m) such that the dimension measured from the forms or structures to the sides of the excavation is reduced to 15 feet (4.56 m) or less (measured at the bottom of the excavation) shall be measured by the linear foot along the centerline of the Trench. Where forms or structures create multiple Trenches in one excavation, each Trench shall be measured separately. This method of measurement shall apply to any and all protective systems, including but not limited to tieback or braced sheeting, tieback or braced soldier piles and lagging, slurry walls, soil nails, rock bolts, shoring, trench boxes, and sloping or benching as used to provide a Trench Excavation Safety Protective System in accordance with the Excavation Safety System Plan.

509S.10 Payment

Payment for Trench Excavation Safety Protective Systems, measured as prescribed above, will be made at unit bid price per centerline linear foot of Trench. The unit bid price shall include full compensation for designing, furnishing, installing the system; for dewatering, and for maintaining, replacing, repairing and removing the Trench Excavation Safety Protective System and for sloping, special clearing, and excavation necessary to safely implement the Excavation Safety System Plan. No payment will be made for Trench Excavation Safety Protective Systems made necessary by the Contractor's selection of an optional design or sequence of work that creates the need for the Trench Excavation Safety Protective System.

Payment will be made under the following:

Pay Item No. 509S-1: Trench Excavation Safety Protective Systems, (all depths) Per Linear Foot.

END

SPECIFIC Cross Reference Materials
Standard Specification Item No. 509S, "Excavation Safety Systems"

City of Austin Standard Contract Documents

Designation	Description
Section 00020	Invitation for Bids
Section 00220	Geotechnical Data
Section 00650	Certificate of Insurance
Section 00700, Article 6.11	Safety and Protection
Section 810	Supplemental General Conditions

29 CFR, Occupational Safety and Health Administration, Part 1926 Safety and Health Regulations for Construction, Subpart P, Excavation
Texas Health and Safety Code Title 9 Chapter 756 Subchapter C
Texas Government Code Chapter 2254

RELATED Cross Reference Materials
Standard Specification Item No. 509S, "Excavation Safety Systems"

Texas Department of Transportation Standard Specifications
For Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 104	Removing Concrete
Item 110	Excavation
Item 402	Trench Excavation Protection

City of Austin Standard Specification Items

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 130S	Borrow

Item No. 132S	Embankment
Item No. 201S	Subgrade Preparation
Item No. 402S	Controlled Low Strength Material
Item No. 501S	Jacking or Boring Pipe
Item No. 503S	Frames, Grates, Rings and Covers
Item No. 504S	Adjusting Structures
Item No. 505S	Concrete Encasement and Encasement Pipe
Item No. 506	Manholes
Item No. 507S	Bulkheads
Item No. 510	Pipe
Item No. 511S	Water Valves
Item No. 593S	Concrete Retards
Item No. 594S	Gabions and Revet Mattresses

ITEM NO. 510 - PIPE 12-8-18

510.1 - Description

This item governs the furnishing and installing all pipe and/or materials for constructing pipe mains, sewers, laterals, stubs, inlet leads, service connections, culverts, temporary service lines and temporary diversion lines, including all applicable Work such as excavating, bedding, jointing, backfilling materials, tests, concrete trench cap, concrete cap and encasement, etc., prescribed under this item in accordance with the provisions of the Edwards Aquifer Protection Ordinance, when applicable, and City of Austin Utility Criteria Manual, Section 5, "Working in Public Rights-of-Way." The pipe shall be of the sizes, types, class and dimensions indicated or as designated by the E/A and shall include all joints or connections to new or existing mains, pipes, sewers, manholes, inlets, structures, etc., as may be required to complete the Work in accordance with specifications and published standard practices of the trade associations for the material specified and to the lines and grades indicated. This item shall include any pumping, bailing, and drainage when indicated or applicable. Unless otherwise provided, this item shall consist of the removal and disposition of trees, stumps and other obstructions, old structures or portions thereof such as house foundations, old sewers, masonry or concrete walls, the plugging of the ends of abandoned piped utilities cut and left in place and the restoration of existing utilities damaged in the process of excavation, cutting and restoration of pavement and base courses, the furnishing and placing of select bedding, backfilling and cement or lime stabilized backfill, the hauling and disposition of surplus materials, bridging of trenches and other provisions for maintenance of traffic or access as indicated.

510.2 - Materials

The Contractor shall submit descriptive information and evidence that the materials and equipment the Contractor proposes for incorporation into the Work are of the kind and quality that satisfies the specified functions and quality. Austin Water Utility Standard Products Lists (SPL) form a part of the Specifications. Contractors may, when appropriate, elect to use products from the SPL; however, submittal to the E/A is still required. Should the Contractor elect to use any materials from these lists, each product shall be completely and clearly identified by its corresponding SPL number when making the product submittal. This will expedite the review process in which the E/A, and, if necessary, the Austin Water Utility Standard Products Committee, decides whether the products meet the Contract requirements and the specific use foreseen by the E/A in the design of this engineered Project. The purpose of the SPL's is to expedite review, by the E/A and, if necessary, the Austin Water Utility Standard Products Committee, of Contractor product submittals. The SPL's shall not be considered as being a pre-approved list of products necessarily meeting the requirements of the Project. Items contained in the SPL cannot be substituted for items shown on the Drawings, or called for in the specifications, or specified in the Bidding Requirements, Contract Forms and Conditions of Contract, unless approved by the E/A in conjunction with the Austin Water Utility Standard Products Committee. The Standard Product List current at the time of plan approval will govern.

(1) Concrete

Concrete shall conform to Item No. 403S, "Concrete for Structures".

(2) Coarse Aggregate

Coarse aggregate shall conform to Item No. 403S, "Concrete for Structures" or one of the following:

(a) Pipe Bedding Stone

Pipe bedding stone shall be clean gravel, crushed gravel or crushed limestone, free of mud, clay, vegetation or other debris, conforming to ASTM C 33 for stone quality. Size gradation shall conform to ASTM C-33 No. 57 or No. 67 or the following Table:

SIEVE SIZE	% RETAINED BY WEIGHT
1½″	0
1″	0—10
½′	40—85
#4	90—100
#8	95—100

(b) Foundation Rock

Foundation rock shall be well graded coarse aggregate ranging in size from 2 to 8 inches.

(c) Flexible Base

Flexible base shall conform to Item No. 210S, "Flexible Base".

(3) Fine Aggregate

(a) Concrete and Mortar Sand

Fine aggregate shall conform to Item No. 403S, "Concrete for Structures".

(b) Bedding Sand

Sand for use as pipe bedding shall be clean, granular and homogeneous material composed mainly of mineral matter, free of mud, silt, clay lumps or clods, vegetation or debris. The material removed by decantation TxDOT Test Method Tex-406-A, plus the weight of any clay lumps, shall not exceed 4.5 percent by weight.

The resistivity shall not be less than 3000 ohms-cm as determined by TxDOT Test Method Tex-129-E. Size gradation of sand for bedding shall be as follows:

GRADATION TABLE	
SIEVE SIZE	% RETAINED BY WEIGHT
¼″	0
#60	75—100
#100	95—100

(c) Stone Screenings

Stone screenings shall be free of mud, clay, vegetation or other debris, and shall conform to the following Table:

SIEVE SIZE	% PASSING
3/8 ″	100
No. 4	95 to 100
No. 8	80 to 100
No. 16	50 to 85
No. 30	25 to 60
No. 50	10 to 30
No. 100	2 to 10

All screenings shall be the result of a rock crushing operation.

(4) Controlled Low Strength Material

Controlled Low Strength Material (CLSM) shall conform to Item 402S, "Controlled Low Strength Material.

(5) Pea Gravel

Pea gravel bedding shall be clean washed material, hard and insoluble in water, free of mud, clay, silt, vegetation or other debris. Stone quality shall meet ASTM C 33. Size gradation shall be as follows:

SIEVE SIZE	% RETAINED BY WEIGHT
¾″	0
½″	0—25
¼″	90—100

(6) Select Backfill or Borrow

This material shall consist of borrow or suitable material excavated from the trench. It shall be free of stones or rocks over 8 inches and shall have a plasticity index of less than 20. The moisture content at the time of compaction shall be within 2 percent of optimum as determined by TxDOT Test Method Tex-114-E. Sandy loam borrow will not be allowed unless shown on the Drawings or authorized by the E/A.

All suitable materials from excavation operations not required for backfilling the trench may be placed in embankments, if applicable. All unsuitable materials that cannot be made suitable shall be considered surplus excavated materials as described in 510.3(13). The Contractor may, if approved by the engineer, modify unsuitable materials to make them suitable for use. Modification may include drying, removal or crushing of over-size material, and lime or cement treatment.

(7) Cement Stabilized Backfill

When indicated or directed by the E/A, all backfill shall be with cement-stabilized backfill rather than the usual materials. Unless otherwise indicated, cement stabilized backfill material shall consist of a mixture of the dry constituents described for Class J Concrete. The cement and aggregates shall be thoroughly dry mixed with no water added to the mixture except as may be directed by the E/A.

(8) Pipe

General

Fire line leads and fire hydrant leads shall be ductile iron. Domestic water services shall not be supplied from fire service leads, unless the domestic and fire connections are on separately valved branches with an approved backflow prevention device in the fire service branch. All wastewater force mains shall be constructed of ductile iron pipe Pressure Class 250 minimum for pipe greater than 12-inch size and Pressure Class 350 for pipe 12-inch size and smaller. Wastewater pipe shall be in accordance with Austin Water Utility's Standard Products List SPL WW-534 and shall have a corrosion resistant interior lining acceptable to the Owner.

All water pipe within utility easements on private property shall be Ductile Iron Pipe, Pressure Class 350 minimum for pipe 12-inch size and smaller and Pressure Class 250 minimum for pipe greater than 12-inch size wrapped as indicated. For sizes over 24 inches, Concrete Pressure Pipe, steel cylinder type, conforming to the requirements of AWWA C-301 will be acceptable.

There may be no service connections to Concrete Pressure Pipe installed in utility easements on private property. Approved service clamps or saddles shall be used when tapping ductile iron pipe 12 inch size and smaller. All service tubing (¾ inch thru 2 inches) installed in utility easements on private property shall be 150 psi annealed seamless Type K copper tubing with no sweat or soldered joints.

All reclaimed water mains shall be constructed of ductile iron pipe, Pressure Class 350 minimum for pipe 12-inch size and smaller and pressure class 250 for pipe greater than 12-inch size. For mains 12-inch size and smaller, PVC pipe, conforming to the requirements of AWWA C-900, DR 14 shall be acceptable. Reclaimed water pipe shall be manufactured purple, painted purple, or wrapped in purple polyethylene film wrap.

Manufacturers of concrete pipe and pipe larger than 24-inch diameter shall have a quality control program consisting of one or more of the following: 1) a quality management system certified by the American National Standards Institute (ANSI) or National Sanitation Foundation (NSF) to comply with ISO 9001:2000, 2) a quality management system certified by the QCast

Program following the requirements of the ACPA Plant Certification Manual, 3) a quality management system certified by the National Precast Concrete Association 4) a quality control program approved by the OWNER prior to submittal of bids for the PROJECT, or 5) an independent, third party quality control testing and inspection firm for testing and inspecting pipe produced for the PROJECT and approved by the OWNER prior to submittal of bids for the PROJECT. All such quality control programs shall be paid for by the manufacturer. It is the intent of this requirement that the manufacturer will document all appropriate tests and inspections with sampling and inspection criteria, frequency of testing and inspection, date of testing and inspection and date on which every piece was manufactured. Required testing and inspection, including that by an independent, third party, shall be performed full-time during production of pipe for the PROJECT. When requested by the OWNER, the manufacturer will provide copies of test data and results and inspection reports with the shipment of pipe for the PROJECT. Test data and results and inspection reports shall be traceable to specific pipe lots or pieces. Owner approval of the manufacturer's quality control program will expire after three years, at which time the manufacturer must present a current quality control program for approval in order to retain listing on the applicable SPL. Owner approval of the Concrete Pipe manufacturer's quality control program will expire after three years, at which time the manufacturer must present a current quality control program for approval.

The quality of materials, the process of manufacture and the finished pipe shall be subject to inspection and approval by the E/A at the pipe manufacturing plant and at the project site prior to and during installation. Plant inspections shall be conducted at the discretion of the City Representative. Only manufacturers having a quality control program of the type described above will be considered as approved providers of concrete pipe and pipe products as listed in the Standard Products List (SPL).

All water distribution pipe and fittings shall be listed in the Fire Protection Equipment Directory published by the Underwriter's Laboratories, Inc., or shall be Factory Mutual approved for fire service. All water pipe and related products shall be registered by the National Sanitation Foundation as having been certified to meet NSF/ANSI Standard 61.

(a) Reserved

(b) Iron Pipe

Iron pipe shall be ductile iron pipe meeting all requirements of standards as follows:

-For push-on and mechanical joint pipe: AWWA C-151

-For flanged pipe: AWWA C-115

Barrels shall have a nominal thickness required by Table 1 of AWWA C-115, which thickness corresponds to Special Class 53 in sizes through 54 inch, and Class 350 in 60 and 64-inch sizes. Flanges shall be ductile iron (gray iron is not acceptable); they shall be as shown in ANSI/AWWA C115/A21.15 and shall conform to dimensions shown in Table 2 and Figure 1 of AWWA C115. These flanges are the same in all respects as flanges shown in ANSI/AWWA C110/A21.10 for fittings and are standard for all flanges used with pipe, valve, and equipment units in the City of Austin water distribution and wastewater force main systems. Flanges shall be fabricated and attached to the pipe barrels by U.S. fabricators using flanges and pipe barrels of U.S. manufacture. If fabrication is to be by other than the pipe barrel manufacturer, a complete product submittal and approval by the Austin Water Utility will be required. Additionally, such fabricator shall furnish certification that each fabricated joint has been satisfactorily tested hydrostatically at a minimum pressure of 300 psi.

-Linings and Coating:

Interior surfaces of all iron potable or reclaimed water pipe shall be cement-mortar lined and seal coated as required by AWWA C104. Interior surfaces of all iron wastewater line and force main pipe shall be coated with a non-corrosive lining material as indicated on Austin Water Utility's Standard Products List SPL WW-534. Pipe exteriors shall be coated as required by the applicable pipe specification. The type and brand of interior lining shall be clearly marked on the outside of the pipe and fittings. Except as authorized by the E/A, only one type and brand of pipe lining shall be used on a given project.

Except as described above for flanged pipe (Thickness Class 53) and where not otherwise indicated, ductile iron pipe shall be minimum Class 250 as defined by ANSI/AWWA C150/A21.50-current; all ductile iron pipe and flanges shall meet the following minimum physical requirements:

Grade 60-42-10:

-Minimum tensile strength: 60,000 psi (414 mPa).

-Minimum yield strength: 42,000 psi (290 mPa).

-Minimum elongation: 10 percent.

The flanges for AWWA C115 pipe may be also be made from:

Grade 70-50-05:

-Minimum tensile strength: 70,000 psi (483 mPa).

-Minimum yield strength: 50,000 psi (345 mPa).

-Minimum elongation: 5 percent.

1. Ductile Iron Fittings:

   Fittings shall be push-on, flanged or mechanical joint as indicated or approved and shall meet all requirements of standards as follows:

   -Sizes 4 inch through 24 inch: AWWA C-110 or AWWA C-153

   -Sizes larger than 24 inch: AWWA C-110.

   -Lining and Coating:

   Interior surfaces or all iron potable/reclaimed water pipe fittings shall be lined with cement- mortar and seal coated as required by AWWA C104. Interior surfaces of all iron wastewater and force main fittings shall be coated with a non-corrosive lining material acceptable to Owner. Fitting exteriors shall be coated as required by the applicable pipe specification.

2. Joint Materials

   Gaskets for mechanical joints shall conform to ANSI/AWWA A21.11/C-111.

   Joining of slip joint iron pipe shall, without exception, be accomplished with the natural or synthetic rubber gaskets of the manufacturer of that particular pipe being used. A joint lubricant shall be used and applicable recommendations of the manufacturer shall be followed.

   Gaskets for flanged joints shall be continuous full face gaskets, of 1/8 inch minimum thickness of natural or synthetic rubber, cloth-reinforced rubber or neoprene material,

preferably of deformed cross section design and shall meet all applicable requirements of ANSI/AWWA A21.11/C-111 for gaskets. They shall be manufactured by, or satisfy all recommendations of, the manufacturer of the pipe/fittings being used and be fabricated for use with Class 125 ANSI B16.1 flanges.

Tee-head bolts, nuts and washers for mechanical joints shall be high strength, low alloy, corrosion resistant steel stock equal to "COR-TEN A" having UNC Class 2 rolled threads or alloyed ductile iron conforming to ASTM A 536; either shall be fabricated in accordance with ANSI/AWWA A21.11/C-111.

Hex head bolts and nuts shall satisfy the chemical and mechanical requirements of ASTM A449 SAE Grade 5 plain, and shall be fabricated in accordance with ASTM B 18.2 with UNC Class 2 rolled threads.

Either Tee-Head or Hex-Head bolts, nuts and washers as required, shall be protected with bonded fluoro-polymer corrosion resistant coating where specifically required by the E/A.

All threaded fasteners shall be marked with a readily visible symbol cast, forged or stamped on each nut and bolt, which will identify the fastener material and grade. The producer and the supplier shall provide adequate literature to facilitate such identification; painted markings are not acceptable.

3. Polyethylene Film Wrap

All iron pipe, fittings and accessories shall be wrapped with standard 8 mil (minimum) low density polyethylene film or 4-mil (minimum) cross laminated high-density polyethylene conforming to AWWA C-105, with all edges overlapped and taped securely with duct tape to provide a continuous wrap to prevent contact between the piping and the surrounding backfill. Repair all punctures of the polyethylene, including those caused in the placement of bedding aggregates, with duct tape to restore the continuous protective wrap before backfilling. Polyethylene film wrap for reclaimed water pipe shall be purple.

4. Marking

Each pipe joint and fitting shall be marked as required by the applicable AWWA specification. This includes in all cases: Manufacturer's identification, Country where cast, year of casting, and "DUCTILE" or "DI". Barrels of flanged pipe shall show thickness class; others shall show pressure class. The flanges of pipe sections shall be stamped with the fabricators identification; fittings shall show pressure rating, the nominal diameter of openings and the number of degrees for bends. Painted markings are not acceptable.

5. Warning Tape

Warning tape for identifying restrained joint pipe and fittings shall be yellow and shall have black lettering at least 2inches high that reads "Restrained Joint / Junta de Restriccion" at intervals not exceeding 24 inches. The warning tape shall be polypropylene having a minimum thickness of 2 mils, a minimum width of 3 inches, and adhesive backing on the side opposite the lettering.

(c) Concrete

1. General

Pipe shall conform to ASTM C 76 for Circular Pipe. Concrete pipe smaller than 12 inches in diameter shall conform to ASTM C 14, Extra Strength. All pipe shall be machine made or cast by a process which will provide uniform placement of the

concrete in the form and compaction by mechanical devices, which will assure a dense concrete. Concrete shall be mixed in a central batch plant or other approved batching facility from which the quality and uniformity of the concrete can be assured. Transit mixed concrete shall not be acceptable for use in precast pipe. The pipe shall be Class III or the class indicated. Storm sewer pipe shall be of the tongue and groove or 0-ring joint design. Wastewater pipe shall be of the 0-ring joint design; it shall be acceptably lined for corrosion protection.

2. Marking

   Each joint of pipe shall be marked with the pipe class, the date of manufacture, the manufacturer's name or trade mark, diameter of pipe and orientation, if required.

   Pipe marking shall be waterproof and conform to ASTM C 76.

3. Minimum Age for Shipment

   Pipe shall be considered ready for shipment when it conforms to the tests specified in ASTM C 76.

4. Joint Materials

   When installing storm sewers (or storm drains), the Contractor shall have the option of using joints with preformed flexible joint sealants or with rubber gaskets. Preformed flexible joint sealants for storm drain joints shall comply with ASTM C990, and rubber gaskets for storm drain joints shall comply with ASTM C 1619. Mortar shall not be used to seal pre-fabricated joints. Pipe manufacturer shall be responsible for submitting to the Owner a detailed design of the joint upon request. The pipe manufacturer shall be responsible for submitting to the Owner a complete list of joint sizes showing the minimum size of material to be used with each size joint, along with complete instructions on recommended installation procedures. Quality control testing at the manufacturing plant shall be in accordance with Texas Department of Transportation (TxDOT) Departmental Materials Specifications (DMS) 7310, "Reinforced Concrete Pipe And Machine-Made Precast Concrete Box Culvert Fabrication And Plant Qualification". The pipe manufacturer shall be verified as compliant with TxDOT DMS 7310 at time of pipe delivery to the jobsite.

   a. Mortar

      Mortar for joints shall meet the requirements set forth below in "Mortar".

   b. Cold Applied Preformed Plastic Gaskets

      Cold Applied Plastic Gaskets shall be suitable for sealing joints of tongue and groove concrete pipe. The gasket sealing the joint shall be produced from blends of refined hydrocarbon resins and plasticizing compounds reinforced with inert mineral filler and shall contain no solvents, irritating fumes or obnoxious odors. The gasket joint sealer shall not depend on oxidizing, evaporating or chemical action for its adhesive or cohesive strength and shall be supplied in extruded rope form of suitable cross section. The size of the plastic gasket joint sealer shall be in accordance with the manufacturer's recommendations and sufficient to obtain squeeze-out around the joint. The gasket joint sealer shall be protected by a suitable removable wrapper that may be removed longitudinally without disturbing the joint sealer to facilitate application.

      The chemical composition of the gasket joint sealing compound as shipped shall meet the following requirements:

Composition (% by weight)	Test Method	Typical Analysis
Bitumen (petroleum plastic content)	ASTM D 4	50-70
Ash-inert Mineral Water	Tex-526-C	30-50
Volatile Matter (at 325 F)	Tex-506-C	2.0 Maximum

The gasket joint sealing compound when immersed for 30 days at ambient room temperature separately in 5 percent solution of caustic potash, a mixture of 5 percent hydrochloric acid, a 5 percent solution of sulfuric acid and a saturated H2S solution shall show no visible deterioration.

The physical properties of the gasket joint sealing compound as shipped shall meet the following requirements:

Property	Test Method	Typical Analysis	
		Minimum	Maximum
Specific Gravity at 77 F	ASTM D 71	1.20	1.35
Ductility at 77F (cm) Minimum	Tex-503-C	5.0	
Softening point	Tex-505-C	275 F	
Penetration:			
32 F (300 g) 60 sec	Tex-502-C	75	
77 F (150 g) 5 sec	Tex-502-C	50	120
115 F (150 g) 5 sec	Tex-502-C		150
Flashpoint C.O.C. F	Tex-504-C	600 F	
Fire Point C.O.C. F	Tex-504-C	625 F	

When constructing wastewater lines, the Contractor shall use 0-ring gasket joints conforming to ASTM C 443. Just before making a joint, the ends of the pipe shall be clean, dry, free of blisters or foreign matter and shall be wire brushed. For O-ring joints, the gasket and the inside surface of the bell shall be lubricated with a light film of soft vegetable soap compound to facilitate assembly of the joint. The rubber O-ring gasket shall be stretched uniformly in the joint. Wedge seal type ("Forsheda" pre-lubricated) gaskets may be used if joint details submitted are approved; installation of such gaskets shall be in strict accordance with the manufacturer's recommendations, and shall be the sole element depended upon to make the joint flexible and watertight.

In wastewater lines no horizontal or vertical angles in the alignment of pipes shall be permitted unless indicated. The spigot shall be centered in the bell, the pipe pushed uniformly home and brought into true alignment. Bedding material shall be placed and tamped against pipe to secure the joint.

5. Bends

When horizontal or vertical angles in the alignment of storm sewers are indicated, the bend or angle shall be constructed by cutting on a bias one or both pipes as may be required for the alignment indicated. The pipe cut shall be sufficiently long to allow exposing the reinforcement, which shall be bent, welded and incorporated into the pipe bend and reinforced concrete collar to maintain the structural integrity. The collar shall be 6 inches minimum, reinforced with #4 bars on a 1 foot center both directions. Builder's hardware cloth may be used on the outside of the joint to aid in holding cementing materials in place. Plywood, fiberboard or other materials placed on the inside of the pipe as formwork shall be removed as soon as the joint materials have obtained initial set, after which the inside surface of the pipe joint shall be finished smooth and true to the line and grade established. The Contractor may use prefabricated bends meeting the specification requirements in lieu of field fabricated bends. All bends shall be watertight, have a smooth flow line and be equal or greater in strength to the adjacent pipe.

Horizontal or vertical changes in alignment in wastewater lines shall be accomplished by use of manholes. With the E/A's approval, horizontal changes in alignment may be made by the "Joint Deflection" method. Joint deflection is limited by regulations of the Texas Commission on Environmental Quality (TCEQ) to 80 percent of the maximum recommended by the manufacturer; such deflection may not exceed 5 degrees at any joint. Changes in alignment using pipe flexure shall not be allowed.

6. Sulfide and Corrosion Control

All concrete pipe used for wastewater installations shall be protected from sulfide and corrosion damage by using limestone aggregate.

(d) Concrete Steel Cylinder (CSC) Pipe

1. General Requirements

The Contractor shall submit to the E/A for approval along with other required data a tabulated layout schedule with reference to the stationing and grade lines to be used.

The manufacturer shall furnish all fittings and special pieces required for closures, bends, branches, manholes, air valves, blow offs and connections to main line valves and other fittings as indicated.

Each pipe length, fitting and special joint shall have plainly marked on the bell end of the pipe, the head condition for which it is designed. In addition, marking shall be required to indicate the location of each pipe length or special joint in the line and such markings will be referenced to the layout schedules and drawings and submitted for approval.

Concrete steel cylinder fittings shall be tested as required by the applicable AWWA Standards.

2. Design and Inspection

Where not otherwise indicated, concrete steel cylinder pipe shall be Class 150, designed to withstand a vacuum of not less than 28 feet of water. Valve reducers, tees and outlets from a pipe run shall be designed and fabricated so that all stresses are carried by the steel forming the fitting or outlet.

Concrete steel cylinder pipe shall meet one of the following specifications:

AWWA C-301 - Any Size

AWWA C-303 - 24-inch maximum size

All pipe flanges shall conform to AWWA C-207, requirements for standard steel flanges of pressure classes corresponding to the pipe class.

Pipe to be installed in a tunnel or encasement shall be manufactured with 1 inch thick by 24-inch wide skid bands of mechanically impacted mortar in addition to the normal coating.

All concrete steel cylinder fittings shall be constructed of steel plate of adequate strength to withstand both internal pressure and external loading. Rod reinforcing shall not be used to figure the required steel area. The fittings shall have a concrete lining and 1 inch minimum coating of cement mortar, except that centrifugally spun lining need not be reinforced.

Minimum lining thickness shall be ½ inch for 16-inch pipe and ¾ inch for sizes larger than 16-inch pipe. Where it is impractical to place such concrete protection on interior surfaces of small outlets, 2 coats of "Bitumastic Tank Solution" shall be applied.

No fitting shall be made by cutting of standard pipe, except that outlets of less than 75 percent of the pipe diameter may be placed in a standard pipe. Beveled spigots may be placed on standard pipe.

3. Joint Materials

Joints shall be of the rubber gasket type conforming to the applicable standards. The inside and outside recesses between the bell and spigot shall be completely filled with Cement Grout in accordance with the pipe manufacturer's recommendations. Grout materials for jointing such pipe, unless otherwise indicated, shall be as described herein.

(e) Reserved

(f) Polyethylene Tubing

1. General

All polyethylene (PE) tubing shall be high density, high molecular weight plastic tubing meeting ASTM D2737; it shall be pressure rated at 200 psi working pressure and

must bear the National Sanitation Foundation seal of approval for potable water service. Pipe manufacturers shall be listed on SPL WW-65.

2. Materials

Polyethylene plastics shall be Designation PE3408 (Grade P34 with hydrostatic design stress of 800 psi).

3. Markings

Permanent marking on the tubing shall include the following at intervals of not more than 5 feet:

Nominal tubing size.

Type of plastic material, i.e., PE 3408.

Dimension Ratio (SDR) and pressure rating in psi for water at 73.4 F (e.g., SDR-9, 200 psi).

ASTM D 2737 designation.

Manufacturer's name or trademark, code and seal of approval (NSF mark) of the National Sanitation Foundation.

Polyethylene tubing for reclaimed service lines shall be purple.

4. Tube Size

PE tubing shall be standard copper tube size outside diameter, with Standard Dimension Ratio (SDR) of 9.

(g) Copper Tubing

All copper service tubing shall be annealed seamless Type K water tube meeting ASTM B88 and rated at 150 psi working pressure. The tubing shall be homogenous throughout and free from cracks, holes, crimping, foreign inclusions or other defects. It shall be uniform in density and other physical properties. Copper tubing for reclaimed water shall be wrapped in purple polyethylene film wrap. Pipe manufacturers shall be listed on SPL WW-613.

(h) Service Connection Fittings

All fittings used in customer service connection - tapping mains, connecting meters, etc. - must be currently listed on the applicable Water and Wastewater Standard Products List (SPL WW-68), or called for in the City of Austin Standard Details (520 - series).

(i) Brass Goods

All brass valves, couplings, bends, connections, nipples and miscellaneous brass pipe fittings and accessories used in meter connections, service lines, air release piping assemblies, and wherever needed in the water distribution system, shall conform to the City of Austin Standards, Austin Water Utility Standard Products Lists, and AWWA C-800, except as herein modified or supplemented.

Unless otherwise noted, the goods described herein shall be fabricated of standard Red Brass (Waterworks Brass) meeting ASTM B62 or B584, alloy 83600, consisting of 85 percent copper and 5 percent each of tin, lead and zinc.

Exposed threads shall be covered with plastic caps or sheeting to protect the threads.

Brass goods of each type and class shall be compatible with other fittings in common usage for similar purposes. Where not otherwise indicated, all such materials shall meet the following requirements:

Inlet threads of corporation valves shall be AWWA iron pipe (IP) thread (male); outlets of service saddles shall be tapped with AWWA IP thread (female). AWWA IP threads shall conform to ANSI/ASME B1.20.1 as required by AWWA C800 for "General Purpose (Inch) Pipe Threads". For ¾" and 1″ sizes only, corporation valve inlet threads, and the internal threads of saddles may be the AWWA taper thread conforming to AWWA C800 Figure 1 and Table 6. External threads of corporation valve inlet must be compatible with internal threads of the service saddle.

Connections of all new tubing, and of tubing repairs wherever possible, shall be by compression fittings. Compression connections shall be designed to provide a seal and to retain the tubing, without slippage, at a working water pressure of 150 psig.

Flanges shall conform to ANSI B16.1, Class 125, as to dimensions, drillings, etc. Copper tubing, when used, shall be Type K tubing having dimensions and weights given in Table A.1 of AWWA C800.

Brass pipe shall conform to the weights and dimensions for Extra Strong pipe given in Table A.2 of AWWA C800.

All fittings shall be suitable for use at hydrostatic working pressures up to 150 psig (hydrostatic testing of installed systems is at 200 psig).

(j) Reserved

(k) Polyvinyl Chloride Potable/Reclaimed Water Pipe

1. General

All polyvinyl chloride (PVC) potable/reclaimed water pipe shall be of the rigid (UNPLASTICIZED) type and must bear the National Sanitation Foundation seal of approval for potable water pipe. Each joint of pipe shall consist of single continuous extrusion; bells or other components attached by solvent welding are not acceptable. Pipe shall be pressure rated at 200 psi (SDR-14).

Pipe shall have push-on, rubber gasket joints of the bell and spigot type with thickened integral bells with rubber gasket joints. The wall thickness of each pipe bell and joint coupling must be greater than the standard pipe barrel thickness. Clearance must be provided in every gasket joint for both lateral pipe deflection and for linear expansion and contraction. Concrete thrust blocking shall be placed behind bends and tees. Concrete support cradles or blocking shall be required for support of all fire hydrants, valves and AWWA C110 fittings; such support shall be provided for AWWA C153 fittings when required by the E/A.

2. Applicable Specifications

Except as modified or supplemented herein, PVC pipe shall meet the following standards:

AWWA C-900, or SDR 14 for PVC Pressure Pipe, in 4, 6, 8 and 12 inch nominal sizes, having Cast Iron Pipe size outside diameters.

Fittings used with PVC Pressure pipe shall be AWWA C-110 or AWWA C-153 compact ductile iron fittings.

All pipe 4 inches and larger must be approved Underwriter's Laboratories for use in buried water supply and fire protection systems.

3. Material Requirements

All pipe and fittings shall be made from clean, virgin, NSF certified, Class 12454B PVC. Clean reworked materials generated from the manufacturers own production may be used within the current limits of the referenced AWWA C-900.

4. Marking

PVC for reclaimed piping shall be purple or wrapped in purple polyethylene film wrap.

Permanent marking on each joint of pipe shall include the following at intervals of not more than 5 feet:

Nominal pipe size and OD base (e.g., 4 CIPS).

Type of plastic material (e.g., PVC 12454B).

Standard Dimension Ratio and the pressure rating in psi for water at 73 F (e.g., SDR 18, 150 psi).

AWWA designation with which the pipe complies (e.g., AWWA C-900).

Manufacturer's name or code and the National Sanitation Foundation (NSF) mark.

5. Tracer Tape

Inductive Tracer Detection Tape shall be placed directly above the centerline of all non-metallic pipe a minimum of 12 inches below subgrade or, in areas outside the limits of pavement, a minimum of 18 inches below finished grade. The tracer tape shall be encased in a protective, inert, plastic jacket and color coded according to American Public Works Association Uniform Color Code. Except for minimum depth of cover, the tracer tape shall be placed according to manufacturer's recommendations. Manufacturers must be listed on SPL WW-597.

(l) Polyvinyl Chloride (PVC) Pipe (Nonpressure) and Fittings

1. General

PVC sewer and wastewater pipe and fittings 6 through 15 inch diameter shall conform to ASTM D 3034. Pipe shall have minimum cell classification of 12364 or 12454. Fittings shall have cell classification of 12454 or 13343. Pipe stiffness shall be at least 115 psi as determined by ASTM D 2412. Pipe manufacturers shall be on SPL WW-227, and fitting manufacturers shall be on SPL WW-227B.

PVC sewer and wastewater pipe and fittings 18 through 27 inch diameter shall conform to ASTM F 679. Pipe shall have minimum cell classification of 12364 or 12454. Pipe stiffness shall be at least 72 psi as determined by ASTM D 2412. Pipe manufacturers shall be on SPL WW-227A, and fitting manufacturers shall be on SPL WW-227B.

2. Joints

PVC pipe and fitting shall have elastomeric gasket joints conforming to ASTM D 3212. Gaskets shall conform to ASTM F 477.

3. Pipe Markings

Pipe meeting ASTM D 3034 shall have permanent marking on the pipe that includes the following at intervals of not more than 5 feet:

Manufacturer's name and/or trademark and code.

Nominal pipe size.

PVC cell classification per ASTM D 1784.

The legend "SDR-_ _ PVC Sewer Pipe" (SDR 26, 23.5. or less is required)

The designation "ASTM D 3034"

Pipe meeting ASTM F 679 shall have permanent marking that includes the following at intervals of not more than 5 feet:

Manufacturer's name or trademark and code

Nominal pipe size

PVC cell classification per ASTM D 1784

Pipe stiffness designation "PS _ _ PVC Sewer Pipe" (PS of at least 72 is required

The designation "ASTM F 679"

4. Fitting Markings

Fittings meeting ASTM D 3034 shall have permanent marking that includes the following:

Manufacturer's name or trademark

Nominal size

The material designation "PVC"

The designation, "ASTM F 679"

Fittings meeting ASTM F 679 shall have permanent marking that includes the following:

Manufacturer's name or trademark and code

Nominal size

The material designation "PVC"

The designation "ASTM F 679"

5. Tracer Tape

Inductive Tracer Detection Tape shall be placed directly above the centerline of all non-metallic pipe a minimum of 12 inches below subgrade or, in areas outside the limits of pavement, a minimum of 18 inches below finished grade. The tracer tape shall be encased in a protective, inert, plastic jacket and color coded according to American Public Works Association Uniform Color Code. Except for minimum depth of cover, the tracer tape shall be placed according to manufacturer's recommendations. Manufacturers must be listed on SPL WW-597.

(m) Steel Pipe

1. Standard Weight

   ASTM A 53, Schedule 40.

2. Extra Heavy Weight

   Seamless ASTM A 53, Schedule 80.

3. Encasement Pipe

   a. For direct-bury installations, pipe shall conform to ASTM A134 with minimum thickness of 3/8 inch (9.5 mm).

   b. For jacked installations, pipe shall conform to requirements on drawings.

4. Fittings

   Nipples and fittings extra strong Federal Specification WW-N 351 or WW-P 521.

5. Coatings

   Black or galvanized as indicated.

(n) Welded Steel Pipe and Fittings for Water-Pipe

1. General Reference Standards Specification.

   Specifications of the American Water Works Association (AWWA) listed below shall apply to this Section.

   C-200 Steel Water Pipe 6 inches and larger.

   C-205 Cement-Mortar Protective Lining and Coating for Steel Water Pipe, 4 inches and larger, Shop Applied.

   C-206 Field Welding of Steel Water Pipe.

   C-207 Steel Pipe Flanges for Waterworks Services, Sizes 4 inches through 144 inches.

   C-208 Dimensions for Steel Water Pipe Fittings.

   C-602 Cement-Mortar Lining of Water Pipelines, 4 inches and larger in Place.

2. Submittals

   Furnish Shop Drawings, product data, design calculations and test reports as described below:

   a. Certified copies of mill tests confirming the type of materials used in steel plates, mill pipe flanges and bolts and nuts to show compliance with the requirements of the applicable standards.

   b. Complete and dimensional working drawings of all pipe layouts. Shop Drawings shall include the grade of material, size, wall thickness of the pipe and fittings, type and location of fittings and the type and limits of the lining and coating systems of the pipe and fittings.

   c. Product data to show compliance of all couplings, supports, fittings, coatings and related items.

3. Job Conditions

a. The internal design pressure of all steel pipe and fittings shall be as indicated.

b. The interior of all steel pipe for potable water, 4 inches and larger, shall be cement-mortar lined.

4. Manufacturing

a. Description

Pipe shall comply with AWWA C-200.

(1) Circumferential deflection of all pipe in-place shall not exceed 2.0 percent of pipe diameter.

(2) Diameter

Nominal pipe diameter shall be the inside diameter of lining or pipe barrel, unless otherwise designated in Job Conditions.

b. Wall Thickness

(1) Steel pipe wall thickness shall be designed for the internal and external loads specified in this section. The cylinder thickness needed to resist internal pressure shall be based on an allowable stress in the steel equal to ½ the minimum yield stress of the material used.

5. Fittings

a. Welded

Fabricated steel fittings shall be of the same material as pipe and shall comply with AWWA C-208.

6. Flanges

a. Flanges shall comply with the requirements of AWWA C-207, Class D or Class E. The class shall be based on operating conditions and mating flanges of valves and equipment.

b. Gaskets shall be cloth-inserted rubber, 1/8 inch thick.

c. Flanges shall be flat faced with a serrated finish.

7. Pipe Joints

a. Lap Joints for Field Welding

(1) Lap joints for field welding shall conform to AWWA C-206. This item applies only to pipes 72 inches in diameter and larger.

(2) The bell ends shall be formed by pressing on a hydraulic expander or a plug die. After forming, the minimum radius of curvature of the bell end at any point shall not be less than 15 times the thickness of the steel shell. Bell ends shall be formed in a manner to avoid impairment of the physical properties of the steel shell. Joints shall permit a lap at least 1 ½ inches when assembled. The longitudinal or spiral weld on the inside of the bell end and the outside of the spigot end on each section of pipe shall be ground flush with the plate surface. The inside edge of the bell and the outside edge of the spigot shall be scarfed or lightly ground to remove the sharp edges or burrs.

b. Bell and Spigot Joints with O-Ring Gasket

(1) Bell and spigot joints with rubber gasket shall conform to AWWA C-200.

(2) The bell and spigot ends shall be so designed that when the joint is assembled, it will be self-centered and the gasket will be confined to an annular space in such manner that movement of the pipe or hydrostatic pressure cannot displace it. Compression of the gasket when the joint is completed shall not be dependent upon water pressure in the pipe and shall be adequate to ensure a watertight seal when subjected to the specified conditions of service. Bell and spigot ends shall be welded on preformed shapes. The bell and spigot ends shall conform to the reviewed Shop Drawings.

8. Interior and Exterior Protective Surface Coatings

a. Exterior Surface to be mortar coated shall conform to AWWA C-205 for shop application and AWWA C-602 for field application. Pipe materials shall be the product of an organization, which has had not less than 5 years successful experience manufacturing pipe materials, and the design and manufacture of the pipe, including all materials, shall be the product of one company.

b. All surfaces except as noted in c and d below shall receive shop application of mortar lining and coating.

c. Field Welded Joints. After installation, clean, line and coat unlined or uncoated ends adjacent to welded field joints, including the weld proper, as specified for pipe adjacent to the weld. Potable water only shall be used in the preparation of any cement, mortar, or grout lining.

d. Machined Surfaces. Shop coat machined surfaces with a rust preventative compound. After jointing surfaces, remaining exposed surfaces shall be coated per a) and b) above.

(o) Corrugated Metal Pipe

1. General

Pipe shall be corrugated continuous lock or welded seam helically corrugated pipe. Corrugated metal pipe may be galvanized steel, aluminized steel or aluminum conforming to the following:

Galvanized Steel AASHTO M 218

Aluminized Steel AASHTO M 274

Aluminum AASHTO M 197

Where reference is made herein to gage of metal, the reference is to U.S. Standard Gage for uncoated sheets. Tables in AASHTO M 218 and AASHTO M 274 list thickness for coated sheets in inches. The Tables in AASHTO M 197 list thickness in inches for clad aluminum sheets.

Sampling and testing of metal sheets and coils used for corrugated metal pipe shall be in accordance with TXDOT Test Method Tex-708-I.

Damaged spelter coating shall be repaired by thoroughly wire brushing the damaged area and removing all loose, cracked or weld-burned spelter coating. The cleaned area shall be painted with a zinc dust-zinc oxide paint conforming to Federal Specifications TT-P 641b. Damaged pipe shall be rejected and removed from the project.

Damaged aluminized coating shall be repaired in accordance with the manufacturer's recommendations.

The following information shall be clearly marked on each section of pipe:

Thickness and corrugations

Trade Mark of the manufacturer

Specification compliance

2. Fabrication

a. Steel Pipe

Galvanized or aluminized steel pipe shall be full circle or arch pipe conforming to AASHTO M 36, Type I or Type II as indicated.

It may be fabricated with circumferential corrugations; lap joint construction with riveted or spot welded seams or it may be fabricated with helical corrugations with continuous helical lock seam or ultra high frequency resistance butt-welded seams.

b. Aluminum Pipe

Pipe shall conform to AASHTO M 196, Type I, circular pipe or Type II, pipe arch as indicated. It may be fabricated with circumferential corrugations; lap joint construction with riveted or spot welded seams or it may be fabricated with helical corrugations with a continuous helical lock seam.

Portions of aluminum pipe that are to be in contact with high chloride concrete or metal other than aluminum, shall be insulated from these materials by a coating of bituminous material. The coating applied to the pipe or pipe arch to provide insulation between the aluminum and other material shall extend a minimum distance of 1 foot beyond the area of contact.

3. Selection of Gages

The pipe diameter, permissible corrugations and required gauges for circular pipe shall be as indicated on the drawings.

For pipe arch, the span, rise, gage, corrugation size and coating thickness shall be as shown on the drawings. A tolerance of plus or minus 1 inch or 2 percent of equivalent circular diameter, whichever is greater, will be permissible in span and rise, with all dimensions measured from the inside crests of the corrugations.

4. Joint Material

Except as otherwise indicated, coupling bands and other hardware for galvanized or aluminized steel pipe shall conform to AASHTO M 36 for steel pipe and AASHTO M 196 for aluminum pipe. Field joints for each type of corrugated metal pipe shall maintain pipe alignment during construction and prevent infiltration of soil material during the life of the installation.

Coupling bands shall be not more than 3 nominal sheet thickness lighter than the thickness of the pipe to be connected and in no case lighter than 0.052 inch for steel or 0.048 inch for aluminum.

Coupling bands shall be made of the same base metal and coating (metallic or otherwise) as the pipe.

Coupling bands shall lap equally on each of the pipes being connected to form a tightly closed joint after installation.

Pipes furnished with circumferential corrugations shall be field jointed with corrugated locking bands. This includes pipe with helical corrugations, which has reformed circumferential corrugations on the ends. The locking bands shall securely fit into at least one full circumferential corrugation on each of the pipe ends being coupled. The minimum width of the corrugated locking bands shall be as shown below for the corrugation which corresponds to the end circumferential corrugations on the pipes being joined:

10½ inches wide for 2 2/3 inches × ½-inch corrugations.

12 inches wide for 3 inches × 1 inch or 5 inches × 1-inch corrugations.

Helical pipe without circumferential end corrugations will be permitted only when it is necessary to join a new pipe to an existing pipe, which was installed with no circumferential end corrugations. In this event pipe furnished with helical corrugations at the ends shall be field jointed with either helically corrugated bands or with bands with projections or dimples. The minimum width of helically corrugated bands shall conform to the following:

12 inches wide for pipe diameters up to and including 72 inches.

14 inches wide for 1 inch deep helical end corrugations.

Bands with projections shall have circumferential rows of projections with one projection for each corrugation. The width of bands with projections shall be not less than the following:

12 inches wide for pipe diameters up to and including 72 inches.

The bands shall have 2 circumferential rows of projections.

16¼ inches wide for pipe diameters of 78 inches and greater.

The bands shall have 4 circumferential rows of projections.

Unless otherwise indicated, all bolts for coupling bands shall be ½-inch diameter. Bands 12 inches wide or less shall have a minimum of 2 bolts and bands greater than 12 inches wide shall have a minimum of 3 bolts.

Galvanized bolts may be hot dip galvanized conforming to AASHTO M 232, mechanically galvanized to provide the same requirements as AASHTO M 232 or electro-galvanized per ASTM A 164 Type RS.

5. Additional Coatings or Linings

a. Bituminous Coated

Bituminous Coated pipe or pipe arch shall be as indicated both as to base metal and fabrication and in addition shall be coated inside and out with a bituminous coating which shall meet the performance requirements set forth herein. The bituminous coating shall be 99.5 percent soluble in carbon bisulphide. The pipe shall be uniformly coated inside and out to a minimum thickness of 0.05 inch, measured on the crests of the corrugations.

The bituminous coating shall adhere to the metal tenaciously, shall not chip off in handling and shall protect the pipe from deterioration as evidenced by samples prepared from the coating material successfully meeting the Shock Test and Flow Test in accordance with Test Method Tex-522-C.

b. Paved Invert

Where a Paved Invert is indicated, the pipe or pipe arch, in addition to the fully coated treatment described above, shall receive additional bituminous material of the same specification as above, applied to the bottom quarter of the circumference to form a smooth pavement with a minimum thickness of 1/8 inch above the crests of the corrugations.

c. Cement Lined

(1) General

Except as modified herein, pipe shall conform to AASHTO M 36 for lock seam or welded helically corrugated steel pipe. Pipe shall be of full circle and shall be fabricated with two annular corrugations for purposes of joining pipes together with band couplers. Lock seams shall develop the seam strength as required in Table 3 of AASHTO M 36. Concrete lining shall conform to the following:

Composition

Concrete for the lining shall be composed of cement, fine aggregate and water that are well mixed and of such consistency as to produce a dense, homogeneous, non-segregated lining.

Cement

Portland Cement shall conform to AASHTO M 85.

Aggregate

Aggregates shall conform to AASHTO M 6 except that the requirements for gradation and uniformity of gradation shall not apply.

Mixture

The aggregates shall be sized, graded, proportioned and thoroughly mixed with such proportions of cement and water as will produce a homogenous concrete mixture of such quality that the pipe will conform to the design requirements indicated. In no case, however, shall the proportions of Portland Cement, blended cement or Portland Cement plus pozzolanic admixture be less than 470 lb/cu. yd of concrete.

Thickness

The lining shall have a minimum thickness of 1/8 inch above the crest of the corrugations.

Lining Procedures

The lining shall be plant applied by a machine traveling through a stationary pipe. The rate of travel of the machine and the rate of concrete placement shall be mechanically regulated so as to produce a homogenous nonsegregated lining throughout.

Surface Finish

The lining machine shall also mechanically trowel the concrete lining as the unit moves through the pipe.

Certification

Furnish manufacturer's standard certification of compliance upon request of the purchaser.

Joints

Pipe shall be joined together with coupling bands made from steel sheets to an indicated thickness of 0.064 inch (12 ga.). Coupling bands shall be formed with two corrugations that are spaced to provide seating in the third corrugation of each pipe end without creating more than ½ inch ± annular space between pipe ends when joined together.

Bands shall be drawn together by two ½ inch galvanized bolts through the use of a bar and strap suitably welded to the band.

When O-ring gaskets are indicated they shall be placed in the first corrugation of each pipe and shall be compressed by tightening the coupling band. Rubber O-ring gaskets shall conform to Section 5.9, ASTM C 361.

(2) Causes for Rejection

Pipe shall be subject to rejection on account of failure to conform to any of the indications. Individual sections of pipe may be rejected because of any of the following:

Damaged ends, where such damage would prevent making satisfactory joint.

Defects that indicate poor quality of work and could not be easily repaired in the field.

Severe dents or bends in the metal itself.

If concrete lining is broken out, pipe may be rejected or at the discretion of the E/A, repaired in the field in accordance with the manufacturer's recommendation.

Hairline cracks or contraction cracks in the concrete lining are to be expected and does not constitute cause for rejection.

d. Fiber Bonded

Where fiber bonded pipe is indicated, the pipe or pipe arch shall be formed from sheets whose base metal shall be as indicated. In addition, the sheets shall have been coated with a layer of fibers, applied in sheet form by pressing them into a molten metallic bonding. If a paved invert is indicated it shall be in accordance with the procedure outlined above. The test for spelter coating above is waived for fiber bonded pipe.

6. Slotted Drain Storm Sewers

The pipes for the slotted drain and slotted drain outfall shall be helically corrugated, lock seam or welded seam pipe. Materials and fabrication shall be in accordance with the above. The metal thickness shall be a minimum 16 gage.

The chimney assemblies shall be constructed of 3/16 inch welded plate or machine formed 14 gage galvanized steel sheets. The height of the chimney required shall be

as indicated. Metal for the welded plate slot shall meet the requirements of ASTM A 36 and the completed plate slot shall be galvanized after fabrication in accordance with ASTM A 123.

Weld areas and the heat affected zones where the slot is welded to the corrugated pipe shall be thoroughly cleaned and painted with a good quality asphalt base aluminum paint.

7. Mortar

Mortar shall be composed of 1 part Type I Portland Cement and 2 parts clean, sharp mortar sand suitably graded for the purpose and conforming in other respects to the provisions for fine aggregate of Item No. 403, "Concrete for Structures". Hydrated lime or lime putty may be added to the mix, but in no case shall it exceed 10 percent by weight of the total dry mix.

(9) Geotextile Filter Fabric for Pipe Bedding Material

Geotextile filter fabric for pipe bedding material shall be Hanes Geo Components - TerraTex NO4.5 (AOS US Standard Sieve 70) geotextile fabric or approved equal.

510.3 - Construction Methods

(1) General

Prior to commencing this Work, all erosion control and tree protection measures required shall be in place and all utilities located and protected as set forth in "General Conditions". Clearing the site shall conform to Item No. 102S, "Clearing and Grubbing". Maintenance of environmental quality protection shall comply with all requirements of "General Conditions" and Item No. 601S, "Salvaging and Placing Topsoil".

The Contractor shall Work such that a reasonable minimum of disturbance to existing utilities will result. Particular care shall be exercised to avoid the cutting or breakage of all existing utilities. If at any time the Contractor's operations damage the utilities in place, the Contractor shall immediately notify the owner of the utility to make the necessary repairs. When active wastewater sewer lines are cut in the trenching operations, temporary flumes shall be provided across the trench while open and the lines shall be restored when the backfilling has progressed to the original bedding lines of the sewer so cut.

The Contractor shall inform utility owners sufficiently in advance of the Contractor's operations to enable such utility owners to reroute, provide temporary detours or to make other adjustments to utility lines in order that the Contractor may Work with a minimum of delay and expense. The Contractor shall cooperate with all utility owners concerned in effecting any utility adjustments necessary and shall not hold the City liable for any expense due to delay or additional Work because of conflicts arising from existing utilities.

The Contractor shall do all trenching in accordance with the provisions and the directions of the E/A as to the amount of trench left unfilled at any time. All excavation and backfilling shall be accomplished as indicated and in compliance with State Statutes.

Where excavation for a pipe line is required in an existing City street, a street cut permit is required and control of traffic shall be as indicated in accordance with the Texas Manual on Uniform Traffic Control Devices.

Wherever existing utility branch connections, sewers, drains, conduits, ducts, pipes or structures present obstructions to the grade and alignment of the pipe, they shall be permanently supported, removed, relocated or reconstructed by the Contractor through cooperation with the owner of the utility, structure or obstruction involved. In those instances

where their relocation or reconstruction is impractical, a deviation from line and grade will be ordered by the E/A and the change shall be made in the manner directed.

Adequate temporary support, protection and maintenance of all underground and surface utility structures, drains, sewers and other obstructions encountered in the progress of the Work shall be furnished by, and at the expense of, the Contractor and as approved by the E/A.

Where traffic must cross open trenches, the Contractor shall provide suitable bridges in conformance with Standard 804S-4. Adequate provisions shall be made for the flow of sewers; drains and watercourses encountered during construction and any structures, which may have been disturbed, shall be satisfactorily restored upon completion of Work.

When rainfall or runoff is occurring or is forecast by the U.S. Weather Service, the Contractor shall not perform or attempt any excavation or other earth moving Work in or near the flood plain of any stream or watercourse or on slopes subject to erosion or runoff, unless given specific approval by the E/A. When such conditions delay the Work, an extension of time for working day contracts will be allowed in accordance with "General Conditions".

(2) Water Line/New Wastewater Line Separation

Separation between water, reclaimed water, and wastewater lines shall be provided as shown in the Drawings.

Crossings of water, reclaimed water, and wastewater lines shall conform to details in the Drawings.

Wastewater manholes within 9 feet of water and reclaimed water lines shall be made watertight according to details in the Drawings.

(3) Utility and Storm Sewer Crossings

When the Contractor installs a pipe that crosses under a utility or storm sewer structure and the top of the pipe is within 18 inches of the bottom of the structure, the pipe shall be backfilled as shown in the Drawings. When the Contractor installs a pipe that crosses under a utility or storm sewer structure that is not shown in the Drawings, the pipe shall be backfilled as directed by the Engineer. Payment for backfilling pipe at utility or storm sewer structures not shown in the Drawings shall be by Change Order.

(4) Trench Excavation

Excavation in a paved street shall be preceded by saw cutting completely through any asphaltic cement concrete or Portland cement concrete surface, base, or subbase to the underlying subgrade. This requirement shall not apply to excavations made with trenching machines that use a rotating continuous belt or chain for cutting and removing of material.

Underground piped utilities shall be constructed in an open cut in accordance with Federal regulations, applicable State Statutes conforming to Item No. 509S, "Excavation Safety Systems" and with a trench width and depth described below. When pipe is to be constructed in fill above the natural ground, Contractor shall construct embankment to an elevation not less than one foot above the top of the pipe, after which trench is excavated. Required vertical sides shall be sheeted and braced as indicated to maintain the sides of the required vertical excavation throughout the construction period. Adequacy of the design of sheeting and bracing shall be the responsibility of the Contractor's design professional. The Contractor shall be responsible for installation as indicated. After the pipe has been laid and the backfill placed and compacted to 12 inches above the top of the pipe, any sheeting, shoring and bracing required may be removed with special care to insure that the pipe is not disturbed. As each piece of sheeting is removed, the space left by its removal must be thoroughly filled and compacted with suitable material and provisions made to prevent the sides of the trench from caving until the

backfill has been completed. Any sheeting left in place will not be paid for and shall be included in the unit price bid for pipe.

(5) Trench Width

Trenches for water, reclaimed, and wastewater lines shall have a clear width on each side beyond the outside surfaces of the pipe bell or coupling of not less than 6 inches nor more than 12 inches.

Trenches for Storm Sewers up to 42 inches shall have a width of 1 foot on each side beyond the outside surfaces of the pipe. Pipes more than 42 inches shall have a trench width not to exceed 18 inches on each side beyond the outside surfaces of the pipe.

If the trench width within the pipe zone exceeds this maximum, the entire pipe zone shall be refilled with approved backfill material, thoroughly compacted to a minimum of 95 percent of maximum density as determined by TxDOT Test Method Tex-114-E and then re-excavated to the proper grade and dimensions. Excavation along curves and bends shall be so oriented that the trench and pipe are approximately centered on the centerline of the curve, using short lengths of pipe and/or bend fittings if necessary.

For all utilities to be constructed in fill above natural ground, the embankment shall first be constructed to an elevation not less than 1 foot above the top of the utility after which excavation for the utility shall be made.

(6) Trench Depth and Depth of Cover

All pipe and in-line appurtenances shall be laid to the grades indicated. The depth of cover shall be measured from the established finish grade, natural ground surface, subgrade for staged construction, street or other permanent surface to the top or uppermost projection of the pipe.

(a) Where not otherwise indicated, all potable/reclaimed water piping shall be laid to the following minimum depths:

1. Potable/reclaimed water piping installed in undisturbed ground in easements of undeveloped areas, which are not within existing or planned streets, roads or other traffic areas shall be laid with at least 36 inches of cover.

2. Potable/reclaimed water piping installed in existing streets, roads or other traffic areas shall be laid with at least 48 inches of cover below finish grade.

3. Unless approved by the E/A, installation of potable/reclaimed water piping in proposed new streets will not be permitted until paving and drainage plans have been approved and the roadway traffic areas excavated to the specified or standard paving subgrade, with all parkways and sidewalk areas graded according to any applicable provisions of the drainage plans or sloped upward from the curb line to the right-of-way line at a minimum slope of ¼ inch per foot. Piping and appurtenances installed in such proposed streets shall be laid with at least 36 inches of cover below the actual subgrade.

(b) Where not otherwise indicated, all wastewater piping shall be laid to the following minimum depths:

1. Wastewater piping installed in natural ground in easements or other undeveloped areas, which are not within existing or planned streets, roads or other traffic areas shall be laid with at least 42 inches of cover.

2. Wastewater piping installed in existing streets, roads or other traffic areas shall be laid with at least 66 inches of cover.

3. Wastewater piping installed in such proposed streets shall be laid with at least 48 inches of cover below the actual subgrade.

(7) Classification of Excavation

Excavation will not be considered or paid for as a separate item of Work, so excavated material will not be classified as to type or measured as to quantity. Full payment for all excavation required for the construction shall be included in the various unit or lump sum Contract prices for the various items of Work installed, complete in place. No extra compensation, special treatment or other consideration will be allowed due to rock, pavement, caving, sheeting and bracing, falling or rising water, working under and in the proximity of trees or any other handicaps to excavation.

(8) Dewatering Excavation

Underground piped utilities shall not be constructed or the pipe laid in the presence of water. All water shall be removed from the excavation prior to the pipe placing operation to insure a dry firm granular bed on which to place the underground piped utilities and shall be maintained in such unwatered condition until all concrete and mortar is set. Removal of water may be accomplished by bailing, pumping or by a well-point installation as conditions warrant.

In the event that the excavation cannot be dewatered to the point where the pipe bedding is free of mud, a seal shall be used in the bottom of the excavation. Such seal shall consist of Class B concrete, conforming to Item No. 403, "Concrete for Structures", with a minimum depth of 3 inches.

(9) Trench Conditions

Before attempting to lay pipe, all water, slush, debris, loose material, etc., encountered in the trench must be pumped or bailed out and the trench must be kept clean and dry while the pipe is laid and backfilled. Where needed, sump pits shall be dug adjoining the trench and pumped as necessary to keep the excavation dewatered.

Backfilling shall closely follow pipe laying so that no pipe is left exposed and unattended after initial assembly. All open ends, outlets or other openings in the pipe shall be protected from damage and shall be properly plugged and blocked watertight to prevent the entrance of trench water, dirt, etc. The interior of the pipeline shall at all times be kept clean, dry and unobstructed.

Where the soil encountered at established footing grade is a quicksand, saturated or unstable material, the following procedure shall be used unless other methods are indicated:

All unstable soils shall be removed to a depth of a minimum 2 feet below bottom of piped utility or as required to stabilize the trench foundation. Such excavation shall be carried out for the entire trench width.

All unstable soil so removed shall be replaced with a concrete seal, foundation rock or coarse aggregate materials placed across the entire trench width in uniform layers not to exceed 6 inches, loose measure and compacted by mechanical tamping or other means which shall provide a stable foundation for the utility.

Forms, sheathing and bracing, pumping, additional excavation and backfill required in unstable trench conditions shall be included in the unit price bid for pipe.

(10) Blasting

All blasting shall conform to the provisions of the "General Conditions" and/or "Public Safety and Convenience".

(11) Removing Old Structures

When out of service masonry structures or foundations are encountered in the excavation, such obstructions shall be removed for the full width of the trench and to a depth of 1 foot below the bottom of the trench. When abandoned inlets or manholes are encountered and no plan

provision is made for adjustment or connection to the new sewers, such manholes and inlets within the construction limits shall be removed completely to a depth 1 foot below the bottom of the trench. In each instance, the bottom of the trench shall be restored to grade by backfilling and compacting by the methods provided above. Where the trench cuts through storm or wastewater sewers which are known to be abandoned, these sewers shall be cut flush with the sides of the trench and blocked with a concrete plug in a manner satisfactory to the E/A. When old structures are encountered, which are not visible from the existing surface and are still in service, they shall be protected and adjusted as required to the finished grade.

(12) Lines and Grades

Grades, lines and levels shall conform to the General Conditions and/or "Grades, Lines and Levels". Any damage to the above by the Contractor shall be re-established at the Contractor's expense. The Contractor shall furnish copies of all field notes and "cut sheets" to the City.

The location of the lines and grades indicated may be changed only by direction of the E/A. It is understood that the Contractor will be paid for Work actually performed on the basis of the unit Contract prices and that the Contractor shall make no claim for damages or loss of anticipated profits due to the change of location or grade.

All necessary batter boards or electronic devices for controlling the Work shall be furnished by, and at the expense of, the Contactor. Batter boards shall be of adequate size material and shall be supported substantially. The boards and all location stakes must be protected from possible damage or change of location. The Contractor shall furnish good, sound twilled lines for use in achieving lines and grades and the necessary plummets and graduated poles.

The Contractor shall submit to the E/A at least 6 copies of any layout Drawings from the pipe manufacturer for review and approval. The Contractor shall submit the layout Drawings at least 30 days in advance of any actual construction of the project. The E/A will forward all comments of the review to the Contractor for revision. Revisions shall be made and forwarded to the E/A for his acceptance. Prior to commencement of the Project, reviewed layout Drawings will be sent to the Contractor marked for construction.

Should the Contractor's procedures not produce a finished pipe placed to grade and alignment, the pipe shall be removed and relayed and the Contractors procedures modified to the satisfaction of the E/A. No additional compensation shall be paid for the removal and relaying of pipe required above.

(13) Surplus Excavated Materials

Excess material or material which cannot be made suitable for use in embankments will be declared surplus by the E/A and shall become the property of the Contractor to dispose of off site at a permitted fill site, without liability to the City or any individual. Such surplus material shall be removed from the Work site promptly following the completion of the portion of the utility involved.

(14) Pipe Bedding Envelope

Pipe shall be installed in a continuous bedding envelope of the type shown on the drawings or as described herein. The envelope shall extend the full trench width, to a depth of at least 6 inches (150 mm) below the pipe and to a depth of the springline of storm water pipe and at least 12 inches (300 mm) above water, reclaimed, and wastewater pipe.

(a) Standard Bedding Materials

USE/PIPE	Cement	Natural or	Pea	PIPE BEDDING STONE

MATERIAL	Stabilized Backfill	Mf'd Sand	Gravel	Uncrushed Gravel	Crushed Gravel	Crushed Stone	Stone Screenings
WATER and RECLAIMED WATER							
Welded Steel	X					X	
Service Tubing ¾" to 2½"		X	X				X
WATER and RECLAIMED WATER (Ductile Iron)							
Up to 15 Inch ID		X	X	X			X
Larger Than 15 Inch ID			X	X			
WATER and RECLAIMED WATER (PVC only) and WASTEWATER							
Up to 15 Inch ID		X	X	X	X	X	X
Larger Than 15 Inch ID			X	X	X	X	
STORMWATER							
Concrete		X	X	X	X	X	X
Metal		X	X	X			X

(b) General requirements and limitations governing bedding selection.

(1) Crushed gravel or crushed stone shall not be used with polyethylene tubing or polyethylene film wrap.

(2) Uncrushed gravel may be used with polyethylene film wrap in trenches up to 6 feet deep and in deeper trenches where ample trench width, a tremmie, or conditions will allow controlled placement of the gravel without damaging the polyethylene wrap.

(3) Bedding shall be placed in lifts not exceeding 8 inches loose thickness and compacted thoroughly to provide uniform support for the pipe barrel and to fill all voids around the pipe.

(4) Pea Gravel or bedding stone shall be used in blasted trenches.

(c) Requirements to prevent particle migration.

Bedding material shall be compatible with the materials in the trench bottom, walls and backfill so that particle migration from, into or through the bedding is minimized. The E/A may require one or more of the following measures to minimize particle migration: use of impervious cut-off collars; selected bedding materials, such as pea gravel or bedding stone mixed with sand; filter fabric envelopment of the bedding; cement stabilized backfill; or other approved materials or methods. Measures to minimize particle migration will be shown on the Drawings or designated by the E/A, and, unless provisions for payment are provided in the contract documents, the cost of these measures shall be agreed by change order. The following limitations shall apply.

(1) Sand, alone, shall not be used in watercourses, in trenches where groundwater is present, or in trenches with grades greater than 5 percent.

(2) Pea gravel or bedding stone, alone, shall not be used in the street right-of-way within 5 feet of subgrade elevation in trenches that are 3 feet or wider.

(3) Each gravel or bedding stone, alone, shall not be used where the trench bottom, sides, or backfill is composed of non-cementitious, silty or sandy soils having plasticity indices less than 20, as determined by the E/A.

(4) Sand, alone, shall not be used for installation of concrete storm water pipe unless the bedding envelope is wrapped with a geotextile membrane and the joints of the stormdrain conduit are wrapped to prevent the migration of fines into the bedding envelope and into the stormdrain conduit.

(5) For concrete storm water pipe, if pea gravel, uncrushed gravel, crushed gravel, crushed stone, or combination thereof is used for pipe bedding material, a geotextile filter fabric shall be placed around the perimeter of the joint.

(15) Laying Pipe

No pipe shall be installed in the trench until excavation has been completed, the bottom of the trench graded and the trench completed as indicated.

Laying of corrugated metal pipes on the prepared foundation shall be started at the outlet end with the separate sections firmly joined together, with outside laps of circumferential joints pointing upstream and with longitudinal laps on the sides. Any metal in joints, which is not protected by galvanizing, shall be coated with suitable asphaltum paint. Proper facilities shall be provided for hoisting and lowering the sections of pipe into the trench without damaging the pipe or disturbing the prepared foundation and the sides of the trench. Any pipe which is not in alignment or which shows any undue settlement after laying or damage, shall be taken up and re-laid without extra compensation.

Multiple installations of corrugated pipe or arches shall be laid with the centerlines of individual barrels parallel. When not otherwise indicated, clear distances of 2 feet between outer surfaces of adjacent pipes shall be maintained.

No debris shall remain in the drainways or drainage structures.

All recommendations of the manufacturer shall be carefully observed during handling and installation of each material. Unless otherwise indicated, all materials shall be delivered to the project by the manufacturer or agent and unloaded as directed by the Contractor. Each piece shall be placed facing the proper direction near to where it will be installed.

The interior of all pipe, fittings and other accessories shall be kept free from dirt and foreign matter at all times and stored in a manner that will protect them from damage. Stockpiled materials shall be stacked so as to minimize entrance of foreign matter.

The interior of all pipeline components shall be clean, dry and unobstructed when installed.

Piping materials shall not be skidded or rolled against other pipe, etc. and under no circumstances shall pipe, fittings or other accessories be dropped or jolted.

During handling and placement, materials shall be carefully observed and inspected and any damaged, defective or unsound materials shall be marked, rejected and removed from the job site. Minor damage shall be marked and repaired in a manner satisfactory to the E/A. Joints, which have been placed, but not joined, backfilled, etc., shall be protected in a manner satisfactory to the E/A.

(16) Assembling of Pipe

Angular spacing of all joints shall meet the manufacturer's recommendations for the pipe and accessories being used. Side outlets shall be rotated so that the operating stems of valves shall be vertical when the valves are installed. Pressure pipe shall be laid with bell ends facing the direction of pipe installation. Pipe end bells shall be placed upgrade for all wastewater lines.

Orientation marks, when applicable, shall be in their proper position before pipe is seated.

Before joining any pipe, all foreign matter, lumps, blisters, excess coal tar coating, oil or grease shall be removed from the ends of each pipe and the pipe ends shall then be wire brushed and wiped clean and dry. Pipe ends shall be kept clean until joints are made.

Every precaution shall be taken to prevent foreign material from entering the pipe during installation. No debris, tools, clothing or other materials shall be placed in the pipe.

(17) Joints

(a) Mortar (Storm Drain joints only)

Pipe ends shall be clean, free of asphalt or other contaminants, which will inhibit the bond of the mortar to the pipe. The pipe ends shall be moistened immediately prior to placing the mortar in the joint.

(b) Cold Applied Preformed Plastic Gaskets (Storm Drain joints only)

The pipe ends shall be clean and the joint material applied to the dry pipe. In cold weather, the joint material shall be heated to facilitate the seal of the joint.

(c) O-Ring and Push-on Joints

Just before making a joint the ends of the pipe shall be clean, dry, free of any foreign matter, lump blisters, excessive coal tar coating and grease or oil and shall be wire brushed. The gasket and the inside surface of the bell shall be lubricated with a light film of soft vegetable soap compound (Flax Soap) to facilitate telescoping the joints. The rubber gasket if not factory installed shall be stretched uniformly as it is placed in the spigot groove to insure a uniform volume of rubber around the circumference of the groove. The spigot shall be centered in the bell, the pipe pushed home uniformly and brought into true alignment. Bedding material shall be placed and tamped against pipe to secure the joint. Care should be taken to prevent dirt or foreign matter from entering the joint space.

(d) Bolted Joints

All flanged, mechanical or other bolted joints shall be joined with nuts and bolts and be coated as indicated above in Iron Pipe.

(e) Storm Drain Joints

Storm drain joints sealed with preformed flexible joint sealants shall be provided and installed in compliance with ASTM C990. Storm drain joints sealed with rubber gaskets shall comply with ASTM C443 Install joint sealants in accordance with the pipe and joint sealant manufacturers' recommendations. Place the joint sealer so that no dirt or other deleterious materials come in contact with the joint sealing material. Pull or push home the pipe with enough force to properly seal the joint with the final joint opening (gap) on the inside of the installed pipe being less than or equal to the pipe manufacturer's recommended dimensions. Protrusion of joint material greater than 1/8 " into the interior of the pipe will not be accepted. Excess joint material will be removed to within 1/8 "of pipe surface. Observe joint sealant manufacturer's recommendations for installation temperature of the joint sealant. Apply joint sealant to pipe joint immediately before placing pipe in trench, and then connect pipe to previously laid pipe.

If inspection (video or other means) reveal C-990 joints that show signs of backfill infiltration, or where joints or conduits exhibit excessive joint gap or are otherwise defective, then the contractor has the following options:

1. Conduits less than 36-inches in any dimension: pour a concrete collar around the joint or wrap joint with a wrap meeting requirements of ASTM C-877 or approved equal.
2. Conduits greater than or equal to 36-inches in all dimensions: repair joints using joint repair techniques recommended by the manufacturer to achieve a completed system that meets all Contract requirements.

(18) Pressure Pipe Laying

(a) Grout for Concrete Steel Cylinder Pipe (CSC) and Welded Steel Pipe

Aggregate, cement, etc., shall be as indicated in "Mortar" herein. Potable water shall be used in the preparation of any cement, mortar, or grout lining.

Grout shall be poured into the recess between the bell and spigot on the outside of the pipe and contained by a joint wrapper ("diaper") recommended by the pipe manufacturer. The wrapper shall have a minimum width of 7 inches for 30 inch and smaller and 9 inches for larger pipe, secured to the pipe by "Band Iron" steel straps. The grout shall be poured in one continuous operation in such manner that after shrinkage and curing the joint recess shall be completely filled.

Mortar for the inside recess shall be of the consistency of plaster. The inside recess between the bell and spigot shall be filled with mortar after the pipe joint on either side of the recess has been backfilled and well tamped with no less than one pipe joint installed ahead of the pipe forming the recess. The mortar shall completely fill the recess and shall be trowelled and packed into place and finished off smooth with the inside of the pipe.

The Contractor shall inspect the joint after the mortar has set and make repairs of any pockets, cracks or other defects caused by shrinkage to the satisfaction of the E/A. The inside surface shall be cleared of any mortar droppings, cement, water, slurry, etc., before they have become set and shall be cleared of any other foreign matter. The inside surface of the pipe shall be left clean and smooth.

Pipe shall be handled at all times with wide non abrasive slings, belts or other equipment designed to prevent damage to the coating and all such equipment shall be kept in such repair that its continued use is not injurious to the coating. The use of tongs, bare pinch-bars, chain slings, rope slings without canvas covers, canvas or composition belt slings with protruding rivets, pipe hooks without proper padding or any other handling equipment, which the E/A deems to be injurious to the coating, shall not be permitted. The spacing of

pipe supports required to handle the pipe shall be adequate to prevent cracking or damage to the cement mortar lining.

(19) Placing Pipe in Tunnels

Piping installed as a carrier pipe in a tunnel, encasement pipe, etc., shall have uniform alignment, grade, bearing and conform to the reviewed Shop Drawings. All necessary casing spacers, bedding material, grout cradle or paving, bracing, blocking, etc., as stipulated by the Contract or as may be required to provide and maintain the required pipe alignment and grade, shall be provided by the Contractor at no cost except as provided by the Bid Items. This shall include casing spacers acceptable to the Owner attached to the carrier pipe in accordance with the manufacturer's recommendations. The insertion pushing forces shall not exceed the pipe manufacturer's recommendation. Such carrier piping shall have flexible bolted or gasketed push-on joints or Concrete Steel Cylinder pipe installed as follows:

(a) 21 Inch Pipe and Smaller

Prior to placing the pipe in the tunnel, the inside joint recess at the bell shall be buttered with cement mortar.

After the joint is engaged, the excess mortar shall be smoothed by pulling a tight fitting swab through the joint. Cement mortar protection shall then be placed in the normal manner to the exterior of the joint and allowed to harden sufficiently to avoid dislodgment during installation. If time is of the essence, a quick setting compound may be used.

(b) 24 Inch Pipe and Larger

Each length of pipe shall be pushed into the tunnel as single units. A flexible mastic sealer shall be applied to the exterior of the joint prior to joint engagement. The surfaces receiving the mastic sealer shall be cleaned and primed in accordance with the manufacturer's recommendation. Sufficient quantities of the mastic sealer shall be applied to assure complete protection of all steel in the joint area. The interior of the joint shall be filled with cement mortar in the normal manner after the pipe is in its final position within the tunnel.

(20) Temporary Pipe Plugs, Caps, Bulkheads and Trench Caps

Temporary plugs, caps or plywood bulkheads shall be installed to close all openings of the pipe and fittings when pipeline construction is not in progress.

All temporary end plugs or caps shall be secured to the pipe as provided under Item No. 507, "Bulkheads".

Trench caps shall be reinforced Class D concrete as indicated.

(21) Corrosion Control

(a) Protective Covering

Unless otherwise indicated, all flanges, nuts, bolts, threaded outlets and all other iron or steel components buried and in contact with earth or backfill shall be wrapped with 8-mil (minimum) polyethylene film meeting ANSI/AWWA C-105 to provide a continuous wrap.

(22) Pipe Anchorage, Support and Protection

Pressure pipeline tees, plugs, caps and bends exceeding 22½ degrees; other bends as directed shall be securely anchored by suitable concrete thrust blocking or by approved metal harness. Unless otherwise indicated, on 24 inch or larger piping, all bends greater than 11 ¼ degrees shall be anchored as described herein.

Storm sewers on steep grades shall be lugged as indicated.

(a) Concrete Thrust Blocking

Concrete for use as reaction or thrust blocking shall be Class B conforming to Item No. 403, "Concrete for Structures".

Concrete blocking shall be placed between solid ground and the fitting to be anchored. The area of bearing on the pipe and on the ground shall be as indicated or directed by the E/A. The blocking shall, unless otherwise indicated, be so placed that the pipe, fittings and joints will be accessible for repair.

The trench shall be excavated at least 6 inches outside the outermost projections of the pipe or appurtenance and the trench walls shaped or undercut according to the detail Drawings or as required to provide adequate space and bearing area for the concrete.

The pipe and fittings shall be adequately weighted and laterally braced to prevent floating, shifting or straining of the pipeline while the concrete is being placed and taking initial set. The Contractor shall be solely responsible for the sufficiency of such restraints.

(b) Metal Thrust Restraint

Fabricated thrust restraint systems such as those described below may be approved for use instead of concrete blocking. To obtain approval, the project Drawings must include sufficient drawings, notes, schedules, etc., to assure that the proposed restraints as installed will be adequate to prevent undesirable movement of the piping components. Such restraint systems may only be used where and as specifically detailed and scheduled on approved Project Drawings.

1. Thrust Harness

   A metal thrust harness of tie rods, pipe clamps or lugs, turnbuckles, etc., may be approved. All carbon steel components of such systems, including nuts and washers, shall be hot-dip galvanized; all other members shall be cast ductile iron. After installation, the entire assembly shall be wrapped with 8-mil polyethylene film, overlapped and taped in place with duct tape to form a continuous protective wrap.

2. Restrained Joints

   Piping or fitting systems utilizing integral mechanically restrained joints may be approved. All components of such systems shall be standard manufactured products fabricated from cast ductile iron, hot-dip galvanized steel, brass or other corrosion resistant materials and the entire assembly shall be protected with a continuous film wrap as described for 1. above. Manufacturers of pipe with restrained joints integral to the pipe shall be listed on SPL WW-27F. All pipe and fitting systems with restrained joints shall be identified by applying an adhesive-backed warning tape to the top of the pipe and for the full length of the pipe, regardless of the type of pipe. For plastic pipes the warning tape shall be applied directly to the top of the pipe. For metal pipes and fittings the warning tape shall be applied to the top of the polyethylene film wrap. The warning tape shall conform to 510.2(8)(b)5.

   Location, configuration and description of such products shall be specifically detailed on the Drawings. (Add-on attachments such as retainer glands, all-thread rods, etc., are not acceptable.)

(c) Concrete Encasement, Cradles, Caps and Seals

When trench foundation is excessively wet or unstable or installation of water or wastewater pipe will result in less than 30 inches of cover, Contractor shall notify E/A. E/A may require Contractor to install a concrete seal, cradle, cap, encasement or other appropriate action.

All concrete cap, etc., shall be continuous and begin and end within 6 inches of pipe joints. Concrete cap, cradle and encasement shall conform to City of Austin Standard No. 510S-1, "Concrete Trench Cap". The pipe shall be well secured to prevent shifting or flotation while the concrete is being placed.

(d) Anchorage Bulkheads

Concrete bulkheads keyed into the undisturbed earth shall be placed as indicated to support and anchor the pipe and/or backfill against end thrust, slippage on slopes, etc. Concrete material and placement shall be Class A, Item No. 403, "Concrete for Structures".

(e) Trench Caps, Concrete Rip-Rap and Shaped Retards

Where called for by the Contract or as directed by the E/A, concrete trench caps, concrete rip-rap and/or shaped retards shall be placed as detailed by the Drawings as protection against erosion. Concrete material and placement shall be Class B, Item No. 403, "Concrete for Structures".

(23) Wastewater Connections

(a) Connections to Mains 12 Inches and Smaller

All branch connections of new main lines shall be made by use of manholes.

Service stubs shall be installed as indicated. Minimum grade shall be 1 percent downward to main and minimum cover shall be 4½ feet at the curb. Standard plugs shall be installed in the dead end before backfilling.

Where a service connection to a main 12 inches or smaller is indicated, a wye, tee or double wye shall be installed.

Where a service connection to a main 15 inches or larger is indicated, a field tap may be made with the pipes installed crown to crown. The tap should be made conforming to the pipe manufacturer's recommendations with the E/A's approval.

Where not otherwise indicated, (wastewater) service connections shall be installed so that the outlet is at an angle of not more than 45 degrees above horizontal at the main line.

(b) Connections to the Existing System

Unless otherwise specified by the E/A, all connections made to existing mains shall be made at manholes with the crown of the inlet pipe installed at the same elevation as the crown of the existing pipe. Service stubs installed on the existing system shall be installed by use of tapping saddles unless otherwise approved by the E/A. Extreme care shall be exercised to prevent material from depositing in the existing pipe as the taps are being made.

When connections to existing mains are made, a temporary plug approved by the E/A must be installed downstream in the manhole to prevent water and debris from entering the existing system before Final Completion. These plugs shall be removed after the castings are adjusted to finish grade or prior to Final Completion.

(c) Connecting Existing Services to New Mains

Where wastewater services currently exist and are being replaced from the main to the property line, those services shall be physically located at the property line prior to installing any new mains into which the services will be connected. Where wastewater services currently exist but are not being replaced to the property line, those services shall

be physically located at the point of connection between the new and existing pipes prior to installing any new mains into which the services will be connected.

(24) Potable or Reclaimed Water System Connections

All necessary connections of new piping or accessories to the existing potable or reclaimed water system shall be made by, and at the expense of, the Contractor. To minimize any inconvenience from outages, the Contractor shall schedule all such connections in advance and such schedule must be approved by the E/A before beginning any Work.

(a) Shutoffs

The City will make all shutoffs on existing potable or reclaimed water mains. The Contractor shall be required to notify the Owner's Representative in writing a least twenty five (25) Calendar Days prior to the anticipated date for a wet-connection. The Owner's Representative is defined as the City Inspector. The Owner's Representative will notify any affected utility customers at least 48 hours prior to the shutoff. Austin Water (AW) will make the shutoff after ensuring that all appropriate measures have been taken to protect the potable or reclaimed water system, customers and employees.

The City will operate all valves to fill existing mains. Where a newly constructed main has not been placed in service and has only one connection to the potable or reclaimed system, the Contractor may operate one valve to fill the main after approval has been obtained from AW. The operation of the valve is to be conducted under the immediate supervision of the Owner's Representative.

Water for the Work shall be metered and furnished by the Contractor in accordance with Section 01500 of the Standard Contract Documents.

(b) Wet Connections to Existing Potable or Reclaimed Water System

The Contractor shall make all wet connections called for by the Contract or required to complete the Work. Two connections to an existing line performed during the same shutout, at the same time and at a distance less than 50 linear feet apart, will be considered one wet connection. Two connections to an existing line performed during the same shutout, at the same time and at a distance equal to, or greater than 50 linear feet will be considered two wet connections. A wet connection shall include draining and cutting into existing piping and connecting a new pipeline or other extension into the existing pressure piping, forming an addition to the potable or reclaimed water transmission and distribution network.

The Contract price for wet connections shall be full payment for all necessary shutoffs, excavation, removing plugs and fittings, pumping water to drain the lines, cutting in new fittings, blocking and anchoring piping, bedding and backfilling, placing the lines and service and all site cleanup.

No water containing detectable amounts of chlorine may be drained, released or discharged until specific planning and appropriate preparations to handle, dilute and dispose of such chlorinated water are approved in advance by the City and the disposal operations will be witnessed by an authorized representative from the City.

(c) Pressure Taps to Existing Potable or Reclaimed Water System

The Contractor shall make all pressure taps called for by the Contract Documents or required to complete the Work. A pressure tap shall consist of connecting new piping to the existing potable or reclaimed water system by drilling into the existing pipe while it is carrying water under normal pressure without taking the existing piping out of service.

Unless otherwise provided by the Contract, the Contractor shall, at the Contractor's expense, perform all necessary excavation, furnish and install the tapping sleeve, valve and accessories, provide the tapping machine, drill the tap and shall block, anchor and backfill the piping, valve and all accessories, place the new piping in service and perform all site cleanup. When the City makes the tap, City forces are not obligated or expected to perform any Work except to provide tapping machine and drill the actual hole. If City crews are to make the tap, fiscal arrangements must be made in advance at the Taps Office, Waller Creek Center, 625 East 10th Street.

If a private Contractor makes the tap, an AW Inspector must be present. "Size on size" taps will not be permitted, unless made by use of an approved full bodied mechanical joint tapping sleeve. Concrete blocking shall be placed behind and under all tap sleeves 24 hours prior to making the wet tap.

(d) Service Connections

Service connection taps into PVC or AC pipe or into CI or DI pipe 12 inches or smaller shall be made using either a service clamp or saddle or a tapping sleeve as recommended by the pipe manufacturer and as approved by the E/A. Direct tapping of these pipes will not be permitted.

All potable or reclaimed water service connections shall be installed so that the outlet is at an angle of not more than 45 degrees above horizontal at the main line.

Precautions should be taken to ensure that the tapping saddle or sleeve is placed on the pipe straight to prevent any binding or deformation of the PVC pipe. The mounting chain or U-bolt strap must be tight.

Tapping shall be performed with a sharp shell type cutter so designed that it will smoothly penetrate heavy walled PVC DR14 and 200 psi AC and will retain and extract the coupon from the pipe.

(25) Backfilling

(a) General

Special emphasis is placed upon the need to obtain uniform density throughout the backfill material. The maximum lift of backfill shall be determined by the compaction equipment selected and in no case shall it exceed 18 inches, loose measurement.

No heavy equipment, which might damage pipe, will be allowed over the pipe until sufficient cover has been placed and compacted. All internal pipe bracing installed or recommended by the manufacturer shall be kept in place until the pipe bedding and trench backfill have been completed over the braced pipe section. Testing of the completed backfill in streets and under and around structures shall meet the specified density requirements. Initial testing shall not be at Contractor's expense and shall conform to the "General Conditions."

(b) General Corrugated Metal Pipe

After the corrugated metal pipe structure has been completely assembled on the proper line and grade and headwalls constructed where indicated; selected material free from rocks over 8 inches in size from excavation or borrow, as approved by the E/A, shall be placed along both sides of the completed structures equally, in uniform layers not exceeding 6 inches in depth (loose measurement), sprinkled if required and thoroughly compacted between adjacent structures and between the structures and the sides of the trench.

Backfill material shall be compacted to the same density requirements as indicated for the adjoining sections of embankment in accordance with the governing specifications thereof. Above the ¾ point of the structure, the fill shall be placed uniformly on each side of the pipe in layers not to exceed 12 inches, loose measure.

Prior to adding each new layer of loose backfill material, until a minimum of 12 inches of cover is obtained over the crown of the pipe, an inspection will be made of the inside periphery of the corrugated metal structure to determine if any floating, local or unequal deformation has occurred as a result of improper construction methods.

(c) Backfill Materials

The Engineer or designated representative may approve any of the following well graded materials as backfill:

1. Select trench material
2. Sand
3. Crushed rock cuttings
4. Rock cuttings
5. Foundation Rock
6. Blasted material with fines and rock
7. Cement stabilized material
8. Borrow

Within the 100-year flood plain, sand will not be permitted for backfilling. The Engineer or designated representative will approve the topsoil for areas to be seeded or sodded.

(d) Backfill in Street Right-of-Way

Placement of backfill under existing or future pavement structures and within 2 feet of any structures shall be compacted to the specified density using any method, type and size of equipment, which will produce the specified compaction without damaging the pipe or bedding. Placement of backfill greater than 2 feet beyond structures in right-of-way shall conform to (g) below.

The thickness of lifts, prior to compaction, shall depend upon the type of sprinkling and compacting equipment used and the test results thereby obtained. Prior to and in conjunction with the compaction operation, each lift shall be brought to the moisture content necessary to obtain the specified density and shall be placed in a uniform thickness to ensure uniform compaction over the entire lift. Testing for density shall be in accordance with Test Method Tex-114-E and Test Method Tex-115-E.

It is highly desirable that the backfill lifts be placed in a flat (or level) configuration; however when approved by the Engineer or designated representative, the backfill lifts may be placed at gradients (percent of vertical rise or fall to horizontal run) that do not exceed 30%.

The proposed gradient for each lift or series of lifts shall be established based on the capabilities of the equipment proposed to attain the required compaction.

Each lift of backfill must provide the density as specified herein. Swelling soils (soils with a minimum Liquid Limit of 50, more than 50% passing a #200 sieve and a plasticity index greater than 22) shall be sprinkled as required to provide not less than optimum moisture nor more than 2 percent over optimum moisture content and compacted to the extent necessary to provide not less than 95 percent nor more than 102 percent of the density as

determined in accordance with Test Method Tex-114-E. Non-swelling soils shall be sprinkled as specified and compacted to the extent necessary to provide not less than 95 percent of the density as determined in accordance with Test Method Tex-114-E.

After each lift of backfill is complete, tests may be made by the Engineer or designated representative. If the material fails to meet the density indicated, the course shall be reworked as necessary to obtain the indicated compaction and the compaction method shall be altered on subsequent Work to obtain indicated density.

At any time, the Engineer or designated representative may order proof rolling to test the uniformity of compaction of the backfill lifts. All irregularities, depressions, weak or soft spots that develop shall be corrected immediately by the Contractor.

If the backfill, due to any reason, loses the specified stability, density or finish before the pavement structure is placed, it shall be recompacted and refinished at the sole expense of the Contractor. Excessive loss of moisture in the subgrade shall be prevented by sprinkling, sealing or covering with a subsequent backfill layer or granular material. Excessive loss of moisture shall be construed to exist when the subgrade soil moisture content is more than 4 percent below the optimum of compaction ratio density. Backfill shall be placed from the top of the bedding material to the existing grade, base course, subgrade or as specified. The remainder of the street backfill shall either be Flexible Base, Concrete or Hot Mix Asphalt Concrete as specified on the drawings or replacement "in kind" to the surface of the materials originally removed for placement of the pipe.

(e) Backfill in County Street or State Highway Right-of-Way

All Work within the right-of-way shall meet the requirements of (d) above, as a minimum and shall meet the requirements of the permit issued by the County when their requirements are more stringent. Prior to the start of construction, the Contractor shall be responsible for contacting the appropriate TxDOT office or County Commissioner's Precinct Office and following the operating procedures in effect for utility cut permits and pavement repair under their jurisdiction. Approval for all completed Work in the State or County right-of-way shall be obtained from the appropriate Official prior to final payment by the Owner.

(f) Backfill in Railroad Right-of-Way

All Work within the railroad right-of-way shall meet the requirements of (d) above, as a minimum and shall meet the requirements of the permit issued by the Railroad Owner when their requirements are more stringent. Approval for all completed Work in the railroad right of way shall be obtained from the Railroad prior to Final Completion.

(g) Backfill in Easements

Where not otherwise indicated, Contractor may select whatever methods and procedures may be necessary to restore entire Work area to a safe, useful and geologically stable condition with a minimum density of 85 percent or a density superior to that prior to construction.

In and near flood plain of all streams and watercourses, under or adjacent to utilities, structures, etc. all backfill shall be compacted to a density of not less than 95 percent conforming to TxDOT Test Method Tex-114-E, unless otherwise directed by E/A.

All soil areas disturbed by construction shall be covered with top soil and seeded conforming to Item No. 604, "Seeding for Erosion Control". All turf, drainways and drainage structures shall be constructed or replaced to their original condition or better. No debris shall remain in the drainways or drainage structures.

(h) Temporary Trench Repair/Surfacing

If details of temporary trench repair/surfacing are not provided in the contract documents, the Contractor shall submit for approval of the E/A (1) a plan for temporary trench repair for areas that will be open to traffic but will be excavated later for full depth repair, and (2) a proposed method for covering trenches to maintain access to properties. The temporary surfacing shall afford a smooth riding surface and shall be maintained by the Contractor the entire time the temporary surface is in place.

(i) Permanent Trench Repair

The Contractor shall install permanent trench repairs conforming to details in the drawings.

(26) Quality Testing for Installed Pipe

(a) Wastewater Pipe Acceptance Testing

After wastewater pipe has been backfilled, the Contractor shall perform infiltration tests, exfiltration tests, or low pressure air tests as determined by the E/A. In addition, the Contractor shall perform deflection tests and shall assist OWNER'S personnel, as directed, in performing pipeline settlement tests. The Contractor shall be responsible for making appropriate repairs to those elements that do not pass any of these tests.

(b) Exfiltration Test

Water for the Work shall be metered and furnished by the Contractor in accordance with Section 01500 of the Standard Contract Documents.

Exfiltration testing shall be performed by the Contractor when determined by the E/A to be the appropriate test method. Exfiltration testing shall conform to requirements of the Texas Commission on Environmental Quality given in the Texas Administrative Code Title 30 Part 1 Chapter 317 Rule §317.2.

(c) Infiltration Test

Infiltration testing shall be performed by the Contractor when determined by the E/A to be the appropriate test method. Infiltration testing shall conform to requirements of the Texas Commission on Environmental Quality given in the Texas Administrative Code Title 30 Part 1 Chapter 317 Rule §317.2.

(d) Pipeline Settlement Test

During the infiltration test or after the exfiltration test, the pipe will be TV inspected for possible settlement. When air testing has been used, water shall be flowed into the pipe to permit meaningful observations. Any pipe settlement which causes excessive ponding of water in the pipe shall be cause for rejection. Excessive ponding shall be defined as a golf ball (1 5/8 ″ dia.) submerged at any point along the line.

(e) Low Pressure Air Test of Gravity Flow Wastewater Lines

(1) General

Wastewater lines up to 33-inch diameter shall be air tested between manholes. Wastewater lines 36-inch in diameter and larger shall be either air tested between manholes or at pipe joints. Backfilling to grade shall be completed before the test and all laterals and stubs shall be capped or plugged by the Contractor so as not to allow air losses, which could cause an erroneous, test result. Manholes shall be plugged so they are isolated from the pipe and cannot be included in the test.

All plugs used to close the sewer for the air test shall be capable of resisting the internal pressures and must be securely braced. Place all air testing equipment above

ground and allow no one to enter a manhole or trench where a plugged sewer is under pressure. Release all pressure before the plugs are removed. The testing equipment used must include a pressure relief device designed to relieve pressure in the sewer under test at 10 psi or less and must allow continuous monitoring of the test pressures in order to avoid excessive pressure. Use care to avoid the flooding of the air inlet by infiltrated ground water. (Inject the air at the upper plug if possible.) Use only qualified personnel to conduct the test.

(2) Ground Water

Since the presence of ground water will affect the test results, test holes shall be dug to the pipe zone at intervals of not more than 100 feet and the average height of ground water above the pipe (if any) shall be determined before starting the test.

(3) Test Procedure

The E/A may, at any time, require a calibration check of the instrumentation used. Use a pressure gauge having minimum divisions of 0.10 psi and an accuracy of 0.0625 psi. (One ounce per square inch.) All air used shall pass through a single control panel. Clean the sewer to be tested and remove all debris where indicated. Wet the sewer prior to testing. The average back pressure of any groundwater shall be determined (0.433 psi) for each foot of average water depth (if any) above the sewer.

Add air slowly to the section of sewer being tested until the internal air pressure is raised to 3.5 psig greater than the average back pressure of any ground water that may submerge the pipe. After the internal test pressure is reached, allow at least 2 minutes for the air temperature to stabilize, adding only the amount of air required to maintain pressure. After the temperature stabilization period, disconnect the air supply. Determine and record the time in seconds that is required for the internal air pressure to drop from 3.5 psig to 2.5 psig greater than the average backpressure of any ground water that may submerge the pipe.

For pipe less than 36-inch diameter, compare the time recorded with the time computed using the following equation:

$T = (0.0850 \times D \times K) \div Q$, where

T = time for pressure to drop 1.0 pounds per square inch gauge in seconds;

$K = 0.000419 \times D \times L$, but not less than 1.0

D = nominal inside diameter, in inches, as marked on the pipe;

L = length of line of same pipe size in feet; and

Q = rate of loss, 0.0015 cubic feet per minute per square foot of internal surface area (ft3/min/ft sq) shall be used.

Because a K value of less than 1.0 shall not be used, there are minimum test times for each pipe diameter as shown in the following table:

Table For Low Pressure Air Testing of Pipe

Pipe Diameter	Minimum Time	Minimum Time Applies to All Pipes Shorter than	Time for Longer Pipes

(inches)	(seconds)	(feet)	(seconds)
8	454	298	1.520 × L
10 (See Note 1)	567	239	2.374 × L
12	680	199	3.419 × L
15	850	159	5.342 × L
18	1020	133	7.693 × L
21	1190	114	10.471 × L
24	1360	100	13.676 × L
30	1700	80	21.369 × L

Note 1. 10-inch diameter pipe to be used only by AW maintenance personnel.

Note 2. The test parameter for pipes larger than 30-inch diameter shall be shown on the construction plans.

Any drop in pressure, from 3.5 psig to 2.5 psig (adjusted for groundwater level), in a time less than that required by the above equation or table shall be cause for rejection. When the line tested includes more than one size pipe, the minimum time shall be that given for the largest size pipe included.

When joint testing, the minimum time allowable for the pressure to drop from 3.5 pounds per square inch to 2.5 pounds per square inch gauge during a joint test, regardless of pipe size, shall be twenty (20) seconds. A drop in pressure from 3.5 psig to 2.5 psig (adjusted for groundwater level) in less than twenty seconds shall be cause for rejection.

Manholes must be tested separately and independently. All manholes must be hydrostatically tested with a maximum loss allowance of 0.025 gallon per foot diameter per foot of head per hour.

When lines are air tested, manholes are to be tested separately by exfiltration or vacuum method (see Standard Specification Item No. 506S, "Manholes").

(f) Deflection Test

Deflection tests shall be performed by the Contractor on all flexible and semi-rigid wastewater pipes. The tests shall be conducted after the final backfill has been in place at least 30 days. Testing for in-place deflection shall be with a pipe mandrel at 95% of the inside diameter of the pipe. A second test of flexible and semi-rigid wastewater pipes 18

inch size and larger, also with a pipe mandrel sized at 95% of the inside diameter of the pipe, shall be conducted by the Contractor 30 days before the warranty expires on the Contractor's Work.

Contractor shall submit proposed pipe mandrels to the E/A or the E/A's designated representative for concurrence prior to testing the line.

Test(s) must be performed without mechanical pulling devices and must be witnessed by the E/A or the E/A's designated representative.

Any deficiencies noted shall be corrected by the Contractor and the test(s) shall be redone.

(g) Inspection of Installed Storm Drain Conduits

(1) General

All storm drain conduits (pipe and box culvert) shall be inspected for conformance to the requirements of this specification. Smart Housing, low/moderate income housing, and projects that are 100-percent privately funded are exempt from the cost of the initial video inspection. All deficiencies revealed by inspection shall be corrected. Video re-inspection meeting the requirements of this specification shall be provided at the Contractor's expense to show that deficiencies have been corrected satisfactorily. Further, the contractor shall provide video in complete segments (manhole to manhole) versus specific deficiency locations.

Projects that are not exempt from the cost of the initial video inspection are also subject to the following constraints:

- All inspectors utilized by the Contractor for video inspection shall be NASSCO-PACP certified for a minimum of 3 years.

- The Contractor will be required to inspect, assess, and record the condition of the storm drain pipe using National Association of Sewer Service Companies (NASSCOs) Pipeline Assessment Certification Program (PACP) coding standards.

(2) Video Inspection of Installed Storm Drain Conduits

Contractor shall provide all labor, equipment, material and supplies and perform all operations required to conduct internal closed-circuit television and video recording of all storm drain conduits. Video recording of each storm drain conduit section shall be conducted after the trench has been backfilled and prior to placement of permanent pavement repairs or permanent pavement reconstruction. The video recording shall be provided to the Owner for review. Contractor shall not place permanent pavement repairs or permanent pavement reconstruction over the storm drain conduit until Owner has reviewed the video and agrees that there are no defects in the storm drain conduit installation shown in the video submitted by the Contractor or shown in any video acquired by the Owner through other means. Placement of permanent pavement repair or permanent pavement reconstruction over the installed storm drain conduit before the Owner acknowledges no defects shall be at the Contractor's risk. Any defects revealed by the video inspection shall be corrected at the Contractor's expense and a new video submitted to the Owner for review prior to acceptance of the conduit.

All video work shall be conducted under the direct full-time supervision of a NASSCO-PACP certified operator.

The conduit inspection camera shall have the capability of panning plus/minus 275 degrees and rotating 360 degrees. The television camera shall be specifically designed and constructed for such use. The camera shall be operative in 100% humidity conditions. Camera shall have an accurate footage counter that displays on the monitor the exact distance of the camera (to the nearest tenth of a foot) from the centerline of the starting manhole or access point. Camera shall have height adjustment so that the camera lens is always centered within plus/minus 10% of the center axis of the conduit being videoed. Camera shall provide a minimum of 460 lines of horizontal resolution and 400 lines of vertical resolution. Camera shall be equipped with a remote iris to control the illumination range for an acceptable picture. Geometrical distortion of the image shall not exceed one percent (1%). The video image produced by each camera shall be calibrated using a Marconi Resolution Chart No. 1 or equivalent.

Lighting for the camera shall be sufficient to allow a clear picture of the entire periphery of the conduit without loss of contrast, flare out of picture or shadowing. A reflector in front of the camera may be required to enhance lighting in dark or large sized conduit. The video camera shall be capable of showing on the digital display the Owner's name, Project name, Contractor name, date, line size and material, conduit identification, and ongoing footage counter. The camera, television monitor, and other components of the video system shall be capable of producing a picture quality satisfactory to the satisfaction of the Owner. The recording of the internal condition of the storm drain conduit shall be clear, accurate, focused and in color. If the recording fails to meet these requirements, the, equipment shall be removed and replaced with equipment that is suitable. No payment will be made for an unsatisfactory recording.

If during video inspection, water is encountered inside the conduit, the conduit shall be dewatered by the Contractor. The storm drain section must be dry. Video recording conducted while the camera is floating is not acceptable unless approved by the Owner.

If during video inspection, debris is encountered that prohibits a proper inspection of the conduit, the Contractor shall remove the debris before proceeding.

All video shall be documented using a data logger and reporting system that are PACP compliant and which use codes as established by the National Association of Sewer Service Companies (NASSCO)s - Pipeline Assessment and Certification Program (PACP).

Computer printed location records shall be kept by the Contractor and shall clearly show the location and orientation of all points of significance such as joints, conduit connections, connections at manholes and inlets, and defects. Copy of all records shall be supplied to the Owner. Noted defects shall be documented as color digital files and color hard copy print-outs. Photo logs shall accompany each photo submitted.

The video recording shall supply a visual and audio record of the storm drain conduits that may be replayed. Video recordings shall include an audio track recorded by the video technician during the actual video work describing the parameters of the storm drain conduit being videoed (i.e. location, depth, diameter, pipe material), as well as describing connections, defects and unusual conditions observed during the video work. Video recording playback shall be at the same speed that it was recorded. Slow motion or stop-motion playback features may be supplied at the option of the Contractor. Once videoed, the CDs/DVDs shall be labeled and become the property of the Owner. The Contractor shall have all video and necessary playback equipment readily accessible for review by the Owner while the project is under construction.

Post-installation video shall not be completed until all work is completed on a section of storm drain conduit. Post-installation video work shall be completed by the Contractor in the presence of the Owner. The post-installation video work shall be completed to confirm that the storm drain conduits are free of defects. Provide a color video showing the completed work. Prepare and submit video logs providing location of storm drain conduit along with location of any defects. Manhole and inlet work shall be complete prior to post-installation video work.

For post-installation video, exercise the full capabilities of the camera equipment to document the completion and conformance of the storm drain installation work with the Contract Documents. Provide a full 360-degree view of conduit, all joints, and all connections. The camera shall be moved through the storm drain conduit in either direction at a moderate rate, stopping and slowly panning when necessary to permit proper documentation of the conduit condition at each pipe connection, joint, and defect. In no case shall the camera be pulled at a speed greater than 30 feet per minute. Manual winches, power winches, TV cable, and powered rewinds or other devices that do not obstruct the camera view or interfere with proper documentation of the storm drain conditions shall be used to move the camera through the storm drain conduit. When manually operated winches are used to pull the camera through the conduit, telephones or other suitable means of communication shall be set up between the two access points of the conduit being videoed to insure good communication between members of the video crew.

Distance measurements shall be provided to an accuracy of one tenth of a foot.

Video shall be continuous for each storm drain conduit segment. Do not show a single segment on more than one CD/DVD, unless specifically allowed by the Owner.

Contractor shall submit to Owner the following:

A. National Association of Sewer Service Companies (NASSCO) Pipeline Assessment and Certification Program (PACP) certification of operators who will be performing video work.

B. Compact Disc (CD) or Digital Video Disc (DVD) of recording of storm drain conduits (concrete storm water pipe or box culvert).

   a. The color CD or DVD shall include a digital color key map in a format acceptable to the Owner with each segment of storm drain conduit labeled with the appropriate inspection ID on the map.

   b. The file folder for each segment of the storm drain conduit shall have a unique name based on the Owner's approved inspection naming convention and shall contain the following:

      i. Video files

      ii. Video inspection logs with information coded in accordance with the PACP

      iii. Photo logs

      iv. A report summarizing the results of the video inspection

      v. A proposed method of repair for any defects discovered.

(3) Time commitments from City for projects that are exempt from the cost of the initial video inspection

Projects that are exempt from the cost of the initial video inspection are afforded the following time commitments from the City.

A. Initial inspection - contractor must inform the City of Austin construction inspector assigned to the project in writing that all stormdrain infrastructure for the project has been completed according to the permit and is ready for inspection. The inspector will then notify the Watershed Protection Department (WPD) in writing that the all of the stormdrain infrastructure for the project has been completed and is ready for inspection. The WPD is allowed 15-days to complete inspection from written notification by the inspector. The outcome of this item does not impact the one-year warranty requirements.

B. Video re-inspection by the contractor for deficient installed stormdrain infrastructure. The contractor must submit the video inspection data as defined in this specification to the City of Austin construction inspector assigned to the project along with a written letter of transmittal certified by a professional engineer stating that all identified stormdrain infrastructure installation deficiencies for the project have been corrected. The inspector will then notify the Watershed Protection Department (WPD) in writing and convey the video inspection data to the WPD. The WPD is allowed 15-days to complete review of the data from the date of delivery by the inspector.

(27) Pressure Pipe Hydrostatic Testing

After the pipe has been installed and backfilled and all service laterals, fire hydrants and other appurtenances installed and connected, a pressure test, followed by a leakage test, will be conducted by the City. The City will furnish the pump and gauges for the tests. The Contractor shall be present and shall furnish all necessary assistance for conducting the tests. The specified test pressures will be based on the elevation of the lowest point of the line or section under test. Before applying the specified test pressure, all air shall be expelled from the pipe. If permanent air vents are not located at all high points, the Contractor shall install corporation cocks at such points.

All drain hydrant and fire hydrant leads, with the main 6-inch gate valve open, the hydrant valve seats closed and no nozzle caps removed, shall be included in the test.

(a) Pressure Test

The entire project or each valved section shall be tested, at a constant pressure of 200 psi for a sufficient period (approximately 10 minutes) to discover defective materials or substandard work. The Contractor assumes all risks associated with testing against valves. Repairs shall be made by the Contractor to correct any defective materials or substandard work. The Contractor shall pre-test new lines before requesting pressure tests by City Forces. The Contractor shall have new lines pressurized to a minimum of 100 psi, on the date of testing, prior to arrival of City Forces.

(b) Leakage Test

A leakage test will follow the pressure test and will be conducted on the entire project or each valved section. The Contractor assumes all risks associated with testing against valves. The leakage test shall be conducted at 150 psi for at least 2 hours. The test pressure shall not vary by more than ±5 psi for the duration of the test.

(1) Allowable Leakage

Leakage shall be defined as the quantity of water that must be supplied into any test section of pipe to maintain the specified leakage test pressure after the air in the pipeline has been expelled and the pipe has been filled with water.

No pipe installation will be accepted if leakage exceeds the amount given by the following formula:

$$\text{Allowable leakage (gal/hr)} = [L \times D] \div 10{,}875$$

Where L = length of pipe tested, in feet
D= nominal pipe diameter, in inches, as marked on the pipe

(2) Location and Correction of Leakage

If such testing discloses leakage in excess of this specified allowable, the Contractor, at the Contractor's expense, shall locate and correct all defects in the pipeline until the leakage is within the indicated allowance.

All visible leakage in pipe shall also be corrected by Contractor at the Contractor's expense.

(28) Service Charges for Testing

Initial testing performed by City forces for the Contractor will be at the City's expense. Retesting, by City forces, of Contractor's work that fails initial testing will be at the Contractor's expense. The City's charge for retests will be a base fee plus an hourly rate published in the current AW Fee Schedule. On City-funded projects, the charges incurred by the City for retesting will be deducted from funds due the Contractor. On non-City-funded projects, the charges incurred by the City for retesting will be billed to the Contractor. The City will withhold acceptance of the Contractor's work until the Contractor has paid the City for the retesting costs.

(29) Disinfection of Potable Water Lines

Prior to performing any disinfection of potable water lines, the Contractor shall submit a Disinfection Plan (Plan) and obtain approval in accordance with COA specification 01300, Submittals. The Plan shall comply with AWWA C651 (Disinfecting Water Mains) and AWWA C655 (Field Dechlorination), latest editions, and shall be developed using one of the following templates, unless otherwise approved by the Engineer and/or AW: Disinfection Plan for Tablet/Granule Method, or Disinfection Plan for Continuous-Feed Method. Templates for these two methods are located at http://www.austintexas.gov/department/construction-standards . The Contractor shall decide which disinfection method to use for a given project. The Slug Method and Spray Method are also acceptable if better suited for disinfection. The initial plan shall be submitted for review a minimum of 60 calendar days prior to when the water main is scheduled to be placed into service, or at the preconstruction conference if the project requires that the waterline be placed in service in less than 60 days, as indicated in the Contractor's Construction Schedule. If any appurtenances are required for injection, sampling, or flushing purposes that are not shown in the original plan/profile sheets, then the Contractor shall include the appurtenances in the project Record Drawings. The Contractor shall disinfect potable water lines only in accordance with an approved Plan.

(a) Preventing Contamination

The Contractor shall protect all piping materials from contamination during storage, handling and installation. Prior to disinfection, the pipeline interior shall be clean, dry and unobstructed. All openings in the pipeline shall be closed with watertight plugs when pipe laying is stopped at the close of the day's work.

(b) Cleaning

Prior to disinfection the Contractor shall clean the pipeline to remove foreign matter. For pipelines 16″ in diameter or smaller, cleaning shall consist of flushing the pipeline. For pipelines greater than 16″ in diameter, cleaning shall be performed by operating hydrants and blow-offs located at low points in the pipeline, or by mechanical means (sweeping or pigging. Water for the Work shall be metered and furnished by the Contractor in accordance with Section 01500 of the Standard Contract Documents.

(c) Procedure and Dosage

For pipelines 16" or smaller in diameter, the Contractor may use either the AWWA C-651 "Tablet/Granular Method" or the "Continuous Feed Method" for disinfecting the pipeline. The Contractor, at its expense, will supply the test gauges and the Sodium Hypochlorite conforming to ANSI/AWWA B300, which contains approximately 5 percent to fifteen percent available chlorine, and will submit for approval a written plan for the disinfection process. Calcium Hypochlorite conforming to ANSI/AWWA B300, which contains approximately 65 percent available chlorine by weight, may be used in granular form or in 5 g tablets for 16″ diameter or smaller lines, if it is included as part of the written plan of disinfection that is approved by the City of Austin. The Contractor, at its expense, shall provide all other equipment, supplies and the necessary labor to perform the disinfection under the general supervision of the City.

One connection to the existing system will be allowed with a valve arranged to prevent the strong disinfecting dosage from flowing back into the existing water supply piping. The valve shall be kept closed and locked in a valve box with the lid painted red. No other connection shall be made until the disinfection of the new line is complete and the water samples have met the established criteria. The valve shall remain closed at all times except when filling or flushing the line and must be staffed during these operations. As an option, backflow prevention in the form of a reduced pressure backflow assembly may be provided if the valve is left unattended. The new pipeline shall be filled completely with disinfecting solution by feeding the concentrated chlorine and approved water from the existing system uniformly into the new piping in such proportions that every part of the line has a minimum concentration of 25 mg/liter available chlorine.

The disinfecting solution shall be retained in the piping for at least 16 hours and all valves, hydrants, services, stubs, etc. shall be operated so as to disinfect all their parts. After this retention period, the water shall contain no less than 10 mg/liter chlorine throughout the treated section of the pipeline.

For pipelines larger than 16″ in diameter, the Contractor may use the AWWA C-651 "Slug Method" for disinfecting the pipeline. Chlorine shall be fed at a constant rate and at a sufficient concentration at one end of the pipeline to develop a slug of chlorinated water having not less than 100 mg/liter of free chlorine. The Contractor shall move the slug through the main so that all interior surfaces are exposed to the slug for at least three (3) hours. The chlorine concentration in the slug shall be measured as it moves through the pipeline. If the chlorine concentration drops below 50 mg/liter, the Contractor shall stop the slug and feed additional chlorine to the head of the slug to restore the chlorine concentration to at least 100 mg/liter before proceeding. As the slug flows past fittings and valves, related valves and hydrants shall be operated so as to disinfect appurtenances and pipe branches.

Unless otherwise indicated, all quantities specified herein refer to measurements required by the testing procedures included in the current edition of "Standard Methods". The chlorine concentration at each step in the disinfection procedure shall be verified by chlorine residual determinations.

(d) Final Flushing

The heavily chlorinated water shall then be carefully flushed from the potable water line by a dechlorination process until the chlorine concentration is no higher than the residual generally prevailing in the existing distribution system. This is necessary to insure that there is no injury or damage to the public, the water system or the environment. The plans and preparations of the Contractor must be approved by the City before flushing of the line may begin. The Contractor will supply the Dechlorination chemical conforming to ANSI/AWWA C655. Additionally the flushing must be witnessed by an authorized representative of the City.

Approval for discharge of the diluted chlorine water or heavily chlorinated water into the wastewater system must be obtained from AW. The line flushing operations shall be regulated by the Contractor so as not to overload the wastewater system or cause damage to the odor feed systems at the lift stations. The City shall designate its own representative to oversee the work.

Daily notice of line discharging must be reported to the AW Dispatch office.

(e) Bacteriological Testing

After disinfection and final flushing, samples shall be collected per one of the two options. Option A: Before approving a main for release, take an initial set of samples and then resample again after a minimum of 16 hours. Both sets of samples must pass for the main to be approved for release. Option B: Before approving a main for release, let it sit for a minimum of 16 hours without any water use. Then collect two sets of samples a minimum of 15 minutes apart while the sampling taps are left running. Both sets of samples must pass for the main to be approved for release. The two (2) sets of water samples from the line will be tested for bacteriological quality by the City and must be found free of coliform organisms before the pipeline may be placed in service. Each set shall consist of one (1) sample that is drawn from the end of the main, at least one from each branch greater than one pipe length, and additional samples that are collected at intervals of not more than 1,200 feet along the pipeline. All stubs shall be tested before connections are made to existing systems.

The Contractor, at its expense, shall install sufficient sampling taps at proper locations along the pipeline. Each sampling tap shall consist of a standard corporation cock installed in the line and extended with a copper tubing gooseneck assembly. After samples have been collected, the gooseneck assembly may be removed and retained for future use.

Samples for bacteriological analysis will only be collected from suitable sampling taps in sterile bottles treated with sodium thiosulfate. Samples shall not be drawn from hoses or unregulated sources. The City, at its expense, will furnish the sterile sample bottles and may, at its discretion, collect the test samples with City personnel.

If the initial disinfection fails to produce acceptable sample test results, the disinfection procedure shall be repeated at the Contractor's expense. Before the piping may be placed in service, two (2) consecutive sets of acceptable test results must be obtained.

An acceptable test sample is one in which: (1) the chlorine level is similar to the level of the existing distribution system; (2) there is no free chlorine and (3) total coliform organisms are absent. An invalid sample is one, which has excessive free chlorine, silt or non-coliform growth as defined in the current issue of the "Standards Methods." If unacceptable sample results are obtained for any pipe, the Contractor may, with the concurrence of the Inspector, for one time only flush the lines and then collect a second series of test samples for testing by the City. After this flushing sequence is completed, any pipe with one or more failed samples must be disinfected again in accordance with the approved disinfection procedure followed by appropriate sampling and testing of the water.

The City of Austin Water Quality Laboratory will notify the assigned City of Austin Inspector in writing of all test results. The Inspector will subsequently notify the Contractor of all test results. The Water Quality Laboratory will not release test results directly to the Contractor.

(30) Cleanup and Restoration

It shall be the Contractor's responsibility to keep the construction site neat, clean and orderly at all times. Cleanup shall be vigorous and continuous to minimize traffic hazards or obstructions along the streets and to driveways. Trenching, backfill, pavement repair (as necessary), and cleanup shall be coordinated as directed by the City. The E/A will regulate

the amount of open ditch and may halt additional trenching if cleanup is not adequate to allow for orderly traffic flow and access.

Materials at the site shall be stored in a neat and orderly manner so as not to obstruct pedestrian or vehicular traffic. All damaged material shall be removed from the construction site immediately and disposed of in a proper manner. All surplus excavated materials shall become the property of the Contractor for disposal at the Contractor's expense. After trenching, the Contractor shall immediately remove all excavated materials unsuitable for or in excess of, backfill requirements. Immediately following the pipe laying Work as it progresses, the Contractor shall backfill, grade and compact all excavations as provided elsewhere. The backfill placed at that time shall meet all compaction test requirements. The Contractor shall immediately clean up and remove all unused soil, waste and debris and restore all surfaces and improvements to a condition equal or superior to that before construction began and to an appearance which complements the surroundings. The Contractor shall grade and dress the top 6 inches of earth surfaces with soil or other material similar and equal to the surrounding, fill and smooth any visible tracks or ruts, replace and re-establish all damaged or disturbed turf or other vegetation and otherwise make every effort to encourage the return of the entire surface and all improvements to a pleasant appearance and useful condition appropriate and complementary to the surroundings and equal or similar to that before construction began.

Placement of the final lift of permanent pavement, if a pavement is required, shall begin immediately after all testing of each segment of piping is satisfactorily completed.

(31) Valve Turn Walk-though

As part of the acceptance of Water or Reclaimed Water pressure pipe, an AW Valve Walk-through will be performed after an initial inspection by the Owner's Representative to identify any deficient items. If deficient items are present during the AW Valve Walk-Through and the project fails acceptance, a re-inspection fee will apply and must be paid before a re-inspection is scheduled to confirm correction of deficient items. See AW Fee Schedule for the current Distribution Walk-Through Re-inspection Fee.

(32) 2-inch Jumper Hose

During connections to the water distribution system, the Contractor may be required to install a temporary jumper hose between the unpressurized water segment and an adjacent pressurized water segment for the purpose of maintaining water service to customers who can't operate without water service during the connection. The jumper shall include an approved backflow preventer and be of adequate size and pressure rating to maintain service to the customer. It shall be polyethylene tubing meeting the requirements of COA SPL WW-65. The jumper hose and other components in the temporary service shall be disinfected, and bacteriological samples will be taken and pass before the temporary service is provided to the customer. Contractor shall provide adequate protection for the jumper hose in vehicular traffic areas at all times during use.

Source: Rule No. R161-17.05 , 5-31-2017; Rule No. R161-17.19 , 11-28-2017; Rule No. R161-18.23 , 12-8-2018.

510.4 - Measurement

Pipe will be measured by the linear foot for the various types, sizes and classes. Parallel lines will be measured individually.

Where a line ties into an existing system, the length of the new line will be measured from the visible end of the existing system at the completed joint. Unless otherwise indicated, the length of water, reclaimed,

and wastewater lines will be measured along pipe horizontal centerline stationing through fittings, valves, manholes, and other appurtenances.

Ductile iron fittings, whether standard mechanical joint or integral factory restrained joint type, will be measured by the ton and paid for in accordance with the schedule in Standard Products List WW-27C. Bolts, glands and gaskets will not be measured for payment. Steel cylinder concrete pipe fittings and welded steel pipe fittings will not be measured separately and are included in the unit price for the respective pipe bid items.

Factory restrained joint pipe meeting the requirements of Standard Products List WW-27F will be measured by the linear foot. The estimated quantity on the bid form is only for restrained joint pipe having integral mechanically restrained joints.

Connecting a new water, wastewater, or reclaimed water service to an existing, comparable type of private service will be measured by each connection. Service pipe from the main to the service connection will be measured by the linear foot.

The Contractor shall be responsible for removing and treating ground water flowing into a trench up to a baseline flow rate of 350 gpm of sustained flow for each mainline open trench (no more that 300 linear feet open trench per work zone segment is allowed at one time). This baseline flow rate is not a prediction of ground water conditions to be expected on the Project. Rather, it establishes contract terms regarding the quantity of ground water for which the contractor is responsible without extra or separate compensation. The flow rate must exceed 350 gpm continuously for at least 4 consecutive hours to be considered sustained flow. It is expected that trench dewatering for this baseline rate may be accomplished with a single 3-inch trash-type pump per open trench; however, measured flow rate, not pump size, type or characteristics shall be used to determine if the baseline rate has been exceeded. Flow rate shall be determined by measurements made at the discharge point of the water treatment facilities. Surface storm water flowing into a trench shall be the Contractor's responsibility to remove and treat without compensation, regardless of inflow rate or volume.

Adjustment of elevations during construction resulting in changes in flow line elevations of plus or minus two feet or less will not be considered for credit or additional compensation and no measurement for payment will be made.

Stormwater pipe will be measured along the slope of the pipe. Where drainage pipe ties into inlets, headwalls, catch basins, manholes, junction boxes or other structures that length of pipe tying into the structure wall will be included for measurement but no other portion of the structure length or width will be so included.

Excavation and backfill, when included as pipe installation will not be measured as such but shall be included in the unit price bid for constructing pipe and measured as pipe complete in place including excavation and backfill.

When pay items are provided for the other components of the system, measurement will be made as addressed hereunder.

Video inspection of newly installed box culverts and storm drain pipe will be measured per linear foot of pipe videoed.

Jumper hose will be measured per linear foot of hose installed, including all depths, excavation and backfill, complete, and in place.

Source: Rule No. R161-17.05 , 5-31-2017.

510.5 - Payment

Payment for pipe, measured as prescribed above, will be made at the unit price bid per linear foot for the various sizes of pipe, of the materials and type indicated, unless unstable material is encountered or trench excavation and backfill is bid as a separate item.

The concrete seal, foundation rock or coarse aggregate when used as directed in unstable material will be paid for at the unit price bid per cubic yard, which shall be full payment for all excavation and removal of unsuitable material and furnishing, placing and compacting the foundation rock, coarse aggregate or other approved material all complete in place.

Excavation and backfill, when included as a separate pay item, will be paid for by Pay Item No. 510-E or 510-F.

No separate payment will be made for dewatering a trench with ground water inflow of less than the baseline rate of 350 gpm of sustained flow as described above. Dewatering of those trenches shall be included in the contract unit price of the Pipe pay item. Payment for dewatering a trench with ground water inflow exceeding 350 gpm of sustained flow shall be agreed by change order. Dewatering of bore pits shall be included in the contract unit price for Bore Entry Pit or Exit Pit regardless of inflow rate or volume unless specified otherwise in the bid item for Bore Entry Pit or Exit Pit.

(1) Pipe

Payment for pipe, measured as prescribed above, will be made at the unit price bid per linear foot complete-in-place as designed and represented in the Drawings and other Contract documents. Restrained joint pipe meeting the requirements of Standard Products List WW-27F will be paid for separately at the unit price bid per linear foot. Unless otherwise provided herein, as separate pay item(s), the bid price per linear foot of pipe shall include the following:

a. clearing

b. constructing any necessary embankment

c. excavation

d. disposal of surplus or unusable excavated material

e. furnishing, hauling and placing pipe

f. field constructed joints, collars, temporary plugs, caps or bulkheads

g. all necessary lugs, rods or braces

h. pipe coatings and protection

i. connections to existing systems or structures, concrete blocking and thrust blocks and restrained joints

j. preparing, shaping, pumping for dewatering, and shoring of trenches

k. bedding materials

l. backfill materials

m. hauling, placing and preparing bedding materials

n. particle migration measures

o. hauling, moving, placing and compacting backfill materials

p. temporary and permanent pavement repairs and maintenance

q. temporary removal and replacement of pavement, curb, drainage structures, driveways, sidewalks and any other improvements damaged or removed during construction

r. cleanup

s. vertical stack on deep wastewater services

t. all other incidentals necessary to complete the pipe installation as indicated.

u. pipe joint restraint devices, where specified or allowed, meeting Standard Products List WW-27A or WW-27G.

No separate payment will be made for thrust restraint measures.

Steel cylinder concrete pipe fittings and welded steel pipe fittings will not be paid for separately. These will be included in the unit price bid for the bid item Pipe.

(2) Concrete Cradles and Seals

When called for in the Bid, concrete cradles and seals will be paid for at the unit Contract price bid per linear foot for the size of pipe specified, complete in place.

(3) Concrete Retards

When called for in the Bid, Concrete retards will be paid under Item No. 593S, Concrete Retards."

(4) Boring or Jacking.

When called for in the Bid, boring or jacking will be paid under Item 501S, "Jacking or Boring Pipe.

(5) Wet Connections to Potable or Reclaimed Water Mains

When called for in the bid, wet connections will be paid at the unit price bid per each, complete in place, according to the size of the main that is in service and shall be full compensation for all Work required to make the connection and place the pipe in service. (See subsection 510.3 'Construction Methods' part (24) (b) 'Wet Connections to Existing Water System').

(6) Fittings

Ductile iron fittings, furnished in accordance with these specifications, will be paid for at the unit price bid per ton, complete in place, according to the schedule of weights in Standard Products List WW-27C. Bolts, glands, and gaskets will not be paid for separately and shall be included in the contract unit price for fittings.

(7) Concrete Trench Cap and Encasement

Where the distance between the top of the concrete encasement and the top of the trench cap is less than 36 inches, the concrete cap and encasement shall be poured as one unit and paid for under this bid item at the Contract price bid per linear foot. When the distance above is greater than 36 inches or when the trench cap is placed separately, the trench cap shall be paid for as a separate item, per linear foot, complete in place.

(8) Cement-Stabilized Backfill

Cement-stabilized backfill will be paid for at the unit price bid per linear foot and shall be full payment to the Contractor for furnishing and installing the required material, mixed, placed and cured complete in place.

(9) Concrete Encasement

When called for in the Bid, Concrete Pipe Encasement will be paid under Item No. 505S, "Encasement and Encasement Pipe".

(10) Pressure Taps

Pressure taps will be paid for at the unit price bid, complete in place, according to the size tap made and the size main tapped and shall be full payment for furnishing all necessary materials,

including tapping sleeve and valve, making the tap, testing and placing the connection in service.

(11) Excavation Safety Systems

When called for in Bid, Trench Safety Systems shall conform to Item No. 509S, "Excavation Safety Systems."

(12) Connecting a New Water, Wastewater, or Reclaimed Water Service to an existing, comparable type of private service will be paid for at the unit price bid, complete in place, according to the size of new service and size of existing private service, and shall be full payment for furnishing and installing all necessary materials, such as cleanouts, pipe, couplings, and fittings, and including excavation and backfill.

(13) Video Inspection

Video Inspection of Newly Installed Box Culverts and Storm Drain Pipe will be paid for at the unit price bid per linear foot and shall be full payment for all labor, equipment, and materials required for video inspection per this specification, including all submittals of CD/DVD as required.

(14) Jumper Hose

Jumper Hose will be paid at the unit bid price, complete and in place, including installation and removal of all materials necessary to provide a fully functional jumper hose. This item shall also include adequate protection for the jumper hose within vehicular traffic areas.

Source: Rule No. R161-17.05 , 5-31-2017.

Payment, when included as a Contract pay item, will be made under one of the following:

Pay Item No. 510-AR___Dia.:	Pipe, ___ Dia. ___ Type (all depths), including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-ARRJ___Dia.:	Factory Restrained Joint Pipe, ___ Dia., Class ___ Ductile Iron, (all depths) including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-BR___×___Dia.:	Connecting New ___ Service to Existing Private Service (___ Dia. New Service to ___ Dia. Private Service)	Per Each.
Pay Item No. 510-CR:	Pipe Excavation, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-DR:	Pipe Trench Backfill, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-ER:	Concrete Seal or Cradle, ___ Dia. Pipe	Per Linear Foot.

Pay Item No. 510-FR:	Concrete Trench Cap, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-GR:	Concrete Cap and Encasement, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-HR:	Cement Stabilized Backfill, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-IR: ___ × ___ Dia.:	Pressure Taps, ___ Dia. × ___ Dia.	Per Each.
Pay Item No. 510-JR: ___ × ___ Dia.:	Wet Connections, ___ Dia. × ___ Dia.	Per Each.
Pay Item No. 510-KR:	Ductile Iron Fittings	Per Ton.
Pay Item No. 510-ASD___Dia.:	Pipe, ___ Dia. (all depths), including excavation and backfill	Per Linear Foot.
Pay Item No. 510-CSD:	Pipe Excavation, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-DSD:	Pipe Trench Backfill, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-ESD:	Concrete Seal or Cradle, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-FSD:	Concrete Trench Cap, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-GSD:	Concrete Cap and Encasement, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-HSD:	Cement Stabilized Backfill, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-AW___ Dia.:	Pipe, ___ Dia. ___ Type (all depths), including excavation and backfill	Per Linear Foot

Pay Item No. 510-AWRJ___ Dia.:	Factory Restrained Joint Pipe, ___ Dia., Class Ductile Iron, (all depths) including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-BW___ × ___ Dia.:	Connecting New ___ Service to Existing Private Service (___ Dia. New Service to ___ Dia. Private Service)	Per Each.
Pay Item No. 510-CW:	Pipe Excavation, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-DW:	Pipe Trench Backfill, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-EW:	Concrete Seal or Cradle, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-FW:	Concrete Trench Cap, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-GW:	Concrete Cap and Encasement, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-HW:	Cement Stabilized Backfill, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-IW:___ × ___ Dia.:	Pressure Taps, ___ Dia. × ___ Dia.	Per Each.
Pay Item No. 510-JW: ___ × ___ Dia.:	Wet Connections, ___ Dia. × ___ Dia.	Per Each.
Pay Item No. 510-KW:	Ductile Iron Fittings	Per Ton.
Pay Item No. 510-AWW: ___ Dia.:	Pipe, ___ Dia. ___ Type (all depths), including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-AWWRJ___ Dia.:	Factory Restrained Joint Pipe, ___ Dia., Class ductile Iron, (all depths) including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-BWW___ × ___ Dia.:	Connecting New ___ Service to Existing Private Service (___ Dia. New Service to ___ Dia. Private Service)	Per Each.

Pay Item No. 510-CWW:	Pipe Excavation, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-DWW:	Pipe Trench Backfill, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-EWW:	Concrete Seal or Cradle, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-FWW:	Concrete Trench Cap, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-GWW:	Concrete Cap and Encasement, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-HWW:	Cement Stabilized Backfill, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-KWW:	Ductile Iron Fittings	Per Ton.
Pay Item No. 510-VIDEO	Video Inspection of Newly Installed Box Culverts and Storm Drain Pipe	Per Linear Foot.
Pay Item No. 510-JH	2-inch Jumper Hose	Per Linear Foot.

An "R" after the pay item indicates the use for reclaimed water.

An "SD" after the pay item indicates the use for storm drain.

A "W" after the pay item indicates the use for water.

A "WW" after the pay item indicates the use for wastewater.

Source: Rule No. R161-17.05 , 5-31-2017.

End

Applicable References:

Standard Specifications Manual: Item Nos. Ref: 102S, 210S, 402S, 403, 501S, 505S, 506, 507S, 509S, 593S, 601S, 604S

Standards Manual: Standard Detail Nos. 510S-1, (520 - series).

Design Criteria Manuals: Utilities Criteria Manual, Section 5.

511S.1 Description

This item shall govern the valves furnished and installed as indicated on the Drawings. Unless otherwise indicated on the Drawings, all valves 4 inches (102 mm) and larger shall be AWWA-type valves of suitable design and fully equipped for service buried in the earth, without need for further modification and shall be wrapped with 8-mil (0.2 mm) polyethylene film with all edges and laps securely taped to provide a continuous wrap. For reclaimed water piping, the polyethylene film shall be purple. Where not indicated, the Contractor may use valves with any type end-joint allowed for fittings of the pipe class being used. Unless otherwise indicated on the Drawings, all valve stems shall be adjusted to situate the operating nut not more than 24 inches (0.6 meters) below the proposed ground or paving surface of the finished project. Laydown valves shall not be used unless indicated otherwise on the Drawings by call out. Standard details shall not be an indicator of options.

This specification is applicable for projects or work involving either inch-pounds or SI units. Within the text, inch-pound units are given preference followed by SI units shown within parentheses.

511S.2 Materials

The Contractor shall submit descriptive information and evidence that the materials and equipment the Contractor proposes for incorporation in the Work is of the kind and quality that satisfies the specified functions and quality. The City of Austin Water and Wastewater Utility Standard Products Lists (SPL) are considered to form a part of these Specifications. Contractors may, when appropriate, elect to use products from the SPL; however, submittal to the Engineer/Architect (E/A) is still required. If the Contractor elects to use any materials from these lists, each product shall be completely and clearly identified by its corresponding SPL number when making the product submittal. This will expedite the review process in which the E/A, and, if necessary, the Water and Wastewater Utility Standard Products Committee, decide whether the products meet the Contract requirements and the specific use foreseen by the E/A in the design of this engineered Project.

The SPL's should not be interpreted as being a pre-approved list of products necessarily meeting the requirements for a given construction Project. Items contained in the SPL cannot be substituted for items shown on the Drawings, or called for in the specifications, or specified in the Bidding Requirements, Contract Forms and Conditions of Contract, unless approved by the E/A in conjunction with the Water and Wastewater Utility Standard Products Committee. The Standard Product List current at the time of plan approval will govern.

A) Samples, Inspection and Testing Requirements:

All tests and inspections called for by the applicable standards shall be performed by the manufacturer. Upon request, results of these tests shall be made available to the purchaser.

B) Other Requirements:

Each submittal shall be accompanied by:

1) Complete data covering:

a). the operator, including type and size, model number, etc.,

b). the name and address of the manufacturer's nearest service facility,

c). the number of turns to fully open or close the valve.

2) Detailed instructions for calibrating the limit stops for open and closed positions, and

3) Any other information that may be necessary to operate and maintain the operator.

4) Complete dimensional data and installation instructions for the valve assembly as it is to be installed, including the operator.

5) Complete replacement parts lists and drawings, identifying every part for both the valve and operator.

511S.3 Valves

A) Iron-Body Gate Valves

Resilient-seated gate valves for potable or reclaimed service, including tapping valves, shall conform to AWWA C-509 and Standard Products List item WW-282.

Reduced-wall, resilient-seated gate valves for potable or reclaimed service, including tapping valves, shall conform to AWWA C-515 and Standard Products List item WW-700,

Metal-seated gate valves for potable or reclaimed service, including tapping valves, shall conform to AWWA C-500 and Standard Products List item WW-132.

1) Stem Seals: All valves shall have approved O-ring type stem seals. At least two O-rings shall be in contact with the valve stem where it penetrates the valve body.

2) Operation: All valves shall have non-rising stems with a 2" (50 mm) square operating nut, or with a spoke type handwheel when so ordered, turning clockwise to close.

3) Gearing: Gate valves in 24 inch (610 mm) and larger sizes shall be geared and, when necessary for proper bury depth and cover, shall be the horizontal bevel-geared type enclosed in a lubricated gear case.

4) Bypass: Unless otherwise indicated on the Drawings, 16 inch (406 mm) and larger metal-seated gate valves shall be equipped with a bypass of the non-rising stem type which meets the same AWWA standard required for the main valve.

5) Valve Ends: Valve ends shall be push-on, flanged or mechanical joint, as indicated or approved.

   Tapping valves shall have inlet flanges conforming to MSS SP-60, with boltholes drilled per ANSI B16.1 Class 125. Seat rings and body casting shall be over-sized as required to accommodate full size cutters; the outlet end shall be constructed and drilled to allow the drilling machine adapter to be attached directly to the valve.

6) Gear Case: All geared valves shall have enclosed gear cases of the extended type, attached to the valve bonnet in a manner that makes it possible to replace the stem seal without disassembly and without disturbing the gears, bearing or gear lubricant. Gear cases shall be designed and fabricated with an opening to atmosphere so that leakage past the stem seal does not enter the gear case.

7) Valve Body: Double disc gate valves in 16 inch (406 mm) and larger sizes installed in the horizontal position shall have bronze rollers, tracks, scrapers, etc. For reclaimed water valves, the body shall be manufactured in purple, factory painted purple, or field painted purple.

B) Butterfly Valves:

Unless otherwise indicated, all valves shall conform to the current "AWWA" Standard C-504, "Rubber-Seated Butterfly Valves", Class 150B, except as modified or supplemented herein.

1) Functional Requirements

a). Valves shall be the short body design and shall have flanged connections on both ends unless otherwise called for.

b). Valves shall be of such design that the valve discs will not vibrate or flutter when operated in a throttled position. Valve discs shall be secured to the shafts by means of keys or pins so arranged that the valve discs can be readily removed without damage thereto. All keys and pins used in securing valve discs to shafts shall be stainless steel or monel. Valve discs shall be stainless steel or ductile iron, ASTM A 536, Grade 65-45-12 (448-310-12); seating edge shall be stainless steel or other corrosion resistant material.

c). Valve shafts shall be constructed of wrought stainless steel or monel. The ends of the shaft shall be permanently marked to indicate the position of the disc on the shaft.

d). All buried valves shall have approved manufacturer's O-ring type or split V type "Chevron" shaft seals. When O-ring seals are used, there shall be at least two O-rings in contact with the valve shaft where it penetrates the valve body.

On 24 inch (635 mm) and larger valves, the seat shall be completely replaceable and/or adjustable with common hand tools without disassembling the valve from the pipeline.

Rubber seats located on the valve disc shall be mechanically secured with stainless steel retainer rings and fasteners.

e). Unless otherwise indicated, valves shall be provided with manual operators with vertical stems and 2 inches (50 mm) square operating nut turning clockwise to close and equipped with a valve disc position indicator. All keys or pins shall be stainless steel or monel. Buried valves shall have the valve stems extended or adjusted to locate the top of the operating nut no more than 24 inches (0.6 meter) below finish grade.

f). Unless otherwise indicated, motorized butterfly valves shall be equipped with 230/460 volt, 3-phase reversing motor operators, extended as required to locate the center line of the operator shaft approximately 4 feet to 4 feet, 6 inches (1.2 to 1.4 meters) above finish grade. Operators shall be equipped with cast iron or malleable iron manual override hand wheel with a valve position indicator, local push button controls, lighted status/position indicator, torque and travel limit switches and all switches, relays and controls (except external power and signal wiring) necessary for both local and remote operation.

2) Performance Requirements

a). Unless otherwise indicated, valve operators shall be sized to seat, unseat, open and close the valve with 150 psi (1 megapascal) shutoff pressure differential across the disk and allow a flow velocity of 16 feet (4.9 meters) per second past the disc in either direction.

b). Motorized valve motors shall be capable of producing at least 140 percent of the torque required to operate the valves under conditions of maximum non-shock shutoff pressure without exceeding a permissible temperature rise of 131^0F over

104^0F ambient (55 degrees Celsius over 40 degrees Celsius ambient); they shall have a duty rating of not less than 15 minutes and shall be capable of operating the valve through 4 1/2 cycles against full unbalanced pressure without exceeding the permissible temperature rise. Motors shall be suitable for operating the valve under maximum differential pressure when voltage to motor terminals is 80 percent of nominal voltage. Motor bearings shall be permanently lubricated and sealed.

C) Ball Valves:

Ball valves shall be brass, bronze, stainless steel or PVC as indicated on the Drawings or Details or as approved by the Engineer or designated representative.

D) Air-Vacuum Release Valves

1) Valves shall be combination air-release, air-vacuum units having small and large orifice units contained and operating within a single body or assembled unit.

The small orifice system shall automatically release small volumes of air while the pipe is operating under normal conditions. The large air-vacuum orifice system shall automatically exhaust large volumes of air while the pipe is being filled and shall permit immediate re-entry of air while being drained.

Valves shall be rated for at least 150 psi (1 megapascal) {maximum} normal service pressure.

2) Material Requirements

Valve exterior bodies and covers shall be cast iron or reinforced nylon.

Internal bushings, hinge pins, float guide and retaining screws, pins, etc., shall be stainless steel, bronze, nylon or Buna-N rubber.

Orifice seats shall be Buna-N rubber.

Floats shall be stainless steel, nylon or Buna-N rubber, rated at 1000 psi (6.9 megapascals).

Unless otherwise indicated, these valves shall be as included in the Standard Products List (SPL WW-367 for water, WW-462 for wastewater force mains).

E) Fire Hydrants

All fire hydrants shall be Dry Barrel, Traffic Model (break-away), Post Type having Compression Type Main Valves with 5 1/4" (133 mm) opening, closing with line pressure. Approved models are listed on SPL WW-3 of the Water and Wastewater Utility Standard Products List.

1) Applicable Specifications

AWWA C-502 current: "AWWA Standard for Dry-Barrel Fire Hydrants".

NFPA 1963: "National (American) Standard Fire Hose Coupling Screw Thread" and City of Austin 4 inch (102 mm) Fire Hose Connection Standard (Available upon request from the Austin Water Utility's Standards Committee Chairperson at 972-0204).

ANSI A-21.11 current: "American National Standard for Rubber Gasket Joints for Cast Iron and Ductile Iron Pressure Pipe and Fittings".

2) Functional Requirements

Design Working Pressure shall be 200 psi (1.38 megapascals) and a test pressure of 400 psi (2.76 megapascals).

Inlet shall be side connection hub end for mechanical joint (ANSI A-21.11-current). Shoe shall be rigidly designed to prevent breakage.

Lower Barrel shall be rigid to assure above ground break at traffic feature. Bury length of hydrant shall be four (4) feet (1.2 meters) minimum, five (5) feet (1.5 meters) maximum (hydrant lead pipe may be elbowed up from main using restrained joints; flanged joints in lead pipes are not allowed). Flange type connections between hydrant shoe, barrel sections and bonnet shall have minimum of 6 corrosion resistant bolts.

Hydrant Main Valve shall be 5 1/4 inch (133 mm) I.D. Valve stem design shall meet requirements of AWWA C502, with Operating Nut turning clockwise to close. Operating Nut shall be pentagonal, 1 1/2 inch (38 mm) point to flat at base, and 1 7/16 inches (36.5 mm) at top and 1 inch (25 mm) minimum height. Seat ring shall be bronze (bronze to bronze threading), and shall be removable with lightweight stem wrench. Valve mechanisms shall be flushed with each operation of valve; there shall be a minimum of two (2) drain ports.

Traffic Feature shall have replaceable breakaway ferrous metal stem coupling held to stem by readily removable type 302 or 304 stainless steel fastenings. Breakaway flange or frangible lugs shall be designed to assure aboveground break. Breakaway or frangible bolts will not be acceptable.

Outlet Nozzles shall be located approximately 18 inches (450 mm) above ground. Each hydrant shall have two (2) 2 1/2 inch (63.5 mm) nozzles 180 degrees apart with National (American) Standard Fire Hose Coupling Screw Thread NFPA 1963 and one (1) 4 inch (102 mm) pumper nozzle with City of Austin standard thread–six (6) threads per inch (25 mm) "Higbee" cut, 4.8590 inch (123.4 mm) O.D., 4.6425 inch (117.9 mm) root diameter. Nozzles shall be threaded or cam-locked, O-ring sealed, and shall have type 302 or 304 stainless steel locking devices. Nozzle caps (without chains) and cap gaskets shall be furnished on the hydrant. The cap nut shall have the same configuration as the operating nut.

Hydrants shall be Dry-Top Construction, factory lubricated oil or grease with the lubricant plug readily accessible. The system shall be described for City approval.

A blue Type II-B-B reflectorized pavement marker, conforming to Standard Specification Item No. 863S, shall be placed 2 to 3 feet (0.6 to 0.9 meters) offset from the centerline of paved streets, on the side of and in line with, all newly installed fire hydrants.

Hydrant shall have double O-ring seals in a bronze stem sheath housing to assure separation of lubricant from water and shall have a weather cap or seal, or both, as approved by the Owner, to provide complete weather protection.

3) Material Requirements

All below ground bolts shall be corrosion resistant. The hydrant valve shall be Neoprene, 90-durometer minimum. The seat ring, drain ring, operating nut and nozzles shall be bronze, AWWA C-502 current, containing not over 16 percent zinc. Break-away stem coupling shall be of ferrous material; its retaining pins, bolts, nuts, etc. of type 302 or 304 stainless steel.

Coatings shall be durable and applied to clean surfaces. Exterior surfaces above ground shall receive a coating of the type and color specified in the applicable version of City of Austin SPL WW-3. The coating shall be applied according to coating manufacturer's

specifications. Other exposed ferrous metal shall receive asphalt-based varnish, or approved equal, applied according to the coating manufacturer's specifications.

F) Pressure/Flow Control Valves:

All control valves to regulate pressure, flow, etc., in City lines shall be models listed in the City of Austin Water and Wastewater Standard Products List (SPL).

G) Drain Valves:

Drain valve materials and installation shall conform to City of Austin Standard Detail No. 511S-9A.

H) Valve Stem Extensions:

Valve stem extensions shall consist of a single piece of the required length with a socket on one end and a nut on the other.

511S.4 Construction Methods

A) Setting Valves, Drains and Air Releases

Unless otherwise indicated, main line valves, drain valves and piping, air and vacuum release assemblies and other miscellaneous accessories shall be set and jointed in the manner described for cleaning, laying, and jointing pipe.

Unless otherwise indicated, valves shall be set at the locations shown on the Drawings and such that their location does not confict with other appurtenances such as curb ramps. Valves shall be installed so that the tops of operating stems will be at the proper elevation required for the piping at the location indicated above. Valve boxes and valve stem casings shall be firmly supported and maintained, centered and aligned plumb over the valve or operating stem, with the top of the box or casing installed flush with the finished ground or pavement in existing streets, and installed with the top of the box or casing approximately 6 inches (150 mm) below the standard street subgrade in streets which are excavated for paving construction or where such excavation is scheduled or elsewhere as directed by the Engineer or designated representative.

Drainage branches or air blowoffs shall not be connected to any sanitary sewer or submerged in any stream or be installed in any other manner that will permit back siphonage into the distribution system (see City of Austin "Standard Detail Drawings- Series 500/500S"). Every drain line and every air release line shall have a full sized independent gate valve flanged directly to the main. Flap-valves, shear gates, etc., will not be accepted.

B) Setting Fire Hydrants:

Fire hydrants shall be located in a manner to provide accessibility and in such a manner that the possibility of damage from vehicles or conflict with pedestrian travel_will be minimized. Unless otherwise directed, the setting of any hydrant shall conform to the following:

Hydrants between curb and sidewalk on public streets shall be installed as shown on Standard 511S-17, with outermost point of large nozzle cap 6" to 18" (150 mm to 450 mm) behind back of curb. Where walk abuts curb, and in other public areas or in commercial areas, dimension from gutter face of curb to outermost part of any nozzle cap shall be not less than 3 feet (0.9 meters), nor more than 6 feet (1.8 meters), except that no part of a hydrant or its nozzle caps shall be within 6 inches (150 mm) of any sidewalk or pedestrian ramp. Any fire hydrant placed near a street corner shall be no less than 20 feet (6 meters) from the curb line

point of tangency. Fire hydrants shall not be installed within nine feet (2.75 meters) vertically or horizontally of any sanitary sewer line regardless of construction.

All hydrants shall stand plumb; those near curbs shall have the 4-inch (102 mm) nozzle facing the curb and perpendicular to it. The hydrant bury mark shall be located at ground or other finish grade; nozzles of all new hydrants shall be approximately 18 inches (450 mm) above grade. Lower barrel length shall not exceed 5 feet (1.5 meters). Barrel extensions are not permitted unless approved by the Engineer or designated representative. Each hydrant shall be connected to the main by 6-inch (152 mm) ductile iron pipe; a 6-inch (152 mm) gate valve shall be installed in the line for individual shutoff of each new hydrant.

Below each hydrant, a drainage pit 2 feet (0.6 meter) in diameter and 2 feet (0.6 meter) deep shall be excavated and filled with compacted coarse gravel or broken stone mixed with coarse sand under and around the bowl of the hydrant, except where thrust blocking is located (City of Austin Specification Item 510 and Standard Detail 510-6 and to a level 6 inches (150 mm) above the hydrant drain opening.

The hydrant drainage pit shall not be connected to a sanitary sewer. The drain gravel shall be covered with filter fabric to prevent blockage of voids in the gravel by migration of backfill material. The bowl of each hydrant shall be well braced against unexcavated earth at the end of the trench with concrete thrust blocking (taking care not to obstruct the hydrant drain holes), or the hydrant shall be tied to the pipe with approved metal harness rods and clamps. The fire line shall be provided with joint restraint from the main line to the fire hydrant. Hydrants shall be thoroughly cleaned of dirt or foreign matter before setting.

Fire hydrants on mains under construction shall be securely wrapped with a poly wrap bag or envelope taped into place. When the mains are accepted and placed in service the bag shall be removed.

C) Pressure Taps: Refer to Section 510.3 (24) of Standard Specification Item Number 510, "Pipe".

D) Plugging Dead Ends

Standard plugs shall be inserted into the bells of all dead ends of pipes, tees or crosses and spigot ends shall be capped. All end plugs or caps shall be secured to the pipe conforming to Section 510.3 (22) of Standard Specification Item Number 510, "Pipe".

E) Protective Covering:

Unless otherwise indicated, all flanges, nuts, bolts, threaded outlets and all other steel component shall be coal tar coated and shall be wrapped with standard minimum 8-mil (0.2 mm) low density polyethylene film or a minimum 4-mil (0.1 mm) cross laminated high-density polyethylene meeting ANSI/AWWA Specification C-105-current, with all edges and laps taped securely to provide a continuous and watertight wrap. Repair all punctures of the polyethylene, including those caused in the placement of bedding aggregates, with duct tape to restore the continuous protective wrap before backfilling. For reclaimed water piping, the polyethylene shall be purple.

F) Valve Box, Casing and Cover:

Stems of all buried valves shall be protected by valve box assemblies. Valve box castings shall conform to ASTM A 48, Class 30B. Testing shall be verified by the manufacturer at the time of shipment. Each casting shall have cast upon it a distinct mark identifying the manufacturer and the country of origin. Valve boxes and covers for potable water shall be round. Valve boxes and covers for reclaimed water piping shall be square and shall have “Reclaimed Water” indicated on the lid.

G) Drain Valve Installations:

Refer to City of Austin Standards 511S-9A.

H) Air Release Assemblies:

Refer to City of Austin Standards 511S-1A, 511S-1B, 511S-2A, 511S-2B, 511S-3A and 511S-3B.

I) Pressure/Flow Control Valves:

Assemblies shall be installed as indicated.

J) Connections to Existing System:

Refer to Item No. 510, "Pipe" for connections to the existing system.

K) Shutoffs:

Refer to Item No. 510, "Pipe" for shutoffs.

511S.5 Measurement

All types of valves will be measured per each. Fire hydrants and drain valve assemblies will be measured per each. Fire Hydrant barrel extensions will be measured per vertical foot (meter: 1 meter equals 3.28 feet). Pressure/Flow control valve assemblies and both manual and automatic air release assemblies will be measured per each. Reflectorized pavement markers for identifying the location of newly installed fire hydrants shall be measured per each, as per Standard Specification Item No. 863S.7.

Bury depths exceeding 5.5 feet (1.68 meters) are defined as Additional Bury Depths. Additional bury depths will only be measured if indicated on the Drawings and identified in the Standard Contract Bid Form 00300U; otherwise, the unit bid price for each completed unit includes all depths.

511S.6 Payment

Payment shall include full compensation, in accordance with the pay item established in the bid, for excavation, furnishing, hauling and placing valves, drain valve assemblies, fire hydrants and barrel extensions including anchorage and all incidental materials and work; preparing, shaping, dewatering, bedding, placing and compacting backfill materials and for all other incidentals necessary to complete the installation, as indicated in the Drawings, complete in place.
Payment for iron fittings and for wet connections is covered in Section 510.6 of Standard Specification Item 510, “Pipe".

Payment for excavation safety systems is covered in Section 509S.10 of Standard Specification Item 509S, Excavation Safety Systems.

A) Valves: Valves will be paid for at the unit bid price for the size and type valve installed, including valve stem casing and cover, excavation and backfill, setting, adjusting to grade, anchoring in place, and other appurtenances necessary for proper operation.

B) Fire Hydrants: Fire Hydrants installation shall be paid for at the unit bid price, which includes all necessary labor and materials to set, adjust to grade and anchor the hydrant body, barrel extensions, concrete block, gravel drain, and other appurtenances necessary for proper operation; but shall not include pipe and valve between the main line and fire hydrant base.

C) Pressure or Flow Control Valve Assemblies: Pressure control and flow control valve assemblies will be paid for at the unit bid price, including box or vault, setting, adjusting to grade, anchoring in place,

adjusting the control device to the required conditions, providing other appurtenances necessary for proper operation, and placing in operation.

D) Drain Valve Assemblies: Drain valve installation shall be paid for at the unit bid price , which includes all necessary labor and materials to set, adjust to grade and anchor the bends, vertical piping, blind flange, joint restraint devices, concrete blocking, concrete pad, and other appurtenances necessary for proper operation; but shall not include pipe and valve between the main line and drain valve buried bend.

E) Manual Air Release Assemblies: Manual air release installations will be paid for at the unit bid price and shall include valves, fittings, pipe, tapping the main, box and cover, and other appurtenances necessary for proper operation.

F) Automatic Combination Air/Vacuum Release Valve Assembly: Automatic air-vacuum release assemblies will be paid for at the unit bid price and will include the main line tap or outlet, all pipe, valves, fittings, box or vault and cover, and other appurtenances necessary for proper operation.

G) Additional Bury Depth: Additional bury depth will be paid for at the unit bid price, which will include all work necessary to install units with bury depths exceeding 5.5 feet (1.68 meters).

H) Fire Hydrant Barrel Extensions: Hydrant barrel extensions will be paid for at the unit bid price which will include necessary hardware and rod extensions.

I) Reflectorized Pavement Markers: Pavement markers will be paid for at the unit bid price, which will include necessary surface preparation and adhesive, as per Standard Specification Item No. 863S.8.

Payment, when included as a contract pay item, will be made under one of the following:

Pay Item No. 511S-A:	Valves, _____ Type, _____Diameter	Per Each.
Pay Item No. 511S-B:	Fire Hydrants (See Standard No. 511S-17)	Per Each.
Pay Item No. 511S- C:	Pressure or Flow Control Valve Assemblies	Per Each.
Pay Item No. 511S- D:	Drain Valve Assemblies (See Standard No. 511S-9A)	Per Each.
Pay Item No. 511S- E:	Manual Air Release Assemblies, ____Diameter	Per Each.
Pay Item No. 511S- F:	Automatic Combination Air/Vacuum Release Valve Assembly, _____ Diameter.	Per Each.
Pay Item No. 511S- G:	Additional Bury Depth	Per Vertical Foot.
Pay Item No. 511S-H:	Fire Hydrant Barrel Extensions	Per Vertical Foot

END

SPECIFIC CROSS REFERENCE MATERIALS
Specification 511S, "Water Valves"

City of Austin Standard Specification Items

Designation	Description
Item No. 510	Pipe
Section-510.3 (22)	Pipe Anchorage, Support and Protection
Section-510.3(24)	Water System Connections

City of Austin Standard Details

Designation	Description
511S-1A	25 mm (1") – 76 mm (2") Vented Air Release Valve Installation (Type I)
511S-1B	25 mm (1") – 76 mm (2") Non-Vented Air Release Valve Installation (Type I)
511S-2A	Type II - 76 mm (3") or Larger Vented Air/Vacuum Valve Installation

511S-2B	Type II - 76 mm (3”) or Larger Non-Vented Air/Vacuum Valve Installation
511S-3A	Type III - 76mm (3”) or Larger Vented Air/Vacuum Valve Installation
511S-3B	Type III-76mm (3”) or Larger Non-Vented Air/Vacuum Valve Installation
511S-9A	Drain Valve Assembly
511S-17	Standard Fire Hydrant Installation

SPECIFIC CROSS REFERENCE MATERIALS (Continued)
Specification 511S, “Water Valves”

City of Austin W/WW Standard Products

Designation	Description
WW-3	Standard Products List for Fire Hydrants
WW-132	Standard Products List for Metal-Seated Gate Valves, AWWA C-500
WW-282	Standard Products List for Resilient-Seated Gate Valves, AWWA C-509
WW-367	Standard Products List for Air Release Valves for Water
WW-462	Standard Products List for Air Release/Vacuum Relief Valves for Wastewater
WW-700	Standard Products List for Resilient-Seated Gate Valves, AWWA C-515

ANSI/AWWA Standards

Designation	Description
A-21.11	American National Standard for Rubber Gasket Joints for Cast Iron and Ductile Iron Pressure Pipe and Fittings
C-105	American National Standard for Polyethylene Encasement for Ductile-Iron Pipe
C-500	Metal-Seated Gate Valves for Water Supply Service
C-502	Dry-Barrel Fire Hydrants
C-504	Rubber-Seated Butterfly Valves
C-509	Resilient Seated Gate Valves for Water and Sewerage Systems
C-515	Reduced-Wall, Resilient-Seated Gate Valves For Water Supply Service

ASTM Standards

Designation	Description
ASTM A48/A48M	Specification for Gray Iron Castings
ASTM A 536	Specification for Ductile Iron Castings

National Fire Protection Association (NFPA)

1963	National (American) Standard Fire Hose Coupling Screw Thread

RELATED CROSS REFERENCE MATERIALS
Specification 511S, “Water Valves”

City of Austin Standard Specification Items

Designation	Description
Item No. 501S	Jacking or Boring Pipe
Item No. 503S	Frames, Grates, Rings and Covers
Item No. 505S	Concrete Encasement and Encasement Pipe
Item No. 506S	Manholes
Item No. 507S	Bulkheads
Item No. 508S	Miscellaneous Structures and Appurtenances
Item No. 509S	Excavation Safety Systems

Item No. 559S
Concrete Box Culverts

559S.1 Description

This item governs the materials used and the constructing, furnishing and placing of concrete box culverts (boxes) on a prepared grade at the location shown on the Drawings and in accordance with Standard Detail 559S-1, “Fabrication Tolerances for Precast Box Culverts”. Unless indicated otherwise on the Drawings, the Contractor shall have the option of furnishing cast-in-place, precast (formed) or precast (machine made) concrete box culverts.

When cast-in-place box culverts are used, they shall conform to the details indicated on the Drawings and Standard Detail 559S-1, “Fabrication Tolerances for Precast Box Culverts” along with the requirements for Standard Specification Item No. 403S, "Concrete for Structures" and Standard Specification Item No. 410, "Concrete Structures".

The manufacturing of precast box culverts shall conform to the requirements of the current version of ASTM C1577. When precast box culverts are used under traffic, the design loads shall consist of the impact load, dead load and live load [AASHTO LRFD Bridge Construction Design Specifications – greater of: Truck Axle load (32Kf {identical to HS-20load axial load of 32Kf})- or Tandem Axle load (2 at 25Kf each)].

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

559S.2 Submittals

The submittal requirements of this specification item include for both cast-in-place and precast boxes:

A. The foundation plan and drilling/excavation details;
B. Class C and S Portland cement concrete mix design for cast-in-place boxes;
C. Anchor bolt plan and details;
D. Reinforcing Steel details and placement drawings;
E. Casting plan and details (if required);
F. Certification of compliance with HL93 Liveload design standards;
G. Bedding Material;
H. Joint design;
I. List of joint sizes showing the minimum size of sealant material to be used with each size joint, along with complete instructions on recommended installation procedures;
J. Test results of the hydrostatic performance testing of the joints, if requested by the City;
K. Box Culvert manufacturer’s recommended final joint opening (gap) dimension on the inside of the installed box;
L. Certification from the QCast Program, which provides a third party certification auditing firm to certify that the manufacturing plant is producing boxes based on the requirements of the National Precast Concrete Association;
M. Inspection procedures to be used by the manufacturer for quality control and assurance for materials; and
N. 5000 psi (34.475 mPa) Concrete mix design for machine made boxes.

559S.3 Quality Control

Manufacturers of concrete boxes shall have a quality management system certified by the QCast Program following the requirements of the American Concrete Pipe Association (ACPA) Plant Certification Manual. Manufacturers of concrete boxes, inlets and storm water manholes shall have a quality control program consisting of one or more of the following: 1) a quality management system certified by the QCast Program following the requirements of the ACPA Plant Certification Manual, 2) a quality management system certified by the National Precast Concrete Association. 3) a quality control program approved by the OWNER prior to submittal of bids for the PROJECT, or 4) an independent, third party quality control testing and inspection firm for testing and inspecting box culverts produced for the PROJECT and approved by the OWNER prior to submittal of bids for the PROJECT.

All such quality control programs shall be paid for by the manufacturer. It is the intent of this requirement that the manufacturer will document all appropriate tests and inspections with sampling and inspection criteria, frequency of testing and inspection, date of testing and inspection and date on which every piece was manufactured. Required testing and inspection, including that by an independent, third party, shall be performed full-time during production of box culverts for the PROJECT. When requested by the OWNER, the manufacturer will provide copies of test data and results and inspection reports with the shipment of box culverts for the PROJECT. Test data and results and inspection reports shall be traceable to specific box culverts lots or pieces. Owner approval of the manufacturer's quality control program will expire after three years, at which time the manufacturer must present a current quality control program for approval.

The quality of materials and, the process of manufacturing and furnishing box culverts shall be subject to inspection and approval by the E/A at the box culvert manufacturing plant and at the project site prior to and during installation. Plant inspections shall be conducted at the discretion of the City Representative. Only manufacturers having a quality control program of the type described above will be considered as approved providers of concrete box culverts and storm water manholes.

559S.4 Materials

A. Concrete

Class C Concrete shall be used for cast-in-place and precast (formed) box culverts conforming to the requirements of Standard Specification Item No. 403S, "Concrete Structures" and Standard Specification Item No. 410S, "Concrete for Structures", except that Class S Portland cement Concrete will be required for the top slab of direct traffic boxes.

Portland cement concrete for precast (machine made) boxes shall conform to the current version of ASTM C 1577 and shall have a minimum 28-day compressive strength of 5,000 psi (34.475 mPa).

B. Reinforcement

Reinforcing steel for cast-in place and precast (formed) box culverts shall conform to Standard Specification Item No. 406S, "Reinforcing Steel".

Reinforcing steel for machine made boxes shall in accordance with ASTM C1577

C. Jointing Material

Unless otherwise shown on the drawings, when installing box culverts, the Contractor shall have the option of making joints with preformed flexible joint sealants or with rubber gaskets. Preformed flexible joint sealants for box culvert joints shall comply with ASTM C990, and rubber gaskets for box culvert joints shall comply with ASTM C1677. Mortar shall not be used to seal pre-fabricated joints. Box culvert joint shall be designed to prevent the flow of solids through the joint

D. Membrane Curing

Materials for membrane curing for cast-in-place and precast (formed) box culverts shall conform to Standard Specification Item No. 409S, "Membrane Curing". Materials for membrane curing for machine made boxes shall be in accordance with ASTM C1577.

E. Admixtures

Admixtures for all box culverts shall conform to Standard Specification Item No. 405S, "Concrete Admixtures". Air entraining admixtures shall be added to the mixture to produce concrete with not less than 4, nor more than 7 percent, air content by volume.

F. Granular Backfill

Materials for Granular Backfill shall conform to Standard Specification Item No. 210S, "Flexible Base".

G. Foundation Rock

Bedding material shall be 1-inch (25 mm) to 3-inch (75mm) diameter clean gravel or crushed gravel or crushed rock in conformance with Standard Specification Item No. 510 “Pipe.”

H. Geotextile Filter Fabric for Bedding Material

Geotextile filter fabric for bedding material shall be Webtec, Terra Tex NO 4 (AOS US Standard Sieve 70) geotextile fabric or approved equal.

559S.5 Fabrication

The fabrication of machine-made precast boxes shall comply with ASTM C1577.

Forms for precast (machine made) boxes shall be made of steel. Forms for precast (formed) boxes may be either wood or steel. Forms shall be mortar-tight and of sufficient strength to prevent bulging or misalignment of adjacent boxes. They shall be constructed to permit their removal without damage to the concrete. Offsets at form joints shall not exceed 1/8 inch (3.2-mm). Forms shall be clean and free of extraneous matter when Portland cement concrete is placed.

Positive means of supporting steel cages in place throughout forming and Portland cement concrete placement will be required and subject to the approval of the Engineer or designated representative. Welding of reinforcing steel will be permitted only where shown on the Drawings. Welding shall be done by a qualified welder.

Precast (machine made) boxes shall be cast by a process, which will provide for uniform placement of the Portland cement concrete in the forms and compaction by mechanical devices, that will assure dense concrete. Portland cement concrete shall be mixed in a central batch plant or other approved batching facility from which the quality and uniformity of the Portland cement concrete can be assured. Transit-mixed concrete will not be acceptable for use in precast (machine made) boxes.

Curing of precast boxes made in a commercial plant shall be by any one or by a combination of the following methods, which are compatible with the joint materials selected or as directed by the Engineer or designated representative.

A. Steam Curing

Boxes will be placed in a curing chamber, free from outside drafts and cured in a moist atmosphere maintained by the injection of steam for such time and temperature as necessary for proper curing. The curing chamber shall be constructed to allow full circulation of steam around the entire box. Steam outlets shall be positioned so that live steam is not applied directly to the Portland cement concrete.

B. Water Curing

Boxes may be water cured by covering with water saturated cotton mats, polyethylene sheeting or polyethylene burlap blankets, by a system of perforated pipe or mechanical sprinklers, by porous hose or by other methods that will keep the boxes moist during the curing period. Water for curing shall conform to Standard Specification Item No. 403S, "Concrete for Structures".

C. Membrane Curing

Type 1 membrane curing compound may be used for interim curing or for complete curing. All surfaces shall be kept moist prior to the application of the curing compound and shall be damp when the compound is applied.

When used for interim curing, the curing compound shall be applied to the outside surface of the box upon removal of forms. It shall also be applied to the inside surface or a suitable covering may be placed over the box opening to protect the inside of the box against rapid drying.

When used for complete curing, curing compound shall be applied to the inside surface of the box when interim curing is applied or when handling strength has been attained, but not later than 24 hours after casting.

Curing shall not be delayed longer than 1 hour after the Portland cement concrete has been placed in the forms or more than 1/2 hour after removal of forms, unless interim curing is applied.

Precast boxes made in a commercial plant shall be continuously cured for a period of 3 days after reaching handling strength or until the design strength has been attained. Curing may be interrupted for no more than 30 minutes for form removal and no more than 4 hours for removal to a storage area and resumption of curing. All precast boxes shall be protected from freezing during the curing period.

A curing day is a calendar day when the air temperature, taken in the shade away from artificial heat, is above 50°F (10°C) for at least 19 hours or for colder days if satisfactory provisions are made to maintain the temperature at all surfaces of the concrete above 50°F (10°C) for the entire 24 hours.

Test cylinders shall be cured at the same time and in the same manner as the boxes.

Not more than 4 lifting holes may be provided in each box to facilitate handling. They may be cast-in, cut into the fresh Portland cement concrete after form removal or drilled and shall not be more than 2 inches (50-mm) in diameter or 2 inches (50-mm) square. Cutting or displacement of reinforcement will not be permitted. Spalled areas around the

holes shall be repaired. Concrete boxes shall be given an ordinary finish conforming to Standard Specification Item No. 410S, "Concrete Structures".

Precast boxes of either type, made in a plant, shall bear the following marking:

The name or trademark of the manufacturer;
The date of manufacture;
The box size and height of fill.

When fitting holes are not provided, one end of each box section shall be clearly marked on the inside and outside walls to indicate the top and/or bottom as it will be installed.

Marking shall be indented into the box or may be painted thereon with waterproof paint.

D. Grout and Bentonite Slurry Injection Holes

Box culvert sections installed by trenchless tunneling and jacking method shall have drilled or fabricated grout injection holes and bentonite slurry injection holes as required by Standard Technical Specification Item No. 501S Jacking or Boring Pipe and its special provision. Injection holes shall be 1-1/2 inch (38 mm) minimum diameter with plugs cast into the box culvert at the time of manufacture.

559S.6 Testing

Precast box culverts made in a commercial plant shall be tested and accepted in accordance with ASTM C1577.

Testing of cast-in-place and precast (formed) box culverts shall conform to Standard Specification Item No. 403S, "Concrete for Structures".

559S.7 Fabricating Tolerances

Tolerances for precast boxes of either type shall conform to the following:

A. The inside vertical and horizontal dimensions shall not vary from plan requirements more than + 1/2 inch (12.5-mm).

B. The horizontal or vertical plane at each end shall not vary from being perpendicular to the top and bottom by more than 1/2 inch (12.5-mm) when measured diagonally between opposite interior corners of the end section.

C. The sides of a section at each end shall not vary from being perpendicular to the top and bottom by more than 1/2 inch (12.5-mm) when measured diagonally between opposite interior corners of the end section.

D. The thickness of walls and slabs shall not be less than that required by the Drawings, except that an occasional deficiency not greater than 1/4 inch (6.3-mm), will be acceptable. If proper jointing is not affected, thick nesses in excess of Drawing requirements are acceptable.

E. The straightness of the tongue and groove at the mating surface shall not vary by more than 1/4 inch (6.3-mm).

Deviations from the above tolerances will be acceptable if the box sections can be fitted at the plant or job site and it is determined that an acceptable joint can be made. For this condition, an acceptable joint is:

When 2 box sections are fitted together on a flat surface in proper alignment and in the position they will be installed, the longitudinal opening at any point shall not exceed 1 inch (50-mm). Box sections accepted in this manner shall be match-marked for installation.

559S.8 Defects and Repair

Fine cracks or checks on the surface of the member which do not extend to the plane of the nearest reinforcement will not be cause for rejection unless they are numerous and extensive. Cracks, which extend into the plane of the reinforcing steel, but are acceptable otherwise, shall be repaired in an approved manner.

Small damaged or honeycombed areas, which are purely surface in nature, may be repaired. Excessive damage, honeycomb or cracking will be subject to structural review. Repairs shall be sound, properly finished and cured in conformance with the pertinent specifications.

When fine cracks or hairchecks on the surface indicate poor curing practices, further production of precast boxes shall be discontinued until corrections are made and proper curing provided.

559S.9 Storage and Shipment

Precast boxes shall be stored on level blocking in a manner acceptable to the Engineer or designated representative. No load shall be placed upon them until design strength is reached and curing completed. Shipment of boxes may be made when the design strength and curing requirements have been met.

559S.10 Construction Methods

Excavation and backfill shall conform to Standard Specification Item No. 401S, "Structural Excavation and Backfill" and Standard Specification Item No. 510, "Pipe", except where tunneling or jacking methods are required or indicated on the Drawings.

Precast concrete boxes shall be bedded on a foundation of firm stable material accurately shaped to conform to their base. When indicated on the Drawings, special bedding materials shall be provided.

The envelope shall extend the full trench width from a depth of 6” (150 mm) and shall rise to at least 12” (300 mm) above the box. Geotextile filter fabric shall be placed within the bedding envelope approximately 8” (200 mm) above the top of the box and covered with a minimum of 4” (100 mm) of bedding material to protect fabric during placement of compaction and backfill. Damaged fabric should be removed and replaced or overlapped at least 12” (300 mm).

Joints sealed with preformed flexible joint sealants shall comply with ASTM C990. Joints sealed with rubber gaskets shall comply with ASTM C1677. Install joint sealants in accordance with the box culvert and joint sealant manufacturers’ recommendations. Place the joint sealer so that no dirt or other deleterious materials come in contact with the joint sealing material. Pull or push home the box culvert with enough force to properly seal the joint. Remove any joint material pushed out into the interior of the box culvert to be flush and smooth with the inside surface of the box culvert. Protrusion of joint material greater than 1/8” (3.13 mm) into the interior of the box culvert shall be grounds for rejection of the box as installed. Observe joint sealant manufacturer’s recommendations for installation temperature of the joint sealant. Apply joint sealant to box culvert joint immediately before placing box culvert section in trench, and then connect box culvert section to previously laid box culvert section.

Contractor shall provide video recording of installed box culverts, in accordance with the video recording work requirements of Standard Specification Item No. 510.

If video inspections reveals joints where soil infiltration is evident, or where joints or conduits are otherwise defective, then the contractor shall remove and replace all affected conduit or repair joints using joint repair techniques recommended by the manufacturer to achieve a completed system that meets all Contract requirements.

When precast boxes are used to form multiple barrel structures, they shall be placed in conformance with the details indicated on the Drawings. Materials to be used between barrels shall be as indicated on the Drawings.

Connections of precast boxes to cast-in-place boxes or to any required headwalls, wingwalls, riprap or other structures shall conform to the details indicated on the Drawings.

Lifting holes shall be filled with mortar or concrete and cured to the satisfaction of the Engineer or designated representative.

559S.11 Measurement

A. Cast in Place Box Culverts

The quantities of Portland cement concrete of the various classifications. which will constitute the completed and accepted "Box Culverts" in place will be measured by the cubic yard (cubic meter: 1 cubic meter equals 1.308 cubic yards) , based on the dimensions indicated on the Drawings.

B. Precast

Concrete box culverts of each size and type shall be measured by the lineal foot (lineal meter: 1 lineal meter equals 3.28 lineal feet). The measurement will be made between the ends of the box along the central axis. For concrete boxes used in multiple barrel structures, the measured length will be the sum of the lengths of all barrels measured as described above.

559S.12 Payment

“Concrete Box Culverts” shall be full compensation for constructing, furnishing and transporting boxes; excavation; disposal of surplus or unusable excavated material; providing, hauling, placing, preparing and shaping bedding material and leveling courses; concrete, reinforcing steel; jointing of boxes; connections to existing systems or structures; connections to new systems or structures; preparing, shaping, pumping for dewatering up to 360 gpm; particle migration measures including geotextile filter fabric; hauling, moving, placing and compacting backfill materials; installation and maintenance of temporary pavement repairs; temporary removal and replacement of pavement, curb, drainage structures, driveways, sidewalks, and any other improvements damaged or removed during construction;; and all other items of material, labor, equipment, tools and incidentals necessary to complete this work in accordance with the Drawings and specifications.

Video recording shall be paid for under Standard Specification 510:

Payment will be made under one of the following:

Item No. 559S:	Precast Concrete Box Culverts, ___Ft. x ___Ft.	Per Lineal Foot.
Item No. 559S-A:	Cast in Place Concrete Box Culverts	Per Cubic Yard.

End

Item No. 591S
Riprap for Slope Protection

591S.1 Description

This item shall govern the excavation of all materials encountered for placing riprap, disposal of excess material and backfilling around the completed riprap to the grade indicated on the Drawings. The work shall include all pumping and bailing, furnishing and placing riprap of rock or concrete in accordance with the details and to the dimensions indicated on the Drawings.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses. The work conducted under this item pertains to riprap for protection of slopes, cuts, fills, drainage facilities and other features susceptible to erosion.

591S.2 Submittals

The submittal requirements for this specification item shall include:

A. The type, size, gradation, physical properties and source of rock riprap material; test data for specific gravity, absorption, soundness and field verification of the rock riprap gradation including a size distribution plot and a list of the measured D15, D50, D85 and D100 (refer to Item No. 591S.3.A).

B. The type, size, and source of broken concrete riprap material.

C. Aggregate types, gradations and physical characteristics for the Portland cement concrete mix,

D. Proposed proportioning of materials for the mortar mix,

E. Type, details and installation requirements for reinforcement, joint material, tie backs and anchors,

F. Description of filter fabric including characteristics, test data and manufacturer's recommendations for installation.

G. The type, size, gradation and source of granular filter material.

Where vegetated soil-riprap is used, and proposed materials differ from the materials already approved for use elsewhere on the project, the submittal requirements also include:

H. Identification of the seed species, source, mixture, pure live seed (PLS) as listed on the analysis tags, certification tags from all seed bags, and seed calculation worksheet per item No. 604S, Table 9.

I. Soil retention blanket material type, evidence that the material is listed on the TxDoT Approved Product List, one (1) full set of manufacturer’s literature and installation recommendations and any special details necessary for the proposed application.

J. Identification of fill soil class, source, and characteristics of proposed borrow material as described in Item No. 130S Borrow.

K. Identification of topsoil source and characteristics including textural (clay/silt/sand) percentage.

591S.3 Materials

A. Rock

The rock shall be suitable in all respects for the purpose intended. Rock sources shall be selected well in advance of the time the rock will be required and shall be pre-approved by the Engineer. Rock used for riprap shall be hard, durable, and angular in shape and consist of clean field rock or rough unhewn quarry rock as nearly uniform in section as practicable. Neither the width nor the thickness of a single rock shall be less than one third of its length. The rocks shall be dense, resistant to weathering and water action, and free of overburden, spoils, shale, and organic material. Shale, chalk, and limestone with shale or chalk seams shall not be acceptable. Rounded rock (river rock) shall not be acceptable.

The rock durability shall be evaluated by visual inspection and laboratory tests for specific gravity, absorption, and soundness. The minimum specific gravity shall be 2.4 (150 pounds per cubic foot) and the maximum absorption 4.2% using ASTM D 6473 or Tex-403-A. Soundness shall be tested in accordance with ASTM D 5240 or Tex-411-A and weight loss shall not exceed 18% after 5 cycles of magnesium sulfate solution, nor 14% after 5 cycles of sodium sulfate solution.

The rock riprap material shall be provided as a gradation of larger and smaller rock sizes associated with a rock class or median diameter (D50) as specified in the drawings. Rock diameter for angular material represents the length of the intermediate axis of an individual rock. The material gradation shall conform to table below for the class sizes corresponding to the D50. The D15, D50, D85, and D100 are the rock sizes for which 15%, 50%, 85%, and 100% of the total sample are of equal size or smaller, respectively.

Rock Riprap Gradation Table								
Rock Riprap Class by Median Particle Diameter (D50)		D15 (in)		D50 (in)		D85 (in)		D100 (in)
Class	Diameter (in)	Min	Max	Min	Max	Min	Max	Max
I	6	3.7	5.2	5.7	6.9	7.8	9.2	12.0
II	9	5.5	7.8	8.5	10.5	11.5	14.0	18.0
III	12	7.3	10.5	11.5	14.0	15.5	18.5	24.0
IV	15	9.2	13.0	14.5	17.5	19.5	23.0	30.0
V	18	11.0	15.5	17.0	20.5	23.5	27.5	36.0
VI	21	13.0	18.5	20.0	24.0	27.5	32.5	42.0
VII	24	14.5	21.0	23.0	27.5	31.0	37.0	48.0
VIII	30	18.5	26.0	28.5	34.5	39.0	46.0	60.0
IX	36	22.0	31.5	34.0	41.5	47.0	55.5	72.0
X	42	25.5	36.5	40.0	48.5	54.5	64.5	84.0

1. Reference: NCHRP Report 568
2. Conversion to weight-based gradation: W = 0.0275D3Sgwhere W is rock size in lbs, D is diameter in inches and Sg is the specific gravity of the rock.

Conformance of rock riprap to the gradation requirements shall be accomplished by field tests for rock sizes that cannot be analyzed via sieve or mechanical sorting machines. In order to perform a field test, the contractor shall provide a sample of the proposed rock riprap material meting the gradation for the specified size class. Gradation field tests shall follow the equal interval test

procedure in NCHRP Report 568, Section 3.2.3, ASTM D 5519, or the modified equal interval method. The general steps of the modified equal interval method are:

1. Spread a representative, well mixed sample of riprap to form a flat, rectangular pile. The thickness of the pile should be approximately equal to D100. The length and width of the footprint should be determined based on the rock size and the minimum sample size that is requested by the Engineer.
2. With a large tape measure, create a linear transect across the sample pile. Mark each rock that falls directly under the tape measure at an equal interval. The interval should be two feet or greater, depending on the D50, such that no rock is marked more than once.
3. Lay additional transects parallel to the first transect, at a spacing equal to the interval between marked rocks, Repeat step B for each transect such that the marked rocks form an equally spaced grid across the pile.
4. Measure the diameter of each marked rock across the intermediate (middle or B axis). The number of rocks measured shall be equal or greater than the minimum sample size.
5. Analyze the data by sorting and plotting a curve of percent smaller by number vs. diameter. Identify the diameters.

Gradation tests shall result in: (1) a size distribution plot comparing the measured sample data with the specified diameter ranges for the rock size class (example below) and (2) the calculated D100, D85, D50, and D15 of the rock sample. The sample gradation is acceptable if the calculated diameters fall within the specified ranges of the applicable gradation. The acceptability of rock that falls outside the specified gradation ranges shall be at the discretion of the Engineer.

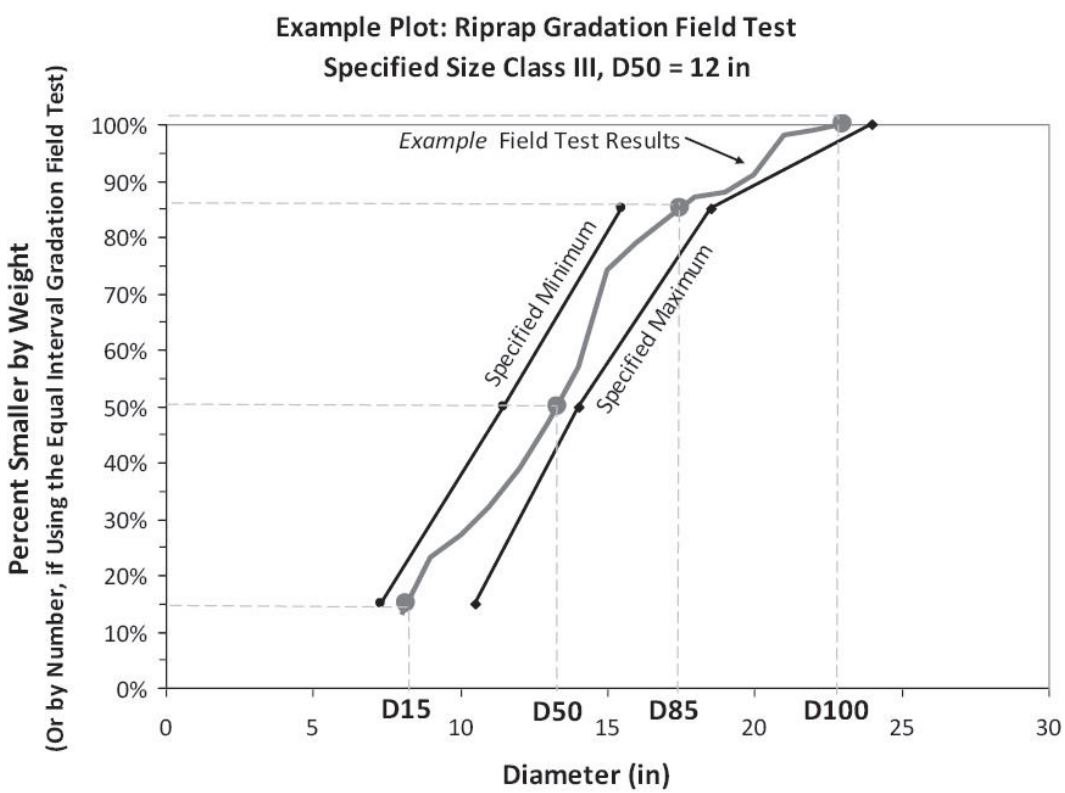

Approved rock rip-rap samples shall be stored onsite as a reference for ongoing visual inspection of additional materials supplied. Supplementary tests may be required for supply materials where visual inspection determines there may be a deviation from the required gradation. Labor, equipment and site location needed to assist in checking gradation shall be provided by the contractor at no additional cost to the owner.

B. Broken Concrete

The rock used for mortar riprap may consist of broken concrete removed under the contract or obtained from other approved sources. Broken concrete shall be as nearly uniform in section as practicable and of the sizes indicated in Section 591S.5, "Dry Riprap".

C. Concrete

Cast in place concrete shall be Class A Concrete and shall conform to Standard Specification Item No. 403S, "Concrete for Structures".

D. Grout and Mortar

Grout and mortar shall consist of 1 part Portland Cement and 3 parts sand, thoroughly mixed with water. Mortar shall have a consistency such that it can be easily handled and spread by trowel. Grout shall have a consistency such that it will flow into and completely fill all joints.

E. Reinforcement

Reinforcement shall conform to Standard Specification Item No. 406S, "Reinforcing Steel".

F. Joints

Premolded expansion joint material shall conform to Standard Specification Item No. 408, "Concrete Joint Material".

G. Tie Backs and Anchors

Galvanized tie backs and anchors shall be as indicated on the Drawings.

H. Filter Fabric

Filter Fabric shall conform to Standard Specification Item No. 620S, "Filter Fabric".

I. Granular Filter

Aggregate used for granular filters shall conform to Standard Specification Item No. 403S "Concrete for Structures".

J. Soils

For vegetated soil-rock rip-rap, soil shall be integrated with the rock rip-rap at 30% soil to 70% rock by volume with minimal voids. Unless specified otherwise in the drawings, soil that is placed below six inches (6”) below the rip-rap top surface shall be Class A Select Borrow material, as described in Item No. 130S Borrow, and referred to herein as “fill soil.” Soil that is placed within the top six inches (6”) of the rip-rap top surface shall be topsoil material as described in Item No, 601S Salvaging and Placing Topsoil, Section 3.

K. For vegetated soil-rock rip-rap, the type of seed mix and application rates shall be as

specified on the Drawings and within the referenced Standard Specification. If no seed mix is specified, apply according to Item No. 604S Seeding for Erosion Control, Section 6.

L. Soil retention blanket

For vegetated soil-rock rip-rap, soil retention blanket shall be a TxDoT approved Class I Type C or D, shall be made of 100% biodegradable fibers, unless specified otherwise in the Drawings. Blanket shall comply with the requirements of Item No. 605S Soil Retention Blanket, Section 3.

591S.4 Construction Methods

Prior to commencement of this work, all required erosion control and tree protection measures (Standard Specification Item 610S, "Preservation of Trees and Other Vegetation) shall be in place and utilities located and protected as set forth in the "General Conditions". Construction equipment shall not be operated within the drip line of trees unless indicated on the Drawings. Construction materials shall not be placed under the canopies of trees. No excavation or embankment shall be placed within the drip line of trees until tree wells (Standard Detail Number 610S-6, "Tree Protection, Tree Wells") are constructed. Spalls and small stones used to fill open joints and voids in rock riprap shall be rocked and wedged to provide a tight fit.

Unsuitable excavated materials or excavation in excess of that needed for construction shall be known as "Waste" and shall become the Contractor's property and sole responsibility to dispose of this material in an environmentally sound manner off the limits of the right of way at a permitted disposal site.

All blasting shall conform to 01550, "Public Safety and Convenience." The Contractor shall comply with all laws, ordinances, applicable safety code requirements, International Fire Code Chapter 27 "Hazardous Materials General Provisions" and Chapter 33 "Explosives and Fireworks" and any other regulations relative to handling, storage and use of explosives. In all cases, a Blasting Permit must be obtained in advance from the appropriate City agency.

Areas to be protected by rock riprap shall be free of brush, trees, stumps and other objectionable materials and be graded to a smooth compacted surface. All soft or spongy material shall be removed and replaced with appropriate material to the depths shown on the plans or as directed by the engineer. Fill Areas, unless otherwise specified will be compacted in accordance with 132S - Embankment. Unacceptable subgrade conditions shall be reworked according to the Engineer's recommendations. Excavation areas shall be maintained until the riprap is placed.

A. Dry Rock Riprap

The mass of rock riprap shall be placed as to be in conformance with the required gradation mixtures, to the lines, grades and layers thickness that is shown on the drawings.

When the riprap will be placed on an erodible soil, as determined by the Engineer or designated representative, a layer of geotextile filter fabric or a granular filter layer shall be placed, prior to placement of the riprap material. In some cases multiple layers of granular filter material of varying gradations may be required. The median rock riprap size (D50), rock riprap layer thickness, filter type, when applicable the number of granular filter layers, granular filter aggregate gradations (grade/size classification), granular layer thicknesses shall be specified on the plans. The minimum granular filter layer thickness shall be 4 inches (102 mm). Geotextile filter fabric shall conform to Standard Specification No. 620 and be installed

with sufficient anchoring and overlap between seams according to the manufacturer's recommendations to ensure full filter barrier protection of the subgrade after riprap installation. When specified on the plans a four (4) inch minimum thickness granular cushion layer of gravel or sand may be placed over the filter fabric to prevent damage the fabric during placement of rock riprap.

Rock riprap shall be machine placed and distributed such that there will be no large accumulations of either larger or smaller sizes. Placing rock riprap by dumping into chutes or similar methods shall not be permitted. The rocks shall be placed in a single layer with close joints. The rock riprap layer thickness shall be no less than the maximum stone size (D100) or 1.5 times the D50, which ever produces the greater thickness. In areas exposed to flowing water the rock riprap layer thickness should be no less than 2.0 times the D50. The upright axis of the rocks shall make an angle of approximately 90 degrees with the embankment slope. The courses shall be placed from the bottom of the embankment upward, with the larger rocks being placed on the lower courses. Open joints shall be filled with spalls. Rocks shall be arranged to present a uniform finished top surface such that the variation between tops of adjacent rocks shall not exceed 3 inches (75 mm). Rocks that project more than the allowable amount in the finished work shall be replaced, embedded deeper or chipped.

B. Mortared Rock Riprap

Rock for this purpose, as far as practicable, shall be selected as to size and shape in order to secure fairly large, flat-surfaced rock which may be laid with a true and even surface and a minimum of voids. Fifty percent of the mass rock shall be broad flat rocks, weighing between 100 and 150 pounds (45 and 69 kilograms) each, placed with the flat surface uppermost and parallel to the slope. The largest rock shall be placed near the base of the slope. The spaces between the larger rocks shall be filled with rocks of suitable size, leaving the surface smooth, reasonably tight and conforming to the contour required on the Drawings. In general, the rocks shall be placed with a degree of care that will insure plane surfaces with variation from the true plane of no more than 3 inches in 4 feet (no more than 60 mm per meter). Warped and curved surfaces shall have the same general degree of accuracy as indicated for plane surfaces.

Before placing mortar, the rocks shall be wetted thoroughly and as each of the larger rocks is placed, it shall be surrounded by fresh mortar and adjacent rocks shall be shoved into contact. After the larger rocks are in place, all of the spaces or opening(s) between them shall be filled with mortar and the smaller rocks then placed by shoving them into position, forcing excess mortar to the surface and insuring that each rock is carefully and firmly embedded laterally. After the work described above has been completed, all excess mortar forced up shall be spread uniformly to completely fill all surface voids. All surface joints then shall be pointed up roughly, either with flush joints or with shallow, smooth raked joints.

B. Vegetated Soil-Rock Riprap

Adjacent stockpiles of rock riprap, fill soil, and topsoil shall be treated and there shall be no premixing of fill soil, top soil and rock prior to placement. Sufficient soil volume shall be provided to result in a final, complete-in-place ratio of 30% soil to 70% rock riprap by volume.

Place underlying filter material and first layer of rock riprap in accordance with 591S.4.A to a thickness equivalent to the D50 rock size of half the design rock layer thickness, whichever is greater. Place a layer of soil over and within the rock voids such that the top of the soil layer is approximately 75% of the rock layer thickness. Work the soil into the rock layer voids by wetting, prodding with a rock bar, and/or vibratory compaction until the soil height is

approximately 50% of the rock height. If the soil height becomes less than 50% of the rock height then repeat the previous steps.

Place the second layer of rock riprap per 591S.4.A up to the final design grade. Place soil over and within the rock riprap, working it into the voids as in the previous step and repeating application as needed until the top of the soil layer approximately matches the top surface of the rock riprap. Excess soil shall not be placed in the voids to the extent that the rock riprap is displaced. The resulting soil-riprap surface shall be smooth, with no lumps or depressions greater than two inches (± 2”) from the final design grade.

Once the soil-rock matrix is placed, the surface of the soil-rock riprap shall be seeded per the Drawings and covered with biodegradable erosion control fabric.

C. Concrete Riprap

Concrete for riprap shall be placed as indicated on the Drawings or as directed by the Engineer or designated representative. Unless otherwise indicated on the Drawings, concrete riprap shall be reinforced using wire or bar reinforcement.

Concrete shall be Class A or as indicated otherwise on the Drawings and shall conform to Standard Specification Item No. 403S, "Concrete for Structures".

When welded wire reinforcement is indicated, it shall be a minimum of 6 x 6 W1.4 x W1.4 (150 x 150 MW9 x MW9) with a minimum lap of 6 inches (150 mm) at all splices. At the edge of the riprap, the wire fabric shall not be less than 1 inch (25 mm) nor more than 3 inches (75 mm) from the edge of the concrete and shall have no wires projecting beyond the last member parallel to the edge of the concrete.

When bar reinforcement is used, the sectional area of steel in each direction shall not be less than the sectional area of the wire fabric described above. The spacing of bar reinforcement shall not exceed 18 inches (450 mm) in each direction and the distance from the edge of concrete to the first parallel bar shall not exceed 6 inches (150 mm).

Reinforcement shall be supported properly throughout the placement to maintain its position approximately equidistant from the top and bottom surface of the slab.

Unless otherwise noted, expansion joints of the size and type indicated on the Drawings shall be provided at intervals not to exceed 40 feet (12.2 meters) and shall extend the full width and depth of the concrete. Marked joints shall be made 3/8 inch (9.5 mm) deep at 10 foot (3 meter) intervals. All joints shall be perpendicular and at right angles to the forms unless otherwise indicated on the Drawings.

Slopes and bottom of the trench for toe walls shall be compacted and the entire area sprinkled before the concrete is placed.

After the concrete has been placed, consolidated and shaped to conform to the dimensions indicated on the Drawings and has set sufficiently to avoid slumping, the surface shall be finished with a wooden float to secure a reasonably smooth surface.

Immediately following the finishing operation, the riprap shall be cured conforming to Standard Specification Item No. 410S, "Concrete Structures".

D. Pneumatically Placed Concrete Riprap, Type I and Type II

Pneumatically placed concrete for riprap shall be placed as indicated on the Drawings or as established by the Engineer or designated representative. Pneumatically placed concrete shall conform to Standard Specification Item No. 404S, "Pneumatically Placed Concrete". Reinforcement shall conform to the details indicated on the Drawings and Standard Specification Item No. 406S, "Reinforcing Steel". Reinforcement shall be supported properly throughout placement of concrete. All subgrade surfaces shall be moist when concrete is placed.

The surface shall be given a wood float finish or a gun finish as indicated on the Drawings.

The strength and design of Pneumatically Placed Concrete Riprap shall be either Type I or if indicated, Type II conforming to Standard Specification Item No. 404S, "Pneumatically Placed Concrete".

Immediately following the finishing operation, the riprap shall be cured conforming to Standard Specification Item No. 410S, "Concrete Structures".

591S.5 Measurement

Measurement of acceptable riprap will be made on the basis of the (a) area in square yards (square meters: 1 square meter equals 1.196 square yards) indicated on the Drawings, complete in place or (b) the volume of concrete placed in cubic yards (cubic meters: 1 cubic meters equals 1.308 cubic yards), complete in place as indicated on the Drawings for the thickness specified.

Concrete toe walls will not be measured separately but shall be included in the unit price bid for riprap of the type with which it is placed.

591S.6 Payment

The riprap quantities, measured as provided above, will be paid for at the unit bid prices per square foot or per cubic yard as indicated for riprap of the various classifications. The Unit Bid Price shall include full compensation for furnishing, hauling and placing all materials, including toe walls, geotextile filter fabric, granular filter material, fill soil and top soil, seed, erosion control fabric, granular cushion, reinforcement and premolded expansion joint material and for all labor, tools, equipment and incidentals necessary to complete the work.

Payment for excavation of toe wall trenches and for all necessary excavation below natural ground or the bottom of excavated drainage channels will be included in the unit bid price for riprap. Excavation, grading and fill materials required to shape drainage channels shall not be included in the unit bid price for riprap.

Payment for excavation required for shaping of slopes for riprap shall be included in the unit bid price for riprap, except for the situation when the header banks upon which the riprap is to be placed are built by prior contract. In this specific case the excavation for shaping of slopes, will be paid for conforming to Standard Specification Item No. 401, "Structural Excavation and Backfill".

Payment will be made under one of the following:

Pay Item No. 591S-A:	Dry Rock Riprap	Per Square Yard.
Pay Item No. 591S-B:	Dry Rock Riprap	Per Cubic Yard.

Pay Item No. 591S-D:	Mortared Rock Riprap	Per Square Yard.
Pay Item No. 591S-F:	Concrete Riprap, ___ In.	Per Square Yard.
Pay Item No. 591S-G:	Concrete Riprap	Per Cubic Yard.
Pay Item No. 591S-I	Vegetated Soil-Rock Riprap	Per Square Yard
Pay Item No. 591S-J	Vegetated Soil-Rock Riprap	Per Cubic Yard
Pay Item No. 591S-P	Pneumatically Placed Concrete Riprap, __In.	Per Square Yard.

,

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 591S, “Riprap for Slope Protection"

International Fire Code

Designation	Description
Chapter 27	Hazardous Materials
Chapter 33	Explosives and Fireworks

City of Austin Standard Contract Documents

Designation	Description
01550	Public Safety and Convenience

City of Austin Standard Specifications

Designation	Description
Item No. 130S	Borrow
Item No. 403S	Concrete for Structures
Item No. 404S	Pneumatically Placed Concrete
Item No. 406	Reinforcing Steel
Item No. 408	Concrete Joint Material
Item No. 410	Concrete Structures
Item No. 601S	Salvaging and Placing Topsoil
Item No. 604S	Seeding for Erosion Control
Item No. 605S	Soil Retention Blanket
Item No. 610S	Preservation of Trees and Other Vegetation
Item No. 620S	Filter Fabric

American Society for Testing and Materials, ASTM

Designation	Description
ASTM D 5240	Standard Test Method for Evaluation of Durability of Rock for Erosion Control Using Sodium Sulfate or Magnesium Sulfate
ASTM D 5519	Standard Method Methods for Particle Size Analysis of Natural and Man-made Riprap Materials
ASTM D 6473	Standard Test Method for Specific Gravity and Absorption of Rock for Erosion Control

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-403-A	Test Procedure for Saturated Surface-Dry Specific Gravity and Absorption of Aggregates
Tex-411-A	Soundness of Aggregate Using Sodium Sulfate or Magnesium Sulfate

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Street, and Bridges

Designation	Description
Item No. 432	Riprap

RELATED CROSS REFERENCE MATERIALS
Specification 591S, “Riprap for Slope Protection"

City of Austin Standard Specifications

Designation	Description
Item No. 623S	Dry Stack Rock Wall

Engineering Design Manuals

Federal Highway Administration, 1989, Design of Riprap Revetment, Hydraulic Engineering Circular HEC-11, FHWA-1P-89-016.

National Cooperative Highway Research Program, 2006, Riprap Design Criteria, Recommended Specifications, and Design Criteria, NCHRP Report 568.

United States Bureau of Reclamation, 1983, Hydraulic Design of Stilling Basins and Energy Dissipators, Engineering Monograph No. 25.

U.S Department of Agriculture, 1983, Soil Conservation Service, Riprap for Slope Protection Against Wave Action, Technical Release No. 69, February.

US Army Corps of Engineers, 1994. Hydraulic Design of Flood Control Channels, US Army Corps of Engineers Engineer Manual EM 1110-2-1601.

Federal Highway Administration, 1998. "Geosynthetic Design and Construction Guidelines,” FHWA-HI-95-038.

Item No. 601S
Salvaging and Placing Topsoil

601S.1 Description

This item shall govern the removal, storage and placement of approved on-site naturally occurring topsoil and topsoil mix (see 601S.3.A) to the depths and area shown on the Drawings or as directed by the Engineer or Landscape Architect.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

601S.2 Submittals

A. Submittal required before construction.

1. Soil test results ad soil classification necessary for approval of material as suitable topsoil. Soil test results should include, at minimum, texture, percentage organic matter (OM), salinity (soil salt) level; pH; and amounts of Phosphorous (P), potassium (K), calcium (Ca), magnesium (Mg), nitrate-nitrogen (NO_3-N) and sulfate-sulfur (SO_4-S).

2. For topsoil mixes containing compost, the soil test for shall also include moisture content, C:N ratio and Solvita compost maturity index.

3. A sample (21 gallon) of proposed topsoil or topsoil mix shall be submitted to the Owner or their representative 30 calendar days before installation and be approved before installation. Sample shall be labeled including type of material, specification number; name, address, and telephone number of manufacturer or supplier; and address of the location of the source or material stockpile.

B. Submittals /Inspection required during construction:

1. Delivery Tickets indicating type/product name, source and quantities of imported topsoil mix or compost) for mixing with salvaged soil).

2. Deliveries of soil to a job site shall be inspected by the project Engineer or Landscape Architect or Owner's construction inspector before placement to verify product compliance with specification.

601S.3 Materials

A. Topsoil Mix

1. Topsoil mix shall be composed of 4 parts of soil mixed with 1 part compost, by volume. The soil shall be locally available native soil that meets the following specifications:

   a. Shall be free of trash, weeds, deleterious materials, rocks and debris.

b. 100% shall pass through a 3/8-inch (9.5-mm) screen.

c. Soil to be a black or dark brown loamy material that meets the requirements of the table below in a accordance with the USDA textural triangle. Soil known locally as “red death” is not an allowable soil. Textural composition shall meet the following criteria:

Textural Class	Minimum	Maximum
Clay	5%	50%
Silt	10%	50%
Sand	15%	67%

d. Organic matter percentage shall be at least 5.0% after the addition of compost.

e. Salinity shall be below 6.00 mmhos/cm.

f. An owner/project designer(s) may propose use of onsite salvaged topsoil which does not meet the soil texture class required above by providing a soil analysis and a written statement from a qualified professional in soils, landscape architecture, or agronomy indicating the onsite topsoil will provide an equivalent growth media and specifying what, if any, soil amendments are required.

3. The compost shall be locally available and shall meet the following specifications:

a) Shall be well decomposed, stable to very stable, weed-free plant-based material source derived from yard trimmings or City approved alternate source. The Carbon/Nitrogen (C/N) ratio shall be less than 25:1 and trace metals test results should "pass".

b) Shall be blended and ground leaf, wood and other plant-based material, composted for a minimum of nine (9) months and at temperatures sufficient to break down all woody fibers, seeds and leaf structures, free of toxic material at levels that are harmful to plants or humans. Source material shall be yard waste trimmings blended with other plants or other materials designed to produce compost high in fungal material. Non-vegetal source materials may be acceptable upon approval by the Owner. The compost will possess no objectionable odors and shall not resemble the raw material from which it was derived.

c) Compost shall be commercially prepared compost and meet US Compost Council STA/TMECC criteria or as modified in this section for "Compost as a Landscape Backfill Mix Component".

http://compostingcouncil.org/admin/wp-content/plugins/wp-pdfupload/pdf/191/LandscapeArch_Specs.pdf

d) Compost shall comply with the following parameters:

PARAMETERS [1]	REPORTED AS (UNITS OF MEASURE)	GENERAL RANGE
pH	pH units	6.0 - 8.5
Salinity (electric conductivity)	dS/m (mmhos/cm)	Maximum 10
Moisture Content	%, net weight basis	30 - 60%
Organic Matter Content	%, dry weight basis	30 - 65%
Particle Size	% passing a selected mesh size, dry weight basis	98% pass through ¾ inch screen
Stability Carbon Dioxide Evolution Rate	mg CO2-C per g OM per day	<8
Solvita Compost Maturity Test	Solvita units	>6
Physical Contaminants (inerts)	%, dry weight basis	<1%
Chemical Contaminants [2]	mg/kg (ppm)	Meet or exceed US EPA Class A standard, 40 CFR § 503.13, Tables 1 and 3 levels
Biological Contaminants Select pathogens Fecal coliform bacteria or Salmonella [3]	MPN per gram per dry weight MPN per 4 grams per dry weight	Meet or exceed US EPA Class A standard, 40 CFR § 503.32(a) levels

[1] Recommended test methodologies are provided in Test Methods for the Examination of Composting and Compost (TMECC, The US Composting Council).

[2] US EPA Class A standard, 40 CFR § 503.13, Tables 1 and 3 levels = Arsenic 41 ppm, Cadmium 39 ppm, Copper 1,500 ppm, Lead 300 ppm, Mercury 17ppm, Molybdenum 75 ppm, Nickel 420 ppm, Selenium 100 ppm, Zinc 2,800 ppm.

[3] US EPA Class A standard, 40 CFR § 503.32(a) levels = Salmonella <3 MPN/4grams of total solids or Fecal Coliform <1,000 MPN/gram of total solids.

e) Compost and other soil amendments shall be worked into the existing onsite topsoil with a disc or tiller to create a well-blended material.

2. All disturbed areas to be revegetated are required to provide a minimum of six (6) inches of topsoil. The topsoil shall be able to support the growth of planting (Standard Specification Item No. 608S), Seeding for Erosion Control (Standard Specification Item No. 604S), sodding (Standard Specification Item No. 602S) and Native Seeding and Planting for Restoration (Standard Specification Item No. 609S).

B. Water

Water shall be furnished by the Contractor and shall be clean and free from seed source, pesticide, fertilizer, industrial wastes and other objectionable matter.

601S.4 Sources

The salvaged topsoil may be obtained from the right-of-way at sites of proposed excavation or embankment when shown on the Drawings or identified by the Engineer or Landscape Architect. The approximate quantity of acceptable topsoil to be salvaged from the project will be shown on the Drawings. The topsoil or topsoil mix may also be obtained from approved sources, which are located outside the right-of-way and have been secured by the Contractor.

601S.5 Construction Methods

Tree protection fencing will be maintained at all times to protect all trees in the limits of construction. Where removal of trees is indicated on the Drawings, they shall be marked as directed by the Engineer or Landscape Architect, or certified Arborist.

Construction equipment shall not be operated nor construction materials stockpiled within the critical root zone of trees .Tree protection fencing shall remain in place per tree protection plan. Topsoil materials shall not be placed within the critical root zone until tree wells are constructed that conform to Item No. 610S, "Preservation of Trees and Other Vegetation " and Standard Details 591S-1 and 610S-6. The source and stockpile areas shall be kept drained, insofar as practicable, during the period of topsoil removal

The existing topsoil shall be removed from the area indicated on the Drawings, stockpiled in designated area on the site plan, windrow along the right of way or other designated area outside the 100-year floodplain (as defined in the Drainage Criteria Manual and Land Development Code), or spread over an area that is ready for topsoil application in accordance with the Drawings or as directed by the Engineer or Landscape Architect.

Trash, wood, brush, stumps, rocks over 1 1/2 inches (37.5 mm) in size and other objectionable material encountered shall be removed and disposed of as directed by the Engineer or Landscape Architect prior to beginning of work required by this item. Grass and other herbaceous plant materials may remain. Large clumps shall be broken up

Where the proposed planting area is compacted more than 85% proctor or 225 p.s.i., the existing soil should be tilled to a minimum depth of six inches before installation of the salvaged topsoil or topsoil mix. In the critical root zone of trees reference 661S.

The topsoil should not be placed if the ground is muddy, saturated, or frozen.

The topsoil should not be placed if the ground is extremely dry. Wet soil enough to prevent dust from leaving the site.

After the grading has been completed to the required alignment, grades and cross-sections and prior to the spreading of the salvaged topsoil, any clay or tight soil surfaces shall be scarified by plowing furrows approximately 4 inches (100 mm) deep along horizontal slope lines at 2 foot (600 mm) vertical intervals. The spreading of the salvaged topsoil or topsoil mix shall be undertaken as soon as the grading has been completed. The topsoil shall be spread so as to form a cover of uniform thickness indicated. After the topsoil has been placed and shaped, it shall be sprinkled with water and rolled to provide a suitable seed bed.

601S.6 Measurement and Payment

Salvaging, removal and/or placing topsoil materials will not be measured for payment, but shall be included in the unit price bid for the item of construction in which these activities are used.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 601S, "Salvaging and Placing Topsoil"

City of Austin Standard Specification Items

Designation	Description
Item No. 602S	Sodding for Erosion Control
Item No. 604S	Seeding for Erosion Control
Item No. 608S	Planting
Item No. 609S	Native Grassland Seeding and Planting For Erosion Control
Item No. 610S	Preservation of Trees and Other Vegetation

City of Austin Standard Details

Designation	Description
591S-1	Dry Stack Rock Wall
610S-6	Typical Tree Well Applications

RELATED CROSS REFERENCE MATERIALS
Specification 601S, "Salvaging and Placing Topsoil"

City of Austin Standard Specification Items

Designation	Description
Item No. 102S	Clearing and Grubbing
Item No. 104S	Removing Concrete
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 132S	Embankment
Item No. 606S	Fertilizer

City of Austin Standard Details

Designation	Description
610S-1	Tree Protection Fence Locations
610S-2	Tree Protection Fence, Type B Chainlink
610S-3	Tree Protection Fence, Type B Wood
610S-4	Tree Protection Fence, Modified Type A
610S-5	Tree Protection Fence, Modified Type B

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 160	Furnishing and Placing Topsoil
Item No. 164	Seeding for Erosion Control
Item No. 204	Sprinkling

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-103-E	**Determination of Moisture Content of Soil Materials**
Tex-104-E	**Determination of Liquid Limit of Soils**
Tex-105-E	**Determination of Plastic Limit of Soils**
Tex-106-E	**Method of Calculating the Plasticity Index of Soils**

Item No. 604S
Seeding for Erosion Control

604S.1 Description

This item shall govern the preparation of a seed bed for temporary or permanent erosion control; sowing of seeds; fertilizing; mulching with straw, cellulose fiber wood chips, and recycled paper mulch; and other management practices along and across such areas as indicated in the Drawings or as directed by the Landscape Architect, Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, inch-pound units are given preference with SI units shown within parentheses.

604S.2 Submittals

The following submittal items are required in writing during construction:

A. Identification of the seed species, source, mixture, and PLS of the seed as listed on the analysis tags and certification tags from all seed bags. Seed calculation worksheet per Table 7. PLS is the percentage of seed purity multiplied by the percentage of germination plus dormant seed. The analysis tag, required on all seed sold in Texas, includes information on quality: kind and variety of seed, lot number, percent pure live seed, percent other crop seed, percent inert matter, percent weed seeds, germination percentage, and date of test. The certification tag also verifies seed quality, an assurance of seed variety and attesting to standards for germination and purity, Information provided includes class of certification, kind of crop, variety, lot number, and name and address of the owner

B. If fertilizer is proposed, results of a recent soil test (6 months old or less) of the area to be seeded, before fertilization. Soil samples shall be collected after final grading, when topsoil has been placed. The test results must include soil lab recommended additions of Nitrogen (N), Phosphorus (P), and Potassium (K) for the type of vegetation proposed, as well as soil organic matter percentage and textural class.

C. Fertilizer formulation and release rate based on a soil test (see B above).

D. For hydromulch applications, proposed application rate of seed, type of mulch and tacking agent, and other relevant information. An example of the required documentation is in Table 1.

E. Type of hydraulic seeding equipment and nozzles proposed for use.

F. If pesticide use is proposed, an IPM plan for pest removal including pesticide label, proposed application rate and timing, and MSDS sheets.

G. One gallon sample of proposed vegetative mulch.

The following submittal items are required before Substantial Completion:

A. For hydromulch applications, the complete hydromulch application log, including date, time and quantity of product units placed in the slurry tank. An example of an

application log is provided in Table 2. This log may be requested at any time during construction by the Landscape Architect, Engineer, or authorized inspector.

B. Pesticide application tracking log. As of January 1, 2012, documentation of all outdoor pesticide use on city-owned properties is required to demonstrate compliance with the EPA/TCEQ mandated Municipal Stormwater Permit, the TPDES General Pesticide Permit, City Code, and the IPM program.

Table 1: Example of proposed hydromulch application rates

				Hydro Slurry Unit (per acre rates)				
Hydro Mix	Sheet No.	Seed Mix	Acres	Seed (Bags/ ac)	Tackifier (Buckets/ ac)	Mulch (Bales/ ac)	Fertilizer (Bags/ ac)	Addl. Amendments (Bags/ac)
1	L2	A	1.0	1	100	1000	50	5
F2	L3	A	0.5	2	200	1500	50	5
3	L5	B	3.0	3	300	3000	50	5

Table 2: Example of hydromulch application log

						Hydro Slurry Unit (per acre rates)				
Date	Start Time	Finish Time	AC/ Tank	Water (gal)	Seed Mix	Seed (Bags/ ac)	Tackifier (Buckets /ac)	Mulch (Bales /ac)	Fertilizer (Bags/ ac)	Addl. Amend-ments (Bags/ac)
4/13	10:30	11:15	1.0	330	A	1	100	1000	50	5
4/17	2:00	2:30	0.5	330	A	2	200	1500	50	5
5/20	8:30	10:00	1.2	330	B	3	300	3000	50	5
					Totals	6	600	5500	127	15

604S.3. Materials

A. Seed. All seed must meet the requirements of the Texas Seed Law including the labeling requirements for showing pure live seed (PLS), name and type of seed and all other required elements of the Analysis and Certification Tags.

The seed furnished shall be of the previous season's crop and the date of analysis, shown on each bag, shall be within twelve (12) months of the time of delivery to the project. Each variety of seed shall be furnished and delivered in separate bags or containers, unless a specific mix is proposed for use. A sample of each variety of seed shall be furnished for analysis and testing when directed by the Landscape Architect, Engineer or designated representative.

The amount of seed planted square yard (0.84 square meters) or per acre (hectare) shall be of the type specified in sections 604S.5 and 604S.6.

B. Water. Water shall be clean and free of industrial wastes and other substances harmful to the growth of plant material or the area irrigated.

C. Top soil. Top soil shall conform to Item No. 601S.3(A).

D. Fertilizer. The fertilizer shall conform to Item No. 606S, "Fertilizer". The type and rate of fertilizer should be based on chemical tests of recent (no older than 6 months before application) representative site soil samples. Fertilizer should be applied only when plants can take them up for growth, during: 1) seed germination and plant establishment and 2) after plant establishment. Fertilizer shall not be applied within 48 hours of a potential rain event.

E. Straw Mulch or Hay Mulch. Straw Mulch shall be oat, wheat or rice straw. Hay mulch shall be prairie grass, or other hay approved by the Landscape Architect, Engineer or designated representative. The straw or hay shall be free of Johnson grass or other noxious weeds and foreign materials. It shall be kept in a dry condition and shall not be moldy or rotted.

F. Tackifier. The tackifier shall be a biodegradable tacking agent, approved by the Landscape Architect, Engineer or designated representative.

G. Cellulose Fiber Mulch (Natural Wood). Cellulose Fiber Mulch shall be natural cellulose fiber mulch produced from grinding clean whole wood chips. The mulch shall be designed for use in conventional mechanical planting, hydraulic planting of seed or hydraulic mulching of grass seed, either alone or with fertilizers and other additives. The mulch shall be such, that when applied, the material shall form a strong, moisture-retaining mat without the need of an asphalt binder.

H Recycled Paper Mulch. Recycled paper mulch shall be specifically manufactured from post-consumer paper and shall contain a minimum of 85% recycled paper content by weight, shall contain no more than 15% moisture and 1.6% ash, and shall contain no growth inhibiting material or weed seeds. The recycled paper mulch shall be mixed with grass seed and fertilizer (see “fertilizer” above) for hydro-seeding/mulching, erosion control, and a binder over straw mulch. The mulch, when applied, shall form a strong, moisture-retaining mat of a green color without the need of an asphalt binder.

I. Mulch. Mulches, acting as seed coverings, can enhance seed germination and seedling establishment. Characteristics of ideal mulches for seeding are those that protect seeds from wind (drying), excessive solar radiation, high evapotranspiration rates, and erosion, while allowing germination and growth. Relatively coarsely shredded, weed-free vegetative mulch should be used on seed installations, especially in open, sunny areas. These materials shall be clean, free of foreign matter, and dry enough to spread evenly.

J. Pesticide. A least toxic, integrated pest management (IPM) approach shall be used to control weeds. A written request for approval of weed control products and materials shall be submitted to the City of Austin Watershed Protection Department (ERM) IPM program coordinator for approval. Additional information can be found at http://www.austintexas.gov/ipm.

604S.4 Construction Methods

A. General. The Contractor shall limit preparation of the seedbed to areas that will be seeded immediately. When seeding for permanent erosion control, weed species listed in Table 3

shall be managed by application of an appropriate herbicide and/or by physical removal by the roots before the seeding operation. The goal of weed management is to facilitate establishment of the permanent vegetative cover. Additionally, the Owner may require removal of any plant species that appears to be out-competing seeded or planted species during the construction period.

Table 3: Weed List

Weed Type	Botanical Name	Common Name
Annual Grass	Cenchrus spp.	Sandbur
Herb	Cnidoscolus texanus	Bull Nettle
Herb	Urtica spp.	Stinging Nettle
Vine	Toxicodendron radicans	Poison Ivy
Perennial Grass	Sorghum halapense	Johnson Grass
Perennial Grass	Arundo donax	Giant Cane
Perennial Grass	Phyllostachys aurea	Golden Bamboo
Summer Annual Herb	Ambrosia trifida	Ragweed
Winter Annual Herb	Rapistrum rugosum	Bastard Cabbage
Winter Annual Herb	Bromus arvensis	Japanese Brome
Winter Annual Herb	Lolium multiflorum	Annual Ryegrass

B. Preparing Seed Bed. After the designated areas have been rough graded to the lines, grades and typical sections indicated in the Drawings or as provided for in other items of this contract and for any other soil area disturbed by the construction, a suitable seedbed shall be prepared. The seedbed shall consist of a minimum of either 6 inches (150 millimeters) of approved topsoil or 6 inches (150 millimeters) of approved salvaged topsoil.

The topsoil or growing medium must be prepared so that compaction is appropriate for plant growth, and to achieve acceptable bulk density or hydrologic function. Rippers and subsoilers may be used to loosen compacted soil and roughen the surface. Disks, plows and excavator attachments are good for compaction reduction, roughening and incorporating amendments. If tracked machinery is used in seedbed preparation, cleat marks should run with the contour to prevent rills. The optimum depth for seeding shall be 1/8 to 1/4 inch (3 to 6 millimeters).

Water shall be gently applied as required to prepare the seedbed prior to the planting operation either by broadcast seeding or hydraulic planting. Seeding shall be performed in accordance with the requirements described below.

C. Watering. All watering shall comply with City Code Chapter 6-4 (Water Conservation). All seeded areas regardless of seed type and method of seeding (e.g., broadcast, hydroseed) shall be watered immediately after installation. For seed germination and establishment it is important to keep the seedbed in a moist condition favorable for the growth of plant materials.

Watering applications shall constantly maintain the seedbed in a moist condition favorable for the growth of plant materials. Watering shall continue until the plant material is at least

1-1/2 inches (40 mm) in height and accepted by the Engineer or designated representative. Supplemental watering can be postponed immediately after a half- inch (12.5 mm) or greater rainfall on the site but shall be resumed before the soil dries out.

D. Cool Season Cover Crop. From September 15 to March 1, non-native and native seeding shall include a cool season cover crop at the rate specified in Table 6. Cool season cover crops are not permanent erosion control. If installed separately from the permanently erosion control seed mix, the cool season cover crops shall be mowed to a height of less than one (1) inch after March 1, and the area shall be re-seeded at the specified seeding rate for non-native or native warm-season species (March 1 to September 15).

604S.5 Non-Native Seeding

A. Method A - Broadcast Seeding. The seed or seed mixture in the quantity specified shall be uniformly distributed over the prepared seed bed areas indicated on the Drawings or where directed by the Engineer or designated representative. If the sowing of seed is by hand, rather than by mechanical methods, the seed shall be sown in two directions at right angles to each other. If mechanical equipment is used, all varieties of seed, as well as fertilizer (if required), may be distributed at the same time, provided that each component is uniformly applied at the specified rate. After planting, the planted area shall be rolled with a corrugated roller of the "Cultipacker" type. All rolling of the slope areas shall be on the contour.

Seed Mixture and Rate of Application for Broadcast Seeding:

From March 1 to September 15, seeding shall be with hulled Bermuda Grass at a rate of 45 lbs/ac (5.0 kilograms per hectare) with a minimum PLS = 0.83. Fertilizer shall be applied if warranted by a soil test, and shall conform to Item No. 606S, "Fertilizer". Bermuda grass is a warm-season grass and is therefore considered permanent erosion control once established.

Method B - Hydraulic Planting. The seedbed shall be prepared as specified above and hydraulic planting equipment, which is capable of placing all materials in a single operation, shall be used. Information about hydromulching for temporary and permanent vegetation stabilization is in the Environmental Criteria Manual (ECM) Section 1.4.7.

Hydroseeding equipment shall be clean and free of all previous seeds, fertilizer, mulch, or any hydroseeding products used on prior jobs.

<u>March 1 to September 15</u>

Hydraulic planting mixture and minimum rate of application pounds per acre or square yard (kilograms per ha):

Hulled Bermuda Seed (min. PLS=0.83)	Fiber Mulch		Soil Tackifier
	Cellulose	Wood	
45 Lbs/ac (50.44 kg/ha)	2000 Lbs/ac (2242 kg/ha)		60.98 Lbs/ac (68.36 kg/ha)
		2500 Lbs/ac (2803 kg/ha)	65.34 Lbs/ac (73.25 kg/ha)

604S.6 Native Grass and Forb Seeding

The seed mixture shall include both grasses and forbs. The dry and moist sites grass mix shall be seeded at rates of at least 23.5 and 17.0 lb/ac (26.32 and 19.04 kg/ha), respectively and the dry and wet site forb mix shall be seeded at a rate of at least 11.5 and 9.0 lb/ac (12.88 and 10.08 kg/ha), for total application rates of 35.00 lb/ac (39.20 and 29.12 kg/ha) [dry site] and 26 lb/ac (29.12 kg/ha) [wet site]. Minimum diversity for dry sites (Table 4) is eight species of grasses and 10 species of forbs. Minimum diversity for wet sites (Table 5) is six species of grasses and seven species of forbs. The species indicated with an asterisk shall be included in all proposed mixes. Application rates may be modified, but no species shall constitute more than 20% of a seed mix. Any species proposed for installation and not included in Tables 4 or 5 shall by City of Austin representative including Environmental Reviewer, Environmental Inspector, or Watershed Protection Department representative, and shall be native to Central Texas as referenced by the LBJ Wildflower Center plant database (www.wildflower.org) or USDA plant database.

Table 4: Native Grasses and Forbs: Dry Sites

Type	Common Name	Botanical Name	Exposure	Recommended Application Rates	
				lbs/ac	kg/ha
Grass Seed Mix	Sideoats grama*	Bouteloua curtipendula	Full-part sun	7.0	7.8
	Green sprangletop*	Leptochloa dubia	Full sun	6.0	6.7
	Buffalograss	Buchloe dactyloides	Full sun	24.0	27.0
	Blue Grama Grass	Bouteloua gracilis	Full-part sun	10.0	11.2
	Canada Wild Rye	Elymus canadensis	Full-part sun	10.0	11.2
	Purple Three-Awn	Aristida purpurea	Full sun	4.0	4.5
	Cane Bluestem	Bothriochloa barbinodis	Full sun	3.0	3.3
	Galleta	Pleuraphis jamesii	Full sun	10.0	11.2
	Black Grama*	Bouteloua eripoda	Full sun	10.0	11.2
	Sand Dropseed*	Sporobolus cryptandrus	Full sun	1.0	1.1
	Alkali Sacaton	Sporobolus airoides	Full sun	0.5	1.7
	Curly Mesquite	Hilaria belangeri	Full sun	2.0	2.2
	Sand Lovegrass	Eragrostis trichodes	Full sun	2.0	2.2
	Black-Eyed Susan	Rudbeckia hirta	Full-part sun	2.0	2.2

	Illinois Bundleflower*	Desmanthus illinoens (legume)	Full-part sun shade	15.0	16.8
	Scarlet Sage	Salvia coccinea	Full-part sun shade	8.0	9.0
	Pink Evening Primrose	Oenethera speciosa	Full-part sun shade	1.0	1.1
	Drummond Phlox	Phlox drummondii	Full-part sun	8.0	9.0
	Plains Coreopsis	Coreopsis tinctoria	Full-part sun	2.0	2.2
	Greenthread	Thelesperma filifoliu	Full sun	6.0	6.7
	Purple Prairie Clover*	Dalea purpurea	Full sun	4.0	4.5
	Cutleaf Daisy	Engelmannia pinnatifida	Full-part sun	18.0	20.1
Forb Seed Mix	Partridge Pea*	Chamaecrista fasciculate	Full-part sun	20.0	22.4
	Indian Blanket	Gaillardia pulchella	Full-part sun	10.0	11.2
	Bluebonnet*	Lupinus texensis (legume)	Full sun	20.0	22.4
	Mexican Hat	Ratibida columnaris	Full-part sun	2.0	2.2
	Maximilian Sunflower	Helianthus maximilia	Full-part sun	5.0	5.6
	Prairie Coneflower	Ratibidia columnifer	Full-part sun	2.0	2.2
	Clasping Coneflower	Dracopis amplexicau	Full-part sun	3.0	3.4
	Purple Coneflower	Echinacea purpurea	Full-part sun shade	10.0	11.2
	Lemon Mint	Monarda citriodora	Full-part sun	3.0	3.4
	Huisache Daisy	Amblyolepis setigera	Full-part sun	8.0	9.0
	Texas Yellow Star	Lindheimera texana	Full-part sun	12.0	13.5
	Lanceleaf Coreopsis	Coreopsis lanceolata	Full-part sun shade	10.0	11.2
	Bush Sunflower	Simsia calva	Full-part sun	3.0	3.4
	Winecup	Callirhoe involucrata	Full-part sun shade	5.0	5.6
	Antelope horns	Asclepias asperula	Full sun	0.1	0.04
	Green milkweed	Asclepias viridis	Full sun	0.1	0.04
TOTAL Total seed mix application rate is 35.0 lb/ac (23.5 lb/ac grasses and 11.5 lb/ac forbs), to be composed of at least 8 species from the grass list and 10 species from the forb list to include the required species.					

*Required species that must be included in the mix

Table 5: Native Grasses and Forbs: Wet Sites

Type	Common Name	Botanical Name	Exposure	Recommended Application Rates	
				lbs/ac	kg/ha
Grass Seed Mix	White Tridens	Tridens albescens	Full-part sun	0.5	0.56
	Plains Bristlegrass	Setaria leucopila	Full-part sun	6.0	6.7
	Switchgrass	Panicum virgatum	Full-part sun	4.0	4.5
	Inland Sea Oats	Chasmanthium latifoliu	Shade	12.0	13.5
	Canada Wild Rye	Elymus canadensis	Full sun - shade	10.0	11.2
	Big Bluestem	Andropogon gerardii	Full sun	4.0	4.5
	Bushy Bluestem	Andropogon glomeratus	Full sun	3.0	3.4
	Green Sprangletop*	Leptochloa dubia	Full sun	2.0	2.2
	Eastern Gamagrass	Tripsacum dactyloides	Full sun - shade	3.0	3.4
Forb Seed Mix	American Basketflower	Centaurea americana	Full sun	10.0	11.2
	Common milkweed	Asclepias syriaca	Full sun	0.1	0.04
	Butterfly weed	Asclepias tuberosa	Full sun	0.1	0.04
	Blue Mistflower	Conoclinium coelestinum	Full-part sun	0.5	0.6
	Clasping Coneflower	Dracopsis amplexicaulis	Full-part sun	3.0	3.4
	Maximilian Sunflower	Helianthus maximliani	Full-part sun	4.0	4.5
	Prairie Blazing Star	Liatris pycnostachya	Full sun	2.0	2.2
	Pink Evening Primrose	Oenothera speciosa	Full sun-dappled shade	1.0	1.1
	Mexican Hat	Ratibida columnifera	Full-part sun	2.0	2.2
	Black-eyed Susan	Rudbeckia hirta	Full sun-dappled shade	2.0	2.2
	Illinois Bundleflower	Desmanthus illinoensis	Full sun-dappled shade	15.0	16.8
	Obedient Plant	Physostegia virginiana	Full sun-dappled shade	4.0	4.5
	Partridge Pea*	Camaecrista fasciculate	Full-part sun	20.0	22.4

Type	Common Name	Botanical Name	Exposure	Recommended Application Rates	
				lbs/ac	kg/ha
	Purple Prairie Clover	Dalea purpurea var purpurea	Full sun	4.0	4.5
	Pitcher Sage	Salvia azurea	Full-part sun	3.0	3.4
	Showy Tick Trefoil	Desmodium canadense	Full sun	0.5	0.6
	Winecup*	Callirhoe involucrata	Full-part sun	5.0	5.6
TOTAL Total seed mix application rate is 26.0 lb/ac (17.0 lb/ac grasses and 9.0 lb/ac forbs), to be composed of at least 8 species from the grass list and 10 species from the forb list to include the required species.					

Table 6: Cool Season Cover Crop

Common Name	Botanical Name	Exposure	Application rates	
			lbs/ac	kg/ha
Western Wheatgrass	*Pascopyrum smithii*	Full-pt sun; dappled shade	5.6	6.28
Oats	*Avena sativa*	Full sun	4.0	4.48
Cereal Rye Grain	*Secale cereale*	Full sun	34.0	38.11

One cover crop species of the listed species is required to be planted between September 15 to March 1. Contractor must ensure that any seed application requiring a cool season cover crop does not utilize annual ryegrass (*Lolium multiflorum*) or perennial ryegrass (*Lolium perenne*). Only cereal rye grain (*Secale cereale*), oats (*Avena sativa*) and western wheatgrass (*Pascopyrum smithii*) are approved as cool season cover crop.

Species substitution as necessary due to availability shall be approved by the Landscape Architect, Engineer or designated representative. Watering and fertilizer application shall follow procedures outlined above or as otherwise specified on the Drawings.

Seed shall be applied by broadcast, hydromulch, blown compost, or drill method and shall be distributed evenly over the topsoil areas. Mulching shall immediately follow seed application for broadcast and hydromulch applications.

Seed Rate Calculations

The amount of seed needed to be planted on a project shall be calculated before installation to ensure adequate seed is placed, and provided as a submittal. Table 7 is an example worksheet, followed by an example calculation. Information for calculation can be obtained from seed tags or the supplier.

Table 7. Seed Calculation Worksheet

Plant Group	Desired Seeding Rate (1bs/ac)	PLS (pure live seed)	Bulk Rate (lbs/ac)	Seeding Area (ac)	Amt. of Seed to be Installed (lbs)
Grasses					
Forbs					
TOTAL					

FORMULAE:

PLS (pure live seed) = (Purity x Germination) x 100. Can also use average PLS from seed tags.

Bulk Rate (lbs/AC) =Desired Seed Rate (lbs/AC)/PLS

Amt. of Seed to be Installed (lbs) = Bulk Rate (lbs/AC) x Seeding Area (AC)

Example:

Plant Group	Desired Seeding Rate (lbs/ac)	PLS (pure live seed)	Bulk Rate (lbs/ac)	Seeding Area (ac)	Amt. of Seed to be Installed (lbs)
Grasses	131.00	0.81	161.73	1.50*	242.60
Forbs	65.34	0.87	75.10	1.50*	112.70
TOTAL	196.34	0.84 (ave.)	236.83	1.50	355.30

604S.7 Mulch

Mulches may be used to help prevent soil erosion until final stabilization is achieved. Mulch shall be used to cover broadcasted seeds, especially in sunny, open areas, to protect them from drying out during germination.

A. Straw Mulch.

Straw mulch shall be spread uniformly over the area indicated or as designated by the Engineer or designated representative at the rate of 2 to 2 1/2 tons of straw per acre (4.5 to 5.6 megagrams of straw per hectare). The actual rate of application will be designated by the Landscape Architect, Engineer or designated representative. Straw may be hand or machine placed and adequately secured.

B. Hydromulch

Refer to ECM Section 1.4.7 for hydromulching applications.

C. Shredded Brush Mulch.

Small brush or tree limbs, which have been shredded, may be used for mulching Native for mulching Native Grass seeding.

604S.8 Management Practices

Management Practices include (1) weed management (pesticide application or mechanical removal) to so than 90 percent of the revegetation area is free of weeds listed in Table 3, and (2) reseeding areas of poor germination to achieve coverage and height per 604S.9, with no bare areas greater than 10 s.f..

Ninety (90) percent of a permanent revegetation area must be free of weeds listed in Table 3. Weeds shall be controlled in the most efficient manner possible. Management of weed species should begin early in the project, before seeding for permanent control, and extend into plant establishment, especially for perennial weeds. Manual removal or application of an appropriate herbicide may be required after the initial seeding if emergence of an annual weed species threatens establishment of sufficient preferred plant cover. Disturbance due to weed management after the initial seeding may necessitate re-seeding of the area to establish sufficient preferred plant coverage. Care should be taken to temporarily stabilize areas where physical removal of weeds has been performed to prevent erosion and sediment runoff.

The entire root system of perennial weeds shall be removed to prevent re-sprouting. Weeds may be controlled with an approved contact, systemic herbicide, provided the product is used with appropriate care and is applied in accordance with label instructions and the following guidelines:

1. Herbicide shall not be applied when the wind is greater than 8 mph (12.9 kph),
2. Herbicide shall not be applied when rainfall is expected within 24 hours,
3. Herbicide shall not contact surface water, i.e. creeks, rivers, and lakes,
4. Herbicide shall not contact desirable vegetation (a wicking method shall be used, if necessary, to accurately contact target weed only during application).

The Landscape Architect, Engineer or designated representative shall be consulted to determine appropriate weed control management when weeds are located in an environmentally sensitive location (e.g. near water or adjacent to a critical environmental feature).

At locations that fail to show an acceptable stand of planting for any reason during the initial seeding, repair and/or reseed locations as determined by the Landscape Architect, Engineer or designated representative. A successful stand of grasses and forbs for erosion control should exhibit the following:

- Seedlings with vigorous green foliage;
- Green leaves remaining throughout the summer, at least at the plant bases;
- Uniform density, with grasses and/or forbs well intermixed;
- Minimum of 95% cover; and
- No exposed soil greater than 10 s.f. in aerial extent.

The Contractor shall meet the requirements of the initial seeding, including seeding method, seed mix, and application rates, unless otherwise agreed to in writing by the Owner. Corrected deficiencies will be re-inspected and approved by the Owner, and final acceptance will be granted upon satisfactory completion.

604S.9 Measurement

Work and acceptable material for "Seeding for Erosion Control" will be measured by the square yard (meter: 1 meter equals 1.196 square yards) or by the acre (hectare: 1 hectare equals 2.471 acres), complete in place, so that all areas of the site that rely on vegetation for stability must be uniformly vegetated with a minimum of 95 percent total coverage for the non-native or native mixes, and 95 percent coverage for the native mix. Bare areas shall not exceed 16 square feet (1.5 square meters), and the average height of vegetation shall stand at a minimum of 1 1/2 inch (40 millimeters). Ninety (90) percent of the revegetated area, whether native or non-native re-vegetation, must be free of weeds listed in Table 3. Bare areas greater than 10 s.f. shall be re-prepared and reseeded as required to develop an acceptable stand of plant material.

604S.10 Payment

The work performed and materials furnished and measured will be paid for at the unit bid price for "Seeding for Erosion Control" of the method specified on the Drawings and type of mulch. The unit bid price shall include full compensation for furnishing all materials, including all topsoil, water, seed, tackifier, fertilizer or mulch and for performing all operations necessary to complete the work.

All fertilizer will be measured and paid for conforming to Item No. 606S, "Fertilizer".

Payment will be made under one of the following:

Pay Item No. 604S-A:	Non-Native Seeding for Erosion Control Method, Hydraulic Planting	Per Square Yard
Pay Item No. 604S-B:	Non-Native Seeding for Erosion Control, Broadcast Seeding	Per Square Yard
Pay Item No. 604S-C:	Non-Native Seeding for Erosion Control Method, Hydraulic Planting	Per Acre
Pay Item No. 604S-D:	Native Seeding for Erosion Control Method, Hydraulic Planting	Per Square Yard
Pay Item No. 604S-E:	Native Seeding for Erosion Control, Broadcast Seeding,	Per Square Yard
Pay Item No. 604S-F:	Native Seeding for Erosion Control Method, Hydraulic Planting	Per Acre
Pay Item No. 604S-G:	Mulch,	Per Square Yard
Pay Item No. 604S-H:	Mulch,	Per Acre
Pay Item No. 604S-I:	Topsoil and Seedbed Preparation,	Per Square Yard
Pay Item No. 604S-J:	Topsoil and Seedbed Preparation,	Per Acre
Pay Item No. 604S-K:	Watering,	Per 1000 gal (Kgal)
Pay Item No. 604S-L:	Management Practices,	Per Square Yard
Pay Item No. 604S-M:	Management Practices,	Per Acre

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 604S "Seeding for Erosion Control"

City of Austin Technical Specifications

Designation	Description
Item No. 130S	Borrow
Item No. 601S	Salvaging and Placing Topsoil
Item No. 606S	Fertilizer

City of Austin Land Development Code

Designation	Description
Section 6-4	Water Conservation

RELATED CROSS REFERENCE MATERIALS
Specification Item 604S "Seeding for Erosion Control"

City of Austin Technical Specifications

Designation	Description
Item No. 601S	Salvaging and Placing Topsoil
Item No. 602S	Sodding for Erosion Control
Item No. 605S	Soil Retention Blanket
Item No. 607S	Slope Stabilization
Item No. 608S	Planting

City of Austin Standards (Details)

Designation	Description
627S-1	Grass Lined Swale
633S-1	Landgrading

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 160	Topsoil
Item No. 162	Sodding for Erosion Control
Item No. 164	Seeding for Erosion Control
Item No. 166	Fertilizer
Item No. 168	Vegetative Watering
Item No. 169	Soil Retention Blanket
Item No. 180	Wildflower Seeding
Item No. 192	Landscape Planting

ITEM NO. 610S - PRESERVATION OF TREES AND OTHER VEGETATION 12-7-18

610S.1 - Description and Definitions

This item shall govern the proper care, protection and treatment of trees and other vegetation in the vicinity of the permitted development activity (as defined in Land Development Code 25-1-21(27)). All work shall be performed in accordance with the City approved drawings and specifications (e.g. Standard Series 600) or as approved by the City Arborist (as defined below). Tree pruning and/or treatments shall be performed under the direct supervision of a qualified arborist (as defined below) or as allowed by the City Arborist.

Definitions

City Arborist - City official designated by the Director of the Planning and Development Review Department (Land Development Code 25-8-603) or as designated by the City Arborist.

Oak wilt - a tree disease caused by a fungus "Ceratocystis fagacearum" that infects the vascular system of Oak "genus Quercus" trees and prevents water transport through the trunk and canopy of the tree. This usually fatal tree disease can be spread by certain insects that come into contact with tree wounds or by interconnected tree roots. February through June is a high risk period due to the stage of the fungus and insect activity. See section 610S.4(H) for additional requirements for preventing Oak wilt infection.

Qualified Arborist - an individual engaged in the profession of arboriculture or closely related field who, through experience, education, and related training, possesses the competence to provide for, or supervise, the management of trees and other woody plants (as defined in the most current version of ANSI A300 (Part 1)-2001, section 4.1).

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

610S.2 - Submittals

The following is a list of the minimum submittal requirements for this specification item shall include:

A. Identification of the location, type of protective fencing (i.e. A, B or C), materials of construction and installation details;

B. Qualified Arborist credentials (i.e. proof of certification from the International Society of Arboriculture, licenses, resume and/or references);

C. Type, location and construction details for proposed tree wells;

D. Location, type, materials of construction and installation details for permeable paving;

E. Proposed nutrient mix specifications and when required by the City Arborist, soil and/or foliar analysis for fertilizer applications.

610S.3 - Materials

A. Protective Fencing and Signage

Protective fencing is designated as the materials used to protect the root zones of trees as illustrated in City of Austin Standard Detail 610S-1. Three basic types of protective fencing materials are allowed by the City of Austin. Type A and Type B are typical applications and shall be installed where damage potential to a tree root system is high, while Type C shall be installed where damage potential is minimal. The specific type of protective fencing for the work shall be as indicated on the drawings. Type C fence materials shall be subject to approval by the City Arborist. Type C fencing

shall be replaced by Type A or Type B fencing as directed by the City Arborist if it fails to perform the necessary function.

1. Type A Chain Link fence (Typical Application-high potential damage)

   Type A protective fencing shall be installed in accordance with City of Austin Standard Details 610S-2 and 610S-4 and shall consist of a minimum five-foot (1.5 meters) high chain link fencing with tubular steel support poles or "T" posts.

2. Type B Wood Fence (Typical Application-high potential damage)

   Type B protective fencing shall be installed in accordance with City of Austin Standard Details 610S-3 and 610S-5 and shall consist of any vertical planking attached to 2x4-inch (50 x 100 mm) horizontal stringers which are supported by 2x4-inch (50 x 100 mm) intermediate vertical supports and a 4x4-inch (100 x 100 mm) at every fourth vertical support .

3. Type C Other Materials (Limited Application-minimal potential damage)

   The following materials may be permitted as alternates for limited or temporary applications (3 days or less) where tree damage potential is minimal (as determined by the City Arborist):

   (a) High visibility plastic construction fencing.

   The fabric shall be 4 feet (1.2 meters) in width and made of high density polyethylene resin, extruded and stretched to provide a highly visible international orange, non-fading fence. The fabric shall remain flexible from -60°F to 200°F (-16°C to 93°C) and shall be inert to most chemicals and acid. The fabric pattern may vary from diamond to circular with a minimum unit weight of 0.4 lbs./Ft. (0.6 kilograms per meter).

   The fabric shall have a 4 foot (1.2 meters) width minimum tensile yield strength (Horizontal) of 2000 psi [13.9 megaPascals], ultimate tensile strength of 2680 psi [18.5 megaPascals] (Horizontal) and a maximum opening no greater than 2 inches (50 mm).

   (b) Other approved equivalent restraining material.

   The fencing materials, identified in (a) and (b) above, shall be supported bysteel pipe, tee posts, U posts or 2″ × 4″ (50 mm x 100 mm) timber posts that are a minimum of 5½ feet (1.68 meters) in height and spaced no more than 8 feet (2.44 meters) on centers. The fabric shall be secured to post by bands or wire ties.

4. Signage

   A laminated sign, no smaller than 8.5 X 11 inches, shall be posted on each tree protective device, and at least every 100 linear feet on protective fencing, identifying the following information: Tree & Root Protection Zone, Per City of Austin code (Chapter 25-8, Subchapter B, Article 1) this protective device is to remain in place for the entirety of the development project and illegal removal is subject to fines and work suspensions. Additional information can be obtained at the City Arborist (512-974-1876) web site (http://www.ci.austin.tx.us/trees). Zona de Protección del Árbol y las Raíces: el dispositivo protector debe quedarse en el lugar para la totalidad del proyecto de la construcción. Para información adicional, contacta la Arborista Municipal (512) 974-1876 o http://www.ci.austin.tx.us/trees/trees_spanish.htm.

B. Trunk Protection (Limited Application)

When indicated on the drawings or directed by the City Arborist tree trunk protection shall be provided in accordance with City of Austin Standard Details 610S-4 and 610S-5. Tree trunk protection shall consist of any 2 x 4-inch (50 x 100 mm) or 2 x 6-inch (50 x 150 mm) planking or plastic strapping and shall be attached in a manner that does not damage the tree.

C. Tree Dressing

Wound treatments should not be used to cover wounds or pruning cuts, except when recommended for disease (see section 610S.4 (H)), insect, mistletoe, or sprout control (from ANSI A300 (Part 1)-2001, section 5.4.1).

D. Tree Wells for Raised Grades

When existing grades are raised by more than 4 inches (10.16 cm), the tree root system shall be protected by the installation of tree wells in accordance with City of Austin Standard Detail 610S-6. Native stone or non-toxic timber shall be used for the separator wall of the well and PVC conforming to ASTM D-2729, SDR-35 shall be used for the aeration systems in fill areas.

E. Permeable Paving (Environmental Criteria Manual Section 3.5.A.1)

Permeable segmented pavers in conjunction with PVC pipe aeration system or concrete on gravel base with cored holes shall be used to protect existing tree root zones when indicated on the drawings or directed by the City Arborist.

F. Fertilizer

Humate/nutrient solutions with mycorrhizae components or soil injection at recommended rates are to be used when appropriate. Construction which will be completed in less than 90 days may use materials at half the recommended rates. Alternative organic fertilizer materials are acceptable when approved by the City Arborist.

610S.4 - Construction Methods

A. Protective Fencing

All trees and shrubs in the proximity of the construction site shall be carefully checked for damage prior to initiation of the permitted development activity.

All individual or groups of trees, shrubs, and natural areas shown to be protected on the drawings or identified to be protected by the City Arborist, shall be protected during construction with temporary fencing as indicated on the drawings or as directed by the City Arborist.

Protective fences (section 610S.4.A) shall be installed prior to the start of any site preparation work (clearing, grubbing, or grading), and shall be maintained in functioning condition throughout all phases of the construction project.

Protective fence locations in close proximity to intersecting streets or drives shall adhere to the sight distance (Section 1.3.1.C.6) and desirable sight triangle (Figure 1-6 criteria found in the City of Austin Transportation Criteria Manual).

1. Protective fences shall be constructed at the locations (typically the outer limits of the critical root zone) and with materials indicated on the drawings to prevent the following (Environment Criteria Manual, Appendix P-2, Note 6):

   (a) Soil compaction in the root zone area resulting from vehicular traffic or storage of equipment or materials.

   (b) Critical root zone disturbances due to grade changes [greater than 4″ (10.16 cm) cut or fill] or trenching not reviewed and authorized by the City Arborist.

   (c) Damage to exposed roots, trunks or limbs by mechanical equipment.

   (d) Other activities detrimental to trees such as chemical storage, concrete truck cleaning, and fires.

2. Exceptions to the installation of protective fences at the tree drip lines may be permitted in the following cases:

(a) Where there is to be an approved grade change, impermeable paving surface, tree well, or other such site development, the fence shall be erected no more than 2 feet (0.6 meters) beyond the area of disturbance unless approved by the City Arborist;

(b) When permeable paving is to be installed within a tree's critical root zone, the fence shall be erected at the outer limits of the permeable paving area (prior to any site grading so that this enclosed area is graded separately to minimize root damage);

(c) When trees are located close to a proposed building or other construction activity (Environment Criteria Manual, Appendix P-2, Note 6.c), the fence shall be erected up to 10 feet (3 meters) to allow work space between the fence and the structure. Apply organic mulch to a depth of 8 inches [30.48 cm] in the unprotected root zone area;

(d) When there are street-side pedestrian walkways, fences shall be constructed in a manner that does not obstruct safe passage;

(e) When there are severe space constraints due to tract size or other special requirements, the Contractor shall contact the City Arborist to discuss alternatives.

When any of the exceptions listed above will result in a fence being located closer than five (5) feet (1.5 meters) to a tree trunk, the Contractor shall also protect the trunk with strapped-on planking to a height of 8 feet [2.4 meters] (or to the limits of lower branching) in addition to the fencing requirement (City of Austin Standard Details 610S-4 and 610S-5).

B. Pruning and Repair of Damage

Tree pruning, to provide clearance for the work and/or to remove hazards, shall be performed under the direct supervision of a qualified arborist and shall follow standards identified in ANSI A300 (Part 1), "Pruning". A minimum clearance height of eight (8) feet (2.4 meters) above the street level must be provided and maintained for all existing trees if adjacent to a sidewalk. However, if the limbs of trees overhang the curb line or edge of travel lane of any street, a minimum clearance height of fourteen (14) feet (4.2 meters) is required (Transportation Criteria manual section 6.2.3,A, 4, "Clearance Height"). Pruning shall provide the minimum clearance needed to perform the work or remove a hazard unless otherwise directed by the City Arborist to comply with transportation criteria or to mitigate for damage.

If tree damage compromises a tree's structural integrity then the area shall be adequately secured until a qualified arborist makes an assessment of the tree and corrective actions are completed with approval from the City Arborist. Damage to oak trees shall be treated immediately, with consideration for site safety, to reduce the risk of Oak Wilt infection (See 610S.4.H, "Oak Wilt Prevention"). Tree root wounds shall be treated to remove loose, damaged tissue from in and around the wound or if necessary the root shall be cut cleanly and covered with topsoil, or other material approved by the City Arborist, to prevent drying of root tissue and to create a favorable environment for root sprouting. Trunk wounds shall also be treated to remove loose, damaged tissue around the wound. Tree canopy repairs shall be performed in accordance with the most current version of ANSI A300 (Part 1), "Pruning", to prevent further damage to the tree and to promote recovery of the tree to sound condition. The ANSI standard describes proper pruning methods for limb removal and for making finish pruning cuts.

Trees damaged or removed without prior approval or where minimum design criteria is exceeded due to failure to maintain approved tree protection shall be mitigated (Environmental Criteria Manual section 3.5.4, "Mitigation Measures") in accordance with Land Development Code Chapter 25-8, Subchapter B, Article 1.

All trees damaged during construction shall receive an application of fertilizer within the drip line conforming to Standard Specification Item No. 606S, "Fertilizer" at the rate of 4 pounds per caliper inch (.07 kilograms per caliper mm).

C. Cutting and Filling Around Trees

When the depth of an excavation or embankment exceeds 4 inches (10.16 cm) within the critical root zone of any tree with a trunk diameter greater than 8 inches (200 mm), the City Arborist may require a tree well to be constructed per the City of Austin approved specifications and details (Section 610S.3.D and City of Austin Standard Detail 610S-6).

D. Paving Around Trees

Where new paving within the ½ critical root zone of any tree greater than a 8 inches (10.16 cm) diameter is approved, a permeable pavement and aeration system may be required by the City Arborist per the City of Austin Standard Detail (Section 610S.3.E, Environmental Criteria Manual Section 3.5.3.A.1 and Figure 3-8) must be installed as indicated on the Drawings, except for street construction.

E. Tree Removal

Tree removal shall comply with Land Development Code Chapter 25-8, Subchapter B, Article 1. An approved permit, or an approved site plan is required for removal of trees 8″ and larger (see Environmental Criteria manual section 3.3.2.A.2 and figure 3-1 for measurement standards) with additional requirements for City Parkland properties and for Hill Country Roadway Corridor sites. Trees 19 inches in diameter and greater are defined as protected trees and require specific review from the City Arborist to approve a permit or site plan for removal. In addition heritage trees require a more extensive evaluation by the City Arborist and may require rulings from boards and commissions.

All trees to be removed shall be performed in a manner that does not damage the canopies, trunks or root systems of remaining trees and that protects all existing facilities, improvements and vegetation. Removal of oak trees shall follow the Oak Wilt Prevention procedures per the City of Austin Standards (Section 610S.4,(H)). All tree material shall be removed from the site unless authorized by the City Arborist or if it will be used as wood chips or mulch.

When a tree or shrub is scheduled for removal, it shall be cut to a maximum depth of 12 inches (30.5 cm) below the surrounding grade (the tree(s) should be removed at grade, and with hand saws, in situations where other tree root systems are present which are to be preserved). When applicable, after tree removal, soil shall be placed in the hole to a depth matching the existing grade.

All damage resulting from tree removal or pruning shall be repaired at the Contractor's own expense and shall follow guidelines in this specification.

F. Final Cleanup

All temporary tree and shrub preservation and protection measures shall be removed when the construction has been completed and any mulch applications shall be removed or reduced to no more than 3 inches (7.62 cm) depth.

G. Root Zone Aeration and Fertilization

As a component of an effective remedial tree care program per Environmental Criteria Manual section 3.5.4, preserved trees within the limits of construction may require soil aeration and supplemental nutrients. Soil and/or foliar analysis should be used to determine the need for supplemental nutrients. The City Arborist may require these analyses as part of a comprehensive tree care plan. Soil pH shall be considered when determining the fertilization composition as soil pH influences the tree's ability to uptake nutrients from the soil. If analyses indicate the need for supplemental nutrients, then humate/nutrient solutions with mycorrhizae components are highly recommended. In addition, soil analysis may be needed to determine if organic material or beneficial microorganisms are needed to improve soil health. Materials and methods are to be approved by the City Arborist (512-974-1876) prior to application. The owner or general contractor shall select a fertilization contractor and ensure coordination with the City Arborist.

Pre-construction treatment should be applied in the appropriate season; ideally the season preceding the proposed construction. Minimally, areas to be treated include the entire critical root zone of trees as depicted on the City approved plans. Treatment should include, but not limited to, fertilization, soil treatment, mulching, and proper pruning.

Post-construction treatment should occur during final revegetation or as determined by a qualified arborist after construction. Construction activities often result in a reduction in soil macro and micro pores and an increase in soil bulk density. To ameliorate the degraded soil conditions, aeration via water and/or air injected into the soil is needed or by other methods as approved by the City Arborist. The proposed nutrient mix specifications and soil and/or foliar analysis results need to be provided to and approved by the City Arborist prior to application (Fax # 512-974-3010). Construction which will be completed in less than 90 days may use materials at ½ recommended rates. Alternative organic fertilizer materials are acceptable when approved by the City Arborist. Within 7 days after fertilization is performed, the contractor shall provide documentation of the work performed to the City Arborist, Planning and Development Review Department. P.O. Box 1088, Austin, TX 78767. This note should be referenced as item #1 in the Sequence of Construction.

H. Oak Wilt Prevention Policy

1. Purpose and Scope

The purpose of this Oak Wilt Prevention Policy is to identify measures that city staff and city-hired contractors and their sub-contractors, who perform the services of removing or trimming trees, will take to prevent the spread of oak wilt.

2. Definitions

Oak Wilt Disease: A tree disease caused by the fungus, Ceratocystis fagacearum. The fungus infects the vascular system of a tree. The vascular system contains vessels which transport moisture throughout the tree. The vessels of an infected tree effectively become blocked by the infection of the fungus, and cannot transport adequate moisture to sustain a healthy or living tree. In most cases, the end result is tree mortality.

3. Prevention Policy

(a) Prior to beginning field work, all city staff associated with projects involving potential contact with oak trees shall be made aware of the city's official Oak Wilt Policy by receiving and reading a written copy of this policy. Staff receiving a written copy of the policy shall include, but not limited to, project managers, equipment operators responsible for removing or trimming trees, or operators using heavy equipment which could cause wounding of susceptible oaks in the use of the equipment. In addition, individual city departments will provide a written copy of the Oak Wilt Policy to contractors participating in city projects in areas where oak trees are present before initiating field work.

(b) When possible, city staff and contractors should avoid trimming, pruning, or wounding Live Oaks and Red Oaks (Spanish, Shumard, Texas Red, and Blackjack oaks) from February through June.

(c) At all times and irrespective of limb size, all cuts and wounds to oak trees shall be dressed immediately using a non-phytotoxic tree wound dressing. Stump cuts and damaged roots (both above and below ground) shall also be dressed.

(d) Disinfection of pruning tools, saws, and related equipment is mandatory during the trimming or pruning of oak trees. Disinfection of tree removal and trimming equipment shall occur before work begins in a project area, between work in individual oak trees, and again prior to leaving a project area. Acceptable disinfectants include either aerosol disinfectant or a 10 percent bleach-water solution.

*NOTE: Although this policy would require the disinfection of pruning equipment before and between oak trees as a precaution, research does not substantiate disinfection as a means of preventing the transmission of the oak wilt disease.

4. Disposal Policy

(a) Chipping or shredding the wood from infected trees to use as mulch is an acceptable means of recycling the wood. Chipping or shredding allows the wood to dry out quickly, thereby killing the fungus.

(b) Burning diseased wood is an acceptable means of disposal. Burning diseased logs will kill the fungus, and the fungus will not spread with the smoke.

(c) Logs from diseased Red Oaks, that are not chipped, shredded, or burned shall be disposed of at a landfill.

(d) Firewood from diseased Red Oak trees shall not be stored near healthy trees where fungal spores or insects that carry the spores have the potential to spread the fungus to healthy trees. It is recommended to store oak firewood under a sheet of clear plastic, tightly sealing the edges of plastic with soil or bricks. Doing so will prevent any spore carrying beetles from escaping and will solarize and heat the stored firewood to speed the drying process. It is also recommended to use clear plastic, as black plastic will reveal any escape holes to the beetles.

(e) In situations where diseased Red Oak trees are identified and are not accessible for chipping, shredding, or removal, the trunk of the diseased tree should be girdled, and the stem treated with an appropriate herbicide to deaden the tree and hasten the desiccation and drying of the wood below the minimum moisture content that could support the development of fungal spores.

610S.5 - Measurement

Tree and shrub pruning, fencing, drains, fertilization, etc. will not be measured for payment unless included as a contract pay item. Tree wells for tree protection will be measured by the units, complete in place, conforming to the Drawings and City of Austin Standard Detail 610S-6, "Tree Protection, Tree Wells".

Removal of existing trees will be measured per each tree.

610S.6 - Payment

The work and materials prescribed herein with the exception of the Protective Fencing and Tree Well (Tree Protection) will not be paid for directly but shall be included in the unit price bid for the item of construction in which this activity is used, unless a payment item is included as a contract pay item.

Payment will be made under:

Pay Item 610S-A:	Protective Fencing Type A Chain Link fence (Typical Application-high damage potential)	Per Lineal Foot
Pay Item 610S-B:	Protective Fencing Type B Wood Fence (Typical Application-high damage potential)	Per Lineal Foot
Pay Item 610S-C:	Protective Fencing Type C Other Materials (Limited Application-minimal damage potential)	Per Lineal Foot

Pay Item 610S-D:	Tree Well (Tree Protection)	Per Each
Pay Item 610S-E:	Tree Trunk Protection (Wood Planking)	Per Each
Pay Item 610S-R:	Removal of Existing Trees	Per Each

Source: Rule No. R161-18.24 , 12-7-2018.

End

SPECIFIC CROSS REFERENCE MATERIALS	
Specification Item 610S, "Preservation of Trees and Other Vegetation"	
City of Austin Standard Specification Items	
Designation	Description
Item No. 606S	Fertilizer
City of Austin Standard Details	
Designation	Description
Item No. 610S-1	Tree Protection Fence Locations
Item No. 610S-2	Tree Protection Fence, Type A, Chainlink
Item No. 610S-3	Tree Protection Fence, Type B, Wood
Item No. 610S-4	Tree Protection Fence, Modified Type A, Chainlink

Item No. 610S-5	Tree Protection Fence, Modified Type B, Wood
Item No. 610S-6	Tree Protection, Tree Wells
City of Austin Transportation Criteria Manual	
Designation	Description
Section 1.3.1.C.6	Sight Distance
Section 6.2.3.A.4	Clearance Height
Figure 1-6	Desirable Sight Triangle
City of Austin Environmental Criteria Manual	
Designation	Description
Appendix P-2, Note 6	Exceptions to Installing Fences
Appendix P-2, Note 6c	Trees close to proposed buildings - - -
Appendix P-6	Remedial Tree Care Notes
Section 3.3.2.A.2	Diameter of trees - - -
Section 3.5.0	Design Criteria
Section 3.5.3.A.1	Permeable Paving
Figure 3-8	Example of Minimum Design Criteria Applied to Permeable Parking
City of Austin Land Development Code	

Designation	Description
Section 25-8-603	Tree Protection Administration
Section 25-8-623	Inspection by City Arborist

ASTM, American Society for Testing and Materials

Designation	Description
D-2729	Specification for Poly (Vinyl Chloride) (PVC) Sewer Pipe and Fittings

RELATED CROSS REFERENCE MATERIALS

Specification 610S, "Preservation of Trees and Other Vegetation"

City of Austin Standard Specification Items

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 132S	Embankment
Item No. 608S	Planting

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges	
Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 132	Embankment
Item No. 158	Specialized Excavation Work
Item No. 160	Furnishing and Placing Topsoil
Item No. 166	Fertilizer
Item No. 168	Vegetative Watering

Item No. 641S
Stabilized Construction Entrance

641S.1 Description

This item governs the construction of a stabilized pad of crushed stone located at any point where traffic will be entering or leaving a construction site to or from a public right of way, street, alley, sidewalk or parking area. The removal of the stabilized pad of crushed stone shall also be included in the item. The purpose of a stabilized construction entrance is to reduce or eliminate the tracking or deposition of sediment onto public right of way (Environmental Criteria Manual Section 1.4.2.N.4).

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

641S.2 Submittals

The submittal requirements for this specification item shall include:

A. Source, type and gradation of rock

B. Drainage technique (i.e. drainage swale or entrance grading) proposed to prevent runoff from exiting the construction site.

641S.3 Materials

Aggregate for construction shall conform to the following gradation:

Table 1: Aggregate Gradation Chart (TEX 401-A, % Retained per sieve)	
US 5 inch (SI 125 mm)	US 3 inch (SI 75 mm)
0	100

641S.4 Construction Methods

All trees, brush, stumps, obstructions and other objectionable material shall be removed and disposed of in a manner that will not interfere with the excavation and construction of the entrance as indicated on the Drawings or as presented in Standard Details No. 641S-1. The entrance shall not drain onto the public right of way or shall not allow surface water runoff to exit the construction site.

When necessary, vehicle wheels shall be cleaned to remove sediment prior to entrance onto public right of way. When vehicle washing is required, it shall be done on an area stabilized with crushed stone, which drains into an approved sediment trap or sediment basin. All sediment shall be prevented from entering any storm drain, ditch or watercourse through use of sand bags, gravel, boards, silt fence (Standard Specification Item No 642S) or other methods approved by the Engineer or designated representative.

The entrance shall be maintained in a condition that will prevent tracking or disposition of sediment onto public right of way. This restriction may require periodic top dressing with additional stone as conditions demand, as well as the repair and/or cleanout of any measures used to trap sediment. All sediment that is spilled, dropped, washed or tracked onto public right of way must be removed immediately.

641S.5 Measurement

Acceptable work performed as prescribed in this item will be measured by unit of each stabilized construction entrance installed.

641S.6 Payment

The work performed and materials furnished and measured as provided under "Measurement" will be paid for at the unit bid price per lineal foot of "Stabilized Construction Entrance". The price shall include full compensation for furnishing, hauling and placing all materials, labor, tools, equipment and incidentals necessary to complete the work including inspecting, repairing, replacing and relocating existing fencing, removal of silt and removal and disposal of all materials at the completion of construction.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 641S: Stabilized Construction Entrance Per Each.

End

SPECIFIC CROSS REFERENCE MATERIALS

Specification 641S, "Stabilized Construction Entrance (SCE)"

City of Austin Environmental Criteria Manual

Designation	Description
Section 1.4.2.N.4	Stabilized Construction Entrance "Design Criteria"

City of Austin Standard Details

Designation	Description
Number 641S-1	Stabilized Construction Entrance

City of Austin Standard Specifications

Designation	Description
Item No. 642S	Silt Fence (SF)

RELATED CROSS REFERENCE MATERIALS

City of Austin Environmental Criteria Manual

Designation	Description
Section 1.4.2.J	Sandbag Berm
Figure 1-11	Sand Bag Berm
Section 1.4.2.G	Silt Fence

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 401S	Structural Excavation and Backfill
Item No. 610S	Preservation of Trees and Other Vegetation

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way

Item No. 110	Excavation
Item No. 132	Embankment
Item No. 158	Specialized Excavation Work
Item No. 168	Vegetative Watering

ITEM NO. 642S
SILT FENCE

642S.1 Description

This item shall govern the provision and placement of a silt fence fabric fence (Environmental Criteria Manual Section 1.4.5.G) including maintenance of the fence, removal of accumulated silt, removal of the silt fence and re-vegetation of disturbed areas upon completion of the project.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

642S.2 Submittals

The submittal requirements for this specification item shall include:

A. Source, manufacturer, characteristics and test data for the silt fence fabric,

B. Manufacturer, characteristics and test data for the posts and wire fence.

C. Re-vegetation program, including:

1. Identification of the type, source, mixture, Pure Live Seed (PLS) and rate of application of the seeding.
2. Type of mulch.
3. Type of tacking agent.
4. Type and rate of application of fertilizer.

642S.3 Materials

A. Fabric

1. General:

   The silt fence fabric shall be of nonwoven polypropylene, polyethylene or polyamide thermoplastic fibers with non-raveling edges. The silt fence fabric shall be non-biodegradable, inert to most soil chemicals, ultraviolet resistant, unaffected by moisture or other weather conditions, and permeable to water while retaining sediment. The silt fence fabric shall be supplied in rolls a minimum of 36 inches (0.9 meter) wide.

2. Physical Requirements:

   The fabric shall meet the requirements presented in Table 1, when sampled and tested in accordance with the methods indicated herein, on Standard Detail No. 642S-1 and/or on the Drawings.

B. Posts:

Posts shall be steel Tee or Y-posts, not less than 4 feet (1.22 meters) in length with a minimum weight of 1.25 pounds per foot (1.86 kilograms per meter) with a minimum Brinell Hardness of 143. Hangers shall be adequate to secure fence and fabric to posts. Posts and anchor plates shall conform to ASTM A-702. Caps are required (*not specifying discretionary criteria).

C. Wire Fence:

Wire fence shall be welded wire fabric 2 in. x 4 in. 12.5 SWG, wire diameter 0.099 in (±0.005 in.), and shall conform to Standard Specification Item No. 406, "Reinforcing Steel".

TABLE 1. Silt Fence Fabric Requirements

Physical Properties	Method	Requirements
Fabric Weight in ounces per square yard (grams/square meter)	TEX-616-J[1]	5.0 minimum (150 minimum)
Equivalent Sieve Opening Size: US Standard (SI Standard sieve size)	CW-02215[2]	40 to 100 (425 to 150 □m)
Mullen Burst Strength: lbs. per sq. inch (psi) megaPascal (mPa)	ASTM D-3786[3]	280 minimum (1.9 minimum)
Ultraviolet Resistance; % Strength Retention	ASTM D-1682[4]	70 minimum

[1] TxDoT Test Method Tex-616-J, "Testing of Construction Fabrics".
[2] US Army Corps of Engineers Civil Works Construction Guide Specification CW-02215, "Plastic Filter Fabric".
[3] ASTM D-3786, " Test Method for Hydraulic Bursting Strength of Knitting Goods and Nonwoven Fabrics: Diaphragm Bursting Strength Tester Method".
[4] ASTM D-1682, " Test Methods for Breaking Load and Elongation of Textile Fabrics ".

642S.4 Construction Methods

The silt fence fabric shall be securely attached to the posts and the wire support fence with the bottom 12 inches (300 mm) of the material buried in a trench a minimum of 6 inches (150 mm) deep and 6 inches (150 mm) wide to prevent sediment from passing under the fence. When the silt fence is constructed on impervious material, a 12-inch (300-mm) flap of fabric shall be extended upstream from the bottom of the silt fence and weighted to limit particulate loss. No horizontal joints will be allowed in the silt fence fabric. Vertical joints shall be overlapped a minimum of 12 inches (300 mm) with the ends sewn or otherwise securely tied.

The silt fence shall be a minimum of 24 inches (0.6 meter) high. Posts shall be embedded a minimum of 12 inches (300 mm) in the ground, placed a maximum of 8 feet (2.4 meters) apart and set on a slight angle toward the anticipated runoff source. When

directed by the Engineer or designated representative, posts shall be set at specified intervals to support concentrated loads.

* Per OSHA §1926.701, 'all protruding reinforcing steel, onto and into which employees could fall, shall be guarded to eliminate the hazard of impalement'. Caps must be large enough to dissipate the forces of impact to prevent impalement from a reasonably foreseeable fall distance. It should be noted that the use of impalement protection caps is but one method of protection; covers or wooden troughs can be another means of meeting the guarding requirement. For City of Austin purposes, this also applies to t-posts and wooden stakes.

The silt fence shall be repaired, replaced, and/or relocated when necessary or as directed by the Engineer or designated representative. Accumulated silt shall be removed when it reaches a depth of 6 inches (150 mm).

642S. 5 Measurement

The work performed and the materials furnished under this item will be measured by the lineal foot of "Silt Fence", complete in place.

642S.6 Payment

The work performed and materials furnished and measured as provided under "Measurement" will be paid for at the unit bid price per lineal foot of "Silt Fence". The price shall include full compensation for furnishing, hauling and placing all materials, labor, tools, equipment and incidentals necessary to complete the work including inspecting, repairing, replacing and relocating the fence, removal of silt and removal and disposal of all materials at the completion of construction in and re-vegetation of disturbed areas.

Payment will be made under:

Pay Item No. 642S:	Silt Fence for Erosion Control	Per Lineal Foot.

END

SPECIFIC CROSS REFERENCE MATERIALS
Specification 642S, "Silt Fence"

City of Austin Environmental Criteria Manual

Designation	Description
Section 1.4.5.G	Silt Fence

City of Austin Standard Details

Designation	Description
Number 642S-1	Silt Fence

City of Austin Technical Specifications

Designation	Description
Item No. 406	Reinforcing Steel

American Society For Testing and Materials (ASTM)

Designation	Description
A-702	Specification for Steel Fence Posts and Assemblies, Hot Wrought
D-1682	Test Methods for Breaking Load and Elongation of Textile Fabrics
D-3786	Test Method for Hydraulic Bursting Strength of Knitting Goods and Nonwoven Fabrics: Diaphragm Bursting Strength Tester Method

Texas Department of Transportation Manual of Testing Procedures

Designation	Description
Tex-616-J	Testing of Construction Fabrics

U.S. Army Corps of Engineers

Designation	Description
CW-02215	Civil Works Construction Guide Specification "Plastic Filter Fabric"

RELATED CROSS REFERENCE MATERIALS
Specification 642S, "Silt Fence"

City of Austin Environmental Criteria Manual

Designation	Description
Table 1-1.3	Recommended Design Values For Functional Controls
Table 1-2	Maximum Water Depth At The Barrier

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 401S	Structural Excavation and Backfill
Item No. 610S	Preservation of Trees and Other Vegetation

Item No. 700S
Mobilization

700S.1 Description

This item shall govern the mobilization of personnel, equipment and materials at the work site for other contract items that will be performed by the Contractor. Mobilization shall include, but not be limited to the movement of equipment, personnel, material, supplies, etc. to the Work site; the installation of temporary facilities (when not paid for separately) and the establishment of office and other necessary facilities prior to the initiation of the Work. The cost of the Payment Bond and Performance Bond on the Work that is delayed due to circumstances beyond Contractor's control, a closed construction season or for the convenience of the City of Austin will be considered part of the mobilization item under this Contract.

700S.2 Measurement.

Measurement of the Specification Item, "Mobilization", as specified herein as "Total Mobilization Payment", will be by the "Lump Sum", as the Work progresses.

700S.3 Payment.

The adjusted contract amount as used below is defined as the original contract amount less the lump sum bid for Mobilization and any payments for materials or equipment not yet incorporated in the Work. The Contractor shall submit a lump sum amount for Payment Item No. 700S-TM, "Total Mobilization Payment".

"Initial Mobilization Payout" as used below is defined as:

1. 8% of the original contract amount for projects with an original contract amount of $ 0.5 million or less; or
2. 4% of the original contract amount for projects with an original contract amount greater than $ 0.5 million.

In those instances where the "Initial Mobilization Payout", as defined above, exceeds the "Total Mobilization Payment" lump sum bid item (i.e. Payment Item No. 700S-TM), the "Total Mobilization Payment" shall be used as the "Initial Mobilization Payout". In no instance shall the "Initial Mobilization Payout" exceed the "Total Mobilization Payment" bid item.

Partial payments of the "Initial Mobilization Payout" shall be as follows:

A. Upon presentation of a paid invoice for the Payment Bond, Performance Bond and/or required insurance, the Contractor will be paid that cost from the amount bid for "Total Mobilization Payment".

B. The Mobilization of tunnel boring machines, batch plants or other similar facilities, along with supporting materials and equipment, to the work site or to the vicinity of the Work site will be considered as partial Mobilization under this contract. The Contractor shall provide a certified statement of the Contractor's

expenditure for the Mobilization and setup of the facility and supporting equipment. Upon approval by the Engineer or designated representative, the certified expenditure will be paid from the amount bid for the Specification Item, “Total Mobilization Payment”. In no case shall the combined amount for all of these facilities be more than 10 percent of the Mobilization “Total Mobilization Payment" lump sum bid or one (1) percent of the total contract amount, whichever is less.

C. When one (1) percent of the adjusted contract amount is earned, 50 percent of the "Initial Mobilization Payout” will be paid. Previous payments under this item will be deducted from this amount.

D. When five (5) percent of the adjusted contract amount is earned, seventy-five (75) of the "Initial Mobilization Payout” will be paid. Previous payments under this item will be deducted from this amount.

E. When ten (10) percent of the adjusted contract amount is earned, one hundred (100) percent of the "Initial Mobilization Payout” will be paid. Previous payments under this item will be deducted from this amount.

F. Payment for the remainder of Pay Item No. 700S-TM, “Total Mobilization Payment” will be made upon receipt of the final pay estimate.

Payment will be made under:

Pay Item No. 700S-TM: **"**Total Mobilization Payment" Lump Sum

END

RELATED CROSS REFERENCE MATERIALS
Specification 700S, “MOBILIZATION”

City of Austin Standard Contract Documents

Designation	Description
00020	Invitation for Bids
00100	Instructions To Bidders
00300	Bid Form
00425	Insurance Cost Form
00500	Agreement
00610	Performance Bond
00620	Bid Bond
00650	Certificate of Insurance
00700	General Conditions
00810	Supplemental General Conditions
00820	Modifications to Bidding Requirements & Contract Forms
01010	Summary of Work
01300	Submittals
01500	Temporary Facilities
01550	Public Safety and Convenience
01700	Contract Closeout
01710	Final Cleaning

Fencing

701S.1 Description

This item shall govern furnishing and installing fencing and gates at locations shown on the Drawings or directed by the Engineer or designated representative, including all posts, bracing and accessories as specified in this Item and as indicated on the Drawings.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text inch-pound units are given preference followed by SI units shown within parentheses.

701S.2 Submittals

Prior to installation of the fencing the Contractor shall furnish the Engineer or designated representative with certification from the manufacturer that all fencing materials comply with the requirements specified in this Item.

701S.3 Materials

A. Chain Link Fabric

1. Wire fabric for fencing shall be 9 gauge (3.76 mm) steel with a minimum breaking strength of 1,290 pounds per foot (1 750 Newtons per square meter). The overall height of the fence when erected shall be the height above grade as indicated on the Drawings. The fabric shall be woven into an approximately 2-inch ± 1/8-inch (50 mm ± 3 mm) mesh such that in a vertical dimension of 23 inches (585 mm) along the diagonals of the openings there shall be at least 7 meshes. Unless indicated otherwise on the Drawings the fabric shall have a knuckled (K) and twisted (T) finish for the top and bottom selvages respectively. The wire in the fabric shall withstand a minimum tensile strength test of 75,000 psi (517 kPa) after galvanizing. Except as provided herein, the chain link fence fabric shall conform to ASTM A392, Class I or ASTM A491.
2. The fabric shall be hot dip galvanized after weaving and shall have a minimum coating of 1.2 ounces per square foot (0.4 kilograms per square meter) of uncoated surface conforming to ASTM A392, Class I.
3. Between posts the fabric shall be fastened at 12-inch (300-mm) intervals to a top and bottom tension wire. When a top rail is shown on the Drawings, the fabric shall also be fashioned in the same manner. On gate frames, the fabric shall be fastened to top and bottom of the gate frame at all 12-inch (300-mm) intervals. Steel or aluminum wire fabric ties with a minimum 9 gauge (3.76 mm) diameter shall be used.

B. Woven Wire Fencing

Woven wire fencing shall be either galvanized steel wire fencing or aluminum-coated steel wire fencing conforming to the following requirements:

1. Galvanized steel wire fencing shall conform to ASTM A116, Class 1.

2. Aluminum-coated steel wire fencing shall consist of aluminum-coated steel wire conforming to the requirement for galvanized steel wire fencing, except the wire shall be aluminum coated. The wire shall not have less than 0.40 ounce (11 grams) coating of aluminum alloy per square foot of uncoated surface in accordance with ASTM A491

C. Wire Fencing

Wire shall be either galvanized or aluminum alloy coated 9 gage (3.76 mm) steel wire conforming to the specifications for galvanized steel or aluminum alloy coated woven wire fencing above.

D. Wood Fencing

Wood for wood fencing shall be Wolmanized pine, cedar or as indicated on the Drawings. The timber shall be sound and free from all decay, shakes, splits or any other defects, which would make it structurally unsuitable for the intended purpose.

E. Metal Posts, Top Rails, Braces and Gates

Steel pipe used for posts, top rails, braces and gate frames shall conform to the specifications of ASTM A 53. Steel sections used for posts, top rails, frames and braces shall be a good commercial quality weldable steel. All material shall be new and no used, re-rolled or open seam material will be acceptable. All posts shall meet the weight and length requirements indicated. The fabric bands and steel wire ties shall conform to the gauge and spacing indicated and shall be of suitable design to fasten fabric to the posts. Wire ties of the gauge shown may be used in lieu of fabric bands. All fittings required for posts shall be pressed or rolled steel, forge steel, malleable iron or wrought iron of good commercial quality and spaced as indicated on the Drawings.

1. Line Posts

Line posts may be either C-section or tubular. Tubular line posts shall be fitted with watertight malleable iron caps. Line posts shall be furnished in sufficient quantity to provide a maximum spacing of 10 feet (3 meters)

2. Terminal Posts

All end, corner and pull posts shall be known as terminal posts and shall be of either round or square sections. All terminal posts shall be furnished with watertight malleable iron caps. Fabric shall be fastened to terminal posts by steel stretcher bars and stretcher bar bands fitted with carriage bolts and nuts of the size and spacing indicated on the Drawings.

3. Gate Posts

Gateposts shall be either round or square. All gateposts shall be furnished with watertight malleable iron caps. The fabric shall be attached to the gateposts by means of steel stretcher bars and stretcher bar bands fitted with carriage bolts and nuts of the size and spacing indicated on the Drawings.

4. Post Caps

Post caps for pipe sections shall be designed to exclude all moisture. Where a top rail is shown on the Drawings, post caps shall have an opening for the top rail. All post caps shall have a 2-inch (50-mm) skirt for rigidity. When barbed wire is allowed for topping a six-foot (1.82 meter) or higher fence (LDC Section 10-1-9) the barbed wire support arms shall be integral with post caps.

5. Gates

a. Single Swing Gate

The gate frames shall be fabricated from sections either round or square of the size and weight indicated on the Drawings and shall be filled out with the same type fabric specified for the chain link fence. All gates shall be equipped with approved malleable iron or steel latches, stops and center rest. A satisfactory locking device suitable for padlocking shall be provided. The gates shall be hung by at least 2 steel or malleable iron hinges securely fastened to the posts. Hinges shall not twist or turn under the action of the gate, shall be capable of allowing a full 180 degree opening turn, shall be so arranged that a closed gate cannot be lifted off the hinges to obtain entry and shall be easily operated by one person.

b. Double Swing Gate

Double Swing gates shall be furnished and installed as indicated on the drawings. Gates shall be of the same height as the fence and shall have a single vertical mat of barbed wire. The gates shall be hinged to swing 180 degrees from closed to open. The gates shall be complete with frames, latches, stops, keepers, hinges, fabric, braces, padlocks and three strands of barbed wire. Gates shall have intermediate members and diagonal truss rods as required for rigid construction and shall be free from sag and twist. Gates shall be fitted with vertical extension arms or shall have frame end members intended to carry barbed wire.

Hinges shall be pinned type, heavy pattern with large bearing surface and shall not twist or turn under the action of gate. Latches for double swing gates shall be plunger bar type, full gate height, and arranged to engage the gate stop. Stops shall consist of a roadway plate with anchor set in Portland Cement concrete and arranged to engage the plunger. Keepers shall consist of mechanical devices for securing and supporting the free end when in the full open position. Latches shall be arranged for padlocking with padlock accessible from sides of the gate. Gates shall be installed so that they cannot be removed without disassembly of the hardware. Hardware attachment bolt shall be penned to prevent easy removal.

6. Top Rail

The top rail shall be of size and weight indicated on the Drawings and shall be furnished in random lengths, not less than 18 feet (5.5 meters) per section with outside sleeve type couplings at least 6 inches (150 mm) long and having a wall thickness of not less than 0.70-inch (18-mm). One coupling in five shall have a heavy spring to take up expansion and contraction of the rail. The top rail shall be installed before installing chain link fabric and shall pass through post tops.

7. Braces

All braces shall be of the size, weight and length indicated on the Drawings. All braces shall be trussed with rods and turnbuckles of the dimensions indicated on the Drawings. Braces shall be installed on all terminal posts and shall extend to the adjacent line posts. All corner and pull posts shall have braces on each side of terminal.

8. Fittings, Bolts and Other Miscellaneous Hardware

All fittings, bolts and miscellaneous hardware shall be hot dip galvanized in conformance with TxDoT Standard Specification Item No. 445, “Galvanizing.

9. Tension Wire

Between posts, the fabric shall be fastened to a top and bottom tension wire or to the top rail and bottom tension wire by steel wire ties of the gauge and spacing indicated on the

Drawings. The tension wire shall be at least 7 gauge (4.5 mm) galvanized coil spring steel of good commercial quality.

Tension wire shall have a minimum coating of 0.8 ounce per square foot (0.2 kilogram per square meter) of uncoated surface when tested in conformance with ASTM A116.

10. Security Fence

The security fence shall be 8 feet (2.44 meters) high with brackets and 3 strands barbed wire.

Barbed wire, when specified on the Drawings, shall be 12-1/2 gauge wire (2.51 mm), twisted with two-point 14 gauge (2.03 mm) barbs spaced approximately 5 inches (125 mm) apart and shall conform to ASTM A121 or ASTM A585. Three strands of barbed wire will be required when a barbed wire top is specified on the Drawings.

Barbed wire support arms shall be at an angle or 45° from vertical and shall have clips for attaching three (3) strands of barbed wire to each support arm. Each support arm shall be of sufficient strength to support a 200-pound (90 kilograms) weight (mass) applied at the outer strand of barbed wire.

11. Galvanizing

Thin-wall, high-strength pipe posts shall be externally hot-dip galvanized with a minimum weight of coating of 0.9 ounce per square foot (0.3 kilogram per square meter). After galvanizing, thin-wall, high-strength pipe posts shall be externally chromated by total immersion followed by application of clear polyurethane finish.

Interior surfaces shall have a hot-dip galvanized coating, a zinc base coating with thickness 0.5 mil ± 0.2 mil (13 micrometer ± 5 micrometer). The coating shall be 94 percent zinc powder by weight (mass).

All tubular posts, rails and braces shall comply with the following salt spray performance requirements when tested in accordance with ASTM B117.

Exterior – 1250 hours to maximum 5 % red rust

Interior – 650 hours to maximum 5 % red rust

The uniformity of the zinc coating shall be determined by visual inspection. If, in the opinion of the Engineer or designated representative, visual examination is not conclusive, he may use the Preece Test as described in ASTM A239. When so tested, all items shall withstand a minimum of 6 one-minute dips except for those items designated in ASTM A153 as Class B-2, B-3, C and D, which shall withstand a minimum of 4 one-minute dips.

Careful visual inspection shall be made to determine the quality of the zinc coating. Excessive roughness, blisters, salammoniac spots, bruises and flaking if present to any considerable extent, shall provide a basis for rejection. Where practicable, all inspection and tests shall be made at the place of manufacturer prior to shipment and shall be so conducted as not to interfere unnecessarily with the progress of the work.

Damaged spelter coating shall be repaired by thoroughly wire brushing the damaged area and removing all loose, cracked or weld-burner spelter coating. The cleaned area shall be painted with 2 coats of zinc oxide-zinc dust paint conforming to the requirements of Federal Specification TT-P-641B. The paint shall be furnished at the Contractor's expense.

F. Concrete Post Anchorages

Concrete for post footings, catch blocks, anchors and other such items related to the fence construction, shall be Class B Concrete conforming to Item No. 403S, "Concrete for Structures" or as indicated on the Drawings. Maximum size of aggregate shall be 3/4 inch (19 mm). Hand mixing of concrete will be permitted on batches under 1/2 cubic yard (0.38 cubic meter). All batches exceeding this volume will be machine mixed.

Concrete shall be placed promptly and without segregation after mixing. The Contractor shall consolidate the concrete satisfactorily by tamping or vibrating. Excess excavation from footings shall be satisfactorily disposed of.

The tops of post footings shall extend slightly above ground and shall be steel troweled to a smooth finish sloped to drain away from posts. Posts, braces and other units shall be centered in footings.

G. Mowing Strip

When called out in the drawings, a mowing strip shall be Class A concrete. It shall be 24 inches (610 mm) wide and a minimum of 4 inches (100 mm) thick. Three (3) number (#3) bars shall be evenly spaced and supported along the full length of the mow strip, and a number 3 (#3) bar shall be cross-tied every 4 feet (1.2 m). Fence posts shall be installed in center of mow strip.

701S.4 Inspection and Sampling

The Contractor shall furnish, upon request of the Engineer or designated representative, samples of each component part of the fence including fittings. These samples shall be subjected to the galvanizing, weight and where required, strength tests. A sample may be taken for each project or for each shipment to a project, when requested by the Engineer or designated representative. All samples shall be furnished to the City free of charge.

If any specimen tested fails to meet the requirements of this specification, two (2) additional specimens shall be cut from the remainder of the sample and tested, both of which shall meet the requirements in every respect or the lot represented by the sample may be rejected.

701S.5 Construction Methods

The Chain Link Fence shall be erected to lines and grades established by the Engineer or designated representative in accordance with the details indicated on the Drawings. The fence shall be true to line, taut and shall comply with the best practice for fence construction of this type.

A. Clearing and Grading

The Contractor shall perform all clearing of brush, rocks and debris necessary for the installation of this fencing.

B. Erection of Posts

Posts shall be set plumb and permanently positioned and anchorages firmly set before fabric is placed. Posts shall be set in concrete, unless otherwise indicated on the Drawings.

Concrete footings shall be carried to the depth and dimensions indicated on the Drawings. Where rock is encountered within the required depth to which the post is to be erected, a hole of a diameter slightly larger than the largest dimension of the post may be drilled into the rock and the post grouted in. The regular dimensioned concrete footing as indicated on the Drawings shall then be placed between the top of the rock and required grade indicated on the Drawings. Posts shall be approximately centered in their footings. All concrete shall be placed promptly and compacted by tamping or other approved methods. Concrete shall be finished in a dome and shall be cured a minimum of 48 hours before further work is done on the posts.

Pull posts shall be placed not over 500 feet (15.25 meters) apart in straight runs and at each vertical angle point, all as directed by the Engineer or designated representative. Corner posts shall be placed at each horizontal angle point greater than 15 degrees. Corner and pull posts shall have horizontal braces and tie rods as specified above and as indicated or designated representative.

C. Erection of Top Rail and Tension Wire

The top rail and bottom tension wire and/or top and bottom tension wires shall be installed before installing the chain link fabric. The top rail shall be firmly attached in final position. Tension wires shall be within 4 inches (100 mm) of the top and bottom of the fabric and shall be pulled taut.

D. Erection of Fabric

After all posts have been permanently positioned and anchorages firmly set with the cables drawn taut with the turnbuckles, the fabric shall be placed by securing one end and applying sufficient tension to the other end to remove all slack before making attachments. Unless otherwise indicated on the Drawings, the fabric shall be cut and each span shall be attached independently at all corner posts and pull posts.

Fabric shall be fastened as indicated on the Drawings and the bottom of the fabric shall be placed a normal distance of 2 inches (50 mm) above the ground line; however, over irregular ground this distance may vary between 1 inch (25 mm) and 6 inches (150 mm) for a distance not to exceed 8 feet (2.44 meters). Any necessary backfilling required, in order to comply with these provisions, will be considered as incidental work.

E. Fence Grounding

This fence shall be grounded where a power line passes over the fence. In any case, a ground shall be provided at locations not to exceed 1,000 feet (30 meters) apart in straight runs of fence. Each individual section of fence shall have at least 1 ground. The ground shall consist of a copper-weld rod 8 feet (2.44 meters) long and a minimum of 5/8 inch (16 mm) in diameter driven or drilled in vertically until the top of the rod is approximately 6 inches (150 mm) below the top of the ground. A No. 6 solid copper conductor shall be brazed to the rod and to the fence in such a manner that each element of the fence is grounded.

F. Erection of Wood Fencing Material

After all posts have been permanently positioned and anchorages firmly set, stringers shall be placed and boards secured to the stringers. Other techniques utilizing modular precut panels may be used, when indicated on the Drawings.

701S.6 Measurement

Chain Link Fence, of each height specified, will be measured by the lineal foot of fence measured at the bottom of the fabric along the centerline of fence from center to center of terminal posts, excluding gates. Gates will be measured as each gate, complete in place.

701S.7 Payment

The work performed and material furnished as prescribed by this item, measured as provided under "Measurement" will be paid for at the unit bid price for "Chain Link Fence" of the height specified. The unit bid price shall include full compensation for furnishing and installing all fencing materials (except gates) including all miscellaneous fittings, braces, post caps, line wires, connection clips or wires; digging post holes and grouting in rock where required; furnishing and placing concrete for setting posts; furnishing and installing all electrical grounds; all hauling and handling charges; and for all manipulations, labor, tools, equipment and incidentals necessary to complete the work, including excavation, backfilling and disposal of surplus material.

Gates measured as provided under "Measurement" will be paid for at the unit bid price for "Pedestrian Gate" or "Vehicular Gate", of the type, height and opening specified. The unit bid price shall include full compensation for furnishing all materials; fabricating, preparation, hauling, handling charges and erecting, including all miscellaneous fittings, braces, latches, gate hinges, stops and center anchorage; and for all manipulations, labor, tools, equipment and incidentals necessary for complete installation.

Payment will be made under one of the following:

Pay Item No. 701*S* -AS: Chain Link Fence, - Per Lineal Foot
Pay Item No. 701*S* –B: Chain Link Pedestrian Single Swing Gate, ___Foot. x __Foot. Per Each
Pay Item No. 701S -BD: Chain Link Pedestrian Double Swing Gate, __Foot. x __Foot. Per Each
Pay Item No. 701S -CS: Chain Link Vehicular Single Swing Gate, ____Foot. x ___Foot. Per Each
Pay Item No. 701S -CD: Chain Link Vehicular Double Swing Gate, __Foot. x ___Foot. Per Each
Pay Item No. 701*S* -D: Wire Fence Per Lineal Foot
Pay Item No. 701*S* -E: Wood Fence Per Lineal Foot
Pay Item No. 701*S* -F: Wood Fence Pedestrian Gate, ___Foot. x __Foot. Per Each
Pay Item No. 701*S* -G: Wood Fence Vehicular Gate, ___Foot. x ___Foot. Per Each
Pay Item No. 701*S* -H: Security Fence, ___Foot, High Type ___ Per Lineal Foot
Pay Item No. 701*S* -T: Temporary Fence, ___Foot High, ____Type Per Lineal Foot
Pay Items No. 701S-MS: Mowing Strip Per Lineal Foot

End

SPECIFIC CROSS REFERENCE MATERIALS

City of Austin Standard Specifications

Designation	*Description*
Item No. 403S	Concrete for Structures

City of Austin Code of Ordinances, Volume I

Designation	*Description*
Section 10-1-9	Barbed Wire Fences

Texas Department of Transportation: Standard Specifications For Construction of Highways, Streets and Bridges

Designation	*Description*
Item No. 445	Galvanizing

American Society For Testing And Materials (ASTM)

Designation	*Description*
A 53/A 53M	Specification For Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
A 116	Specification For Zinc-Coated (Galvanized) Steel Woven Wire Fence Fabric
A 121	Specification For Zinc-Coated (Galvanized) Steel Barbed Wire
A 153/A 153M	Specification For Zinc-Coated (Hot-Dip) on Iron and Steel Hardware
A 239	Practice for Locating the Thinnest Spot in a Zinc (Galvanized) Coating on Iron and Steel Articles
A 392	Specification For Zinc-Coated Steel Chain-Link Fence Fabric
A 491	Specification For Aluminum-Coated Steel Chain-Link Fence Fabric
A 585	Specification For Aluminum-Coated Steel Barbed Wire
B 117	Practice for Operating Salt Spray (Fog) Apparatus

Federal Specification TT-P-641B

RELATED CROSS REFERENCE MATERIALS

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	*Description*
Item No. 550	Chain Link Fence
Item No. 552	Wire Fence

Item No. 702S
Removal and Relocation of Existing Fences

702S.1 Description

This item shall govern the removal and relocation of existing fence, gates and hardware to a new alignment at the location in conformance to the typical details indicated on the Drawings or as directed by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text inch-pound units are given preference followed by SI units shown within parentheses.

702S.2 Removal of Existing Materials

The existing boards, fabric, posts, wire, rails, braces, hardware, gates and miscellaneous items shall be carefully removed, bundled, rolled and stockpiled as indicated on the Drawings for installation at the new fence assignment. The removal and handling shall be such that the fence materials may be reused in the relocated fence.

A. Removal of Fabric and Wire

Fabric and wire of all types shall be carefully untied or disassembled from the posts and other appurtenances and shall be rolled in bundles of a size that will allow handling with ordinary equipment.

B. Removal of Posts

Posts shall be carefully removed from the ground and the concrete footing removed. The concrete shall be disposed of off site. Post holes shall be filled with suitable embankment material and thoroughly compacted.

C. Removal of Boards

Boards of all types shall be carefully disassembled from the rails and other appurtenances to facilitate removal in panels. Excess material removed shall be disposed of as indicated below.

D. Storage of Materials

Storage of all salvageable materials, that will be reinstalled at a new location, shall be stored on-site or at such other locations as the Contractor may elect, subject to approval by the Engineer or designated representative. Security and maintenance of the salvageable materials shall be the responsibility of the Contractor.

E. Excess Materials

Materials, that are damaged, unsuitable for reinstallation or unnecessary for completion of the scope of the fence work in the new alignment shall be considered as excess but shall be offered to the Owner before removal from the site by the Contractor.

702.S 3 New Materials

New materials that are required to complete the fence at the location indicated on the Drawings shall be of equal quality to the existing materials. Used materials from other projects or from the Contractor's own used material stocks will not be allowed. The new materials to be furnished will be those necessary to replace items from the existing fence which were damaged during removal operations or which for other reasons cannot be reused.

702S.4 Construction Methods

The removed fence shall be installed at the new assignment in accordance with the typical details indicated on the Drawings and shall comply with Standard Specification Item No. 701S, “Fencing” and the best practice for fence construction of the specified type.

702S.5 Measurement

Fences of the height and type to be relocated will be measured by the lineal foot (lineal meter: 1lineal foot equals 0.31 meters) of fence in its new location measured at the bottom of the fence along the centerline of the fence from center to center of terminal posts, excluding gates.

702S.6 Payment

The work performed and material furnished as prescribed by this item measured under "Measurement" will be paid for at the unit bid price for "Removing and Relocating Fences" of the size and type specified to be relocated. The unit bid price shall include full compensation for removing, salvaging, storing and handling all existing fence materials; furnishing new posts, boards, rails, braces, tie wires, connection clips, fabric, rails, brace rods and any other fence component items that were damaged during removal and necessitating new material being furnished to complete the project; digging post holes and grouting in rock where required; furnishing concrete for post footings; and for all manipulations, labor, tools, equipment and incidentals necessary to complete the work including excavation, backfilling and disposal of surplus materials.

Gates as provided under "Measurement" will be paid for at the unit bid price for Removal and Relocation of Existing Pedestrian or Vehicular Gates of the type and size specified to be relocated. The unit bid price shall include full compensation for removing the gate from the existing locations, handling, storing and hauling all gate materials, furnishing any new materials necessary for installing at new locations; providing new center anchorage blocks, latches and catch blocks and for manipulations, labor, tools, equipment and incidentals necessary to complete the gate relocation.

Payment will be made under one of the following:

Pay Item No. 702S -A:	Removing and Relocating Existing _Ft. Chain Link Fence	Per Lineal Foot.
Pay Item No. 702S -B:	Removing and Relocating Existing _Ft. x _Ft. Chain Link Pedestrian Gate	Per Each.
Pay Item No. 702S-C:	Removing and Relocating Existing _Ft. x _Ft. Chain Link Vehicular Gate	Per Each.
Pay Item No. 702S-D:	Removing and Relocating Existing _Ft. Wooden Fence	Per Lineal Foot.

Pay Item No. 702S-E: Removing and Relocating
Existing _Ft. x _Ft. Wooden Pedestrian Gate Per Each.
Pay Item No. 702S-F: Removing and Relocating
Existing _Ft. x _Ft. Wooden Vehicular Gate Per Each.
Pay Item No. 702S-G: Removing and Relocating
Existing _Ft. Wire Fence Per Lineal Foot.
Pay Item No. 702S-H: Removing & Relocating Existing __Ft. x _Ft. Metal Gate Per Each.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 702S, "Removal and Relocation of Existing Fences"

City of Austin Standard Specifications

Designation	Description
Item No. 701S	Fencing

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Specifications

Designation	Description
Item No. 403S	Concrete for Structures

Texas Department of Transportation: Standard Specifications For Construction of Highways, Streets and Bridges

Designation	Description
Item No. 445	Galvanizing

American Society For Testing And Materials (ASTM)

Designation	Description
A 53/A 53M	Specification For Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
A 116	Specification For Zinc-Coated (Galvanized) Steel Woven Wire Fence Fabric
A 121	Specification For Zinc-Coated (Galvanized) Steel Barbed Wire
A 153/A 153M	Specification For Zinc-Coated (Hot-Dip) on Iron and Steel Hardware
A 239	Practice for Locating the Thinnest Spot in a Zinc (Galvanized) Coating on Iron and Steel Articles
A 392	Specification For Zinc-Coated Steel Chain-Link Fence Fabric
A 491	Specification For Aluminum-Coated Steel Chain-Link Fence Fabric
A 585	Specification For Aluminum-Coated Steel Barbed Wire
B 117	Practice for Operating Salt Spray (Fog) Apparatus

803S.1 Description

This item shall govern for providing, installing, moving, replacing, maintaining, cleaning and removing upon completion of the work, all temporary or permanent street closure barricades, signs, cones, lights or other devices required to handle the traffic in conformance with the current edition of the Texas Manual of Uniform Traffic Control Devices for Street and Highways and as indicated on the Drawings or directed by the Engineer or designated representative.

Constructing A Detour, if required, shall conform to Standard Specification Item No. 801S, " Constructing A Detour". Capital Improvement Project Signs shall conform to Standard Specification Item No. 802S, " Project Signs".

This item shall also include the installation of all required safety fencing as described in the latest adopted version of Standard Detail 804S-4.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

803S.2 Submittals

The submittal requirements of this specification item include:

A. Type of Barricade and proposed materials and Construction of the barricade,

B. Test results for Retro-Reflective sheeting.

803S.3 Materials

All barricades, signs, cones, lights and other types of devices to handle traffic, as indicated on the Drawings or directed by the Engineer or designated representative, shall conform to details shown on the Drawings or those indicated in the Texas Manual on Uniform Traffic Control Devices (TMUTCD).

803S.4 Construction Methods

Prior to commencement of construction, suitable "Barricades, Signs and Traffic Handling" devices shall be installed to protect the workers and the public.

The Contractor shall be responsible for the installation of all markers, signs and barricades in accordance with the Drawings and in conformance with the Texas Manual on Uniform Traffic Control Devices (TMUTCD) and/or as indicated on the Drawings or directed by the Engineer or designated representative. If, in the opinion of the Engineer or designated representative, additional markers, signs or barricades are needed in the interest of safety, the Contractor will install such as are required or as directed by the Engineer or designated representative. All changes and/or revisions to the detour/traffic control plan shall be approved by the Engineer or designated representative.

Lumber shall be painted with 2 coats of paint as indicated on the Drawings.

803S.5 Maintenance

It shall be the Contractor's responsibility to maintain, clean, move and replace if necessary, barricades, signs and traffic handling devices during the time required for construction of the project. Permanent barricades shall be constructed as required after the completion of the street by drilling holes to place the posts and concrete foundations. Foundation concrete shall be cured before the rails are attached. When no longer needed, all temporary Barricades, Signs and Traffic Handling Devices shall be removed and the area restored to its original condition or as directed by the Engineer or designated representative.

803S.6 Measurement

The work performed and material furnished as prescribed by this item, City of Austin Standard Details, details included on the Drawings or indicated in the TMUTCD shall be measured as follows:

A. Pavement Markings.

   All pavement marking required for proper installation of the designated Traffic Control Plans and Details, as well as required removal of existing pavement marking, shall be measured and paid for under Standard Specification Item No. 870S, “Work Zone Pavement Markings” and Standard Specification Item No. 874S, “Eliminating Existing Pavement Markings”.

B. Barricades, Signs and Traffic Handling.

   All work performed and material furnished as prescribed by this item, City of Austin Standard Details, details shown on the Drawings or indicated in the TMUTCD, that are not included in the above paragraph, shall be measured by the number of calendar days, working days or months of actual service.

   Traffic control for the project will be measured and paid for once per contract defined time period, i.e. either per Calendar Day, Working day or Month at the contract rate, regardless of the number of set-ups, locations or streets under construction.

C. Safety Fencing

   Safety fencing will be measured by the lineal foot.

803S.7 Payment

The work performed and materials furnished as prescribed by this item, measured as provided under section “803S.6 Measurement” shall be paid for at the contract unit price for barricades, signs and traffic handling. This unit price shall include full compensation for furnishing, placement and removal of all materials and for all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item No. 803S -CD:	Barricades, Signs, and Traffic Handling	Per Calendar Day.
Pay Item No. 803S-WD:	Barricades, Signs, and Traffic Handling	Per Working Day.
Pay Item No. 803S-MO:	Barricades, Signs, and Traffic Handling	Per Month.
Pay Item No. 803S-SF:	Safety Fence	Per Lineal Foot.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 803S, "Barricades, Signs and Traffic Handling"

City of Austin Standard Specifications

Designation	Description
Item No. 801S	Constructing A Detour
Item No. 802S	Project Signs
Item No. 870S	Work Zone Pavement Markings
Item No. 874S	Eliminating Existing Pavement Markings and Markers

Texas Technical Documents:

Designation	Description
(TMUTCD)	Texas Manual on Uniform Traffic Control Devices

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 803S, "Barricades, Signs and Traffic Handling"

City of Austin Standard Specifications

Designation	Description
Item No. 403S	Concrete for Structures
Item No. 860S	Pavement Marking Paint (Reflectorized)
Item No. 863S	Reflectorized Pavement Markers
Item No. 864S	Abbreviated Pavement Markings
Item No. 867S	Epoxy Adhesive
Item No. 871S	Reflectorized Pavement Markings
Item No. 875S	Pavement Surface Preparation For Markings

City of Austin Standard Details

Designation	Description
803S-1	Street-End Barricades

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 502	Barricades, Signs and Traffic Handling
Item No. 508	Constructing Detours
Item No. 510	One-Way Traffic Control
Item No. 512	Portable Concrete Traffic Barrier
Item No. 514	Permanent Concrete Traffic Barrier
Item No. 662	Work Zone Pavement Markings
Item No. 666	Reflectorized Pavement Markings
Item No. 667	Prefabricated Pavement Markings
Item No. 672	Raised Pavement Markers
Item No. 677	Eliminating Existing Pavement Markings and Markers
Item No. 678	Pavement Surface Preparation For Markings

Item No. 824S
Traffic Signs

824S.1 Description

This item shall govern furnishing and placement of Traffic Signs including excavation, posts, hardware and signs.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

824S.2 Submittals

The submittal requirements of this specification item include:

A. Identification of the types of materials proposed for traffic sign, i.e. faces, posts, clamps, etc.,

B. Results of any State or Federal tests (reflectance, diffuse day color, specific intensity brightness, Weather-O-meter, etc.) performed on their products,

824S.3 Materials

The following ASTM Standards and documents, of the issue in effect on the date of Invitation for Bid, form a part of this specification to the extent herein.

A. ASTM B 209 Specification for Aluminum and Aluminum Alloy Sheet and Plate

B. ASTM D 523 Standard Method for Test for Specular Gloss

C. ASTM D 4956 Standard Specification for Retroreflective Sheeting for Traffic Control

D. ASTM E 284 Standard Definition of Terms Relating to Appearance of Materials

E. ASTM E 308 Computing the Colors of Objects by Using the CIE System

F. ASTM E 810 Standard Test Method for Coefficient of Retroreflection of Retroreflective Sheeting

G. ASTM E 1164 Standard Practice for Obtaining Spectrophotometric Data for Object-Color Evaluation

H. CIE Publication Number 39-2, Recommendation for Surface Colors for Visual Signaling

I. FP-92 Standard Specifications for Construction of Roads and Bridges on Federal Highway Project

J. Substrate. This shall be aluminum alloy 5052-H38 or 6061-T-6 and otherwise in conformance with ASTM B-209.

1. Metal working. The aluminum shall be free of burrs and pits on both sides, including edges and holes, and shall be made ready for applications of the sheeting.

The aluminum shall be new and corrosion-free with holes drilled or punched, corners rounded to the radii shown in the standard detail sheet, and all edges smoothed prior to application of sheeting.

2. Size. The dimensions of substrate applications for regulatory, warning, and guide signs shall be as specified by the Engineer and as shown on the plans.

K. Background, Legends, Symbols, and Colors. These shall be in accordance with the Standard Highway Sign Designs (SHSD) for Texas and with the Texas Manual of Uniform Traffic Control Devices (TMUTCD).

1. Retroreflective Materials. Retroreflective materials shall comply with Texas Department of Transportation Departmental Materials Specification 8300, Sign Face Materials. The materials requirements for Reflective Sheeting must meet all the requirements of ASTM D 4956.

   a. Retroreflective Sheeting. Type III (High Intensity Prismatic): The materials as listed in these specifications shall comply with Texas Department of Transportation Departmental Materials Specification 8300, Sign Face Materials. The materials requirements for Reflective Sheeting must meet all the requirements of ASTM D 4956. Colors shall be as specified in specifications for Standard Highway Sign Colors (FHWA, HTO-21).

   b. Retroreflective Sheeting. Type IX (Fluorescent yellow green): The materials shall comply with ASTM 4956. Designed to provide higher nighttime sign brightness in the legibility distance and brightness at high entrance angles. The minimum fluorescence luminance factor (YF) for new sheeting shall be 35%.

2. Electronically Cuttable Film. Electronically cuttable film shall consist of flexible, transparent, durable acrylic colored films coated with a transparent pressure sensitive adhesive protected by a clear removable liner. These films are designed to be applied to retroreflective materials for the creation of traffic control signs and devices by either cutting by knife over roll (sprocket fed or friction fed) and flat bed electronic cutting machines. The films shall be available in standard traffic colors, be dimensionally stable, and be designed to optimally cut, weed, lift, and transfer. Use of electronic cuttable films will not require the release of any volatile organic compounds.

   When electronic cuttable film is applied to retroreflective sheeting, the resulting color of the composite sheeting will conform to Texas Department of Transportation Departmental Materials Specification 8300, Sign Face Materials. The materials requirements for Reflective Sheeting must meet all the requirements of ASTM D 4956.

   Only signage utilizing electronically cuttable film will be allowed. Silk screened sign faces will not be accepted.

   a. Color Test. Conformance to color requirements shall be determined by instrumental method in accordance with ASTM E 1164 on sheeting applied to aluminum test panels. The values shall be determined on a HunterLab Labscan 6000 0/45 Spectrocolorimeter with option CMR 559 [or approved equal 0/45 (45/0) instrument

with circumferential viewing (illumination)].

Computations shall be done in accordance with ASTM E 308 for the 2º observer.

b. Coefficient of Retroreflection R^. When electronic cuttable film is applied to retroreflective sheeting, the composite will conform to the percentage retained of the minimum coefficient of retroreflection specified by the using agency and the manufacturer for the retroreflective sheeting when the retroreflective sheeting is screen processed. The coefficient of retroreflection shall be determined in accordance with ASTM E 810. Coefficients of retroreflection R^ shall be specified in units of candelas as per foot candle per square foot (candelas per lux per square meter). The observation angles shall be 0.2 and 0.5 degrees unless otherwise specified. The entrance angles shall be -4 and 30 degrees unless otherwise specified. The electronic cuttable film shall have and 85º specular gloss of not less than 50 when tested in accordance with ASTM D 523.

c. Processing and Cuttability. The electronic cuttable film shall permit cutting, weeding, masking with transfer tape, lifting, and application to retroreflective sheeting when used in accordance with manufacturer's recommendations at temperatures between 65º and 95º F and relative humidifies between 30% and 70%. The film shall lay flat with minimal edge curl and be dimensionally stable.

d. Adhesive Liner. The protective liner attached to the adhesive shall be removable by peeling without soaking in water or other solutions, without breaking, tearing, or removing any adhesive from the electronic cuttable film. The liner shall have a controlled release from the adhesive coated film sufficient to allow cutting without the film popping off from the liner while still allowing the liner to easily be peeled from the film.

e. Film. Film with punched edges for use on sprocket fed knife over roll cutters shall be edge scored and weeded to remove film in the punched area as a means of eliminating adhesive build up on the sprockets.

f. Resistance to Accelerated Outdoor Weathering. When electronic cuttable film is applied to retroreflective sheeting, the surface of the film shall be weather resistant and show no appreciable cracking, blistering, crazing, or dimensional change after 2 years unprotected outdoor exposure, facing the equator and inclined 45º from the vertical. Following weather exposure, panels shall be washed in a 5% HCI solution for 45 seconds, rinsed thoroughly with clean water, blotted dry with a soft cloth and brought to equilibrium at standard conditions.

After cleaning, the coefficient of retroreflection shall not be less than the value specified by the using agency for the retroreflective sheeting when the retroreflective sheeting is screen processed. Show no appreciable evidence of cracking, scaling, pitting, blistering, edge lifting or curling or more than 1/32 inch shrinkage or expansion. Show good color fastness or better when tested. The electronic cuttable film shall not be removable from the retroreflective sheeting without damage.

3. Application Methods. The method of application of sheeting, letters, numbers, and symbols shall be precisely as prescribed in writing by the manufacturer.

a. Legend Spacing and Layout. Spacing and layout for all traffic control signs shall

conform to the Texas SHSD.

L. Sign Posts. Steel post shall conform to the standard specification for hot rolled carbon sheet steel, structural quality, ASTM designation A570, Grade 50. Average minimum yield strength after cold forming is 60,000 psi. The cross section of the post shall be square tube formed steel, carefully rolled to size and shall be welded directly in the comer by high frequency resistance welding or equivalent process and externally scarified to agree with corner radii. Sign posts shall be hot dipped galvanized conforming to ASTM A653, G90.

1. Sizes. Perforated sign posts, anchors and sleeves shall be of the following size:

Size	USS Gauge	Weight
1 ¾" X 1 ¾ "	14	1.71
2" X 2"	12	2.42

On square tubing, holes shall be on centerline of each side in true alignment and opposite each other directly and diagonally. The length of each post shall have a permissible length tolerance of ± ¼".

The finished posts shall be straight and have a smooth, uniform finish. It shall be possible to telescope all consecutive sizes of square tubes freely and for not less than ten feet of their length without the necessity of matching any particular face to any other face. All holes and ends shall be free from burrs and ends shall be cut square.

a. Tolerance on Outside Sizes

Nominal Outside Dimension	Outside Tolerances at Corners
1 ¾" X 1 ¾ "	±0.008"
2" X 2"	±0.008"

Note: Measurement from outside dimensions shall be made at least 2 inches from the end of the tube.

Permissible variation in wall thickness is +0.011", -0.005".

Convexity and concavity shall be measured in the center of the flat sides, tolerance in ±0.010", determined at the corner.

b. Squareness of Sides and Twist Permissible in 3" Length.

Nominal Outside Dimension	Squareness Tolerance	Twist
1 ¾" X 1 ¾ "	±0.010"	0.062"
2" X 2"	±0.012"	0.062"

Permissible variation in straightness is 1/16 of an inch in 3 feet. The standard outside corner radius shall be 5/32 of an inch ±1/64 inch.

2. Installation. The square end of the post shall not be modified or pointed.

   a. Mount Base. When sign post installation is required over building basements, bridges and cavities, a galvanized cast iron surface mount coupler shall be used. The square post surface mount base must be a NCHRP 350-Compliant breakaway system for use with 1 ¾ - inch square post.

   b. Hardware. All ground mounted signs shall be attached to posts using 3/8" aluminum drive rivets. Stainless steel banding material, brackets and clips will be used for signs installed on light standards or mast arms.

   c. Construction.
      1. Concrete specifications: Insert a 2” square x 30” 12 gauge into concrete with 1-2 inches exposed above ground. Make sure the anchor assembly is level. Attach the sign to the 1 ¾” square 14 gauge post (length varies with installation) at a minimum height of seven feet using drive rivets and nylon washers. Insert the post 6-8 inches into the anchor assembly. Bolt the signpost to the anchor assembly using a corner bolt and flange nut.

      2. Soil specifications: Drive a 2” square x 30” 12 gauge omni-directional anchor sleeve into soil with 1-2 inches exposed above ground. Make sure the anchor assembly is level. Attach the sign to the 1 ¾” square x 14 gauge post (length varies with installation) at a minimum height of seven feet using drive rivets and nylon washers. Insert the post 6-8 inches into the anchor assembly. Bolt the signpost to the anchor assembly using a corner bolt and flange nut.

M. Maker's Mark Decals. Each sign shall be permanently marked on the lower right corner of the back side with the month and year of installation, and name of manufacturer.

Table 1
Minimum Coefficient of Retroreflectivity
[0.2º observation angle and -4º entrance angle]

Type III Sheeting: 10 Year Life Span	
Sheeting Color	**Candelas per Foot-Candle per Sq. Ft.**
White	250
Yellow	170
Green	45
Red	45
Blue	20
Brown	12

Table 2
Minimum Coefficient of Retroreflectivity
[0.2º observation angle and -4º entrance angle]

Type IX Sheeting: 7 Year Life Span	
Sheeting Color	Candelas per Foot-Candle per Sq. Ft.
Fluorescent Yellow Green	300

824S.4 Equipment
Provide machinery, tools, and equipment necessary for proper execution of the work.

824S.5 Construction:
Construction shall be high quality with no visible defects in the finished product. Fabrication shall be in accordance with these specifications. Street name signs shall always be supplied and installed at each project intersection whether signs previously existed at the location or not.

A. Unsignalized Intersection. At unsignalized intersections, ground-mounted street name signs of 9 inch height with 6 inch letters and 3 inch suffix and block numbers are required. Lettering on street name signs must be in upper/lower case letters.

B. Signalized Intersection.

1. Ground Mounted Street Signs
   If a signalized intersection has either mast arms or span- wire on which overhead street name signs can be attached, no ground mounted streets name signs are required at that intersection.

2. Overhead Street Signs
   Signs shall be strapped to the mast arm or span wire. Attachments to mast arms shall be by means of a 3/4 inch stainless steel strap and a stainless steel flared strap bracket.

   a. Letter Heights
      Overhead street name signs shall be 18 inches high. Street name signs must be 8 inch (or larger) upper/lower case letters. The suffix and block numbers shall be at least 4 ½ inches high.

C. Existing Signs.
The removal of existing signs shall be coordinated with the Austin Transportation Department to assure required signage is in place during all construction phases. When existing signs are to be removed, they will be removed from their post by hand and delivered to the Traffic Sign Shop (974 - 4055).

D. No Parking Signs
No Parking signs with horizontal dimensions wider than 15” shall not be used unless specifically authorized in advance by the City. For 24 hour parking restriction see the attached detail for the typical No Parking sign.

824S.6 Measurement

Traffic signs shall be measured as each complete sign constructed and placed as indicated on the Drawings.

824S.7 Payment

The work performed and materials furnished as prescribed by this item will be paid for at the unit bid price for "Traffic Signs" per each complete in place. The unit bid price shall include full compensation for furnishing all materials, completing the excavation, placing p.c. concrete and reinforcing steel, setting posts in p.c. concrete and for all labor, tools, equipment and incidentals necessary to complete the work.

Payment will be made under:

Pay Item No. 824S: Traffic Signs Per Each.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 824S, "Traffic Signs"

City of Austin Standard Specifications

Designation	Description
Item No. 401S	Structural Excavation and Backfill
Item No. 403S	Concrete for Structures
Item No. 406S	Reinforcing Steel
Item No. 410S	Concrete Structures
Item No. 411	Surface Finishes for Concrete
Item No. 722	Paint and Painting

Texas Department of Transportation Manual of Testing Procedures:

Designation	Description
Tex-839-B	Determining Color in Reflective Materials
Tex-842-B	Method for Measuring Retroreflectivity

Texas Department of Transportation; Departmental Materials Specifications

Designation	Description
DMS-8300	Flat Surface Reflective Sheeting

American Society for Testing and Materials (ASTM):

Designation	Description
A-36/A-36M	Specification for Structural Steel
A-307	Specification for Carbon Steel Externally Threaded Standard Fasteners
A-320	Specification for Alloys-Steel Bolting Materials For Low-Temperature Service
A-513	Specification for Electric Resistance-Welded Carbon and Alloy Steel Mechanical Tubing
B-26	Specification for Aluminum-Alloy Sand Castings
B-108/B-108M	Specification for Aluminum-Alloy Permanent Mold Castings
B-221/B-221M	Specification for Aluminum-Alloy Extended Bars, Rods, Wire, Shapes, and Tubes
D-523	Test Method for Specular Gloss

SPECIFIC CROSS REFERENCE MATERIALS- Continued
Specification Item No. 824S, "Traffic Signs"

American Society for Testing and Materials (ASTM):

Designation	Description

D 822	Recommended Practice for Operating Light- and Water-Exposure Apparatus (Carbon-Arc Type) for Testing Paint, Varnish, Lacquer, and Related Products
D 828	Test Method for Tensile Breaking Strength of Paper and Paperboard
E 97	45-degree, 0-degree Directional Reflectance Factor of Opaque Specimens by Broad-Band Filter Reflectometry
G 23	Recommended Practice for Operating Light- and Water-Exposure Apparatus (Carbon-Arc Type) for Exposure of Nonmetallic Materials

Other Specifications
Federal Specification A-G-90
Federal Test Method 8801
Federal Specification O-G-93 (stick only)
Federal Specification TT-P-64lb.

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 824S, "Traffic Signs

Texas Department of Transportation Technical Documents:

Designation	Description
(TMUTCD)	Texas Manual on Uniform Traffic Control Devices

City of Austin Standard Details

Designation	Description
824S-1	Standard Street-End Markers

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 445	Galvanizing
Item No. 636	Aluminum Signs (Type A)
Item No. 637	Aluminum Signs (Type G)
Item No. 642	Aluminum Signs (Type O)
Item No. 646	Small Roadside Sign Supports
Item No. 647	Large Roadside Sign Supports
Item No. 656	Foundations for Signs, Traffic Signals and Roadway Illumination Assemblies

Texas Department of Transportation: Departmental Materials Specifications

Designation	Description
DMS-7110	Aluminum Sign Blanks
DMS-7120	Sign Hardware
DMS-8310	Flexible Roll-up Reflective Signs
DMS-8320	Vinyl, Non-reflective Decal Sheeting

Item No. **863S**
Reflectorized Pavement Markers

863S.1 Description

This item governs reflectorized pavement markers to be used to delineate traffic lanes or fire hydrants.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

863S.2 Submittals

The submittal requirements of this specification item include:

A. List of specific application(s) [i.e. type: (reflectorized Type I-A, I-C or II-A-A, II-B-B or II-C-R)] and applicable epoxy system and adhesive types [867S.5].

B. Specific manufacturer with test results and technical specifications for proposed pavement markers.

C. Manufacturer's recommendations for surface preparation, cleaning, placement temperatures and installation instructions.

D. Adhesive components and mixing recommendations.

863S.3 Materials

All materials shall meet the requirements as specified below and indicated on City of Austin Standard Detail 863S-1, "Pavement Markers (Reflectorized - Type I & II)". The pavement markers shall comply with TxDoT Departmental Materials Specifications DMS-4210.

A. Design and Shape

The outer surface of the marker shall be smooth and all corners and edges exposed to traffic must be rounded. The base of the marker shall have a width of 4.0 inches + 1/2 inch (100 mm + 13 mm) and shall have a minimum area exposed to traffic of 12.5 square inches (8000 square mm). The maximum height shall be 3/4 inch (19 mm). The maximum slope of the reflector face or faces shall be not more than 30 degrees from the horizontal.

The bottom surface of the markers shall be of a design for adhesion with epoxy adhesives to comply with TxDoT Test Method Tex-611-J.

The marker shall be designed to show no change in shape or color when subjected to the requirements of TxDoT Test Method Tex-846-B, at a temperature of 140°F (60°C) with the marker in a vertical position.

B. Optical

1. Definitions

(a) Horizontal entrance angle is defined as being in a plane parallel to the base of the road marker, between a line in the direction of the incident light and a line that is perpendicular to the leading edge of the reflective surface.

(b) Divergence angle shall mean the angle at the reflector between observer's line of sight and the direction of the light incident on the marker.

(c) Specific intensity shall mean candle power of the returned light at the chosen divergence and entrance angles for each footcandle of incident light per reflective face. TxDoT Test Method Tex-842-B will be used to determine specific intensity.

2. Performance

For the pavement markers the specific intensity of the reflecting surface at a 15-degree divergence angle shall be not less than the following when the incident light is parallel to the base of the marker.

	Specific Intensity	
Horizontal Entrance Angle, Degrees	Crystal	Amber
0	3.0	2.0
20	1.5	1.0

The specific intensity of the marker shall not be less than 80 percent of the above minimum values after being subjected to heat test of TxDoT Test Method Tex-846-B.

C. Pavement Marker Types

Pavement markers shall be of the following types:

1. Type I-A shall contain an approach face that reflects amber light. The body, other than the reflective face, shall be yellow.
2. Type I-C shall contain an approach face that reflects white light. The body, other than the reflective face, shall be white, silver white or light gray.
3. Type II-A-A, shall contain two reflective faces (approach and trailing), each of which shall reflect amber light. The body, other than the reflective faces, shall be yellow.
4. Type II-B-B shall contain two reflective faces (approach and trailing) with glass covered pneumatic reflective faces, each of which shall reflect blue light. The body, other than the reflective faces, shall be blue.
5. Type II-C-R shall contain two reflective faces (approach and trailing), one of which reflects white light and one of which reflects red light. The body, other than the reflective faces, shall be either white, silver white or light gray or one-half white, silver white or light gray on the side that reflects white light and one-half red on the side that reflects red light.

   The reflective faces of the Type II markers shall be located so that the direction from one face shall be directly opposite the direction of reflections of the other face.

863S.4 Sampling

Sampling will be conducted in accordance with TxDoT Test Method Tex-729-I.

863S.5 Testing

The Contractor shall certify that the markers meet the requirements defined in the specification and meet or exceed the applicable tests required. All testing will be in accordance with the TxDoT manual of Testing Procedures. Applicable tests shall include the following:

Tex-611-J: Adhesion Requirements

Tex-842-B: Light Retroreflectivity

Tex-846-B: Heat Resistance

Blue markers' color will conform to Fire Department requirements.

863S.6 Construction Methods

The Contractor shall use a crew experienced in the work of installing reflectorized pavement markers and in the necessary traffic control for such operations on the roadway surface and shall supply all the equipment, personnel, traffic control and materials necessary for the placement of the pavement markings as indicated on the Drawings or as directed by the Engineer or designated representative. All work shall conform to the current edition of the Texas Manual of Uniform Traffic Control Devices (TMUTCD), The City of Austin Transportation Criteria Manual and Standard Detail 863S-1.

All reflectorized pavement markers shall be from the same manufacturer. Surfaces to which markers are to be attached by an adhesive shall be prepared by any method approved by the Engineer or designated representative to ensure that the surface is free of dirt, curing compound, grease, oil, moisture, loose or unsound pavement markings and any other material which would adversely affect the adhesive bond. Unless indicated otherwise on the Drawings, surface preparation for installation of raised reflectorized pavement markers will not be paid for directly, but shall be included in the unit price bid for this specification item.

Guides to mark the lateral location of pavement markings shall be established as indicated on the Drawings or as directed by the Engineer or designated representative. The Contractor will establish the pavement marking guides and the Engineer or designated representative will verify the location of the guides prior to final installation.

The pavement markers shall be placed in proper alignment with the Guides. The deviation rate in alignment shall not exceed 1 inch per 200 feet (25 millimeters per 60 meters) of roadway. The maximum deviation shall not exceed 2 inches (50 millimeters) nor shall any deviation be abrupt.

Markers placed which are not in alignment indicated on the Drawings shall be removed by the Contractor at the Contractor's expense. Removal shall be in accordance with Specification Item 874S except for measurement and payment. Guides placed on the roadway for alignment purposes shall not establish a permanent marking on the roadway.

The Reflectorized Pavement Markers shall be applied using an approved epoxy adhesive (City of Austin Standard Specification Item 867S) to the lines and spacings as indicated on the Drawings or as directed by the Engineer or designated representative. The adhesive shall be applied in sufficient quantity to ensure that 100 percent of the bonding area of the pavement markers shall be in contact with the adhesive. The adhesive shall be applied in accordance with the manufacturer's recommendations.

Pavement markers shall be placed immediately after the adhesive is applied and shall be firmly bonded to the pavement. Adhesive or any other material that impairs functional reflectivity will not be acceptable.

When deemed necessary by the Engineer or designated representative, the Contractor, at the Contractor's expense, shall place any additional pilot markings required to facilitate the placement of the permanent markings in the alignment specified. Any and all additional markings placed on the roadway for alignment purposes shall be temporary in nature and shall not establish a permanent marking on the roadway. Materials used for pilot markings and equipment used to place such markings shall be approved by the Engineer or designated representative.

863S.7 Measurement

Reflectorized Pavement Marker will be measured as per each, complete in place.

863S.8 Payment

Payment will be made at the unit bid price per each. The price shall include full compensation for all work performed and all materials furnished in constructing, transporting and placing the markers.

Payment will be made under:

Pay Item No. 863S -1:	Reflectorized Pavement Markers (Type I-A) -	Per Each.
Pay Item No. 863S -2:	Reflectorized Pavement Markers (Type I-C) -	Per Each.
Pay Item No. 863S -3:	Reflectorized Pavement Markers (Type II-A-A) -	Per Each.
Pay Item No. 863S -4:	Reflectorized Pavement Markers (Type II-B-B) -	Per Each.
Pay Item No. 863S -5:	Reflectorized Pavement Markers (Type II-C-R) -	Per Each.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 863S " Reflectorized Pavement Markers"

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex 611-J	Adhesion Test For Traffic Buttons, Markers, and Jiggle Bars
Tex-729-I	Sampling of Traffic Markers
Tex-842-B	Method for Measuring Retroreflectivity
Tex-846-B	Method of Testing The Heat Resistance of Reflector Units

Texas Department of Transportation: Departmental Materials Specifications

Designation	Description
DMS-4210	Pavement Markers (All Weather Reflectorized

City of Austin Standard Details

Designation	Description
863S-1	Pavement Buttons (Reflectorized-Type I & Type II)

City of Austin Standard Specifications

Designation	Description
Item No. 867S	Epoxy Adhesive
Item No. 874S	Eliminating Existing Pavement Markings and Markers
Item No. 875S	Pavement Surface Preparation For Markings

City of Austin Transportation Criteria Manual

Designation	Description
Section 8	Traffic Control

State of Texas Manual on Uniform Traffic Control Devices for Streets and Highways

Designation	Description
Part III	Markings
Part VI	Traffic Controls for Street and Highway Construction, Maintenance, Utility and Incident Management Operations
Part VI, Article D	Markings
Part VI, Article F	Control of Traffic Through Work Areas

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Specifications

Designation	Description
Item No. 865S	Non-Reflectorized Traffic Buttons
Item No. 870S	Work Zone Pavement Markings
Item No. 871S	Reflectorized Pavement Markings
Item No. 873S	Raised Pavement Markers

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 666	Reflectorized Pavement Markings
Item No. 672	Raised Pavement Markers
Item No. 677	Eliminating Existing Pavement Markings and Markers
Item No. 678	Pavement Surface Preparation For Markings

Item No. 871S
Reflectorized Pavement Markings

871S.1 Description

This item shall govern furnishing and placement of reflectorized pavement markings of the colors, types, shapes, sizes, widths and thickness indicated on the Drawings.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

871S.2 Materials

A. Type I Marking Material.

Type I markings are thermoplastic type materials that require heating to elevated temperatures for application. Type I marking materials shall conform to TxDOT Departmental Materials Specification Item DMS-8220, "Thermoplastic Pavement Markings". Each container of Type I Marking Material shall be clearly marked to indicate the color, weight (mass), type of material, manufacturer's name and lot/batch number.

B. Type II Marking Material.

Type II markings are paint- type materials that are applied at ambient temperature or slightly elevated temperatures. Type II marking materials shall conform to Specification Item No. 860S, "Pavement Marking Paint".

C. Source of Supply.

All Type I marking materials shall be purchased on the open market. All glass traffic beads shall be purchased on the open market.

871S.3 Equipment Requirements

The equipment used to place pavement markings shall:

(1) be maintained in satisfactory operating condition;

(2) be considered in satisfactory operating condition if it has an average placement rate of 5,000 lineal feet (1 525 lineal meters) per hour of acceptable four (4) inch {100 millimeters} solid or broken lines over any five (5) consecutive working days;

(3) meet or exceed the material handling at elevated temperature requirements of the National Fire Underwriters and the Texas Railroad Commission;

(4) be capable of placing a minimum of 40,000 lineal feet (12 190 lineal meters) of 4 inch {100 millimeters} solid or broken markings per day;

(5) have production capabilities similar to four-inch (100 mm) marking equipment and shall be capable of placing linear markings up to 8 inches {200 millimeters} in width in a single pass when used for placing markings in widths other than 4 inches {100 millimeters};

(6) have production capabilities considered satisfactory by the Engineer or designated representative, when used to place markings other than solid or broken lines;

(7) be capable of placing a centerline and no-passing barrier-line configuration consisting of one broken line with two solid lines at the same time to the alignment and spacing shown on the Drawings;

(8) be capable of placing broken and/or continuous white line from both sides;

(9) be capable of placing lines with clean edges and of uniform cross-section. All lines shall have a tolerance of plus or minus 1/8 inch per 4-inch width {3 mm per 100-mm width};

(10) have an automatic cut-off device with manual operating capabilities to provide clean, reasonably square marking ends to the satisfaction of the Engineer, and to provide a method of applying broken line in an approximate stripe-to-gap ratio of 10 to 30. The length of the stripe shall not be less than 10 feet (3.05 meters) or more than 10.5 feet (3.2 meters). The total length of any stripe-gap cycle shall not be less than 39.5 feet (12 meters) or more than 40.5 feet (12.3 meters);

(11) provide continuous mixing and agitation of the pavement marking material. The use of pans, aprons or similar appliances, which the die overruns, will not be permitted for longitudinal striping applications;

(12) apply beads by an automatic bead dispenser attached to the pavement marking equipment in such a manner that the beads re-dispensed uniformly and almost instantly upon the marking as the marking is being applied to the road surface. The bead dispenser shall have an automatic cut-off control, synchronized with the cut-off of the pavement marking equipment.

871S.4 Construction Methods

A. General.

When required by the Engineer, the Contractor and the Engineer shall review the sequence of Work to be followed and the estimated progress schedule.

Markings may be placed on streets either free of traffic or open to traffic. On streets already open to traffic, the markings shall be placed under traffic conditions that exist with a minimum of interference to the operation of the facility. Traffic control shall be as shown on the Drawings or as approved in writing by the Engineer or designated representative. All markings placed under open-traffic conditions shall be protected from traffic damage and disfigurement. On streets open to traffic with 3 lanes of travel in one direction, all markings shall be placed from the outside lanes only, unless otherwise approved in writing by the Engineer or designated representative.

Guides to mark the lateral location of pavement markings shall be established as shown on the Drawings or as directed by the Engineer or designated representative. The Contractor shall establish the pavement marking guide and the Engineer or designated representative will verify the location of the guides.

Markings shall be placed in proper alignment with the guides. The deviation rate in alignment shall not exceed 1 inch per 200 feet {25 mm per 60 meters} of street. The maximum deviation shall not exceed 2 inches {50 millimeters} nor shall any deviation be abrupt.

Markings shall essentially have a uniform cross-section. The density and quality of markings shall be uniform throughout their thickness. The applied markings shall have no more than five (5) percent, by area, of holes or voids and shall be free of blisters.

Markings, in place on the street, shall be reflectorized both internally and externally. Glass beads shall be applied to the materials at a uniform rate sufficient to achieve uniform and distinctive retroflective characteristics when observed in accordance with TxDOT Test Method Tex-828-B.

Contractor personnel shall be sufficiently skilled in the Work of installing pavement markings.

Markings placed that are not in alignment or sequence, as shown on the drawings or as stated in the Standard Specification Item, shall be removed by the Contractor at its own expense. Removal shall be in accordance with Specification Item 874S, "Eliminating Existing Pavement Markings and Markers", except for measurement and payment. Guides placed on the street for alignment purposes shall not establish a permanent marking on the street.

Unless indicated otherwise on the Drawings, pavement markings shall not be placed sooner than 3 calendar days after the placement of a new hot mix asphaltic concrete surface course or surface treatment.

Unless otherwise shown on the Drawings, pavement markings may be applied by any method that will yield markings meeting the requirements of the Specification Item.

B. Surface Preparation

New Portland cement concrete surfaces shall be cleaned in accordance with Specification Item 875S, "Pavement Surface Preparation for Markings" to remove curing membrane, dirt, grease, loose and/or flaking existing construction markings and other forms of contamination.

Older Portland cement concrete surfaces and asphaltic surfaces that exhibit loose and/or flaking existing markings shall be cleaned in accordance with Specification Item 875S, "Pavement Surface Preparation for Markings" to remove all loose and flaking markings.

Pavement to which material is to be applied shall be completely dry. Pavements shall be considered dry if, on a sunny day after observation for 15 minutes, no condensation occurs in the underside of a 1 foot {300 mm} square piece of clear plastic that has been placed on the pavement and weighted on the edges.

C. Application of Type I Markings.

New Portland cement concrete surfaces shall be further prepared for Type I markings, after cleaning, by placing a Type II marking as a sealer in accordance with the Specification Item. When placing Type I markings in new locations on asphaltic surfaces 3 years old or older or any Portland cement concrete surfaces, a Type II marking shall be used as a sealer. Unless otherwise shown on the Drawings, existing Portland cement concrete and asphaltic surfaces to be restriped will not require Type II markings as a sealer; existing markings may be used as a sealer in lieu of Type II markings. Type II markings shall be placed a minimum of 2 and a maximum of 30 calendar days in advance of placing Type I markings. Type II markings which become dirty due to inclement weather or street conditions shall be cleaned by washing, brushing, compressed air or other means approved by the Engineer, prior to application of Type I markings. If washing is used, the surface of Type II markings shall become thoroughly dry before placing Type I

markings. Color, location and configuration of Type II markings shall be the same as that of Type I markings.

Type I pavement marking material shall be applied within temperature limits recommended by the material manufacturer. Application of Type I pavement markings shall be done only on clean, dry pavement having a surface temperature above 50^0F (10^0C). Pavement temperature shall be measured in accordance with TxDOT Test Method Tex-829-B.

When Type I pavement marking application is by spray, and operations cease for 5 minutes or more, the spray head shall be flushed by spraying pavement marking material into a pan or similar container until the pavement marking material being sprayed is at the proper temperature for application.

Unless otherwise directed by the Engineer in writing, Type I pavement-marking materials shall not be placed on streets between September 30 and March 1, subject to temperature and moisture limitations specified herein.

Unless otherwise shown on the Drawings, the minimum thickness of Type I marking shall be 0.060 inches (60 mil) {1.5 millimeters} for edgeline markings and 0.090 inches (90 mil) {2.3 millimeters} for stop-bars, legends, symbols, gore and center-line/no-passing barrier-line markings, when measured in accordance with TxDOT Test Method Tex-854-B. The maximum thickness of all Type I markings shall be 0.180 inches (180 mil) {4.6 millimeters}.

The thickness of Type I markings at the time of placement will be measured above the plane formed by the pavement surface. The Contractor will supply an approved device to measure the thickness of the applied markings. The markings shall be of uniform thickness throughout their lengths and widths.

D. Application of Type II Markings

The application of Type II marking materials shall be done only on surfaces with a minimum surface temperature of 50^0F (10^0C).

The application rate for Type II marking material shall be between 15 and 20 gallons per mile (35 to 47 liters per kilometer) of solid 4 inch {100 millimeter} line and between 30 and 40 gallons per mile (70 to 95 liters per kilometer) of solid 8 inch {200 millimeter} line. For new surface treatment projects the application rate shall be between 25 and 30 gallons per mile (60 to 70 liters per kilometer) of solid four (4) inch line {one hundred (100) millimeters} and between 40 and 50 gallons per mile (95 to 120 liters per kilometer) of solid 8 inch {200 millimeters} line.

Pavement markings for new surface treatment projects shall be applied in two applications, each approximately one-half the application rate. The first application shall not contain glass beads. The interval between the first and second application shall be a minimum of 1 hour.

When there is impending inclement weather and the Contractor chooses to apply water-based traffic paint and the markings, that are subsequently damaged by rain, sleet, hail, etc., the Contractor is responsible for all costs associated with the replacement markings. The Contractor will be paid, when the work is acceptable.

871S.5 Performance Period for Type I Markings.

Type I pavement markings shall meet all the requirements of this technical specification for a minimum of 15 calendar days after installation. Pavement markings that fail to meet all requirements of this specification shall be removed and replaced by the Contractor at its own expense. The Contractor shall replace all pavement markings failing the requirements of this technical specification within 30 calendar days following notification by the Engineer or designated representative of such failing. All replacement markings shall also meet all requirements of this technical specification for a minimum of 15 calendar days after installation.

871S.6 Measurement

This Specification Item will be measured by the lineal foot (lineal meter), by each of the various words, shapes or symbols, or by any other unit as shown on the Drawings.

Where double stripes are placed, each stripe will be measured separately.

Type II pavement markings requiring 2 applications on new surface treatments (Specification Item No. 320S) will be measured as 1 marking.

Type II pavement marking materials, when used as a sealer for Type I markings will be measured as Type II markings.

Final work zone pavement markings (paint and beads), which will be used as a sealer for Type I pavement markings, will not be measured for payment.

871S.7 Payment

The work performed and materials furnished in accordance with this Standard Specification Item and measured as provided under "Measurement" will be paid for at the Unit bid price for "Reflectorized Pavement Markings" of the various types, colors, shapes, sizes, widths and thickness (Type I markings only) specified. This price shall include full compensation for furnishing all materials; for application of pavement markings; and for all other labor, tools, equipment and incidentals necessary to complete the Work, except as described below.

Surface Preparation, when indicated on the Drawings, will be paid for under Specification Item 875S, "Pavement Surface Preparation for Markings."

Final work zone pavement markings (paint and beads), which will be used as a sealer for Type I pavement markings, shall be included in the unit price bid for the item of construction for which final work zone pavement markings are used.

When replacement Type II markings are required due to damage to the original markings from rain, sleet, hail, etc., and the original markings were placed at the Direction of the Engineer, the Contractor will be paid for the actual quantity of original and replacement markings at the unit bid price for the bid item.

Payment will be made under one or more of the following:

<u>Original placement of Reflectorized Pavement Markings</u>:

Pay Item 871S-A: Reflectorized Type I Thermoplastic Pavement Markings ___inches in width, ___mils in thickness_____ in color per lineal foot.

Pay Item 871S-B: Reflectorized Type I Thermoplastic Pavement Markings ___inches in width, ___ mils in thickness_____ in color **<u>Words</u>** per each.

Pay Item 871S-C: Reflectorized Type I Thermoplastic Pavement Markings **Shapes**
___inches in width, ___ mils in thickness_____ in color per each.

Pay Item 871S-D: Reflectorized Type I Thermoplastic Pavement Markings **Symbols**
___inches in width, ___ mils in thickness_____ in color per each.

Pay Item 871S-E: Reflectorized Type II Paint Pavement Markings
___inches in width, _____ in color per lineal foot.

Pay Item 871S-F: Reflectorized Type II Paint Pavement Markings **Words**
___inches in width, _____ in color per each.

Pay Item 871S-G: Reflectorized Type II Paint Pavement Markings **Shapes**
____inches in width, _____ in color per each.

Pay Item 871S-H: Reflectorized II Paint Pavement Markings **Symbols**
___inches in width, _____ in color per each.

Replacement of Reflectorized Pavement Markings:

Pay Item 871S-AR: Replace Reflectorized Type I Thermoplastic Pavement Markings
___inches in width, ___mils in thickness_____ in color per lineal foot.

Pay Item 871S-BR: Replace Reflectorized Type I Thermoplastic Pavement Markings **Words**
___inches in width, ___ mils in thickness_____ in color per each.

Pay Item 871S-CR: Replace Reflectorized Type I Thermoplastic Pavement Markings **Shapes**
___inches in width, ___ mils in thickness_____ in color per each.

Pay Item 871S-DR: Replace Reflectorized Type I Thermoplastic Pavement Markings **Symbols**
___inches in width, ___ mils in thickness_____ in color per each.

Pay Item 871S-ER: Replace Reflectorized Type II Paint Pavement Markings
___inches in width, _____ in color per lineal foot.

Pay Item 871S-FR: Replace Reflectorized Type II Paint Pavement Markings **Words**
___inches in width, _____ in color per each.

Pay Item 871S-GR: Replace Reflectorized Type II Paint Pavement Markings **Shapes**
___inches in width, _____ in color per each.

Pay Item 871S-HR: Replace Reflectorized Type II Paint Pavement Markings **Symbols**
___inches in width, _____ in color per each.

END

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 871S, "Reflectorized Pavement Markings"

City of Austin Contract Documents

Designation	Description
Section 00300U	Bid Form (Unit Price)

City of Austin Standard Specifications

Designation	Description
Item No. 320S	Two Course Surface Treatment
Item No. 860S	Pavement Marking Paint (Reflectorized)
Item No. 874S	Eliminating Existing Pavement Markings and Markers
Item No. 875S	Pavement Surface Preparation For Markings

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-828-B	Determining Functional Characteristics of Pavement Markings

Tex-829-B	Method For Measuring Pavement Temperature
Tex-854-B	Evaluation Of Thermoplastic Striping For Uniformity And Thickness

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 871S, "Reflectorized Pavement Markings"

City of Austin Standard Specifications

Designation	Description
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 302S	Aggregates for Surface Treatments
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving
Item No. 312S	Seal Coat
Item No. 313S	Rubber Asphalt Joint and Crack Sealant
Item No. 315S	Milling Asphaltic Concrete Paving
Item No. 340S	Hot Mix Asphaltic Concrete Pavement
Item No. 341S	Paving Fabric
Item No. 350S	Heating, Scarifying and Repaving
Item No. 360	Concrete Pavement
Item No. 801S	Construction Detours
Item No. 803S	Barricades, Signs and Traffic Handling
Item No. 863S	Reflectorized Pavement Markers
Item No. 864S	Abbreviated Pavement Markings
Item No. 865S	Nonreflectorized Traffic Buttons
Item No. 866S	Jiggle Bar Tile
Item No. 867S	Epoxy Adhesive
Item No. 870S	Work Zone Pavement Markings
Item No. 872S	Prefabricated Pavement Markings
Item No. 873S	Raised Pavement Markers
Item No. 863S-1	Pavement Buttons (Reflectorized-Type I & Type II)
Item No. 865S-1	Traffic Buttons (Non-Reflectorized)

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 302	Aggregates for Surface Treatments
Item No. 314	Emulsified Asphalt Treatment
Item No. 315	Emulsified Asphalt Seal
Item No. 316	Surface Treatments
Item No. 334	Hot Mix-Cold Laid Asphaltic Concrete Pavement

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 871S, "Reflectorized Pavement Markings"

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 340	Hot Mix Asphaltic Concrete Pavement
Item No. 342	Plant Mix Seal
Item No. 351	Repairing Existing Flexible Pavement Structure
Item No. 354	Planing and/or Texturing Pavement
Item No. 358	Asphaltic Concrete Surface Rehabilitation
Item No. 360	Concrete Pavement
Item No. 421	Hydraulic Cement Concrete
Item No. 427	Surface Finishes for Concrete
Item No. 428	Concrete Surface Treatment

Item No. 662	Work Zone Pavement Markings
Item No. 666	Reflectorized Pavement Markings
Item No. 667	Prefabricated Pavement Markings
Item No. 672	Raised Pavement Markers
Item No. 677	Eliminating Existing Pavement Markings and Markers
Item No. 678	Pavement Surface Preparation For Markings

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex 729-I	Sampling of Traffic Markers

Texas Department of Transportation: Departmental Materials Specifications

Designation	Description
DM S-4100	Jiggle Bar Tile
DMS-4200	Pavement Markers (Reflectorized)
DMS-4300	Traffic Buttons
DMS-4210	Pavement Markers
DMS-6130	Bituminous Adhesive
DMS-8200	Pavement Paint
DMS-8220	Thermoplastic marking material
DMS-8240	Prefabricated Marking Materials
DMS-8241	Removable Tape
DMS-8290	Pavement Paint
YPT-10 and/or WPT-10	Pavement Paint

SPECIAL PROVISION To
Standard Specification Item No. 508S (Version 02/24/10)
Miscellaneous Structures and Appurtenances

For this project **Item No. 508S Miscellaneous Structures and Appurtenances dated 02/24/10** of the City of Austin Standard Technical Specifications is hereby amended with respect to the clauses cited below. No other clauses or requirements of this Section of the City of Austin Standard Specifications are waived or changed.

To **Section 508S.7 Payment,** add the following:

Pay Item No. SP508S-R:	Remove Misc. P.C. Concrete Drainage Structure, including Pipe and Wall	Per Lump Sum.

End

SPECIAL PROVISION To
Standard Specification Item No. 824S (Version 02/24/10)
Traffic Signs

For this project **Item No. 824S Traffic Signs dated 02/24/10** of the City of Austin Standard Technical Specifications is hereby amended with respect to the clauses cited below. No other clauses or requirements of this Section of the City of Austin Standard Specifications are waived or changed.

To **Section 824S.5 Construction,** add the following:

E. Flexible Delineator Post
Shall be reflectorized embedded post per TXDOT Standard Detail (D & OM (2) – 15), complete and in-place.

To **Section 824S.7 Payment,** add the following:

Pay Item No. SP824S-D: Flexible Roadside Delineator Post Per Each.

End

PART 1: GENERAL

1.1 Scope

Provide all equipment and labor required for calibration, setting and testing as described herein or otherwise required. All tests are to be witnessed by the Owner or designated representative. Give written notification of the tests at least **seven days** prior to the desired date to perform the tests. Tests cannot be scheduled until the lift station RTU/PLC has been programmed, the Walnut top-end has been programmed and a communication link has been established between the two by Austin Water personnel. **ALLOW A MINIMUM OF 15 WORKING DAYS FOR THE PROGRAMMING WORK.** Repair or replace all defective material, equipment or workmanship disclosed as a result of these tests at no cost to Owner.

1.2 Records

Provide the Owner with a typed record of all tests including the piece of equipment tested, the date and time of day tested, weather conditions; and tests values and results.

1.3 Documents

See attached documents "Start-up Requirements" and "AWU Lift Station Construction Outline" for more start-up information.

PART 2: PRODUCTS

No products are required by this Section of the Specifications.

PART 3: EXECUTION

Documents Required On Hand For Site Inspection:

1. Design plans and specifications.
2. Complete set of approved O&M manuals/submittals.
3. Mechanical and electrical as-built drawings, pump curves, wiring and control schematics.
4. Spare Parts.
5. Copy of recorded easements or plat.

3.1 LIFT STATION DATA: To be filled out by contractor and submitted with written notification requesting station testing and prior to start-up.

Lift Station General:

Lift Station Address: _____
Lift Station Number: _____
Lift Station Phone Number: (at time of inspection)_____

Lift Station Type:

Grinder [ ] Non-Clog [ ]

Site Data:

Wet Well Dimensions:_____ft. diameter, or _____ft. x __ft.
Wet Well Floor Elevation: ___ft.
Top Slab Elevation: __ft.
Valve Vault Slab Elevation: __ft.
Invert Elevation: _____ft .
Discharge Pressure Tap elevation: ___ft.
Nearest influent manhole at street elevation _____ft.

Mechanical Data:

Pump 1:
Manufacturer _____, Model_____,
Serial Number _____, GPM_____, TDH _____,
Manufacturer date _____

Motor 1:
Manufacturer _____, Model,
Serial Number _____, HP_____, V _____,
FLA _____, RPM _____, Megger Reading _____,
Frame _____

Pump 2:
Manufacturer _____, Model_____,
Serial Number _____, GPM_____, TDH _____,
Mfg. date _____

Motor 2:
Manufacturer _____, Model,
Serial Number_____, HP _____, V_____,
FLA _____, RPM _____, Megger Reading _____,

Frame _____

Pump 3:
Manufacturer _____, Model_____,
Serial Number _____, GPM_____, TDH _____,
Mfg. date _____

Motor 3:
Manufacturer _____, Model_____,
Serial Number_____, HP _____, V _____,
FLA _____, RPM _____, Megger Reading _____,
Frame _____

Service Data:

Transformer Size: _____ KVA, _____Volts, _____Wire, _____Amps,
Overhead, [ ] Underground, [ ]
Service Conductor Size_____, Ground Size _____.
Main Disconnect Switch or Circuit Breaker: MFDS [ ]____ A fuses; MCB [ ] ____A rating;
NEMA ____ enclosure rating.
Pump Control Panel bus wire type/size_____

Generator Data:

Manufacturer: _____
Model: _____
KW: _____
Rating: _____Volts, _____Phase, _____Amp Output Breaker
Serial Number_____
Fuel Tank Capacity _____ gallons
Secondary Containment _____ gallons

Automatic Transfer Switch:

Manufacturer: _____
Model: _____
Override momentary outages _____seconds.
Transfer to generator _____minutes.
Re-transfer to normal _____minutes.
Generator cool down _____minutes.

RTU:

Manufacturer: _____
Base Model # Slot 1 _____
Slot 2 _____
Slot 3 _____
Slot 4 (if applicable) _____

Surge Protection:

Incoming Line model:_____
Control Power model:_____
Phone Line model:_____

Primary Controls:

Bubbler Sensor Line End Elevation: _____ ft.
Bubbler Stand Pipe End Elevation:_____ft.

Back up Controls:

Differential Pressure Transducer Elevation: _____ ft.

Odor Control Unit:

7 day time clock [ ]
Manufacturer: _____
Model: _____

Jib Crane & Hoist:

Crane Mfg._____ Model _____ Capacity_____ Tons
Hoist Mfg._____ Model _____ Capacity_____ Tons _____ Volts

3.2 INSPECTION DATA SHEET: To be filled out by Contractor and verified by COA Representative.

Site:

A. Chain link fence? [Y/N]
B. Barbed wire 45° angle around entire perimeter? [Y/N]
C. Check diagonal horizontal bracing. [acceptable/unacceptable]

D. Decorative fence? [Y/N]
E. Check decorative fence welds. [acceptable/unacceptable]
F. Seven (7) foot overall height? [Y/N]
G. Eighteen (18) inch wide mow strip? [Y/N]
H. Fence grounded? [Y/N]
H. Access Road? [Y/N]
I. Access road accessible for a semi truck with tank trailer for chemical and sludge pumping? [Y/N]
J. One (1) foot wide ribbon curb? [Y/N]
K. Concrete tire stops? [Y/N]
L. Odor control supplier letter on file? [Y/N]
M. Lift station sign bolted to gate? [Y/N]
N. Correct emergency phone number and lift station number? [Y/N]
O. Jib crane with chain hoist? [Y/N]
P. Gate operating and locking mechanism with pad lock. [Y/N]
Q. Easements staked and pinned? [Y/N]
U. Washed landscape gravel one and one half (1&1/2) inch in diameter six (6) inches deep on water permeable weed-proof fabric installed on two (2) inch bed of compacted sand. [Y/N].
R. Pump around manhole located in lift station yard? [Y/N]

Notes: _____
_____
_____
_____

Wet Well:

A. Ten foot tall 316 stainless steel vent pipe and screen? [Y/N]; Approved option description: _____.
B. Metal in wet well (nuts, bolts, washers, guide rails, supports, pump lifting cable, anchor bolts, etc.) 316 stainless steel? [Y/N]
C. Coating inside and out? [Y/N]
D. Flygt safety access hatch with lock? [Y/N]
E. Access hatch correct material, size and gasket? [Y/N]
F. Bubbler standpipe mounted per plans? [Y/N]
G. Bubbler sensing line constructed of stainless steel tubing and tubing fittings? [Y/N]
H. Submersible level transducer mounted in an accessible location? [Y/N]
I. Transducer mounting hardware 316 stainless steal? [Y/N]
J. Stainless steel hoist chain? [Y/N]
K. Correct hoist chain size? [Y/N]
L. ITT Flygt Grip-Eye System? [Y/N]
M. Remove and install each pump, check for tangled power and control cables. [Y/N]
N. Crane height and location should allow all pumps to be lowered into a standard truck bed (36 inches). [Y/N]

Notes: _____
_____
_____
_____

Piping and Valves:

A. Pressure tap with 1/4-inch ball valve on each discharge line installed? [Y/N]
B. Approved eccentric plug valves installed? [Y/N]
C. Approved check valves installed? [Y/N]
D. Air release valve required? [Y/N]
E. Air release valve installed and operation witnessed? [Y/N].
F. Air release isolation valve installed? [Y/N]
G. Drain line for air release valve shall discharge to valve vault floor drain. [Y/N]
H. Stainless steel piping required if smaller than 6-inches? [Y/N/NA]
I. Watts reduced pressure backflow prevention system #995 (RPZ) with freeze proof cover installed? [Y/N]
J. Hose bib with back flow preventer installed? [Y/N]
K. Four (4) inch female camlock quick connection "pump around" attachment in valve vault installed? [Y/N]
L. Surge relief valve required? [Y/N]
M. Surge relief valve installed and operation witnessed? [Y/N]

Valve Vault:

A. Coating inside and out? [Y/N]
B. Four (4) inch minimum drain line with gas trap and flap valve? [Y/N]
C. Stainless steel vent and screen? [Y/N]
D. Flygt safety access hatch with lock? [Y/N]
E. Access hatch correct material, size and gasket? [Y/N]
F. Access hatch mounting allows use of 4" bypass pumping piping without any hatch/grating interference? [Y/N]
G. Ladder [Y/N] Ladder material_____

Flow Meter Vault:

A. Precast manhole? [Y/N]
B. Parmex 32-inch easy opening flip style access lid? [Y/N]
C. Gravel Bottom? [Y/N]

Enclosure:

A. Split-face rock? [Y/N]
B. Ventilator? [Y/N] Velocity reading: _____
C. Intake vent? [Y/N]
D. Metal door? [Y/N]
E. Corbin-Russwin Model ML 2048-CSA-6Z6 door lock? [Y/N]
F. Door hold open arms? [Y/N]
G. Threshold plate? [Y/N]
H. Door stops with hooks? [Y/N]
I. Bubbler compressor securely mounted? [Y/N]
J. Bubbler compressor automatic drain piped to the outside of the enclosure? [Y/N]

Notes: _____
_____
_____
_____

Odor Control System:

A. Timer Operational? [Y/N]
B. Pump Operational? [Y/N]
C. Chemical on site? [Y/N]
D. Feed Point: gravity line [ ]; wet well [ ]; force main [ ]
E. Emergency phone number inside panel with MSDS? [Y/N]
F. Chemical tank with NFPA 704 diamond visible from access gate? [Y/N]
G. Location of testing point: _____

Notes: _____
_____
_____
_____

Lighting Fixtures:

A. Area Light? [Y/N]
B. Control building lights? [Y/N]
C. Area lighting switch and photocell control, working? [Y/N]
D. Panel lighting? [Y/N]

Notes: _____
_____
_____
_____

Miscellaneous Electrical Materials:

A. Contractor data sheet correct per site and submittals? [Y/N]
B. Equipment and material installed per contract drawings? [Y/N]
C. Installed per NEC? [Y/N]
D. Underground Conduit in red concrete? [Y/N]

Notes: _____
_____
_____
_____

Electrical System:

A. Disconnect(s) padlockable in on and off positions? [Y/N]
B. Power Distribution
   1. Power wiring/conductors COA color code compliance (refer to specs)? [Y/N]
   2. Main power feeders, bus & devices correct rating per drawings? [Y/N]
C. Incoming voltmeter operates properly. [Y/N]

Voltmeter Readings:

VAB _____
VAC _____
VCA _____
VAN _____
VBN _____
VCN _____

D. Meter Reading _____and Number_____
E. Utility Name_____ and Emergency Phone Number_____

Notes: _____
_____
_____
_____

Verify Wiring And Equipment Is Tagged According To Schematics.

Verify pump nameplate data [ ], motor starter overload heaters [ ].

Flame Retardant Material Installed In Conduit Seal Offs? [Y/N]

Spare Parts:

A. Tool box? [Y/N]
B. Mechanical spare parts? [Y/N]
C. Electrical spare parts? [Y/N]
D. Complete Operation and Maintenance Manuals? [Y/N]
E. Grab lifting device? [Y/N]
F. Spare pump? [Y/N]
G. Spare pump tested? [Y/N]
H. Hatch key for wet well and valve vault? [Y/N]

Notes: _____
_____
_____
_____

3.3 Functional Tests for Control System Contractor to perform test and City of Austin representative will direct and witness the test. See attachment "Start-up Requirements" for further information/requirements

The test will fully test out the primary and backup control systems as shown in the PLANS. The contractor is to fully test and configure the system prior to the witnessed test. Failure to do so may result in a FAILED startup test which result in a re-scheduled test at a later date.

Notes: _____
_____
_____
_____
_____
_____

3.4 Functional Testing of Pumping System

The following tests are to be performed by the pump manufacturer. (may be unwitnessed)

Contractor is responsible for supplying enough water for the tests. The tests shall consist of two pump-cycles per pump and two complete station operational cycles at a minimum. The wet well and force main must be full prior to the test.

1. A system head curve shall be determined for each pump at design condition, at mid-point, and at shut-off head.

Pump 1

Trial 1	Design Conditions	Midpoint	Shutoff
Flow (Q)			
Head (H)			
Motor Current (A)			
Trial 2	Design Conditions	Midpoint	Shutoff
Flow (Q)			
Head (H)			
Motor Current (A)			

Pump 2

Trial 1	Design Conditions	Midpoint	Shutoff
Flow (Q)			
Head (H)			
Motor Current (A)			

Trial 2	Design Conditions	Midpoint	Shutoff
Flow (Q)			
Head (H)			

Motor Current (A)			

Pump 3

Trial 1	Design Conditions	Midpoint	Shutoff
Flow (Q)			
Head (H)			
Motor Current (A)			
Trial 2	Design Conditions	Midpoint	Shutoff
Flow (Q)			
Head (H)			
Motor Current (A)			

2. Each pump curve shall be compared with the manufacturer's certified curve to verify they are the same.

3. Each pump shall pump down the working volume of the wet well.

4. Station shall be run at firm capacity.

5. Station shall be run in automatic to check the level settings.

6. Pump draw down test and head pressure test results are to be certified by the pump manufacturer and submitted to the utility in writing on company stationary and signed by representative.

Notes: _____
_____
_____
_____
_____
_____

3.5 Generator Testing

The following tests are to be performed after the generator manufacturer has completed check out of the emergency generator system and has determined it is ready for operation.

1. With all pumps in off mode, turn off Utility power to the entire station.

   The generator should start.
   The transfer switch should transfer to generator power.
   Check and record voltage readings.

   VAB _____
   VAC _____
   VCA _____
   VAN _____
   VBN _____
   VCN _____

   Verify Emergency Power and Generator Run RTU alarm inputs are lit.

2. Restore Utility power to the station.

   The transfer switch should return to normal power after a time delay.
   Verify Emergency Power RTU alarm input light goes out and Generator Run RTU alarm input remains on while generator is running.
   Return to normal set at _____minutes.

3. With all pumps connected and in auto mode complete the following:

   Apply 4-20 mA signal to pump controller to lead pump, lag pump and lag-lag pump start setpoints.
   Lead, lag and lag lag pumps should start.
   Simulate a power fail to the station by turning the main breaker off and make the generator "pick up" the running pumps.
   Verify no breakers trip due to inrush. (This is verifying the transfer switch in phase monitor.)

4. Restore power to the station.

5. The generator should cool down after a time delay and stop.

Cool down set at _____minutes.
Verify Generator Run RTU alarm input light goes out.

6. Verify O&M manual generator documentation.

3.6 RTU Testing

1. Once the utility power and phone line has been connected to the lift station, the contractor is to submit in writing that the lift station is ready for Austin Water SCADA personnel to start the lift station RTU/PLC programming and the database programming of the Lift Station Telemetry System at Walnut Creek WWTP. **Programming may take a MINIMUM of fifteen (15) WORKING DAYS.** A communication link cannot be established until this programming is done. A valid communication link is one component that is required for completion.

2. Verify communication link between the station and the Lift Station Telemetry System at Walnut. Link should communicate real time data and experience no communication failures for at least 24 hours prior to inspection and start-up.

3. Once communications has been established, the contractor is to work with Austin Water SCADA personnel to simulate all alarms and verify that each is communicated to the Lift Station Telemetry System at Walnut Creek.

3.7 RTD Testing

Verify RTD element is installed in cabinet, connected to RTU, and shows temperature at Walnut Creek Treatment Plant SCDA top end is comparable to cabinet temperature at time of test.

3.8 Performance Inspection

(Contractor to perform test and City of Austin representative to witness)

A. It is intended that the contractor has completed and documented the above power and controls testing and calibrations form. Subsequently, the contractor shall schedule start-up and inspection with the City's Representative after the programming of the RTU and Walnut top-end by Austin Water personnel. Contractor shall have above documentation present at start-up inspection. Witnessed start-up and inspection shall consist of going through the above power and control operations in the presence of the City's representative.

Attachment A

AW Lift Station Construction Outline

This document provides for basic outline of what is required by AW for lift station construction, start-up, substantial and final completion. This document is by no means inclusive and only provides for the basics.

Construction

- All work, equipment, materials, etc. must have a submittal approved by both the engineer and AW before installation, ordering, etc.

Start-up testing (these items are required before a start-up will occur)

- All equipment installed per manufacturer's recommendation and functional
- Electricity and telephone installed, connected and turned on
- Generator properly started-up and commissioned by manufacturer with start-up report
- Pumps commissioned and draw-down test performed and pumps certified by pump manufacturer/representative (certified at time of testing not manufacture)
- Force main connected so that pumps maybe ran during testing
- Control panel fully connected and tested
- Wetwell full of water with the ability to add more for pump testing
- All dirt and trash removed from wetwell and not pumped through pumps
- Jib crane and hoist functional
- RTU and modem programmed and communications to Walnut Creek WWTP performed and tested by AWU personnel prior to any station testing

ALLOW A MINIMUM OF THREE WEEKS IN THE CONSTRUCTION SCHEDULE FOR SCADA PROGRAMMING
PROGRAMMING WILL NOT START UNTIL THE LIFT STATION HAS UTITLITY POWER AND PHONE LINE

- O&M manuals and as-builts completed except for any modifications that derive from start-up testing (See O&M section for required preliminary O&M's)
- Perform pre-start-up test prior to start-up testing all equipment, pump controls, alarms, etc. to ensure functionality
- See Lift Station Start-up requirements document for more details

Substantial completion

- Rarely given. If given, **all** equipment must be functional. The station must be able to pump, communicate, control, etc. The only outstanding items will only cosmetic in nature
- All O&M manuals and as-builts updated from any modifications from start-up (See O&M section for required preliminary O&M's)
- Recorded easement for station

Final completion

- No outstanding punchlist items

- Once granted, AWU assumes station operation and contractor will be allowed entrance by AWU personnel only
- Site clean of any trash, extra materials, etc.
- After final completion, utilities may be transferred. Until final completion, maintenance of the utilities is the contractor's responsibility.

Operation and Maintenance Manuals (O&M's)

- List of minimum required O&M's (in both hard copy (4 copies) and pdf format (3 copies on CD or thumbdrive)
    - Control panel O&M with all updated parameters from start-up
    - Electrical O&M (MCC, panels, transformers, etc.) with updated parameters from start-up
    - Pump O&M with test reports and start-up report
    - Mechanical O&M (contains valves, check valves, backflow preventer with certification report, etc.)
    - Generator O&M with start-up report and updated parameters from start-up
    - Automatic transfer switch O&M with updated parameters from start-up

Attachment B
Lift Station Start-up Minimum Requirements (DRAFT)

General Contractor

Coordinate all subs/vendors that are needed/required below
Fill wetwell with water to at least high level for generator/ATS testing

Pump Supplier

If jib crane is not present, needs to have a method of pulling each pump. Each pump will be pulled to verify lifting mechanisms, rails and pump/hatch/rail/opening clearance. All pulling equipment – grip-eyes, lifting mechanisms, etc. – is the responsibility of the pump supplier
Assist in controls testing – need to demonstrate/simulate pump overtemp and seal fail
Pumps ready for generator/ATS test – alarms cleared and rotation checked prior to test/start-up
Pump down test (maybe completed earlier or later)

Electrical contractor

Flip the main disconnect for the generator/ATS testing
Disconnect the pump motor leads for controls testing (see I&C/Controls Testing)
Generator clear of alarms and operational for generator testing (if supplied by electrical contractor, otherwise by supplying vendor/subcontractor)
Generator point testing – simulate/demonstrate generator run and fail alarms

I&C/Controls Testing

The intent is to test the pump controls without physically running the pumps. Will need the motor leads disconnected at the starter and two 4-20mA signal generators/simulators (one for the bubbler and one for the static). This should allow multiple "starts" to test the program controls and the hard-wire controls and their interaction.

At least two 4-20mA source/simulators
PLC point testing – simulate/demonstrate all alarms in the control panel to the PLC
Responsible for all testing/power, etc. in the control panel
Insure at least a .1-.2 foot difference between the static and bubbler levels
Calibration and setup of the flowmeter (if provided by I&C subcontractor, otherwise by supplying vendor/subcontractor)
Bubbler system compressor set-up and ready for operation (oil installed, break-in completed, etc.) (if provided by I&C subcontractor, otherwise by supplying vendor/subcontractor)

Smart overloads/starters set-up and ready for operation with correct settings/parameters (I&C, electrical, pump supplier)

PART 1: GENERAL

1.1 Scope of Work

Furnish and install submersible, grinder raw sewage pump(s) as specified herein and as shown on plans.

1.2 Related Specifications

1.3 Applicable Standards and Specifications

TCEQ 30TAC Chapter 317

All pump/ motor assemblies shall be designed, constructed, and tested according to the latest applicable sections of AFBMA, AISI, ANSI, ASTM, Hydraulic Institute, IEEE, NEC, NEMA MG-1, NFPA, and UL standards. Requirements listed in the drawings and specifications are considered additional to the standard requirements listed above.

1.4 Acceptable Manufacturers

A. Flygt

B. Liberty – (Approved by Facility Engineering on a case by case basis.)

C. KSB – (Approved by Facility Engineering on a case by case basis.)

1.5 Submittals

A. Submittals

The Contractor is to submit the following information for approval by the Engineer and Owner prior to start of fabrication of the pumping units.

1. Pumps

   a. Name of pumping unit Manufacturer.
   b. Pump model number.
   c. Rotating speed.
   d. Proposed impeller size.
   e. Maximum impeller size to fit proposed pump case.
   f. Minimum impeller size to fit proposed pump case.

g. Performance curves for like unit showing total dynamic head, capacity, and horsepower from shutoff to beyond the minimum operating head at operating speed.
h. List of materials used in the construction of the pumps. Designate materials using ASTM Standards.
i. Type of wear rings and materials for impeller and case wear rings.
j. Type of pump bearings (radial and axial).
k. Type of mechanical seal and materials of construction.
l. Outline drawing of pumps showing exterior dimensions of pump.
m. Net weight of pump.
n. Net weight of base plate.

2. Motor

a. Motor manufacturer's name.
b. Type of motor and/or motor enclosure type.
c. Insulation class and type.
d. Temperature rise over 40ºC ambient.
e. Service factor.
f. Frame size.
g. Rated horsepower.
h. Full load speed, rpm.
i. Operating voltage, volts at 60 Hz.
j. Locked rotor current, amps and/or letter code.
k. Full load current, amps.
l. Starting inrush magnetizing current, % of full load, amps.
m. Complete outline drawing showing overall dimensions, location of terminal boxes, mounting provisions, and lifting provisions.
n. Sectional drawing of motor showing all components and a list of materials for each component per ANSI, ASTM, NEMA.
   1) Frame/ enclosure
   2) Stator.
   3) Rotor/ shaft.
   4) Bearings.
   5) Paint or coatings.
o. Net motor weight.
p. Motor shaft diameter at all points.
s. Motor stator winding resistance, ohms.

B. Operation and Maintenance Manuals

The contractor shall submit the following information for approval by the Engineer and Owner prior to equipment start-up.

1. Assembly, installation, alignment, adjustment, and checking instructions.

2. Lubrication and maintenance instructions.
3. Guide to "trouble shooting".
4. Parts list and predicted life for parts subject to wear. Parts list should also list part numbers.
5. Recommended spare parts list.
6. Certified dimensional drawings.
7. Sectional Drawings showing arrangement of internal components.
8. Certified performance curves showing total dynamic head, capacity, and horsepower from shutoff to beyond the minimum operating head at operating speed.
9. All information supplied in the submittals.

C. Certified Report

Furnish 3 copies of a report prepared by the Manufacturer's technical representative certifying satisfactory installation, operation, and in-service placement of units.

1.6 Warranty

For new lift stations, warranty shall begin upon acceptance of the station. For existing stations, warranty shall begin following successful completion of the field testing and acceptance of the pump/motor assemblies.

A. The pumping unit Manufacturer shall warrant the entire pump unit against faulty or inadequate design, improper assembly and erection, defective workmanship and materials, and leakage, breakage, or other failure.

B. The Manufacturer shall furnish a written warranty agreeing to furnish and install FOB Austin, Texas at his own expense, any part of the pumping unit proving defective within twelve (12) months of the acceptance of the unit.

C. The Manufacturer shall also provide a full parts and labor warranty for the motor, its components, and its accessories for one year, and extended pro-rated 5-year warranty.

1.7 Manufacturer Services

Furnish the services of the Manufacturer's technical representative to check installation, assist Contractor in field testing, making adjustments, and instructing operators in maintenance and operation procedures.

A. Motor Compatibility

The manufacturer shall ensure that the motor included with the drive is compatible with driven equipment and complies with these specifications.

B. Efficiency and Cost Effectiveness

The most efficient and cost-effective premium efficiency motor shall be selected for continuous duty operation in wastewater lift stations.

PART 2: PRODUCT

2.1 General

Detailed in this specification are the design, construction and testing of submersible grinder pump/motor assemblies suitable for sewage service.

2.2 Construction and Materials

A. Pump

1. Volute

The pump volute, motor, and seal housing shall be high quality gray cast iron, ASTM A-48, minimum of Class 30. Outside of the volute shall be coated to prevent corrosion

2. Shaft

The pump shaft shall be constructed of solid stainless steel.

3. Bearings

The pump and motor shaft shall be rigid and kept in correct alignment by bearings. The pump shaft shall rotate on two bearings. The upper bearing shall be a single deep grove ball bearing. The lower bearing shall be a two-row angular contact bearing to compensate for axial thrust and radial forces. Bearings shall be anti-friction and designed to withstand all stresses to ensure a long service life. Bearing houses are to be designed so that water cannot enter the housing. Bearings shall be permanently lubricated.

4. Impeller

Pump impellers shall be multi-vane, semi-open, and non-overloading, constructed of ASTM A48 Class 30 cast iron minimum or of bronze. The impeller can either be factory or field trimmed to meet specific performance conditions. Impellers shall be hydraulically balanced at the factory. Wear or field trimming shall not deter the factory balance. The impeller shall be keyed, not screwed or pinned to the shaft and shall be readily removable

without the use of a special tool. The impeller shall be locked against rotation in any direction by a stainless steel or bronze impeller nut. The impeller shall be statically and dynamically balanced for smooth performance.

5. Wear Rings

When required, the pump impeller and the adjacent casing surface shall be fitted with replaceable non-corrosive metal wear rings installed to prevent rotation.

6. Mechanical Seals

The pump shall be protected from leakage at the point that the shaft passes through the pump casing by mechanical seals. Mechanical seals must meet the following requirements:

a. The seal shall be a double mechanical seal in a cast iron seal housing constructed in two sections with a registered fit.
b. The housing shall be recessed into the pump back head.
c. The seals shall be constructed of **tungsten carbide**.
d. The upper and lower seal assemblies shall operate in a lubricant reservoir that lubricates the lapped seal faces at a constant rate.
e. Each seal interface shall be held in place by its own spring system.

7. External Hardware

All external wetted hardware shall be 316 stainless steel.

8. O-Rings

All O-rings shall be made of Buna N Rubber or approved equal.

9. Grinder Cutters

Grinder cutters shall be constructed of stainless steel. The grinder unit shall be on the suction side of the pump impeller and discharge directly into the impeller inlet leaving no exposed shaft to permit packing of ground solids. The grinder shall be capable of grinding all materials found in domestic sewage into a finely ground slurry with particle dimensions no greater than 1/4-inch.

B. Motor

This specification details the materials and construction for a submersible pump and motor assembly.

1. Construction

The motors shall be constructed as an integral part of submersible pump/ motor assemblies. Each motor shall be electrically and mechanically suited for the pump to which it shall be applied. The motor shall be compatible with the pump to which it shall be applied, and the motor shall operate efficiently, without overheating or abnormal vibration. The motor shall be designed to provide a 20-year life. Motor shall be capable of continuous operation without relying on external fluid contact for cooling. The motor chamber shall be fitted with moisture/leak detector for signaling chamber's breach for water (See specification elsewhere herein).

2. Motor Rating

Motor shall be Underwriters Laboratories (UL) or Factory Mutual (FM) approved as explosion proof. Rated voltage shall be per contract drawings. Motor shall be rated with a Class B temperature rise. The motor shall comply with NEMA Standard MG-1 and associated ASA and IEEE Standards unless specifically amended hereafter. Motor shall be inverter duty rated.

3. Motor Housing

Motor shall be constructed of ASTM Type A-48 Class 30 Cast Iron. The housing shall be coated for corrosion resistance.

4. Rotor and Stator

Stator windings shall be copper. Rotor may be machined, rigid, one-piece aluminum or steel core with a machined or pressure cast or brazed solid end copper or aluminum ring connection. Rotor shall be a dynamically balanced single unit. Rotor shall be removable without disassembling stator. Rotor shall be solidly attached or keyed to the motor shaft.

5. Shaft

The motor shaft shall be constructed of solid stainless steel.

6. Bearings

See Pump section, above.

7. Insulation

All motors shall be constructed with Class H or better insulation with a Class B temperature rise per NEMA MG-1. This temperature rise of 115°C over

40°C ambient shall be determined by resistance method or RTD's. Method of testing shall be listed in the motor submittal.

8. Motor Power/ Control Wiring and Cable

   a. Motor power lead wires shall be permanently and thermally connected to the stator for structural strength.

   b. Motor lead wires shall be connected to the power cable in a watertight chamber and appropriate watertight seal cable entrance. Pump motor power cable shall be oil and watertight, rated for continuous submerged service. Cable conductors shall be copper, sized and rated per N.E.C. Cable shall be sized using 125 % of motor nameplate.

   c. Motor control conductors for thermal and moisture leak sensory shall be rated for continuous submerged service and shall be run in a separate jacketed cable and conduit from the power cable.

   d. Power cable shall include a dedicated ground conductor. All conductors shall be permanently identified at both ends.

   e. Power/control cable shall be of sufficient length as designated with pump order to allow required power and control termination.

9. Motor Starting

   Motors sized 75 hp and above shall be reduced voltage auto transformer type sized for starting on the 65 % tap and accelerating to full speed from the reduced voltage start without overheating or otherwise causing damage to the motor windings or bearings.

10. Motor Over-temperature and Moisture Protection

   a. Motor shall have a stator winding over-temperature (OT) sensory or switch device to detect high temperature and provide shutdown protection. The OT device shall be rated and set to actuate providing protection and reaching the limits of the Class H insulation. OT sensory shall actuate in the vicinity of 25-30°C before the limits of Class H insulation rating and reset dead band of about 15-20°C. The pump/motor manufacturer shall furnish applicable OT sensory components and a complete schematic and wiring diagram.

   b. Motor shall have a moisture leak detector sensory device in the seal chamber or motor housing to detect the collection/leakage of water into the motor housing and actuate designated switch contact signals.

Pump/motor manufacturer shall furnish applicable moisture sensory components and a complete schematic and wiring diagram.

C. Nameplate

1. Pump and Motor Assembly

The pump and motor assembly shall have a stainless-steel nameplate attached to its frame with stainless steel fasteners. The nameplate shall meet the requirements of NEMA MG-1. The following information shall be displayed on the name plate:

a. Manufacturer's name.
b. Model number.
c. Serial number.
d. Rated capacity in gallons per minute.
e. Rated total dynamic head in feet.
f. Pump speed.
g. Bearing information.
h. Motor frame description.
i. Motor horsepower.
j. Service factor.
k. Motor speed.
l. Motor voltage, phases, and frequency.
m. Wiring diagram.
n. Amperage at full and no load.

2.3 Functional Requirements

A. Operation

1. Pumps

Pumps shall be grinder submersible pumps capable of grinding a 3-inch solid.

2. Motor

a. The manufacturer shall coordinate pump operation so that all physical and operational characteristics of the motor are compatible with the requirements of the pump.
b. The motor shall operate efficiently, without overloading, overheating, or abnormal vibration, throughout the entire range of speed and load for the specified impeller.
c. There shall be no point on the pump curves at which the motor name plate rating is overloaded, even momentarily.

d. Motor shall be capable of bi-directional rotation by changing the electrical phase connections of the motor power lead wires.
e. The motor shall be capable of up to 15 evenly spaced starts per hour.
f. The motor shall be able to operate dry without damage while pumping under load.

B. Controls

Per drawings and as approved by engineer.

C. Performance

1. Each pump supplied shall be tested for performance prior to shipment. Testing shall be in accordance with Hydraulic Institute and NEMA MG-1 Standards.
2. Six sets of pump curves shall be provided by the Manufacturer for all operating points.
3. The pump shall operate at a minimum of 25% below its critical shaft speed.
4. Pump's capacity shall be given in gallons per minute and feet of water.
5. The lift station's firm capacity and the number of pumps operating to achieve that capacity shall also be provided.
6. Operating and design requirements shall be listed in the Supplemental Data Sheet provided in Section 4 of this document.
7. The motor shall have normal starting torque and low starting current per specified motor design per NEMA MG-1.
8. All motors, regardless of size, shall have a minimum 1.15 service factor for continuous duty.

2.4 Tools, Spare Parts, and Accessories

A. Tools

A toolbox shall be supplied. The toolbox shall include all tools needed to maintain the pump, including any special tools. Any required metric tools shall be provided.

B. Spare Parts & Spare Pump

1. Spare gaskets and O-rings shall be provided for each pump. One spare seal shall be provided in a sealed factory container for each pump. Provide one spare set of complete over-temperature sensory components. Provide one spare set of complete moisture leak detector sensory components. One spare grinder cutter shall be supplied. Any additional spare parts recommended by the manufacturer shall be provided. One spare pump/motor assembly shall be provided as specified.

2. Furnish spare pump and its accessories and appurtenances. Deliver spare pump at time of station startup and inspection. Owner's receipt of spare pump is required before granting station's final acceptance.

C. Spare Nameplates

Spare nameplates shall be provided for each pump/motor assembly to be mounted on the control panel.

D. Guide Rail System

1. Guide Rail

A guide rail system shall be used to direct the pump in proper alignment with the stationary discharge piping. Supports shall not interfere with removal of pump. The rail system and supports shall be corrosion resistant and shall be fabricated of 316 stainless steel. Guide rails for each pump must be supplied by the pump manufacturer to ensure compatibility with supplied equipment. The pump shall be easily removed for inspection or service. Personnel shall have no reason to enter the wet well. Supports shall be provided for the guide rail for every 8 feet of rail. The supports shall be evenly spaced along the length of the rail.

2. Guide Brackets

The guide brackets and hardware shall be constructed of 316 stainless steel. Guide brackets for each pump must be supplied by the pump manufacturer to ensure compatibility with supplied equipment.

E. Pump Lifting Chain

Each pumping unit shall be provided with a chain sling. The chain sling is a combination of a stainless-steel cable and 3 feet of stainless steel, chain which is connected to the pump. All associated lifting hardware shall be stainless steel. The free end of the cable is connected to the top of the wet well.

F. ITT Flygt Grip-Eye System

Refer to Specification WW-15202, Part 2, Sec. 2.2, Item C.

G. Pump Wire/Cable Support

Furnish pump wire/cable support device for suspended support of pump power cables. Device shall be constructed of 316 stainless steel.

H. Flush Valve or Mixer

A flush valve for each pump or mixer for the lift station shall be provided per design and approved by owner on a case by case basis. Additionally, a blind flange shall be provided to facilitate maintenance and repair of flush valves. Acceptable manufacturers shall be Flygt or approved equal.

I. Hardware

All hardware, fasteners, and pump mounting bolts shall be 316 stainless steel.

PART 3: EXECUTION

3.1 Factory Inspection and Testing

Each pump is to be tested at the factory to determine capacity, shut-off head, rated head, minimum head (for continuous operation), required power, efficiency and as required to develop an accurate performance curve. Certified copies of a report for each test are to be submitted to the Owner. All of the above tests are to be performed in conformity with the requirements and recommendations of the Hydraulic Institute.

3.2 Field Installation and Testing

A. Field Installation

The pump/motor assembly shall be installed according to the manufacturer's recommendations.

B. Field Testing

See Specification WW-01650, “Submersible Startup”.

3.3 Storage and Handling

At all times Contractor shall take such precautions as may be necessary to properly protect all materials and equipment from damage from the time of delivery until the completion of the work.

3.4 Equipment Protection and Restoration

A. All equipment must be boxed, totally enclosed with plastic sheet covering and crated, or otherwise completely enclosed and protected during shipment, handling, and storage.

B. All equipment shall be protected from exposure to the elements and shall be kept thoroughly dry at all times.

C. Painted surfaces shall be protected against impact, abrasion, discoloration, and other damage during shipment.

D. All painted surfaces which are damaged prior to acceptance of equipment shall be re-painted to the satisfaction of the Engineer.

3.5 Required Spare Parts and Accessories

A. Spare gaskets or O-rings.
B. Spare thermal overload.
C. Spare moisture sensor.
D. Motor over-current protection system.
E. Spare grinder cutter.
F. Spare pump/motor assembly.
G. Manufacturer recommended spares.
H. Tools (exclusive to manufacturer)
I. Spare Nameplates.

PART 1: GENERAL

1.1 Scope of Work

Furnish and install lifting apparatus as specified herein and as shown on the plans. The system shall be supplied with a minimum of jib crane, electric hoist, trolley and lifting attachments (i.e. safety hook and chain grabber).

1.2 Applicable Standards and Specifications

TECQ 30 TAC Chapter 317

ANSI, NEC

1.3 Acceptable Manufacturers

A. Jib crane: Anchor Crane, or approved equal
B. Electric hoist: Budgit, or approved equal

1.4 Submittals

Contractor shall submit the following information:

A. Jib crane:

a. Capacity

b. Height

c. Boom length

d. Weight

e. Mounting detail

B. Electric hoist:

a. Dimensional data

b. Weight

c. Voltage

d. Phase

e. Horsepower

f. Chain length

g. Breaking capacity

h. Mounting details

i. Trolley data

1.5 Warranty

One-year warranty from date of final acceptance of station is required.

PART 2: PRODUCTS

2.1 General

Detailed in this specification are the minimum requirements for the jib crane and hoist.

2.2 Construction

A. Jib crane:

a. The crane shall have sufficient capacity to accommodate 2 times the maximum working load at the station. The combined weight of the hoist, trolley and accessories shall be added to the rated load to determine the crane capacity required. In no case shall the capacity rating of the jib arm at the furthest lifting point be less than 2000 lbs.

b. The crane shall have the ability to rotate 360 degrees and shall be equipped with a **spring-loaded rotation/wind lock** and have a **stop block** to prevent the boom from rotating more than 360 degrees.

c. The jib crane shall have sufficient height so that when the pump is fully raised from the wet well, the distance from the top deck of the lift station to the bottom of the pump shall be at least 3 feet.

d. The crane shall be equipped with an electrical collector ring assembly that eliminates fouling of electrical lines to hoisting equipment and permits continuous rotation. The main crane support shall provision for the hoist wiring to be ran inside of the support to the collector ring assembly.

B. Electric hoist:

a. The hoist shall be capable of providing single lift from the pump base to at least 3 feet above the top deck of the lift station. The chain shall be long enough to reach the bottom of the wet well.

b. The hoist shall have integrated contactor control that can be disconnected and stored separately from the hoist.

c. The hoist shall include chain collector box suitable to hold the entire chain.

d. The minimum capacity rating of the electric hoist shall be one-half ton and have a minimum lifting speed of 16 feet per minute.

e. The hoist shall be designed with overload protection for loads up to 10,000 pounds.

f. The hoist shall be permanently hardwired **240-volt prime power with 120-volt control.**

C. ITT Flygt Grip-Eye System

a. All submersible lift station pumps shall be furnished with a pump lifting-chain positive-recovery system consisting of the following components as manufactured by ITT Flygt Corporation, Norwalk, Connecticut:

1. Minimum of 10 meters (33 ft.) of nylon line, of diameter matching weight of lifting chain required, connected to a short length (approximately ten links long) of high tensile strength proof-tested chain of required capacity, connected to the lifting eye or lifting bail of the submersible pump.

2. A forged "grip-eye" of wrought alloy steel, provided separately to connect to the end of the lifting cable or chain of the pump lifting device.

b. Grip-Eye System shall be appropriately sized for weight of pump to be lifted.

2.3 Materials of Construction

A. Jib crane:

a. Crane shall be constructed of steel. It shall be suitable for outdoor use and shall be protected with a weatherproof coating to prevent corrosion. The crane shall have provisions to stop at each end. Crane shall be forest green.

B. Electric hoist:

a. The hoists shall have sturdy lightweight aluminum die-cast housing with modern design.

b. The hoist shall have type IP55 enclosure that ensures high protection against moisture and dust penetration. The hoist shall be equipped with a rain proof cover.

c. Clutch shall be integrated in the first stage gear with asbestos-free linings. The slipping clutch shall act as reliable protection against extreme overloading; and also act as emergency limit switch for the highest and lowest hook position.

d. Chain shall be high strength steel with **zinc plating** to prevent corrosion.

e. The gearbox shall be two-stage gears of coaxial design with oil lubrication. The first stage gear shall be helical design to minimize noise.

f. The motor shall have sliding rotor brake with long life, easily adjustable, conical brake with asbestos-free brake lining. Motor shall be class F insulation for high temperature safety reserve and extended operating periods.

g. The chain drive shall be low tolerance, hardened chain guide with inserts for precise, low wear guidance of the chain.

C. Jib Crane Footing

Jib crane shall be mounted on a concrete footing per design plans and submittals. Concrete footing dimensions, steel reinforcing rods (12 inches on center both ways top and bottom), **stainless steel (304) mounting 'L' anchor bolts**, and anchor bolt pattern shall be sized per capacity ton rating and span of the jib crane. Concrete shall be a minimum of 3000 p.s.i. compressive strength. Existing soil pressure conditions at the construction site shall be incorporated in the design of the footing and noted on the design plans.

PART 3: EXECUTION

Field Installation and Testing

A. Jib crane and hoist shall be installed according to the manufacturer's recommendations.

B. An installation report shall be provided to owner certifying the crane is rated for the published value for this particular installation.

SECTION 13 34 19

PRE-ENGINEERED METAL BUIDLINGS

PART 1 - GENERAL

1.1 SECTION INCLUDES

A. Metal Building Systems Including:

1. Metal Framing Components
2. Metal Wall Panels and Trim
3. Metal Roof panels and trim

1.2 DESIGN REQUIREMENTS

A. The building shall be designed by the Manufacturer as a complete system. Members and connections not indicated on the drawings shall be the responsibility of the Manufacturer and/or Contractor. All components of the system shall be supplied or specified by the same manufacturer.

B. Governing Design Code: Structural design for the metal building system shall be performed by the manufacturer of the metal building system in accordance with the building code provided in the Structural Design Drawings.

C. Design Basis

1. Use standards, specifications, recommendations, findings, and interpretations of professionally recognized groups as basis for establishing design, drafting, fabrication, and quality criteria, practices, and tolerances, including the AISC Code of Standard Practice for Steel Buildings and Bridges.
2. Design structures in accordance with MBMA Metal Building Systems Manual including fabrication and erection tolerances.
3. Design structural mill sections and welded plate sections in accordance with AISC 360, ASD Method.
4. Design the lateral force resisting systems and related components for seismic loads in accordance with AISC 341.
5. Design cold-formed steel structural members and panels in accordance with AISI S-100.
6. Design all bolted joints in accordance with RCSC Specification.
7. Design roof assembly tested in accordance with UL 580 Class 90.
8. Design Roof or Wall assembly to comply Factory Mutual FM 4471 and/or FM 4881 Approval

D. Design Loads:

1. In accordance with Contract Documents and manufacturer's standard design practices.
2. Design loads include dead loads, roof live loads, wind loads, seismic loads, collateral loads, auxiliary loads, floor live loads and applied or specified loads.

1.3 SUBMITTALS

A. Submittals for Review:

1. Shop Drawings:

   a. Complete erection drawings with identification and assembly of building components.
   b. Show anchor bolt settings, transverse cross-sections, sidewall, endwall, and roof framing, flashing and sheeting, and accessory installation details.
   c. Bear seal and signature of Registered Professional Engineer responsible for metal building system design in accordance with state law.

2. Manufacturer installation manual showing:
    a. Preparation instructions and recommendations.
    b. Storage and handling requirements and recommendations.
    c. Installation methods.
3. Structural Design Calculations: [___ sets] sealed and signed by a professional engineer licensed in accordance with applicable state law.
4. Documentation [including test reports] supporting Thermal Transmission Coefficients (U-factors) and Solar Heat Gain Coefficients (SHGC; for non-opaque components only) of

B. Samples:
1. Submit color chips showing manufacturer's full range of available colors and patterns for each finish product.
2. After color selection submit samples representing actual product, color, and patterns.

C. Quality Control Submittals:
1. IAS AC472 Certificate for each facility involved in the design and fabrication of the Metal Building System.
2. Certified Erector Certificate issued to the erector by the manufacturer.

1.4 QUALITY ASSURANCE

A. Manufacturer and Fabricator Qualifications: Primary products furnished by single IAS AC472 accredited manufacturer/fabricator with minimum [5] years of experience.

B. Erector Qualifications:
1. Single installer with minimum [5] years of experience in installing products of same or similar type and scope.
2. Installer must be certified by the metal building manufacturer.

C. Welder Qualifications: AWS D1.1/D1.1M and/or AWS D1.3/D1.3M

1.5 WARRANTY

A. Special Manufacturer's Warranty: On manufacturer's standard form, in which manufacturer agrees to repair or replace metal building system components that fail in materials and workmanship within one year from date of Substantial Completion.

B. Special Weathertightness Warranty: On manufacturer's standard form, in which manufacturer agrees to repair or replace metal building system components that fail to remain weathertight, including leaks, [without monetary limitation] [up to cost limitation of seven dollars ($7.00) per square foot of covered area] [up to cost limitation of fourteen dollars ($14.00) per square foot of covered area] within [5] [10] [15] [20] years from date of Substantial Completion.

1.6 ADMINISTRATION

A. All nomenclature shall conform to the MBMA Metal Building Systems Manual.

B. Coordination and administration of the work shall be in accordance with the MBMA Metal Buidling Systems Manual - Common Industry Practices.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Basis of Design Manufacturer: Star Building Systems, a subsidiary of NCI Building Systems, Inc. (www.starbuildings.com). Other acceptable manufacturers include:
1. Metallic Building Co., subsidiary of NCI Building Systems, Inc. (www.metallic.com)
2. Ceco Building Systems, subsidiary of NCI Building Systems, Inc. (www.cecobuildings.com)

B. Substitutions: Under provisions of Division 01

2.2 MATERIALS

A. Primary Framing Steel:

1. Recycled Content: Post-consumer recycled content plus one-half of pre-consumer recycled content not less than 75 percent.
2. Hot-rolled shapes: ASTM A 36 or ASTM A 992 or ASTM A572, minimum yield of 36 ksi (248 MPa) or 50 ksi (345 MPa).
3. Built-up sections:
    a. Webs:
        1) ASTM A 1011 or ASTM A1018, SS or HSLAS Class 1, Grade 55 (380) for webs 3/16 inch (4.76 mm) thick and thinner.
        2) ASTM A 572 Grade 50 (340) or 55 (380) for webs thicker than 3/16 inch (4.76 mm).
    b. Flanges: ASTM A 529 Grade 55 (380) or ASTM A 572 Grade 50 (340) or 55 (380).
4. Round tube: ASTM A 500, Grade B or C with minimum yield strength of 42 ksi (290 MPa).
5. Square and rectangular tube: ASTM A 500, Grade B or C, minimum yield strength of 42 ksi (290 MPa).
6. Cold-formed C sections: ASTM A 1011, Grade 55 (380), or ASTM A 653, Grade 55 (380).
7. X-bracing: ASTM A 529 or A 572 for rod bracing 36 ksi (248 MPa) or 50 ksi (345 MPa), ASTM A 36 for angle bracing or ASTM A 475 for cable bracing.

B. Secondary Framing Steel:

1. Recycled Content: Post-consumer recycled content plus one-half of pre-consumer recycled content not less than 25 percent.
2. Purlins, girts, and eave struts: ASTM A 1011 Grade 55 (380), or ASTM A 653, Grade 55 (380).
3. Finish: [G-90 Pre-galvanized] [Red Oxide] [Gray] Shop Coat. Shop coat only intended to provide temporary protection during transportation and erection.

C. Bolts

1. Rigid Frame Connections: Provide High Strength Bolts, Nuts and Washers:
    a. Bolts: ASTM A 325 or ASTM A 490 Heavy Hex Structural Type I as required by manufacturer's design.
    b. Washers: [ASTM F 436 Type 1 Hardened Steel] [Not Required].
    c. Nuts: ASTM A 563 Grade C Heavy Hex.
    d. Coating: [ASTM F 1941 Electrodeposited Yellow Zinc] [Hot-Dipped Galvanized].
2. Other Connections: Provide High Strength or Machine Bolts as required by manufacturer design.

D. Single Skin Panels:

1. Recycled Content: Post-consumer recycled content plus one-half of pre-consumer recycled content not less than 25 percent.
2. Standing Seam Roof Panels:
    a. Painted: ASTM A 792 AZ 50 SS Grade 50 Class 4
    b. Bare: ASTM A 792 AZ 55 SS Grade 50 Class 4
3. Through-Fastened Roof and Wall Panels:
    a. Painted: ASTM A792 AZ 50 SS Grade 80 Class 1
    b. Bare: ASTM A 792 AZ 55 SS Grade 80 Class 1
4. Thickness:
    a. 26 gauge: 0.0172 inch (0.437 mm) minimum uncoated thickness.
    b. 24 gauge: 0.0212 inch (0.538 mm) minimum uncoated thickness.

c. 22 gauge: 0.0272 inch (0.690 mm) minimum uncoated thickness.

5. Finish:

a. Exterior Paint:

1) Fluoropolymer Two-Coat Metallic System (PVDF Metallic): 0.2 - 0.3 mil primer with 0.7 - 0.8 mil 70 percent PVDF metallic fluoropolymer color coat. Basis of Design: Signature 300 Metallic.

E. Metal Wall Panels

1. Labeling: Labeled through [a nationally recognized program] [FM Global], identifying the manufacturer, product name and model and product listings required in this section.
2. Fire Resistance:

a. FM 4880 Class 1 Approval with no height restrictions.
b. Flame Spread and Smoke Developed Index: The Flame Spread Index shall not exceed 25 and the Smoke Developed Index shall not exceed 450 when tested to ASTM E 84.

3. Panel Strength: Determine and certify panel allowable strengths as follows:

a. Positive Loading (Toward Panel Supports): Determine in accordance with ASTM E 72.
b. Negative Loading (Away from Panel Supports): Determine in accordance with ASTM E 1592.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean surfaces prior to installation.

B. Prepare surfaces using methods recommended by manufacturer for best result for substrate.

3.2 INSTALLATION

A. Install system in accordance with manufacturer's instructions and approved Shop Drawings.

B. Fit members square against abutting components.

C. Position members plumb, square, and level.

D. Temporarily brace members until permanently fastened.

E. Do not splice load bearing members.

F. Align and adjust various members forming parts of a complete frame or structure after assembly but before fastening.

G. Welding to conform to AWS D1.1.

H. Fasten panels to supports.

I. Install trim to maintain visual continuity of system.

J. Install joint sealant and gaskets to prevent water penetration.

K. Flash penetrations through roofing with metal trim to match panels

3.3 PROTECTION

A. Protect installed products until completion of project.

3.4 ADJUSTMENT

A. Touch up, repair, or replace damaged products before Substantial Completion.

SECTION 260519

LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Copper building wire rated 600 V or less.
2. Connectors, splices, and terminations rated 600 V and less.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Sustainable Design Submittals: Provide product data as required for LEED certification

C. Product Schedule: Indicate type, use, location, and termination locations

1.3 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

PART 2 - PRODUCTS

2.1 COPPER BUILDING WIRE

A. Description: Flexible, insulated and uninsulated, drawn copper current-carrying conductor with an overall insulation layer or jacket, or both, rated 600 V or less.

B. Standards:
1. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.
2. RoHS compliant.
3. Conductor and Cable Marking: Comply with wire and cable marking according to UL's "Wire and Cable Marking and Application Guide."

C. Conductors: Copper, complying with ASTM B 3 for bare annealed copper and with ASTM B 8 for stranded conductors.

D. Conductor Insulation:
1. Type THHN and Type THWN-2: Comply with UL 83.
2. Type THW and Type THW-2: Comply with NEMA WC-70/ICEA S-95-658 and UL 83.
3. Type XHHW-2: Comply with UL 44.

2.2 CONNECTORS AND SPLICES

A. Description: Factory-fabricated connectors, splices, and lugs of size, ampacity rating, material, type, and class for application and service indicated; listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and use.

B. Jacketed Cable Connectors: For steel and aluminum jacketed cables, zinc die-cast with set screws, designed to connect conductors specified in this Section.

C. Lugs: One piece, seamless, designed to terminate conductors specified in this Section.
   1. Material: Copper.
   2. Type: Two hole with standard barrels.
   3. Termination: Compression.

PART 3 - EXECUTION

3.1 CONDUCTOR MATERIAL APPLICATIONS

A. Feeders: Copper; solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.

B. Feeders: Copper for feeders smaller than No. 4 AWG; copper for feeders No. 4 AWG and larger. Conductors shall be solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.

C. Branch Circuits: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.

3.2 CONDUCTOR INSULATION APPLICATIONS AND WIRING METHODS

A. Service Entrance, Feeders, and Branch-Circuits: Type THHN/THWN-2, single conductors in raceway

3.3 INSTALLATION OF CONDUCTORS AND CABLES

A. Conceal cables in finished walls, ceilings, and floors unless otherwise indicated.

B. Complete raceway installation between conductor and cable termination points according to Section SS26 05 33 "Raceways and Boxes for Electrical Systems" prior to pulling conductors and cables.

C. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.

D. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.

E. Install exposed cables parallel and perpendicular to surfaces of exposed structural members and follow surface contours where possible.

F. Support cables according to Section SS26 05 29 "Hangers and Supports for Electrical Systems."

3.4 CONNECTIONS

A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A-486B.

B. Make splices, terminations, and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.
   1. Use oxide inhibitor in each splice, termination, and tap for aluminum conductors.

C. Wiring at Outlets: Install conductor at each outlet, with at least 12 inches (300 mm) of slack.

3.5 IDENTIFICATION

A. Identify and color-code conductors and cables according to Section SS26 05 53 "Identification for Electrical Systems."

B. Identify each spare conductor at each end with identity number and location of other end of conductor and identify as spare conductor.

3.6 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies.

B. Where conduits enter building from below slab, seal between concrete and sleeve as well as between sleeve and conduit.

PART 4 – MEASUREMENT AND PAYMENT

4.1 MEASUREMENT AND PAYMENT

A. Measurement and payment for items in this Section shall be on a lump sum basis.

B. Pay Items:

The Division 26 pay item includes all materials, labor, transportation incidental and services required for electrical work as shown on the plans. It is the intent of this pay item that all equipment, devices, materials, systems, and appurtenances, etc. which are required for the electrical work shall be lump sum. Refer to the Bid Tabulation for information on further breakdown.

END OF SECTION 26 05 19

SECTION 260526

GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes grounding and bonding systems and equipment.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Plans showing dimensioned as-built locations of grounding features specified in "Field Quality Control" Article.

B. Qualification Data: For testing agency and testing agency's field supervisor.

C. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

1. Plans showing as-built, dimensioned locations of grounding features specified in "Field Quality Control" Article, including the following:

a. Test wells.

b. Ground rods.

2. Instructions for periodic testing and inspection of grounding features at test wells based on NFPA 70B.

a. Tests shall determine if ground-resistance or impedance values remain within specified maximums, and instructions shall recommend corrective action if values do not.

b. Include recommended testing intervals.

1.5 QUALITY ASSURANCE

A. Testing Agency Qualifications: Certified by NETA.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Comply with UL 467 for grounding and bonding materials and equipment.

2.2 CONDUCTORS

A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by applicable Code or authorities having jurisdiction.

B. Bare Copper Conductors:
   1. Solid Conductors: ASTM B 3.
   2. Stranded Conductors: ASTM B 8.
   3. Tinned Conductors: ASTM B 33.
   4. Bonding Cable: 28 kcmil, 14 strands of No. 17 AWG conductor, 1/4 inch (6 mm) in diameter.
   5. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor.
   6. Bonding Jumper: Copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches (41 mm) wide and 1/16 inch (1.6 mm) thick.

2.3 CONNECTORS

A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.

B. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

C. Bus-Bar Connectors: Compression type, copper or copper alloy, with two wire terminals.

D. Cable-to-Cable Connectors: Compression type, copper or copper alloy.

E. Conduit Hubs: Mechanical type, terminal with threaded hub.

F. Ground Rod Clamps: Mechanical type, copper or copper alloy, terminal with hex head bolt.

G. Lay-in Lug Connector: Mechanical type, copper rated for direct burial terminal with set screw.

H. Service Post Connectors: Mechanical type, bronze alloy terminal, in short- and long-stud lengths, capable of single and double conductor connections.

I. Signal Reference Grid Clamp: Mechanical type, stamped-steel terminal with hex head screw.

J. Straps: Solid copper, copper lugs. Rated for 600 A.

K. U-Bolt Clamps: Mechanical type, copper or copper alloy, terminal listed for direct burial.

L. Water Pipe Clamps:
   1. Mechanical type, two pieces with stainless-steel bolts.
      a. Material: Tin-plated aluminum.
      b. Listed for direct burial.
   2. U-bolt type with malleable-iron clamp and copper ground connector rated for direct burial.

2.4 GROUNDING ELECTRODES

A. Ground Rods: Copper-clad steel; 3/4 inch by 10 feet (19 mm by 3 m).

PART 3 - EXECUTION

3.1 APPLICATIONS

A. Conductors: Install solid conductor for No. 8 AWG and smaller, and stranded conductors for No. 6 AWG and larger unless otherwise indicated.

B. Underground Grounding Conductors: Install bare copper conductor, No. 2/0 AWG minimum.

1. Bury at least 24 inches (600 mm) below grade.

C. Conductor Terminations and Connections:

1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
2. Underground Connections: Welded connectors except at test wells and as otherwise indicated.
3. Connections to Ground Rods at Test Wells: Bolted connectors.
4. Connections to Structural Steel: Welded connectors.

3.2 EQUIPMENT GROUNDING

A. Install insulated equipment grounding conductors with all feeders and branch circuits.

B. Install insulated equipment grounding conductors with the following items, in addition to those required by NFPA 70:

1. Feeders and branch circuits.
2. Lighting circuits.

C. Poles Supporting Outdoor Lighting Fixtures: Install grounding electrode and a separate insulated equipment grounding conductor in addition to grounding conductor installed with branch-circuit conductors.

3.3 INSTALLATION

A. Grounding Conductors: Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.

B. Ground Rods: Drive rods until tops are 2 inches (50 mm) below finished floor or final grade unless otherwise indicated.

1. Interconnect ground rods with grounding electrode conductor below grade and as otherwise indicated. Make connections without exposing steel or damaging coating if any.

C. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.

1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.
2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.
3. Use exothermic-welded connectors for outdoor locations; if a disconnect-type connection is required, use a bolted clamp.

3.4 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:

1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal, at ground test wells, and at individual ground rods. Make tests at ground rods before any conductors are connected.
   a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
   b. Perform tests by fall-of-potential method according to IEEE 81.
4. Prepare dimensioned Drawings locating each test well, ground rod and ground-rod assembly, and other grounding electrodes. Identify each by letter in alphabetical order, and key to the record of tests and observations. Include the number of rods driven and their depth at each location and include observations of weather and other phenomena that may affect test results. Describe measures taken to improve test results.

C. Grounding system will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

E. Report measured ground resistances that exceed the following values:

1. Power and Lighting Equipment or System with Capacity of 500 kVA and Less: 10 ohms.
2. Power and Lighting Equipment or System with Capacity of 500 to 1000 kVA: 5 ohms.

F. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Architect promptly and include recommendations to reduce ground resistance.

PART 4 – MEASUREMENT AND PAYMENT

4.1 MEASUREMENT AND PAYMENT

A. Measurement and payment for items in this Section shall be on a lump sum basis.

B. Pay Items:

The Division 26 pay item includes all materials, labor, transportation incidental and services required for electrical work as shown on the plans. It is the intent of this pay item that all equipment, devices, materials, systems, and appurtenances, etc. which are required for the electrical work shall be lump sum. Refer to the Bid Tabulation for information on further breakdown.

END OF SECTION 26 05 26

SECTION 260529

HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Steel slotted support systems.
   2. Conduit and cable support devices.
   3. Structural steel for fabricated supports and restraints.
   4. Mounting, anchoring, and attachment components, including powder-actuated fasteners, mechanical expansion anchors, concrete inserts, clamps, through bolts, toggle bolts, and hanger rods.
   5. Fabricated metal equipment support assemblies.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For fabrication and installation details for electrical hangers and support systems.
   1. Hangers. Include product data for components.
   2. Slotted support systems.
   3. Equipment supports.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Details, drawn to scale, and coordinated with each other, using input from installers of the items involved.

B. Welding certificates.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
   1. Flame Rating: Class 1.
   2. Self-extinguishing according to ASTM D 635.

2.2 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

A. Steel Slotted Support Systems: Preformed steel channels and angles with minimum 13/32-inch- (10-mm-) diameter holes at a maximum of 8 inches (200 mm) o.c. in at least one surface.
   1. Standard: Comply with MFMA-4 factory-fabricated components for field assembly.
   2. Material for Channel, Fittings, and Accessories: Galvanized steel in all areas other than wet/chemical where Stainless steel, Type 304 is required.
   3. Channel Width: Selected for applicable load criteria.
   4. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-4.
   5. Nonmetallic Coatings: Manufacturer's standard PVC, polyurethane, or polyester coating applied according to MFMA-4.
   6. Painted Coatings: Manufacturer's standard painted coating applied according to MFMA-4.
   7. Protect finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Conduit and Cable Support Devices: Steel hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.

C. Structural Steel for Fabricated Supports and Restraints: ASTM A 36/A 36M steel plates, shapes, and bars; black and galvanized.

D. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:
   1. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened Portland cement concrete, steel, or wood, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.
   2. Mechanical-Expansion Anchors: Insert-wedge-type, stainless steel, for use in hardened Portland cement concrete, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.
   3. Concrete Inserts: Steel or malleable-iron, slotted support system units are similar to MSS Type 18 units and comply with MFMA-4 or MSS SP-58.
   4. Clamps for Attachment to Steel Structural Elements: MSS SP-58 units are suitable for attached structural element.
   5. Through Bolts: Structural type, hex head, and high strength. Comply with ASTM A 325.
   6. Toggle Bolts: All-steel springhead type.

2.3 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES

A. Description: Welded or bolted structural-steel shapes, shop or field fabricated to fit dimensions of supported equipment.

B. Materials: Comply with requirements in Section 05 5000 "Metal Fabrications" for steel shapes and plates.

PART 3 - EXECUTION

3.1 APPLICATION

A. Comply with the following standards for application and installation requirements of hangers and supports, except where requirements on Drawings or in this Section are stricter:
   1. NECA 1.
   2. NECA 101
   3. NECA 102.
   4. NECA 105.
   5. NECA 111.

B. Comply with requirements for raceways and boxes specified in Section SS26 05 33 "Raceways and Boxes for Electrical Systems."

C. Maximum Support Spacing and Minimum Hanger Rod Size for Raceways: Space supports for EMT and RMC as scheduled in NECA 1, where its Table 1 lists maximum spacings that are less than those stated in NFPA 70.

D. Multiple Raceways or Cables: Install supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.
   1. Secure raceways and cables to these supports with two-bolt conduit clamps.

E. Spring-steel clamps designed for supporting single conduits without bolts may be used for 1-1/2-inch (38-mm) and smaller raceways serving branch circuits and for fastening raceways to trapeze supports.

3.2 SUPPORT INSTALLATION

A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this article.

B. Raceway Support Methods: In addition to methods described in NECA 1, EMT and RMC may be supported by openings through structure members, according to NFPA 70.

C. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb (90 kg).

D. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:
   1. To Wood: Fasten with lag screws or through bolts.
   2. To Concrete: Bolt to concrete inserts.
   3. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
   4. Instead of expansion anchors, powder-actuated driven threaded studs provided with lock washers and nuts may be used in existing standard-weight concrete 4 inches (100 mm) thick or greater. Do not use for anchorage to lightweight-aggregate concrete or for slabs less than 4 inches (100 mm) thick.
   5. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate by means that comply with anchorage requirements.

E. Drill holes for expansion anchors in concrete at locations and to depths that avoid the need for reinforcing bars.

3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

A. Comply with installation requirements in Metal Fabrications section for site-fabricated metal supports.

B. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.

C. Field Welding: Comply with AWS D1.1/D1.1M.

PART 4 – MEASUREMENT AND PAYMENT

4.1 MEASUREMENT AND PAYMENT

A. Measurement and payment for items in this Section shall be on a lump sum basis.

B. Pay Items:

The Division 26 pay item includes all materials, labor, transportation incidental and services required for electrical work as shown on the plans. It is the intent of this pay item that all equipment, devices, materials, systems, and appurtenances, etc. which are required for the electrical work shall be lump sum. Refer to the Bid Tabulation for information on further breakdown.

END OF SECTION 26 05 29

SECTION 260533

RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Metal conduits and fittings.
   2. Nonmetallic conduits and fittings.
   3. Surface raceways.
   4. Boxes, enclosures, and cabinets.
   5. Handholes and boxes for exterior underground cabling.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For custom enclosures and cabinets. Include plans, elevations, sections, and attachment details.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Conduit routing plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of items involved:
   1. Structural members in paths of conduit groups with common supports.
   2. HVAC and plumbing items and architectural features in paths of conduit groups with common supports.

PART 2 - PRODUCTS

2.1 METAL CONDUITS AND FITTINGS

A. Metal Conduit:
   1. Listing and Labeling: Metal conduits, tubing, and fittings shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
   2. GRC: Comply with ANSI C80.1 and UL 6.
   3. PVC-Coated Steel Conduit: PVC-coated rigid steel conduit.
      a. Comply with NEMA RN 1.
      b. Coating Thickness: 0.040 inch (1 mm), minimum.
   4. EMT: Comply with ANSI C80.3 and UL 797.
   5. FMC: Comply with UL 1; zinc-coated steel.

6. LFMC: Flexible steel conduit with PVC jacket and complying with UL 360.

B. Metal Fittings: Comply with NEMA FB 1 and UL 514B.
   1. Listing and Labeling: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
   2. Fittings, General: Listed and labeled for type of conduit, location, and use.
   3. Conduit Fittings for Hazardous (Classified) Locations: Comply with UL 1203 and NFPA 70.
   4. Fittings for EMT:
      a. Material: Steel.
      b. Type: Compression.
   5. Coating for Fittings for PVC-Coated Conduit: Minimum thickness of 0.040 inch (1 mm), with overlapping sleeves protecting threaded joints.

C. Joint Compound for GRC: Approved, as defined in NFPA 70, by authorities having jurisdiction for use in conduit assemblies, and compounded for use to lubricate and protect threaded conduit joints from corrosion and to enhance their conductivity.

2.2 NONMETALLIC CONDUITS AND FITTINGS

A. Listing and Labeling: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
   1. ENT: Comply with NEMA TC 13 and UL 1653.

B. Nonmetallic Fittings:
   1. Fittings, General: Listed and labeled for type of conduit, location, and use.
   2. Fittings for ENT: Comply with NEMA TC 3; match to conduit or tubing type and material.
   3. Solvents and Adhesives: As recommended by conduit manufacturer.

2.3 BOXES, ENCLOSURES, AND CABINETS

A. General Requirements for Boxes, Enclosures, and Cabinets: Boxes, enclosures, and cabinets installed in wet locations shall be listed for use in wet locations.

B. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.

C. Cast-Metal Access, Pull, and Junction Boxes: Comply with NEMA FB 1 and UL 1773, cast aluminum with gasketed cover.

D. Box extensions used to accommodate new building finishes shall be of same material as recessed box.

E. Hinged-Cover Enclosures: Comply with UL 50 and NEMA 250, Type 1 (interior), Type 3R (exterior) or Type 4 (chemical) with continuous-hinge cover with flush latch unless otherwise indicated.
   1. Metal Enclosures: Steel, finished inside and out with manufacturer's standard enamel.

2. Interior Panels: Steel; all sides finished with manufacturer's standard enamel.

F. Cabinets:
1. NEMA 250, Type 1 (interior), Type 3R (exterior) or Type 4 (chemical) galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
2. Hinged door in front cover with flush latch and concealed hinge.
3. Key latch to match panelboards.
4. Metal barriers to separate wiring of different systems and voltage.
5. Accessory feet where required for freestanding equipment.

2.4 HANDHOLES AND BOXES FOR EXTERIOR UNDERGROUND WIRING

A. General Requirements for Handholes and Boxes:
1. Boxes and handholes for use in underground systems shall be designed and identified as defined in NFPA 70, for intended location and application.
2. Boxes installed in wet areas shall be listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Polymer-Concrete Handholes and Boxes with Polymer-Concrete Cover: Molded of sand and aggregate, bound together with polymer resin, and reinforced with steel, fiberglass, or a combination of the two.
1. Standard: Comply with SCTE 77.
2. Configuration: Designed for flush burial with open bottom unless otherwise indicated.
3. Cover: Weatherproof, secured by tamper-resistant locking devices and having structural load rating consistent with enclosure and handhole location.
4. Cover Finish: Nonskid finish shall have a minimum coefficient of friction of 0.50.
5. Cover Legend: Molded lettering, "ELECTRICAL.".
6. Conduit Entrance Provisions: Conduit-terminating fittings shall mate with entering ducts for secure, fixed installation in enclosure wall.

PART 3 - EXECUTION

3.1 RACEWAY APPLICATION

A. Outdoors: Apply raceway products as specified below unless otherwise indicated:
1. Exposed Conduit: GRC.
2. Concealed Conduit, Aboveground: EMT.
3. Underground Conduit: RNC, Type EPC-40-PVC direct buried.
4. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.
5. Boxes and Enclosures, Aboveground: NEMA 250, Type 3R.

B. Indoors: Apply raceway products as specified below unless otherwise indicated.
1. Exposed, Not Subject to Physical Damage: GRC.

2. Exposed and Subject to Physical Damage: GRC.
3. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): FMC, except use LFMC in damp or wet locations.
4. Damp or Wet Locations: GRC.
5. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4 stainless steel in wet/chemical locations.

C. Minimum Raceway Size: 3/4-inch (21-mm) trade size.

D. Raceway Fittings: Compatible with raceways and suitable for use and location.
1. Rigid and Intermediate Steel Conduit: Use threaded rigid steel conduit fittings unless otherwise indicated. Comply with NEMA FB 2.10.
2. PVC Externally Coated, Rigid Steel Conduits: Use only fittings listed for use with this type of conduit. Patch and seal all joints, nicks, and scrapes in PVC coating after installing conduits and fittings. Use sealant recommended by fitting manufacturer and apply in thickness and number of coats recommended by manufacturer.
3. EMT: Use compression, steel fittings. Comply with NEMA FB 2.10.
4. Flexible Conduit: Use only fittings listed for use with flexible conduit. Comply with NEMA FB 2.20.

E. Do not install aluminum conduits, boxes, or fittings in contact with concrete or earth.

F. Install surface raceways only where indicated on Drawings.

3.2 INSTALLATION

A. Comply with NECA 1 and NECA 101 for installation requirements except where requirements on Drawings or in this article are stricter. Comply with NECA 102 for aluminum conduits. Comply with NFPA 70 limitations for types of raceways allowed in specific occupancies and number of floors.

B. Comply with requirements in Section 26 0529 "Hangers and Supports for Electrical Systems" for hangers and supports.

C. Arrange stub-ups so curved portions of bends are not visible above finished slab.

D. Install no more than the equivalent of three 90-degree bends in any conduit run except for control wiring conduits, for which fewer bends are allowed. Support within 12 inches (300 mm) of changes in direction.

E. Conceal conduit and EMT within finished walls, ceilings, and floors unless otherwise indicated. Install conduits parallel or perpendicular to building lines.

F. Support conduit within 12 inches (300 mm) of enclosures to which attached.

G. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.

H. Coat field-cut threads on PVC-coated raceway with a corrosion-preventing conductive compound prior to assembly.

I. Raceway Terminations at Locations Subject to Moisture or Vibration: Use insulating bushings to protect conductors including conductors smaller than No. 4 AWG.

J. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install bushings on conduits up to 1-1/4-inch (35-mm) trade size and insulated throat metal bushings on 1-1/2-inch (41-mm) trade size and larger conduits terminated with locknuts. Install insulated throat metal grounding bushings on service conduits.

K. Install pull wires in empty raceways. Use polypropylene or monofilament plastic line with not less than 200-lb (90-kg) tensile strength. Leave at least 12 inches (300 mm) of slack at each end of pull wire. Cap underground raceways designated as spare above grade alongside raceways in use.

L. Surface Raceways:
   1. Install surface raceway with a minimum 2-inch (50-mm) radius control at bend points.
   2. Secure surface raceway with screws or other anchor-type devices at intervals not exceeding 48 inches (1200 mm) and with no less than two supports per straight raceway section. Support surface raceway according to manufacturer's written instructions. Tape and glue are not acceptable support methods.

M. Install raceway sealing fittings at accessible locations according to NFPA 70 and fill them with listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces.

N. Install devices to seal raceway interiors at accessible locations. Locate seals so no fittings or boxes are between the seal and the following changes of environments. Seal the interior of all raceways at the following points:
   1. Where conduits pass from warm to cold locations, such as boundaries of refrigerated spaces.
   2. Where an underground service raceway enters a building or structure.
   3. Where otherwise required by NFPA 70.

O. Flexible Conduit Connections: Comply with NEMA RV 3. Use a maximum of 72 inches (1830 mm) of flexible conduit for recessed and semi-recessed luminaires, equipment subject to vibration, noise transmission, or movement; and for transformers and motors.
   1. Use LFMC in damp or wet locations subject to severe physical damage.
   2. Use LFMC in damp or wet locations not subject to severe physical damage.

P. Fasten junction and pull boxes to or support from building structure. Do not support boxes by conduits.

3.3 INSTALLATION OF UNDERGROUND CONDUIT

A. Direct-Buried Conduit:
   1. Excavate trench bottom to provide firm and uniform support for conduit.
   2. After installing conduit, backfill and compact. Start at tie-in point, and work toward end of conduit run, leaving conduit at end of run free to move with expansion and contraction as temperature changes during this process. Firmly hand tamp backfill around conduit to provide maximum supporting strength. After placing controlled backfill to within 12 inches (300 mm) of finished grade, make final conduit connection at end of run and complete backfilling with normal compaction as specified in Section 31 2000 "Earth Moving."
   3. Install manufactured duct elbows for stub-up at poles and equipment and at building entrances through floor unless otherwise indicated. Encase elbows for stub-up ducts throughout length of elbow.
   4. Install manufactured rigid steel conduit elbows for stub-ups at poles and equipment and at building entrances through floor.
      a. Couple steel conduits to ducts with adapters designed for this purpose, and encase coupling with 3 inches (75 mm) of concrete for a minimum of 12 inches (300 mm) on each side of the coupling.
      b. For stub-ups at equipment mounted on outdoor concrete bases and where conduits penetrate building foundations, extend steel conduit horizontally a minimum of 60 inches (1500 mm) from edge of foundation or equipment base. Install insulated grounding bushings on terminations at equipment.
   5. Underground Warning Tape: Comply with requirements in Section 26 0553 "Identification for Electrical Systems."

3.4 INSTALLATION OF UNDERGROUND HANDHOLES AND BOXES

A. Install handholes and boxes level and plumb and with orientation and depth coordinated with connecting conduits to minimize bends and deflections required for proper entrances.

B. Unless otherwise indicated, support units on a level bed of crushed stone or gravel, graded from 1/2-inch (12.5-mm) sieve to No. 4 (4.75-mm) sieve and compacted to same density as adjacent undisturbed earth.

C. Elevation: In paved areas, set so cover surface will be flush with finished grade. Set covers of other enclosures 1 inch (25 mm) above finished grade.

D. Install handholes with bottom below frost line, below grade.

E. Field-cut openings for conduits according to enclosure manufacturer's written instructions. Cut wall of enclosure with a tool designed for material to be cut. Size holes

for terminating fittings to be used, and seal around penetrations after fittings are installed.

3.5 PROTECTION

A. Protect coatings, finishes, and cabinets from damage and deterioration.
   1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
   2. Repair damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

PART 4 – MEASUREMENT AND PAYMENT

4.1 MEASUREMENT AND PAYMENT

A. Measurement and payment for items in this Section shall be on a lump sum basis.

B. Pay Items:

The Division 26 pay item includes all materials, labor, transportation incidental and services required for electrical work as shown on the plans. It is the intent of this pay item that all equipment, devices, materials, systems, and appurtenances, etc. which are required for the electrical work shall be lump sum. Refer to the Bid Tabulation for information on further breakdown.

END OF SECTION 26 05 33

SECTION 260553

IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes Color and legend requirements for raceways, conductors, and warning labels and signs, and all materials required for identification.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Comply with ASME A13.1 and IEEE C2.

B. Comply with NFPA 70.

C. Comply with 29 CFR 1910.144 and 29 CFR 1910.145.

D. Comply with ANSI Z535.4 for safety signs and labels.

E. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, shall comply with UL 969.

F. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.

2.2 COLOR AND LEGEND REQUIREMENTS

A. Raceways and Cables Carrying Circuits at 600 V or Less:
   1. Black letters on an orange field.
   2. Legend: Indicate voltage and system or service type.

B. Color-Coding for Phase- and Voltage-Level Identification, 600 V or Less: Match existing branch-circuit and feeder color-coding for ungrounded conductors.
   1. Color shall be factory applied or field applied for sizes larger than No. 8 AWG if authorities having jurisdiction permit.

2. Color for Equipment Grounds: Green.

C. Warning Label Colors:
1. Identify system voltage with black letters on an orange background.

D. Warning labels and signs shall include, but are not limited to, the following legends:
1. Multiple Power Source Warning: "DANGER - ELECTRICAL SHOCK HAZARD - EQUIPMENT HAS MULTIPLE POWER SOURCES."
2. Workspace Clearance Warning: "WARNING - OSHA REGULATION - AREA IN FRONT OF ELECTRICAL EQUIPMENT MUST BE KEPT CLEAR FOR 36 INCHES (915 MM)."

E. Equipment Identification Labels:
1. Black letters on a white field.

2.3 LABELS

A. Vinyl Wraparound Labels: Preprinted, flexible labels laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing label ends.

B. Snap-around Labels: Slit, pre-tensioned, flexible, preprinted, color-coded acrylic sleeves, with diameters sized to suit diameter and that stay in place by gripping action.

C. Self-Adhesive Wraparound Labels: Preprinted 3-mil- (0.08-mm-) thick, vinyl flexible label with acrylic pressure-sensitive adhesive.
1. Self-Lamination: Clear; UV-, weather- and chemical-resistant; self-laminating, protective shield over the legend. Labels sized such that the clear shield overlaps the entire printed legend.
2. Marker for Labels: Machine-printed, permanent, waterproof, black ink recommended by printer manufacturer.

D. Self-Adhesive Labels: Vinyl, thermal, transfer-printed, 3-mil- (0.08-mm-) thick, multicolor, weather- and UV-resistant, pressure-sensitive adhesive labels, configured for intended use and location.
1. Minimum Nominal Size:
a. 1-1/2 by 6 inches (37 by 150 mm) for raceway and conductors.
b. 3-1/2 by 5 inches (76 by 127 mm) for equipment.
c. As required by authorities having jurisdiction.

2.4 BANDS AND TUBES

A. Snap-around, Color-Coding Bands: Slit, pretensioned, flexible, solid-colored acrylic sleeves, 2 inches (50 mm) long, with diameters sized to suit diameter and that stay in place by gripping action.

B. Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tubes with machine-printed identification labels, sized to suit diameters of and shrunk to fit firmly around item being

identified. Full shrink recovery occurs at a maximum of 200 deg F (93 deg C). Comply with UL 224.

2.5 TAPES AND STENCILS

A. Marker Tapes: Vinyl or vinyl-cloth, self-adhesive wraparound type, with circuit identification legend machine printed by thermal transfer or equivalent process.

B. Self-Adhesive Vinyl Tape: Colored, heavy duty, waterproof, fade resistant; not less than 3 mils (0.08 mm) thick by 1 to 2 inches (25 to 50 mm) wide; compounded for outdoor use.

C. Tape and Stencil: 4-inch- (100-mm-) wide black stripes on 10-inch (250-mm) centers placed diagonally over orange background and is 12 inches (300 mm) wide. Stop stripes at legends.

D. Underground-Line Warning Tape:
   1. Tape:
      a. Recommended by manufacturer for the method of installation and suitable to identify and locate underground electrical and communication utility lines.
      b. Printing on tape shall be permanent and shall not be damaged by burial operations.
      c. Tape material and ink shall be chemically inert and not subject to degradation when exposed to acids, alkalis, and other destructive substances commonly found in soils.
   2. Color and Printing:
      a. Comply with ANSI Z535.1, ANSI Z535.2, ANSI Z535.3, ANSI Z535.4, and ANSI Z535.5.
      b. Inscriptions for Yellow-Colored Tapes: "ELECTRIC LINE, HIGH VOLTAGE" Inscriptions for Orange-Colored Tapes: "TELEPHONE CABLE, CATV CABLE, COMMUNICATIONS CABLE, OPTICAL FIBER CABLE."
   3. Tag:
      a. Detectable three-layer laminate, consisting of a printed pigmented polyolefin film, a solid aluminum-foil core, and a clear protective film that allows inspection of the continuity of the conductive core; bright colored, compounded for direct-burial service.
      b. Width: 3 inches (75 mm).
      c. Overall Thickness: 5 mils (0.125 mm).
      d. Foil Core Thickness: 0.35 mil (0.00889 mm).
      e. Weight: 28 lb/1000 sq. ft. (13.7 kg/100 sq. m).
      f. Tensile according to ASTM D 882: 70 lbf (311.3 N) and 4600 psi (31.7 MPa).

E. Stenciled Legend: In nonfading, waterproof, black ink or paint. Minimum letter height shall be 1 inch (25 mm).

2.6 TAGS

A. Write-on Tags:
   1. Polyester Tags: 0.010 inch (0.25 mm) thick, with corrosion-resistant grommet and cable tie for attachment.
   2. Marker for Tags: Permanent, waterproof, black ink marker recommended by tag manufacturer.
   3. Marker for Tags: Machine-printed, permanent, waterproof, black ink marker recommended by printer manufacturer.

2.7 SIGNS

A. Laminated Acrylic or Melamine Plastic Signs:
   1. Engraved legend.
   2. Thickness:
      a. For signs up to 20 sq. in. (129 sq. cm), minimum 1/16 inch (1.6 mm) thick.
      b. For signs larger than 20 sq. in. (129 sq. cm), 1/8 inch (3.2 mm) thick.
      c. Engraved legend with white letters on a black background.
      d. Self-adhesive.
      e. Framed with mitered acrylic molding and arranged for attachment at applicable equipment.

2.8 CABLE TIES

A. General-Purpose Cable Ties: Fungus inert, self-extinguishing, one piece, self-locking, and Type 6/6 nylon.
   1. Minimum Width: 3/16 inch (5 mm).
   2. Tensile Strength at 73 Deg F (23 Deg C) according to ASTM D 638: 12,000 psi (82.7 MPa).
   3. Temperature Range: Minus 40 to plus 185 deg F (Minus 40 to plus 85 deg C).
   4. Color: Black, except where used for color-coding.

B. UV-Stabilized Cable Ties: Fungus inert, designed for continuous exposure to exterior sunlight, self-extinguishing, one piece, self-locking, and Type 6/6 nylon.
   1. Minimum Width: 3/16 inch (5 mm).
   2. Tensile Strength at 73 Deg F (23 Deg C) according to ASTM D 638: 12,000 psi (82.7 MPa).
   3. Temperature Range: Minus 40 to plus 185 deg F (Minus 40 to plus 85 deg C).
   4. Color: Black.

2.9 MISCELLANEOUS IDENTIFICATION PRODUCTS

A. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws or stainless-steel machine screws with nuts and flat and lock washers.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Verify and coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and operation and maintenance manual. Use consistent designations throughout Project.

B. Install identifying devices before installing acoustical ceilings and similar concealment.

C. Verify identity of each item before installing identification products.

D. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and operation and maintenance manual.

E. Apply identification devices to surfaces that require finish after completing finish work.

F. Install signs with approved legend to facilitate proper identification, operation, and maintenance of electrical systems and connected items.

G. Self-Adhesive Identification Products: Before applying electrical identification products, clean substrates of substances that could impair bond, using materials and methods recommended by manufacturer of identification product.

H. System Identification for Raceways and Cables under 600 V: Identification shall completely encircle cable or conduit. Place identification of two-color markings in contact, side by side.
   1. Secure tight to surface of conductor, cable, or raceway.

I. Vinyl Wraparound Labels:
   1. Secure tight to surface at a location with high visibility and accessibility.
   2. Attach labels that are not self-adhesive type with clear vinyl tape, with adhesive appropriate to the location and substrate.

J. Snap-around Labels: Secure tight to surface at a location with high visibility and accessibility.

K. Self-Adhesive Wraparound Labels: Secure tight to surface of raceway or cable at a location with high visibility and accessibility.

L. Self-Adhesive Labels:
   1. On each unit of equipment, install unique designation label that is consistent with wiring diagrams, schedules, and operation and maintenance manual.
   2. Unless otherwise indicated, provide a single line of text with 1/2-inch- (13-mm-) high letters on 1-1/2-inch- (38-mm-) high label; where two lines of text are required, use labels 2 inches (50 mm) high.

M. Snap-around Color-Coding Bands: Secure tight to surface at a location with high visibility and accessibility.

N. Heat-Shrink, Preprinted Tubes: Secure tight to surface at a location with high visibility and accessibility.

O. Marker Tapes: Secure tight to surface at a location with high visibility and accessibility.

P. Self-Adhesive Vinyl Tape: Secure tight to surface at a location with high visibility and accessibility.
   1. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for a minimum distance of 6 inches (150 mm) where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding.

Q. Tape and Stencil: Comply with requirements in painting Sections for surface preparation and paint application.

R. Underground Line Warning Tape:
   1. During backfilling of trenches, install continuous underground-line warning tape directly above cable or raceway at 6 to 8 inches (150 to 200 mm) below finished grade. Use multiple tapes where width of multiple lines installed in a common trench or concrete envelope exceeds 16 inches (400 mm) overall.
   2. Install underground-line warning tape for direct-buried cables and cables in raceways.

S. Write-on Tags:
   1. Place in a location with high visibility and accessibility.
   2. Secure using general-purpose (indoors) or UV-stabilized (outdoors) cable ties.

T. Laminated Acrylic or Melamine Plastic Signs:
   1. Attach signs and plastic labels that are not self-adhesive type with mechanical fasteners appropriate to the location and substrate.
   2. Unless otherwise indicated, provide a single line of text with 1/2-inch- (13-mm-) high letters on minimum 1-1/2-inch- (38-mm-) high sign; where two lines of text are required, use signs minimum 2 inches (50 mm) high.

U. Cable Ties: General purpose, for attaching tags, except as listed below:
   1. Outdoors: UV-stabilized nylon.

3.2 IDENTIFICATION SCHEDULE

A. Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment. Install access doors or panels to provide view of identifying devices.

B. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, pull points, and locations of high visibility. Identify by system and circuit designation.

C. Accessible Raceways, 600 V or Less, for Service, Feeder, and Branch Circuits, More Than 30A and 120V to Ground: Identify with self-adhesive raceway labels.
   1. Locate identification at changes in direction, at penetrations of walls and floors, at 50-foot (15-m) maximum intervals in straight runs, and at 25-foot (7.6-m) maximum intervals in congested areas.

D. Power-Circuit Conductor Identification, 600 V or Less: For conductors in vaults, pull and junction boxes, manholes, and handholes, use self-adhesive wraparound labels to identify the phase.
   1. Locate identification at changes in direction, at penetrations of walls and floors, at 50-foot (15-m) maximum intervals in straight runs, and at 25-foot (7.6-m) maximum intervals in congested areas.

E. Locations of Underground Lines: Underground-line warning tape for power, lighting, communication, and control wiring and optical-fiber cable.

F. Instructional Signs: Self-adhesive labels, including the color code for grounded and ungrounded conductors.

G. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Self-adhesive equipment labels.
   1. Apply to exterior of door, cover, or other access.
   2. For equipment with multiple power or control sources, apply to door or cover of equipment, including, but not limited to, the following:
      a. Controls with external control power connections.

H. Operating Instruction Signs: Laminated acrylic or melamine plastic signs.

I. Equipment Identification Labels:
   1. Indoor Equipment: Self-adhesive laminated acrylic or melamine plastic sign.
   2. Outdoor Equipment: Laminated acrylic or melamine sign.

PART 4 – MEASUREMENT AND PAYMENT

4.1 MEASUREMENT AND PAYMENT

A. Measurement and payment for items in this Section shall be on a lump sum basis.

B. Pay Items:

The Division 26 pay item includes all materials, labor, transportation incidental and services required for electrical work as shown on the plans. It is the intent of this pay item that all equipment, devices, materials, systems, and appurtenances, etc. which are required for the electrical work shall be lump sum. Refer to the Bid Tabulation for information on further breakdown.

END OF SECTION 26 05 53

SECTION 262416

PANELBOARDS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Branch-circuit panelboards.

1.2 DEFINITIONS

A. MCCB: Molded-case circuit breaker.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of panelboard.

B. Shop Drawings: For each panelboard and related equipment.
   1. Include dimensioned plans, elevations, sections, and details.
   2. Detail enclosure types including mounting and anchorage, environmental protection, knockouts, corner treatments, covers and doors, gaskets, hinges, and locks.
   3. Detail bus configuration, current, and voltage ratings.
   4. Short-circuit current rating of panelboards and overcurrent protective devices.
   5. Include evidence of NRTL listing for series rating of installed devices.
   6. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices and auxiliary components.
   7. Include wiring diagrams for power and control wiring.
   8. Include time-current coordination curves for each type and rating of overcurrent protective device included in panelboards.

1.4 INFORMATIONAL SUBMITTALS

A. Panelboard schedules for installation in panelboards.

1.5 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

1.6 WARRANTY

A. Manufacturer's Warranty: Manufacturer agrees to repair or replace panelboards that fail in materials or workmanship within specified warranty period.
   1. Panelboard Warranty Period: 18 months from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PANELBOARDS COMMON REQUIREMENTS

A. Fabricate and test panelboards according to IEEE 344 to withstand seismic forces defined in Section 26 0548.16 "Seismic Controls for Electrical Systems."

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

C. Comply with NEMA PB 1.

D. Comply with NFPA 70.

E. Enclosures: Surface-mounted, dead-front cabinets.
   1. Rated for environmental conditions at installed location.
      a. Indoor Dry and Clean Locations: NEMA 250, Type 1.
      b. Outdoor Locations: NEMA 250, Type 3R.
      c. Wet/Chemical/Pool Equipment Areas: NEMA 250, Type 4X stainless steel.
   2. Height: 84 inches (2.13 m) maximum.
   3. Front: Secured to box with concealed trim clamps. For surface-mounted fronts, match box dimensions; for flush-mounted fronts, overlap box. Trims shall cover all live parts and shall have no exposed hardware.
   4. Hinged Front Cover: Entire front trim hinged to box and with standard door within hinged trim cover. Trims shall cover all live parts and shall have no exposed hardware.

F. Incoming Mains Location: Bottom.

G. Phase, Neutral, and Ground Buses: Hard-drawn copper, 98 percent conductivity.

H. Conductor Connectors: Suitable for use with conductor material and sizes.
   1. Material: Hard-drawn copper, 98 percent conductivity.
   2. Main and Neutral Lugs: Compression type, with a lug on the neutral bar for each pole in the panelboard.
   3. Ground Lugs and Bus-Configured Terminators: Compression type, with a lug on the bar for each pole in the panelboard.
   4. Feed-Through Lugs: Compression type, suitable for use with conductor material. Locate at opposite end of bus from incoming lugs or main device.
   5. Subfeed (Double) Lugs: Compression type suitable for use with conductor material. Locate at same end of bus as incoming lugs or main device.

I. NRTL Label: Panelboards shall be labeled by an NRTL acceptable to authority having jurisdiction for use as service equipment with one or more main service disconnecting and overcurrent protective devices. Panelboards shall have meter enclosures, wiring, connections, and other provisions for utility metering. Coordinate with utility company for exact requirements.

J. Future Devices: Panelboards shall have mounting brackets, bus connections, filler plates, and necessary appurtenances required for future installation of devices.

K. Panelboard Short-Circuit Current Rating: Rated for series-connected system with integral or remote upstream overcurrent protective devices and labeled by an NRTL. Include label or manual with size and type of allowable upstream and branch devices listed and labeled by an NRTL for series-connected short-circuit rating.

L. Panelboard Short-Circuit Current Rating: Fully rated to interrupt symmetrical short-circuit current available at terminals. Assembly listed by an NRTL for 100 percent interrupting capacity.

2.2 BRANCH-CIRCUIT PANELBOARDS

A. Panelboards: NEMA PB 1, distribution type.

B. Doors: Secured with vault-type latch with tumbler lock; keyed alike.
   1. For doors more than 36 inches (914 mm) high, provide two latches, keyed alike.

C. Mains: Circuit breaker or lugs only, as scheduled.

D. Branch Overcurrent Protective Devices for Circuit-Breaker Frame Sizes 125 A and Smaller: Plug-in circuit breakers where individual positive-locking device requires mechanical release for removal.

E. Branch Overcurrent Protective Devices for Circuit-Breaker Frame Sizes Larger Than 125 A: Bolt-on circuit breakers.

F. Branch Overcurrent Protective Devices: Fused switches.

2.3 DISCONNECTING AND OVERCURRENT PROTECTIVE DEVICES

A. MCCB: Comply with UL 489, with series-connected rating to meet available fault currents.
   1. Thermal-Magnetic Circuit Breakers:
      a. Inverse time-current element for low-level overloads.
      b. Instantaneous magnetic trip element for short circuits.
      c. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.
   2. Adjustable Instantaneous-Trip Circuit Breakers: Magnetic trip element with front-mounted, field-adjustable trip setting.
   3. Electronic Trip Circuit Breakers:
      a. RMS sensing.
      b. Field-replaceable rating plug or electronic trip.
      c. Digital display of settings, trip targets, and indicated metering displays.
      d. Multi-button keypad to access programmable functions and monitored data.

e. Ten-event, trip-history log. Each trip event shall be recorded with type, phase, and magnitude of fault that caused the trip
f. Integral test jack for connection to portable test set or laptop computer.
g. Field-Adjustable Settings:
1) Instantaneous trip.
2) Long- and short-time pickup levels.
3) Long and short time adjustments.
4) Ground-fault pickup level, time delay, and I squared T response.

4. Current-Limiting Circuit Breakers: Frame sizes 400 A and smaller; let-through ratings less than NEMA FU 1, RK-5.
5. GFCI Circuit Breakers: Single- and double-pole configurations with Class A ground-fault protection (6-mA trip).
6. GFEP Circuit Breakers: Class B ground-fault protection (30-mA trip).
7. Arc-Fault Circuit Interrupter Circuit Breakers: Comply with UL 1699; 120/240-V, single-pole configuration.
8. Subfeed Circuit Breakers: Vertically mounted.
9. MCCB Features and Accessories:
a. Standard frame sizes, trip ratings, and number of poles.
b. Breaker handle indicates tripped status.
c. UL listed for reverse connection without restrictive line or load ratings.
d. Lugs: Compression style, suitable for number, size, trip ratings, and conductor materials.
e. Application Listing: Appropriate for application; Type SWD for switching fluorescent lighting loads; Type HID for feeding fluorescent and HID lighting circuits.
f. Ground-Fault Protection: Integrally mounted relay and trip unit with adjustable pickup and time-delay settings, push-to-test feature, and ground-fault indicator.
g. Shunt Trip: 120-V trip coil energized from separate circuit, set to trip at 75 percent of rated voltage.
h. Handle Padlocking Device: Fixed attachment, for locking circuit-breaker handle in on or off position.
i. Handle Clamp: Loose attachment, for holding circuit-breaker handle in on position.

2.4 IDENTIFICATION

A. Panelboard Label: Manufacturer's name and trademark, voltage, amperage, number of phases, and number of poles shall be located on the interior of the panelboard door.

B. Breaker Labels: Faceplate shall list current rating, UL and IEC certification standards, and AIC rating.

C. Circuit Directory: Directory card inside panelboard door, mounted in metal frame with transparent protective cover.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with NECA 1.

B. Mount top of trim 90 inches (2286 mm) above finished floor unless otherwise indicated.

C. Mount panelboard cabinet plumb and rigid without distortion of box.

D. Mount recessed panelboards with fronts uniformly flush with wall finish and mating with back box.

E. Install overcurrent protective devices and controllers not already factory installed.
   1. Set field-adjustable, circuit-breaker trip ranges.

F. Make grounding connections and bond neutral for services and separately derived systems to ground. Make connections to grounding electrodes, separate grounds for isolated ground bars, and connections to separate ground bars.

G. Install filler plates in unused spaces.

H. Arrange conductors in gutters into groups and bundle and wrap with wire ties.

3.2 IDENTIFICATION

A. Identify field-installed conductors, interconnecting wiring, and components; install warning signs complying with requirements in Section SS26 05 53 "Identification for Electrical Systems."

B. Create a directory to indicate installed circuit loads; incorporate Owner's final room designations. Obtain approval before installing. Handwritten directories are not acceptable. Install directory inside panelboard door.

C. Panelboard Nameplates: Label each panelboard with a nameplate complying with requirements for identification specified in Section SS26 05 53 "Identification for Electrical Systems."

D. Device Nameplates: Label each branch circuit device in power panelboards with a nameplate complying with requirements for identification specified in Section 26 0553 "Identification for Electrical Systems."

3.3 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Acceptance Testing Preparation:
   1. Test insulation resistance for each panelboard bus, component, connecting supply, feeder, and control circuit.
   2. Test continuity of each circuit.

C. Tests and Inspections:

1. Perform each visual and mechanical inspection and electrical test for low-voltage air circuit breakers stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
2. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.

D. Panelboards will be considered defective if they do not pass tests and inspections.

E. Prepare test and inspection reports, including a certified report that identifies panelboards included and that describes scanning results, with comparisons of the two scans. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.

PART 4 – MEASUREMENT AND PAYMENT

4.1 MEASUREMENT AND PAYMENT

A. Measurement and payment for items in this Section shall be on a lump sum basis.

B. Pay Items:

The Division 26 pay item includes all materials, labor, transportation incidental and services required for electrical work as shown on the plans. It is the intent of this pay item that all equipment, devices, materials, systems, and appurtenances, etc. which are required for the electrical work shall be lump sum. Refer to the Bid Tabulation for information on further breakdown.

END OF SECTION 26 24 16

SECTION 262726
WIRING DEVICES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
1. Straight-blade convenience receptacles.
2. GFCI receptacles.
3. Toggle switches.
4. Wall switch sensor light switches with dual technology sensors.
5. Wall switch sensor light switches with passive infrared sensors.
6. Wall switch sensor light switches with ultrasonic sensors.
7. Digital timer light switches.
8. Wall plates.

1.2 DEFINITIONS

A. Abbreviations of Manufacturers' Names:
1. Cooper: Copper Wiring Devices; Division of Cooper Industries, Inc.
2. Hubbell: Hubbell Incorporated: Wiring Devices-Kellems.
3. Leviton: Leviton Mfg. Company, Inc.
4. Pass & Seymour: Pass& Seymour/Legrand.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

PART 2 - PRODUCTS

2.1 GENERAL WIRING-DEVICE REQUIREMENTS

A. Wiring Devices, Components, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Comply with NFPA 70.

C. Devices that are manufactured for use with modular plug-in connectors may be substituted under the following conditions:
   1. Connectors shall comply with UL 2459 and shall be made with stranding building wire.
   2. Devices shall comply with the requirements in this Section.

D. Devices for Owner-Furnished Equipment:
   1. Receptacles: Match plug configurations.

E. Source Limitations: Obtain each type of wiring device and associated wall plate from single source from single manufacturer.

2.2 STRAIGHT-BLADE RECEPTACLES

A. Duplex Convenience Receptacles, 125 V, 20 A: Comply with NEMA WD 1, NEMA WD 6 Configuration 5-20R, UL 498, and FS W-C-596.

2.3 GFCI RECEPTACLES

A. General Description:
   1. 125 V, 20 A, straight blade, non-feed-through type.
   2. Comply with NEMA WD 1, NEMA WD 6 Configuration 5-20R, UL 498, UL 943 Class A, and FS W-C-596.
   3. Include indicator light that shows when the GFCI has malfunctioned and no longer provides proper GFCI protection.

2.4 TOGGLE SWITCHES

A. Comply with NEMA WD 1, UL 20, and FS W-S-896.

B. Switches, 120/277 V, 20 A. Single-pole or three-way as indicated on drawings.

C. Pilot-Light Switches, 120/277 V, 20 A:
   1. Description: Single pole, with LED-lighted handle, illuminated when switch is off.

D. Key-Operated Switches, 120/277 V, 20 A:
   1. Description: Single pole, with factory-supplied key in lieu of switch handle.

2.5 WALL SWITCH SENSOR LIGHT SWITCH, DUAL TECHNOLOGY

A. Description: Switchbox-mounted, combination lighting-control sensor and conventional switch lighting-control unit using dual technology.
   1. Connections: Hard wired.
   2. Rated 10 A at 120-V ac for fluorescent or LED lighting, and 1/4 hp at 120-V ac.
   3. Adjustable time delay.
   4. Able to be locked to Manual-On mode.
   5. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc (21.5 to 2152 lux).
   6. Comply with NEMA WD 1, UL 20, and FS W-S-896.

2.6 WALL SWITCH SENSOR LIGHT SWITCH, PASSIVE INFRARED

A. Description: Switchbox-mounted, combination, lighting-control sensor and conventional switch lighting-control unit using passive infrared technology.
   1. Connections: Hard wired.
   2. Rated 10 A at 120-V ac for fluorescent or LED lighting, and 1/4 hp at 120-V ac.
   3. Integral relay for connection to BAS.
   4. Adjustable time delay.
   5. Able to be locked to Manual-On mode.
   6. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc (21.5 to 2152 lux).
   7. Comply with NEMA WD 1, UL 20, and FS W-S-896.

2.7 WALL SWITCH SENSOR LIGHT SWITCH, ULTRASONIC

A. Description: Switchbox-mounted, combination, lighting-control sensor and conventional switch lighting-control unit using ultrasonic technology.
   1. Connections: Hard wired.
   2. Rated 10 A at 120-V ac for fluorescent or LED lighting, and 1/4 hp at 120-V ac.
   3. Integral relay for connection to BAS.
   4. Adjustable time delay.
   5. Able to be locked to Manual-On mode.
   6. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc (21.5 to 2152 lux).
   7. Comply with NEMA WD 1, UL 20, and FS W-S-896.

2.8 DIGITAL TIMER LIGHT SWITCH

A. Description: Switchbox-mounted, combination digital timer and conventional switch lighting-control unit, with backlit digital display, with selectable time interval in 10-minute increments.
   1. Rated 10 A at 120-V ac for fluorescent or LED lighting, and 1/4 hp at 120-V ac.

2.9 WALL PLATES

A. Single and combination types shall match corresponding wiring devices.
   1. Plate-Securing Screws: Metal with head color to match plate finish.
   2. Material for Interior, Dry Locations: 0.035-inch- (1-mm-) thick, satin-finished, Type 302 stainless steel.
   3. Material for Damp Locations: Cast aluminum with spring-loaded lift cover, and listed and labeled for use in wet and damp locations.

B. Wet-Location, Weatherproof Cover Plates: NEMA 250, complying with Type 3R, weather-resistant, die-cast aluminum with lockable cover.

2.10 FINISHES

A. Device Color:

1. Wiring Devices Connected to Normal Power System: White, unless otherwise selected by Architect or unless otherwise indicated or required by NFPA 70 for device listing.

B. Wall Plate Color: For plastic covers, match device color.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with NECA 1, including mounting heights listed in that standard, unless otherwise indicated.

B. Coordination with Other Trades:
   1. Protect installed devices and their boxes. Do not place wall finish materials over device boxes and do not cut holes for boxes with routers that are guided by riding against outside of boxes.
   2. Keep outlet boxes free of plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other material that may contaminate the raceway system, conductors, and cables.
   3. Install device boxes in brick or block walls so that the cover plate does not cross a joint unless the joint is troweled flush with the face of the wall.
   4. Install wiring devices after all wall preparation, including painting, is complete.

C. Conductors:
   1. Do not strip insulation from conductors until right before they are spliced or terminated on devices.
   2. Strip insulation evenly around the conductor using tools designed for the purpose. Avoid scoring or nicking of solid wire or cutting strands from stranded wire.
   3. The length of free conductors at outlets for devices shall meet provisions of NFPA 70, Article 300, without pigtails.

D. Device Installation:
   1. Replace devices that have been in temporary use during construction and that were installed before building finishing operations were complete.
   2. Keep each wiring device in its package or otherwise protected until it is time to connect conductors.
   3. Do not remove surface protection, such as plastic film and smudge covers, until the last possible moment.
   4. Connect devices to branch circuits using pigtails that are not less than 6 inches (152 mm) in length.
   5. When there is a choice, use side wiring with binding-head screw terminals. Wrap solid conductor tightly clockwise, two-thirds to three-fourths of the way around terminal screw.

6. Use a torque screwdriver when a torque is recommended or required by manufacturer.
7. When conductors larger than No. 12 AWG are installed on 15- or 20-A circuits, splice No. 12 AWG pigtails for device connections.
8. Tighten unused terminal screws on the device.
9. When mounting into metal boxes, remove the fiber or plastic washers used to hold device-mounting screws in yokes, allowing metal-to-metal contact.

E. Receptacle Orientation:
1. Install ground pin of vertically mounted receptacles down, and on horizontally mounted receptacles to the left.

F. Device Plates: Do not use oversized or extra-deep plates. Repair wall finishes and remount outlet boxes when standard device plates do not fit flush or do not cover rough wall opening.

G. Arrangement of Devices: Unless otherwise indicated, mount flush, with long dimension vertical and with grounding terminal of receptacles on top. Group adjacent switches under single, multi-gang wall plates.

H. GFCI Receptacles: Install non-feed-through-type GFCI receptacles where protection of downstream receptacles is not required.

3.2 FIELD QUALITY CONTROL

A. Test Instruments: Use instruments that comply with UL 1436.

B. Test Instrument for Convenience Receptacles: Digital wiring analyzer with digital readout or illuminated digital-display indicators of measurement.

C. Perform the following tests and inspections:
1. Tests for Convenience Receptacles:
   a. Line Voltage: Acceptable range is 105 to 132 V.
   b. Percent Voltage Drop under 15-A Load: A value of 6 percent or higher is unacceptable.
   c. Ground Impedance: Values of up to 2 ohms are acceptable.
   d. GFCI Trip: Test for tripping values specified in UL 1436 and UL 943.
   e. Using the test plug, verify that the device and its outlet box are securely mounted.
   f. Tests shall be diagnostic, indicating damaged conductors, high resistance at the circuit breaker, poor connections, inadequate fault current path, defective devices, or similar problems. Correct circuit conditions, remove malfunctioning units and replace with new ones, and retest as specified above.

D. Wiring device will be considered defective if it does not pass tests and inspections.

E. Prepare test and inspection reports.

PART 4 – MEASUREMENT AND PAYMENT

4.1 MEASUREMENT AND PAYMENT

A. Measurement and payment for items in this Section shall be on a lump sum basis.

B. Pay Items:

The Division 26 pay item includes all materials, labor, transportation incidental and services required for electrical work as shown on the plans. It is the intent of this pay item that all equipment, devices, materials, systems, and appurtenances, etc. which are required for the electrical work shall be lump sum. Refer to the Bid Tabulation for information on further breakdown.

END OF SECTION 26 27 26

SECTION 265619

LED EXTERIOR LIGHTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Exterior solid-state luminaires that are designed for and exclusively use LED lamp technology.
   2. Luminaire supports.

1.2 DEFINITIONS

A. CCT: Correlated color temperature.

B. CRI: Color rendering index.

C. Fixture: See "Luminaire."

D. IP: International Protection or Ingress Protection Rating

E. Lumen: Measured output of lamp and luminaire, or both.

F. Luminaire: Complete lighting unit, including lamp, reflector, and housing.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of luminaire.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Plans, drawn to scale and coordinated.

B. Product Certificates: For each type of the following:
   1. Luminaire.

C. Sample warranty.

1.5 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.
   1. Provide a list of all lamp types used on Project. Use ANSI and manufacturers' codes.

1.6 FIELD CONDITIONS

A. Mark locations of exterior luminaires for approval by Architect prior to the start of luminaire installation.

1.7 WARRANTY

A. Warranty: Manufacturer and Installer agree to repair or replace components of luminaires that fail in materials or workmanship within specified warranty period.
   1. Warranty Period: Minimum 2 year(s) from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 LUMINAIRE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. NRTL Compliance: Luminaires shall be listed and labeled for indicated class and division of hazard by an NRTL.

C. FM Global Compliance: Luminaires for hazardous locations shall be listed and labeled for indicated class and division of hazard by FM Global.

D. UL Compliance: Comply with UL 1598 and listed for wet location.

E. Color temperature for lamps as scheduled. Lamps dimmable from 100 percent to 0 percent of maximum light output.

F. Nominal Operating Voltage: 120 V ac.

G. Lamp Rating: Lamp marked for outdoor use and in enclosed locations.

H. Source Limitations: Obtain luminaires from single source from a single manufacturer.

I. Source Limitations: For luminaires, obtain each color, grade, finish, type, and variety of luminaire from single source with resources to provide products of consistent quality in appearance and physical properties.

2.2 MATERIALS

A. Metal Parts: Free of burrs and sharp corners and edges.

B. Sheet Metal Components: Corrosion-resistant aluminum or Stainless steel. Form and support to prevent warping and sagging.

C. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position. Doors shall be removable for cleaning or replacing lenses.

D. Diffusers and Globes:
   1. Acrylic Diffusers: 100 percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.

2. Glass: Annealed crystal glass unless otherwise indicated.
3. Lens Thickness: At least 0.125 inch (3.175 mm) minimum unless otherwise indicated.

E. Lens and Refractor Gaskets: Use heat- and aging-resistant resilient gaskets to seal and cushion lenses and refractors in luminaire doors.

F. Reflecting surfaces shall have minimum reflectance as follows unless otherwise indicated:
1. White Surfaces: 85 percent.
2. Specular Surfaces: 83 percent.
3. Diffusing Specular Surfaces: 75 percent.

G. Housings:
1. Rigidly formed, weather- and light-tight enclosure that will not warp, sag, or deform in use.
2. Provide filter/breather for enclosed luminaires.

2.3 FINISHES

A. Variations in Finishes: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

B. Luminaire Finish: Manufacturer's standard paint applied to factory-assembled and -tested luminaire before shipping. Where indicated, match finish process and color of pole or support materials.

C. Factory-Applied Finish for Aluminum Luminaires: Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
1. Finish designations prefixed by AA comply with the system established by the Aluminum Association for designating aluminum finishes.
2. Natural Satin Finish: Provide fine, directional, medium satin polish (AA-M32); buff complying with AA-M20 requirements; and seal aluminum surfaces with clear, hard-coat wax.
3. Class I, Color-Anodic Finish: AA-M32C22A42/A44 (Mechanical Finish: Medium satin; Chemical Finish: Etched, medium matte; Anodic Coating: Architectural Class I, integrally colored or electrolytically deposited color coating 0.018 mm or thicker), complying with AAMA 611.
   a. Color: As selected by Architect during submittal phase from manufacturer's full range.

D. Factory-Applied Finish for Steel Luminaires: Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
1. Surface Preparation: Clean surfaces to comply with SSPC-SP 1, to remove dirt, oil, grease, and other contaminants that could impair paint bond. Grind welds and

polish surfaces to a smooth, even finish. Remove mill scale and rust, if present, from uncoated steel, complying with SSPC-SP 5/NACE No. 1 or SSPC-SP 8.

2. Exterior Surfaces: Manufacturer's standard finish consisting of one or more coats of primer and two finish coats of high-gloss, high-build polyurethane enamel.
   a. Color: As selected by Architect during submittal phase from manufacturer's full range.

2.4 LUMINAIRE SUPPORT COMPONENTS

A. Comply with requirements in Section 26 0529 "Hangers and Supports for Electrical Systems" for channel and angle iron supports and nonmetallic channel and angle supports.

PART 3 - EXECUTION

3.1 GENERAL INSTALLATION REQUIREMENTS

A. Comply with NECA 1.

B. Use fastening methods and materials selected to resist seismic forces defined for the application and approved by manufacturer.

C. Install lamps in each luminaire.

D. Fasten luminaire to structural support.

E. Supports:
   1. Sized and rated for luminaire weight.
   2. Able to maintain luminaire position after cleaning and relamping.
   3. Support luminaires without causing deflection of finished surface.
   4. Luminaire-mounting devices shall be capable of supporting a horizontal force of 100 percent of luminaire weight and a vertical force of 400 percent of luminaire weight.

F. Wiring Method: Install cables in raceways. Conceal raceways and cables.

G. Install luminaires level, plumb, and square with finished grade unless otherwise indicated. Install luminaires at height as indicated on Drawings.

H. Coordinate layout and installation of luminaires with other construction.

I. Comply with requirements in Section SS26 05 19 "Low-Voltage Electrical Power Conductors and Cables" and Section SS26 05 33 "Raceways and Boxes for Electrical Systems" for wiring connections and wiring methods.

3.2 CORROSION PREVENTION

A. Aluminum: Do not use in contact with earth or concrete. When in direct contact with a dissimilar metal, protect aluminum by insulating fittings or treatment.

B. Steel Conduits: Comply with Section 26 0533 "Raceways and Boxes for Electrical Systems." In concrete foundations, wrap conduit with 0.010-inch- (0.254-mm-) thick, pipe-wrapping plastic tape applied with a 50 percent overlap.

3.3 IDENTIFICATION

A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 26 0553 "Identification for Electrical Systems."

3.4 FIELD QUALITY CONTROL

A. Inspect each installed luminaire for damage. Replace damaged luminaires and components.

B. Perform the following tests and inspections with the assistance of a factory-authorized service representative:
   1. Operational Test: After installing luminaires, switches, and accessories, and after electrical circuitry has been energized, test units to confirm proper operation.
   2. Verify operation of controls.

C. Tests:
   1. Operational Test: After installing luminaires, switches, and accessories, and after electrical circuitry has been energized, test units to confirm proper operation.

D. Luminaire will be considered defective if it does not pass tests and inspections.

E. Prepare a written report of tests, inspections, observations, and verifications indicating and interpreting results. If adjustments are made to lighting system, retest to demonstrate compliance with standards.

3.5 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain luminaires and associated controls.

PART 4 – MEASUREMENT AND PAYMENT

4.1 MEASUREMENT AND PAYMENT

A. Measurement and payment for items in this Section shall be on a lump sum basis.

B. Pay Items:

The Division 26 pay item includes all materials, labor, transportation incidental and services required for electrical work as shown on the plans. It is the intent of this pay item that all equipment, devices, materials, systems, and appurtenances, etc. which are re-

quired for the electrical work shall be lump sum. Refer to the Bid Tabulation for information on further breakdown.

END OF SECTION 26 56 19