CITY OF AUSTIN
PUBLIC WORKS DEPARTMENT

PROJECT MANUAL
Contract Documents and Technical Specifications

VOLUME 1 of 2

HARMON AVENUE AREA
WATER AND WASTEWATER RENEWAL

SUBPROJECT ID NUMBER: 2231.298
SOLICITATION NUMBER: CLMC796

Document Prepared by

CITY OF AUSTIN
Public Works Department
505 Barton Springs Road
Austin, Texas 78704

And

Hejl, Lee & Associate, Inc.
TBPE Firm No. F-755
206 Taylor Street, Hutto, Texas 78634

STATE OF TEXAS
EFFENDY
108565
LICENSED
PROFESSIONAL ENGINEER
04/23/2020

April 2020

Table of Contents

Document Number	Date	Title
VOLUME 1		
	04/23/2020	Table of Contents
BIDDING REQUIREMENTS, CONTRACT FORMS, & CONDITIONS OF THE CONTRACT		
00020	04/03/2020	Invitation for Bids
00100	04/03/2020	Instructions to Bidders
00220	03/30/18	Geotechnical Data
00300U	02/04/2020	Bid Form-Unit Price
00400	04/30/19	Statement of Bidder's Experience
00405	03/30/18	Certificate of Non-Suspension or Debarment
00410	09/17/18	Statement of Bidder's Safety Experience
00440	10/22/19	Prohibited Activities
00475	08/12/19	Nonresident Bidder Provisions
00500	02/04/2020	Agreement (SAMPLE)
00610	02/04/2020	Performance Bond
00620	02/04/2020	Payment Bond
00630	10/22/19	Non-Discrimination and Non-Retaliation Certificate
00631	03/30/18	Title VI Assurances Appendix A
00632	03/30/18	Title VI Assurances Appendix E
00650	06/08/18	Certificate of Insurance
00670	01/11/19	Sales Tax Exemption Certificate
00680	03/30/18	Non-Use of Asbestos Affidavit (Prior to Construction)
00681	03/30/18	Non-Use of Asbestos Affidavit (After Construction)
00700	02/04/2020	General Conditions
00810	02/04/2020	Supplemental General Conditions
00830	02/04/2020	Wage Rates and Payroll Reporting
00830HH	01/11/19	Wage Rates Highway Heavy
00840	09/27/19	Construction Training Program Requirements
00900	01/11/19	Addendum (SAMPLE)

SPECIFICATIONS

Division 1 - General Requirements

01010	02/04/2020	Summary of Work
01020	03/30/18	Allowances
01050	10/19/15	Grades Lines & Levels
01095	07/21/03	Reference Standards and Definitions
01096	05/06/11	Stormwater Pollution Prevention Plan (SWPPP)
01200	08/09/12	Project Meetings
01300	01/11/19	Submittals
01352	06/29/18	Sustainable Construction Requirements
01353	08/09/12	Construction Equipment Emissions Reduction Plan
01380	08/09/12	Construction Photography & Videos
01500	08/12/19	Temporary Facilities
01505	08/12/19	Construction and Demolition Waste Management
01550	08/09/12	Public Safety and Convenience
01900	03/12/12	Prohibition of Asbestos Containing Materials
01900a	06/05/06	Statement of Non-Inclusion of Asbestos Containing Material (E/A Prior to Design)
01900b	06/05/06	Statement of Non-Inclusion of Asbestos Containing Material (E/A After Design)

City Standard Technical Specifications

Series100 – Earthwork

Spec. #	Description	Adopted
110S	Street Excavation	11/18/2004

Series 200 – Subgrade and Base Construction

Spec. #	Description	Adopted
234S	Rolling (Tamping)	8/20/2007

Series – 300 Street Surface Courses

Spec. #	Description	Adopted
301S	Asphalts, Oils and Emulsions	8/20/2007
306S	Prime Coat	2/24/2010
315S	Milling Asphaltic Concrete Pavement & Non-Portland Cement Concrete Bases	9/26/2012
340S	Hot Mix Asphaltic Concrete Pavement	9/26/2012

Series 400 – Concrete and Structures

Spec. #	Description	Adopted
402S	Controlled Low Strength Material	11/13/2007
405S	Concrete Admixtures	11/13/2007
406S	Reinforcing Steel	9/26/2012
408S	Concrete Joint Materials	11/13/2007
411S	Surface Finishes for Concrete	11/13/2007
430S	P.C. Concrete Curb and Gutter	11/15/2011
432S	P.C. Concrete Sidewalks	1/04/2010
433S	P.C. Concrete Driveways	12/09/2008

Table of Contents

Series 500 – Pipe and Appurtenances

Spec. #	Description	Adopted
503S	Frames, Grates, Rings and Covers	2/17/2000
506	Manholes	3/15/2011
509S	Excavation Safety Systems	9/26/2012
510	Pipe	12/08/2018
511S	Water Valves	9/26/2012

Series 600 – Environmental Enhancement

Spec. #	Description	Adopted
602S	Sodding for Erosion Control	6/16/2008
606S	Fertilizer	6/21/2007
610S	Preservation of Trees and Other Vegetation	12/07/2018
620S	Filter Fabric	1/04/2016
632S	Storm Inlet Sediment Trap	11/26/2001
641S	Stabilized Construction Entrance	6/21/2007
642S	Silt Fence	9/01/2011

Series 700 – Incidental Construction

Spec. #	Description	Adopted
700S	Mobilization	9/26/2012
703	Fencing for Excavations	9/22/1988

Series 800 – Urban Transportation

Spec. #	Description	Adopted
801S	Constructing a Detour	6/21/2007
802S	Project Signs	9/26/2012
803S	Barricades, Signs and Traffic Handling	11/15/2011
863S	Reflectorized Pavement Markers	9/26/2012

Special Provisions to City Standard Technical Specifications

SP110S	Special Provision to Item 110S Street Excavation	03/24/2020
SP506S	Special Provision to Item 506 Manholes	11/21/2018
SP510S	Special Provision to Item 510 Pipe	11/21/2018
SP511S	Special Provision to Item 511S Water Valves	04/29/2019
SP632S	Special Provision to Item 632S Storm Inlet Sediment Trap	11/21/2018
SP703	Special Provision to Item 703 Fencing for Excavation	08/07/2019

Special Specifications

SS4150	Contaminated Soil and Water	01/31/2019

VOL. 2 of 2 03/01/17 **MBE/WBE Procurement Program Package**

END

1. OVERVIEW AND PROJECT INFORMATION

Following is a summary of information for this Project. Bidder is cautioned to refer to other sections of the Project Manual, Drawings and Addenda (Bid Documents) for further details.

The City of Austin, hereafter called OWNER, is requesting Bids for furnishing all labor, materials, equipment, supervision, and incidentals, and for performing all Work required for the following:

Project:	HARMON AVENUE AREA WATER AND WASTEWATER RENEWAL
Located at:	Generally bounded by 53rd Street on the north, IH-35 & Harmon Avenue on the east, E. 48th Street on the south, and Airport Blvd. on the west.
CIP ID No.:	2231.298
Solicitation No.:	CLMC 796

The Work consists of upgrading and replacement of approximately 8,085 LF of 8-inch water lines and approximately 5,427 LF of 8-inch wastewater lines.

2. BID DOCUMENTS

Bid Documents are obtained through the City's Vendor Connection website, log on www.austintexas.gov/financeonline/vendor_connection/index.cfm. A complete set of Bid Documents, including all sections of the Project Manual and Drawings, are included in the attachments section of each solicitation.

All addenda and answers to Bidders' questions will also be posted in the attachments section for each solicitation on the City's Vendor Connection website.

3. SUBMISSION OF BIDS

Sealed Bids may be submitted to the Capital Contracting Office Bid Opening Desk located at One Texas Center, 505 Barton Springs Rd., Suite 1045-B, Austin, Texas 78704, or may be submitted electronically (see eResponse, Attachment 1 -Submitting Bids in Austin Finance Online).

Sealed Bid may be mailed using address below:

Address for US Mail (If mailed to the physical address, the proposal will be returned unopened)	
City of Austin	
Capital Contracting Office	
P. O. Box 1088	
Austin, Texas 78767-8845	

NOTE: Bids must either be received and time stamped in the Capital Contracting Office prior to the Due Date and Time or submitted electronically via Austin Finance Online. The time of record for those electronically submitted is the time received in Austin Finance OnLine. It is the responsibility of the Offeror to ensure that their Bid arrives at the reception desk in the Capital Contracting Office or

electronically prior to the time and date indicated. Arrival at the City's mailroom, mail terminal, or post office box will not constitute the Proposal arriving on time.

Public Bid Opening Update
Due to the unprecedented event of COVID-19 and to help prevent the further spread, Capital Contracting Office will NOT be conducting an in person bid opening. Bidders must either submit their bids and compliance plans no earlier than 10:00 AM and prior to 2:00 PM on the date bids are due to One Texas Center, 505 Barton Springs Rd., Suite 1045-B, Austin, Texas 78704; or must submit Bids and Compliance Plans electronically via Austin Finance Online prior to 2:00 PM on the day proposals are due. Bids and compliance plans submitted after 2:00 PM on the date bids are due will not be accepted. The Capital Contracting Office will open both the sealed bids and bids received electronically via Austin Finance Online at 3:00 PM on the date bids are due.

Bidders may watch the bid opening online using the following Web link: CCO Web Bid Opening Click Here

Disclaimer: The result of the bid opening does not become final until all bids are verified, and the bid tab is certified. The pencil bid tab and certified bid tab will be posted in Austin Finance Online at the following link:

https://www.austintexas.gov/financeonline/account_services/solicitation/solicitations.cfm

ALL BIDS AND COMPLIANCE PLANS ARE DUE PRIOR TO (Austin time) 2:00 PM on INSERT DATE
BIDS WILL BE OPENED AT (Austin time) 3:00 PM on INSERT DATE.

ALL BIDS AND COMPLIANCE PLANS NOT RECEIVED PRIOR TO THE DATE AND TIME SET FORTH ABOVE WILL NOT BE ACCEPTED FOR CONSIDERATION. The time stamp clock in SUITE 1045B is the time of record and is verified with www.time.gov, the official U.S. time. For Bids submitted electronically via Austin Finance Online, the time of record is the time received in Austin Finance Online.

4. VENDOR REGISTRATION AND NON-DISCRIMINATION

Prime Contractors must be registered with the OWNER prior to submitting a proposal electronically via Austin Finance Online. All CONTRACTORS must be registered to do business with OWNER prior to the Contract Award. All Subcontractors must be registered with the OWNER prior to execution of a contract. Prime Contractors are responsible for ensuring that their Subcontractors are registered as vendors with the City of Austin. Registration can be done through the OWNER's on-line Vendor Registration system. Log onto and follow directions: https://www.austintexas.gov/financeonline/account_services/account/login.cfm

The City of Austin, in accordance with the provisions of Title VI of the Civil Rights Act of 1964 (78 Stat. 252, 42 U.S.C. §§ 2000d to 2000d-4) and the Regulations, hereby notifies all bidders that it will affirmatively ensure that any contract entered into pursuant to this advertisement, disadvantaged business enterprises will be afforded full and fair opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

5. MBE/WBE PROCUREMENT PROGRAM

All City procurements are subject to the City's Minority-Owned and Women-Owned Business Enterprise Procurement Program found at Chapter 2-9-A of the City Code, as amended. The Program provides Minority-Owned and Women-Owned Business Enterprises (MBEs/WBEs) or Disadvantaged Business Enterprises (DBEs) full opportunity to participate in all City contracts. Goals for MBE/WBE or DBE participation are stated for each solicitation. Information on achieving the goals or documenting good faith efforts to achieve the goals are contained in the MBE/WBE Procurement Program Package or DBE Procurement Program Package attached to the solicitation. When goals are established, Bidders are required to complete and return the MBE/WBE or DBE Compliance Plan with their Bid. If a Compliance Plan is not submitted prior to the date and time set forth in the solicitation, the Bid will not be accepted for consideration. (See Section 00820 for MBE/WBE requirements on "no goal" solicitations.)

6. BID GUARANTY

All Bids shall be accompanied by an acceptable Bid guaranty in an amount of not less than five percent (5%) of the total Bid, as specified in Section 00100, Instructions to Bidders.

7. BONDS AND INSURANCE

Performance and payment bonds when required shall be executed on forms furnished by OWNER. Each bond shall be issued in an amount of one hundred percent (100%) of the Contract Amount by a solvent corporate surety company authorized to do business in the State of Texas, and shall meet any other requirements established by law or by OWNER pursuant to applicable law.

Minimum insurance requirements are specified in Section 00810, Supplemental General Conditions.

8. WAGE COMPLIANCE

Minimum wage rates have been established and are specified in Section 00830, Wage Rates and Payroll Reporting.

9. CONTRACT TIME

Contract Time is of the essence and all Work shall be **substantially completed** within **two hundred and seventy (270) Calendar Days** after date specified in the Notice to Proceed, in accordance with the Bid Form, Section 00300.

Final completion shall be achieved within **thirty (30) Calendar Days after substantial completion**.

Liquidated damages are one thousand ($1000) per Calendar Day for failure to substantially complete the work and five hundred ($500) per Calendar Day for failure to achieve final completion within thirty (30) Calendar Days after substantial completion, in accordance with the Bid Form, Section 00300.

10. OWNER'S RIGHTS

OWNER reserves the right to reject any or all Bids and to waive any minor informality in any Bid or solicitation procedure (a minor informality is one that does not affect the competitiveness of the Bid).

11. PRE-BID CONFERENCE

A **non-mandatory** Pre-Bid Conference will be held on 05/07/2020, 10:30 a.m. (Austin time), Microsoft Teams Video Conference, +1 512-831-7858 United States, Austin (Toll), Conference ID: 610 746 301#.

Please contact the Project Manager Tomas Rodriguez (tomas.rodriguez@austintexas.gov) to request a link to join the video conference or use the phone number above to call in.

Attendance is not mandatory unless otherwise stated. Bidders must attend any mandatory Pre-Bid Conference and are encouraged to attend any non-mandatory Pre-Bid Conference to ensure their understanding of OWNER's bidding and contracting requirements, particularly MBE/WBE or DBE Procurement Program requirements. If the Pre-Bid Conference is mandatory the Bidder must arrive and sign-in within fifteen (15) minutes of the scheduled start time of the meeting, otherwise the Bidder will not be allowed to submit a Bid for the project.

12. ANTI-LOBBYING AND PROCUREMENT

On June 14, 2018, the Austin City Council adopted Ordinance No. 20180614-056 replacing Chapter 2.7, Article 6 of the City Code relating to Anti-Lobbying and Procurement. The policy defined in this Code applies to Solicitations for goods and/or services requiring City Council approval under City Charter Article VII, Section 15 (Purchase Procedures). The City requires Offerors submitting Offers on this Solicitation to certify that the Offeror has not in any way directly or indirectly had communication restricted in the ordinance section 2-7-104 during the No-Lobbying Period as defined in the Ordinance. The text of the City Ordinance is posted on the Internet at:

https://assets.austintexas.gov/purchase/downloads/New_ALO_Ordinance_No_20180614-056.pdf

13. AUTHORIZED CONTACT PERSONS

The persons listed below may be contacted for information regarding the Invitation for Bid.

PROJECT MANAGER: MR. TOMAS RODRIGUEZ, P.E. CFM, phone 512-974-7730, email tomas.rodriguez@austintexas.gov

CAPITAL CONTRACTING OFFICE CONTACT: IVAN QUINONES, phone 512-974-7207, email ivan.quinones@austintexas.gov

SMALL & MINORITY BUSINESS RESOURCES DEPARTMENT CONTACT: JOHN WESLEY-SMITH, phone 512-974-7758, email john.wesley-smith@austintexas.gov

END

INSTRUCTIONS TO BIDDERS
Section 00100

1. PREPARATION OF BID

1.1 Bid Documents. Each Bidder must prepare its Bid on forms furnished by OWNER or as otherwise specified or permitted. Blank spaces for each item in Bid form must be filled. Bidder must submit a price for each item in Bid. In case of conflict between unit prices and extensions, unit prices shall govern. The Bid must be executed in the complete and correct legal name of individual, partnership, firm, corporation or other legal entity constituting the Bidder.

1.2 Vendor Registration. Prime Contractors must be registered with the OWNER prior to submitting a proposal electronically via Austin Finance Online. All CONTRACTORS must be registered to do business with OWNER prior to Contract Award. All Subcontractors must be registered with the OWNER prior to execution of a contract. Prime Contractors are responsible for ensuring that their Subcontractors are registered as vendors with the City of Austin. Registration can be done through the OWNER's on-line Vendor Registration system. Log onto https://www.austintexas.gov/financeonline/account_services/account/login.cfm and follow the directions.

1.3 Pre-Bid Conference. Unless otherwise notified, Bidders must attend the Pre-Bid Conference to ensure their understanding of OWNER's bidding and contracting requirements, particularly MBE/WBE Procurement Program requirements.

1.4 Sales Tax Exemption. The Owner is a tax-exempt organization as defined by Chapter 11 of the Property Tax Code of Texas. Bid prices shall not include sales tax on materials, supplies, or equipment that are incorporated into the real property interest of the OWNER or are otherwise completely used and consumed in the performance of the Contract. OWNER will furnish CONTRACTOR with a Sales Tax Exemption Certificate to be issued to Suppliers in lieu of the tax.

1.5 Minimum Wages. Workers on Project shall be paid not less than wage rates, including fringe benefits, as published by the Department of Labor (DOL) for Building Construction and Heavy and Highway Trades "AS APPLICABLE" and/or the minimum wage required by City of Austin Ordinance No. 20160324-015, whichever is higher. The Total Minimum Wage required can be met using any combination of cash and non-cash qualified fringe benefits provided the cash component meets or exceeds the minimum wage required.

1.6 Addenda. Bidder shall be knowledgeable of all Addenda issued and shall acknowledge all Addenda in spaces provided on Bid form. Further information regarding the Bid documents and the Project may be obtained from the Project Manager listed at the end of Section 00020, Invitation for Bids.

1.7 Required Items. Bids must include all specified items in this section and be submitted in accordance with paragraph No. 7 below. Any additional requirement to the bid submittal is specified in Section 00820. Any corrections to a Bid shall be initialed by the person signing the Bid.

1.8 Professional Services. Bidders must secure any required professional services that are defined as professional services under the Professional Services Procurement Act, Chapter 2254 of the Texas Government Code (for example: registered professional land surveyors and professional engineers) using the qualifications based selection process

prescribed by that chapter. (Note: It is a violation of State Law to solicit Bids for professional services.)

1.9 Further Information. Prospective Bidders desiring further information or interpretation of Project Manual or Drawings must make a written request for such information to OWNER addressed to the Authorized Contact Person listed in Section 00020 no later than seven (7) Working Days before Bid opening. Interpretation of Project Manual or Drawings will be made by Addendum only and obtained through the City's Vendor Connection website. Log on to: www.austintexas.gov/financeonline/vendor_connection/index.cfm. Any verbal communications will not be binding on the OWNER.

1.10 Anti-Lobbying and Procurement. Article 6, Chapter 2-7, City Code, repealed and replaced effective on June 25, 2018, prohibits lobbying activities or representations by Offerors during the No Lobbying Period as defined in the Ordinance.

1.10.1. FINDINGS; PURPOSE.

(A) The council finds that persons who enter a competitive process for a city contract voluntarily agree to abide by the terms of the competitive process, including the provisions of this article.

(B) The council finds that it is in the City's interest:

(i) to provide the most fair, equitable, and competitive process possible for selection among potential vendors in order to acquire the best and most competitive goods and services; and

(ii) to further compliance with State law procurement requirements.

(C) The council intends that:

(i) each response is considered on the same basis as all others; and

(ii) respondents have equal access to information regarding a solicitation, and the same opportunity to present information regarding the solicitation for consideration by the City.

1.10.2. APPLICABILITY.

(A) This article applies to all solicitations except:

(i) City social service funding;

(ii) City cultural arts funding;

(iii) federal, state or City block grant funding;

(iv) the sale or rental of real property;

(v) interlocal contracts or agreements; and

(vi) solicitations specifically exempted from this article by council.

(B) Absent an affirmative determination by the council, the purchasing officer has the discretion to apply this article to any other competitive process.

(C) City Code Section 1-1-99 (*Offenses; General Penalty*) does not apply to this article.

1.10.3. DEFINITIONS.

In this article:

(A) AGENT means a person authorized by a respondent to act for or in place of the respondent in order to communicate on behalf of that respondent. Each of the following is presumed to be an agent:

(i) a current full-time or part-time employee, owner, director, officer, member, or manager of a respondent;

(ii) a person related within the first degree of consanguinity or affinity to a current fulltime or part-time employee, owner, director, officer, member, or manager of a respondent;
(iii) a person related within the first degree of consanguinity or affinity to the respondent, if a respondent is an individual person; and Section 0200 V2, Solicitation Instructions 4 Rev. 06-26-2018
(iv) a lobbyist, attorney, or other legal representative of the respondent that has been retained by the respondent with respect to the subject matter of either the solicitation or the respondent's response to the solicitation.

(B) AUTHORIZED CONTACT PERSON means a City employee designated in a City solicitation as the point of contact for all purposes for that solicitation.
(C) CITY EMPLOYEE is defined in Section 2-7-2 (*Definitions*), and further includes an independent contractor hired by the City with respect to the solicitation.
(D) CITY OFFICIAL is defined in Section 2-7-2 (*Definitions*).
(E) NO-LOBBYING PERIOD means the period of time beginning at the date and time a solicitation is published and continuing through the earliest of the following:
(i) the date the last contract resulting from the solicitation is signed;
(ii) 60 days following council authorization of the last contract resulting from the solicitation; or
(iii) cancellation of the solicitation by the City
(F) PURCHASING OFFICER means the City employee authorized to carry out the purchasing and procurement functions and authority of the City.
(G) RESPONSE means a written offer or submission in reply to a solicitation.
(H) RESPONDENT means a person or entity that has timely submitted or subsequently timely submits a response to a City solicitation, even if that person subsequently withdraws its response or has been disqualified by the City for any reason. Respondent includes:
(i) a subsidiary or parent of a respondent;
(ii) a joint enterprise, joint venture, or partnership with an interest in a response and in which a respondent is a member or is otherwise involved, including any partner in such joint enterprise, joint venture, or partnership; and
(iii) a subcontractor to a respondent in connection with that respondent's response.
(I) SOLICITATION means an opportunity to compete to conduct business with the City that requires council approval under City Charter Article VII Section 15 (*Purchase Procedure*), and includes, without limitation:
(i) an invitation for bids;
(ii) a request for proposals;
(iii) a request for qualifications;
(iv) a notice of funding availability; and
(v) any other competitive solicitation process for which the purchasing officer, in the purchasing officer's sole discretion, affirmatively determines this article should apply in accordance with Section 2-B.

1.10.4. RESTRICTION ON LOBBYING.

Subject to the exclusions in Section 5 (*Permitted Communications*), during a no-lobbying period,

(A) a respondent or an agent shall not communicate directly with a City official or a City employee, or both in order to:

(i) provide substantive information about any respondent or response with respect to the solicitation to which the communication relates;

(ii) encourage the City to reject one or more of the responses to the solicitation to which the communication relates;

(iii) convey a complaint about the solicitation to which the communication relates; or

(iv) ask any City official or City employee to favor or oppose, recommend or not recommend, vote for or against, consider or not consider, or take action or refrain from taking action on any vote, decision, or agenda item regarding the solicitation to which the communication relates.

(B) a City official shall not contact or communicate with a respondent regarding a response or the solicitation to which the no-lobbying period applies;

(C) a City employee, other than the authorized contact person, shall not contact or communicate with a respondent regarding a response or the solicitation to which the no-lobbying period applies.

1.10.5. PERMITTED COMMUNICATIONS.

The following communications are permitted under this article at any time:

(A) any communication between a respondent or agent and any authorized contact person, including, without limitation and in accordance with regulation, any complaint concerning the solicitation;

(B) any communication between a respondent or agent and any person to the extent the communication relates solely to an existing contract between a respondent and the City, even when the scope, products, or services of the current contract are the same or similar to those contained in an active solicitation;

(C) any communication between a respondent or an agent and a City employee to the extent the communication relates solely to a non-substantive, procedural matter related to a response or solicitation;

(D) any communication required by or made during the course of a formal protest hearing related to a solicitation;

(E) any communication between a respondent or an agent and the City's Small & Minority Business Resources Department, that solely relates to compliance with Chapters 2-9A through 2-9D (*Minority-Owned and Women-Owned Business Enterprise Procurement Program*) of the City Code;

(F) any communication between an attorney representing a respondent and an attorney authorized to represent the City, to the extent the communication is permitted by the Texas Disciplinary Rules of Professional Conduct;

(G) any communication made by a respondent or an agent to the applicable governing body during the course of a meeting properly noticed and held under Texas Government Code Chapter 551 (*Open Meetings Act*);

(H) any communication between a respondent or an agent and a City employee whose official responsibility encompasses the setting of minimum insurance requirements for the solicitation to which the communication relates, to the extent the communication relates solely to the insurance requirements established by the City in the solicitation; and

(I) any contribution or expenditure as defined in Chapter 2-2 (*Campaign Finance*).

1.10.6. MODIFICATION OF RESTRICTION.

The purchasing officer may waive, modify, or reduce the requirements in Section 4 (*Restrictions on Lobbying*) in order to allow respondents to communicate with a City employee or a City official other than the authorized contact person when the purchasing officer determines, in writing, that the solicitation must be conducted in an expedited manner, including but not limited to a solicitation conducted for reasons of health or safety under the shortest schedule possible with no extensions. Any such modification authorized by the purchasing officer shall be stated in the solicitation.

1.10.7. NOTICE.

(A) Each solicitation shall include a notice advising respondents and prospective respondents:

(i) of the requirements of this article;

(ii) that any communication initiated by a City employee or City official, other than the authorized contact person, during the no-lobbying period regarding a response or the solicitation may result in a violation of Section 4(A) if the respondent subsequently lobbies that City employee or City official.

(B) The purchasing officer, or a City employee designated by the purchasing officer, shall provide weekly written notice, accessible to all City employees and City officials, of each solicitation for which the no-lobbying period is in effect.

1.10.8. DISCLOSURE OF VIOLATION.

A City official or a City employee other than the authorized contact person that becomes aware of a violation of Section 4 (*Restrictions on Lobbying*) shall notify the authorized contact person in writing as soon as practicable.

1.10.9. ENFORCEMENT.

(A) A respondent that has been disqualified pursuant to Section 10(A) (*Disqualification; Contract Voidable*) may appeal such disqualification to a subcommittee that is less than a quorum of the Ethics Review Commission established in Chapter 2-7, Article 2 (*Ethics Review Commission*), whose decision on appeal shall be final and binding. Any appeal must be filed in the manner prescribed by the Ethics Review Commission within 5 calendar days of the notice given by the purchasing officer pursuant to Section 10(B).

(B) The purchasing officer shall waive a violation of Section 4(A) if the violation was solely the result of communications initiated by a City official or a City employee other than the authorized contact person.

(C) The purchasing officer has the authority to enforce this article through rules promulgated in accordance with Chapter 1-2 (*Adoption of Rules*), which at a minimum shall include a notice and protest process for respondents disqualified pursuant to Section 10 (*Disqualification;Contract Voidable*), including:

(1) written notice of the disqualification imposed pursuant to Section 10 (*Disqualification;Contract Voidable*);

(2) written notice of the right to protest the disqualification imposed; and

(3) written notice of the right to request an impartial hearing process.

1.10.10. DISQUALIFICATION; CONTRACT VOIDABLE.

(A) If the purchasing officer finds that a respondent has violated Section 2-7-104(1), the respondent is disqualified from participating in the solicitation to which the violation related.
(B) The purchasing officer shall promptly provide written notice of disqualification to a disqualified respondent.
(C) If a respondent is disqualified from participating in a solicitation as a result of violating Section 2-7-104(1) and the solicitation is cancelled for any reason, that respondent is also disqualified from submitting a response to any reissue of the same or similar solicitation for the same or similar project. For the purposes of this section, the purchasing officer may determine whether any particular solicitation constitutes a "same or similar solicitation for the same or similar project".
(D) If a respondent violates Section 104(1) and is awarded a contract resulting from the solicitation to which the violation relates, the City may void that contract.
(E) Respondents that violate Section 2-7-104(1) three or more times during a five year period may be subject to debarment from participating in any new contracts with the City for a period of up to three years.

1.11 City's Minority-Owned and Women-Owned Business Enterprise / Disadvantaged Business Enterprise (MBE/WBE or DBE) Program Requirements. Good Faith Efforts. When a bidder cannot achieve the MBE/WBE or DBE goals or subgoals established for the project, the bidder must document its Good Faith Efforts to meet the goals or subgoals. Good Faith Effort evaluations will consider, at a minimum, the bidder's efforts to do the following:

1.11.1 Soliciting through at least two reasonable, available and verifiable means MBEs/WBEs within the Significant Local Business Presence boundaries at least seven (7) business days prior to the bid opening date to allow the MBEs/WBEs or DBEs to respond to the bid.

1.11.2 Providing interested MBEs/WBEs or DBEs adequate information about the bid documents and requirements, including addenda, in a timely manner to assist them in responding to the bid.

1.11.3 Negotiating in good faith with interested MBEs/WBEs DBEs that have submitted bids to the bidder.

1.11.4 Publishing notice in a local publication such as a newspaper, trade association publication or via electronic/social media.

1.11.5 Not rejecting MBEs/WBEs or DBEs as being unqualified without sound reasons based on a thorough investigation of their capabilities.

1.11.6 Making economically feasible portions of the work available to MBE/WBE or DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available MBE/WBE or DBE subcontractors and suppliers, so as to facilitate meeting the goals or subgoals.

1.11.7 The ability or desire of the bidder to perform the project work with its own organization does not relieve the bidder of the responsibility to make Good Faith Efforts.

1.11.8 Bidders are not required to accept higher quotes in order to meet the goals

or subgoals.

1.11.9 Effectively using the services of Minority Person/Women community organizations; Minority Person/Women Contractors groups; local, state and federal Minority Person/Women business assistance offices; and other organizations to provide assistance in solicitation and utilization of MBEs, WBEs and/or DBEs.

1.11.10 In assessing minimum Good Faith Efforts, the OWNER may consider (1) whether the bidder sought guidance from the City of Austin Small and Minority Business Resources Department (SMBR) on any question regarding compliance with these requirements; and (2) the performance of other bidders in meeting the goals.

For additional information, refer to the MBE/WBE or DBE Compliance Program Requirements Volume of the Project Manual.

Bid shopping is not allowed in conjunction with this solicitation and may result in the disqualification of prospective bidders and subcontractors.

2. ESTIMATES OF QUANTITIES (UNIT PRICE CONTRACTS ONLY)

Quantities listed in unit price Bid form are to be considered approximate quantities and will be used only for comparison of Bids. Payment to CONTRACTOR will be made only for actual quantities of Work performed or materials furnished in accordance with Contract and it is understood that quantities may be increased or decreased as provided in Section 00700, General Conditions, and as may be modified by Section 00810, Supplemental General Conditions.

3. DRAWINGS, PROJECT MANUAL AND SITE (S) OF WORK

Before submitting a Bid, the Bidder shall carefully examine the Bid Documents, site(s) of the proposed Work, soils, and other conditions that may affect the performance of the Work to satisfy the Bidder as to character, quality and quantities of Work to be performed and materials to be furnished. By submitting a Bid, the Bidder will be deemed to have certified that the Bidder has complied with these requirements. If, during preparation of the Bid, the Bidder discovers any suspected discrepancies or errors, the Bidder must immediately notify the Authorized Contact Person in writing of the suspected discrepancy or error. Failure to provide written notice of any suspected discrepancies or errors may be cause for rejection of the Bid.

4. BID GUARANTY

All Bids shall be accompanied by a Bid guaranty in an amount of not less than five percent (5%) of the total Bid. Bid guaranty will be a Bid bond with Power of Attorney attached, issued by a solvent surety authorized under laws of the State of Texas and acceptable to OWNER. For Bidders electing to submit Bids and Bid Guaranties electronically via Austin Finance Online, Bid Guaranties will be verified by the Owner prior to bid certification and electronic copies of Bid Guaranties will not be returned to Bidders.

The Bid guaranty accompanying the Bid of the three (3) apparent low Bidders will be retained until Contract is awarded and successful Bidder executes Contract and furnishes required bonds and insurance, after which Bid guaranties will be returned to the Bidders. All other Bid guaranties will be returned after Bid certification. In the event that the Bidder to whom the Contract is awarded fails to execute the Contract within five (5) working days of receipt

of a complete set of Contract Documents whether in electronic or hard copy form, the Bidder agrees that the OWNER in its discretion may rescind the initial award and award the Contract to the next lowest responsible Bidder.

5. PERFORMANCE AND PAYMENT BONDS

When performance and/or payment bonds are required, each shall be issued in an amount equal to the Contract Amount as security for the faithful performance and/or payment of all Contractor's obligations under the Contract Documents. Performance and payment bonds shall be issued by a solvent corporate surety authorized to do business in the State of Texas, and shall meet any other requirements established by law or by OWNER pursuant to applicable law.

6. CONSIDERATION OF BID AMOUNT

For purpose of award, after Bids are opened, reviewed, and certified, the total amount of the Bid, including accepted Bid alternates, will be considered the amount of the Bid. Certified Bid tabulations will be made available to the public through the City's Vendor Connection website, log on www.austintexas.gov/financeonline/vendor_connection/index.cfm. OWNER reserves the right to reject any or all Bids and to waive any minor informality in any Bid or solicitation procedure (a minor informality is one that does not affect the competitiveness of the Bids).

7. SUBMISSION OF BID

Each Bid must be completed and signed by person(s) authorized to bind individual, partnership, firm, corporation, or any other legal entity submitting the Bid, and, shall include the following in one envelope or electronically via Austin Finance Online (see eResponse, Attachment 1 -Submitting Bids in Austin Finance Online):

7.1 One copy of Bid form (Section 00300L or 00300U) completed and signed.

7.2 Acknowledgment of receipt of Addenda issued in spaces provided in Bid form.

7.3 Required Bid guaranty (copy of Bid guaranty if submitted electronically via Austin Finance Online).

7.4 Required Information indicated in Drawings or Project Manual as specified in Section 00820.

7.5 One copy of Total Bid Form if bid is submitted electronically via Austin Finance Online.

Bid must be accompanied by a MBE/WBE or DBE Compliance Plan. Compliance Plans will either be submitted separately, in a second envelope or electronically via Austin Finance Online, prior to the date and time set forth in Section 00020, Invitation for Bids. The Compliance Plan forms are included in the MBE/WBE Procurement Program Package or DBE Procurement Program Package (a separately bound volume).

Bid shall include all specified items in this section submitted electronically via Austin Finance Online, or may be submitted to the Capital Contracting Office in a sealed envelope, clearly identified on outside as a Bid to OWNER, with Bidder's company name and address, project name, bid due date/time, signed acknowledgement of the number of Addenda received and authorized signature. Failure to submit Bid appropriately may subject Bidder to

disqualification.

Sealed Bids may be mailed using the address below:

Address for US Mail (If mailed to the physical address, the proposal will be returned unopened)	
City of Austin	
Capital Contracting Office	
P. O. Box 1088	
Austin, Texas 78767-8845	

NOTE: Bids must either be received and time stamped in the Capital Contracting Office prior to the Due Date and Time or submitted electronically via Austin Finance Online. The time of record for those electronically submitted is the time received in Austin Finance OnLine. It is the responsibility of the Offeror to ensure that their Bid arrives at the reception desk in the Capital Contracting Office or electronically prior to the time and date indicated. Arrival at the City's mailroom, mail terminal, or post office box will not constitute the Proposal arriving on time.

It is the sole responsibility of the Bidder to ensure timely delivery of Bid. OWNER will not be responsible for failure of service on the part of the U.S. Post Office, courier services, or any other form of delivery service chosen by the Bidder. (See Section 00820, Modifications to Bidding Requirements and Contract Forms, for modifications to solicitations without MBE/WBE or DBE goals.)

In submitting its Bid, Bidder certifies that it has not lobbied the City or its officials, managers, employees, consultants, or contractors in such a manner as to influence or to attempt to influence the bidding process. In the event it reasonably appears that the Bidder influenced or attempted to influence the bidding process, the City may, in its discretion, reject the Bid.

8. WITHDRAWAL OF BID

A Sealed Bid may be withdrawn by a Bidder, provided an authorized individual of the Bidder submits a written request to withdraw the Bid prior to the time set for opening the Bids. For withdrawal of electronic bids see eResponse, Attachment 1 -Submitting Bids in Austin Finance Online)

9. REJECTION OF BIDS

9.1 The following **will** be cause to reject a Bid:

9.1.1 Failure to submit Section 00300 (Bid Form) and signed by an individual empowered to bind the Bidder.

9.1.2 Bids which are not accompanied by acceptable Bid guaranty, with Power of Attorney attached, or a letter certifying the Bidder's ability to be bonded, from a surety company, in accordance with Paragraph 4 above.

9.1.3 More than one Bid for same Work from an individual, firm, partnership or corporation.

9.1.4 Evidence of collusion among Bidders.

9.1.5 Sworn testimony or discovery in pending litigation with OWNER which discloses misconduct or willful refusal by contractor to comply with subject contract or instructions of OWNER.

9.1.6 Failure to submit MBE/WBE or DBE Compliance Plan in accordance with the separately bound volume titled MBE/WBE Procurement Program Package or DBE Procurement Program Package.

9.1.7 Failure to have an authorized agent of the Bidder attend the mandatory Pre-Bid Conference, if applicable.

9.1.8 Bids received from a Bidder who has been debarred or suspended by OWNER's Purchasing Officer.

9.1.9 Bids received from a Bidder when Bidder or principals are currently debarred or suspended by Federal, State or City governmental agencies. (Applicable for Bid amounts equal to or in excess of $25,000.00).

9.1.10 Bids received from a Bidder, who is identified on a list maintained by the Texas Comptroller of Public Accounts as a company known to have contracts with or provide supplies or services to a foreign terrorist organization, unless otherwise exempted from sanctions by the United States government.

9.2 The following **<u>may</u>** be cause to reject a Bid:

9.2.1 Poor performance in execution of work under a previous City of Austin contract.

9.2.2 Failure to achieve reasonable progress on an existing City of Austin contract.

9.2.3 Default on previous contracts or failure to execute Contract after award.

9.2.4 Evidence of failure to pay Subcontractors, Suppliers or employees in accordance with Contract requirements.

9.2.5 Bids containing omissions, alterations of form, additions, qualifications or conditions not called for by OWNER, or incomplete Bids may be rejected. In any case of ambiguity or lack of clarity in the Bid, OWNER reserves right to determine most advantageous Bid or to reject the Bid.

9.2.6 Failure to acknowledge receipt of Addenda.

9.2.7 Failure to submit any of the items specified below in paragraph 11, "Submission of Post Bid Information".

9.2.8 Failure to identify a dollar amount (price) of a unit price(s) in the 00300U including all Bid Alternates in the Bid Form 00300U or 00300L.

9.2.9 Failure to submit post-Bid information within the allotted time(s) (see paragraph 11 for post-Bid requirements).

9.2.10 Failure to timely execute Contract after award.

9.2.11 Previous environmental violations resulting in fines or citations by a governmental entity (i.e. U.S. Environmental Protection Agency, Texas Commission on Environmental Quality, etc.).

9.2.12 Safety record as set forth in Section 00410, Statement of Bidder's Safety Experience.

9.2.13 Failure of Bidder to demonstrate the minimum experience required as specified in Section 00400 if that Section is included in the bidding documents.

9.2.14 Evidence of Bidder's lack of sufficient resources, workforce, equipment or supervision, if required by inclusion of appropriate attachments in Section 00400.

9.2.15 Evidence of poor performance on previous Projects as documented in Owner's project performance evaluations.

9.2.16 Unbalanced Unit Price Bid: "Unbalanced Bid" means a Bid, which includes a Bid that is based on unit prices which are significantly less than cost for some Bid items and significantly more than cost for others. This may be evidenced by submission of unit price Bid items where the cost are significantly higher/lower than the cost of the same Bid items submitted by other Bidders on the project.

10. PROTEST PROCEDURES

The OWNER's Capital Contracting Officer has the authority to settle or resolve any claim of an alleged deficiency or protest. The procedures for notifying OWNER of an alleged deficiency or filing a protest are listed below. If you fail to comply with any of these requirements, the Capital Contracting Officer may dismiss your complaint or protest.

10.1 Prior to Bid opening: If you are a prospective Bidder and you become aware of the facts regarding what you believe is a deficiency in the solicitation process before the Bid is opened, you must notify OWNER in writing of the alleged deficiency before that date, giving OWNER an opportunity to resolve the situation prior to the Bid opening.

10.2 After Bid opening: If you submit a Bid to OWNER and (1) you have been found non-responsive, or (2) you believe that there has been a deficiency in the solicitation process or the award, you have the opportunity to protest the solicitation process or the recommended award as follows:

10.2.1 You must file written notice of your intent to protest within four (4) calendar days of the date that you know or should have known of the facts relating to the protest. If you do not file a written notice of intent within this time, you have waived all rights to protest the solicitation process or the award.

10.2.2 You must file your written protest within fourteen (14) calendar days of the date that you know or should have known of the facts relating to the protest unless you know of the facts before the Bid has been opened. If you know of the facts before that date, you must notify OWNER as stated above.

10.2.3 You must submit your protest in writing and must include the following information:

.1 your name, address, telephone, and email address;
.2 the solicitation number and the CIP number, if applicable;
.3 a detailed statement of the factual grounds for the protest, including copies of any relevant documents.

10.2.4 Your protest must be concise and presented logically and factually to help with OWNER's review.

10.2.5 When OWNER receives a timely written protest, the Capital Contracting Officer will determine whether the grounds for your protest are sufficient. If the Capital Contracting Officer decides that the grounds are sufficient, the Capital Contracting Office will schedule a protest hearing, usually within five (5) working days. If the Capital Contracting Officer determines that your grounds are insufficient, you will be notified of that decision in writing.

10.2.6 The protest hearing is informal and is not subject to the Open Meetings Act. The purpose of the hearing is to give you a chance to present your case; it is not an adversarial proceeding. Those who may attend from OWNER are: representatives from the department that requested the purchase, the Law Department, the Capital Contracting Office, and other appropriate City staff. You may bring a representative or anyone else that will present information to support the factual grounds for your protest with you to the hearing.

10.2.7 A decision will usually be made within fifteen (15) calendar days after the hearing.

10.2.8 The Capital Contracting Officer will send you a copy of the hearing decision after the appropriate City staff has reviewed the decision.

10.2.9 When a protest is filed, OWNER usually will not make an award until a decision on the protest is made. However, OWNER will not delay an award if the City Manager or the Capital Contracting Officer determines that:

.1 OWNER urgently requires the supplies or services to be purchased, or
.2 Failure to make an award promptly will unduly delay delivery or performance.

In those instances, the Capital Contracting Office will notify you and make every effort to resolve your protest before the award.

The protest or notice of intent and the protest shall be submitted in writing to:

Address for Delivery Service:	Address for US Mail:
City of Austin	City of Austin
Capital Contracting Office	Capital Contracting Office
ATTN: Capital Contracting Officer	ATTN: Capital Contracting Officer
One Texas Center	P.O. Box 1088
505 Barton Springs Rd.	Austin, Texas 78767-1088
Suite 1045-A	
Austin, Texas 78704	
PHONE: 512/974-7141	

11. SUBMISSION OF POST BID INFORMATION

11.1 Prior to determination of the certified low Bidder, the three (3) apparent low Bidders

must submit to OWNER the following information within three (3) business days of receipt of notice of apparent low Bidder status by the OWNER:

11.1.1 One copy of Attachments A-I and any other specifically designated Attachments of the Statement of Bidder's Experience (Section 00400), completed and signed. (Unless provided to the contrary in Section 00820 Modifications to Bidding Requirements and Contract Forms). (Note: OWNER reserves the right to solely determine whether the comparable experience documentation provided by the Bidder is sufficient and relevant to the Work described in the Contract Documents for the Bidder to be considered a responsible Bidder.)

11.1.2 One Copy of the Certificate of Non-Suspension or Debarment (Section 00405), completed and signed. (Applicable for Bid amounts equal to or in excess of $25,000.00.)

11.1.3 One copy of Section 00410, Statement of Bidder's Safety Experience, including required attachments, completed and signed.

11.1.4 One copy of the Title VI Assurances Appendix A (Section 00631), completed and signed.

11.1.5 One copy of the Title VI Assurance Appendix E (Section 00632), completed and signed.

11.1.6 One copy of Exhibit A Federal Provisions (Section 00810A) completed and signed. (Federal projects only)

11.1.7 Such other information as is required to evaluate Bid or Bidder.

11.2 Upon notification of status as certified low Bidder, Bidder shall submit the following information to OWNER within three (3) business days:

11.2.1 Confirmation Letters between Bidder and all subcontractor(s) and all supplier(s) identified in the MBE/WBE Compliance Plan.

11.2.2 Section 00425A, Insurance Cost Form. For ROCIP projects.

11.2.3 Section 00425B, Contractor Affidavit of Receipt and Provision of ROCIP Information, and Subcontractor Affidavit of Receipt and Provision of ROCIP Information (for Subcontractor(s) of all tiers identified in the MBE/WBE Compliance Plan). For ROCIP projects.

11.2.4 Such other information as required. In addition, the Bidder acknowledges and agrees that the failure to timely provide the additional information required by this section will result in a determination that, for the purposes of this solicitation, the Bidder has not provided sufficient information for the OWNER to be able to determine that the Bidder is a responsible Bidder.

12. AWARD AND EXECUTION OF CONTRACT

OWNER will process Bids expeditiously. Award of Contract will be to the lowest, responsible Bidder meeting all requirements of the Bid Documents. OWNER may not award Contract to a nonresident Bidder unless the nonresident underbids the lowest Bid submitted by a responsible resident Bidder by an amount that is not less than the amount by which a

resident Bidder would be required to underbid the nonresident Bidder to obtain a comparable contract in the state in which the nonresident's principal place of business is located.

Award of Contract will occur within the period identified on the Bid form, unless mutually agreed between the parties. Capital Contracting Officer shall submit recommendation for award to the City Council for those project awards requiring City Council action. Contract will be signed by City Manager or his/her designee after award and submission of required documentation by Bidder. Contract will not be binding upon OWNER until it has been executed by both parties. OWNER will process the Contract expeditiously. However, OWNER will not be liable for any delays prior to the award or execution of Contract.

Upon contract award, the selected Bidder must submit either their existing or an updated personnel policy (on letterhead) documenting conformity with City Code, Chapter 5-4, § 5-4-2. If the company does not submit a copy of their personnel policy incorporating the non-discrimination policy, the City of Austin Nondiscrimination Policy (Section 00630) will be considered the Bidder's nondiscrimination policy.

In any case of ambiguity or lack of clarity in the Bid, OWNER reserves the right to determine the most advantageous Bid or to reject the Bid.

Notwithstanding anything in this Section 00100 to the contrary, the OWNER may award a contract for construction services in an amount of less than $100,000 to a bidder whose principal place of business is in the City of Austin and whose bid is within 5% of the lowest bid price received from a bidder whose principal place of business is not within the City of Austin, if the City finds that the local bidder offers the City the best combination of contract price and additional economic development opportunities for the City created by the contract award including the employment of resident of the City and increased tax revenues to the City.

13. PARTNERING

In order to complete the Work in a manner that is most beneficial to the OWNER and CONTRACTOR, OWNER and CONTRACTOR may form a "Partnering Team", which will include the E/A, and any major Subcontractors. This partnering relationship will draw on the strength of all parties to identify and achieve mutual goals. The objectives of this partnering relationship are effective and efficient communication and Contract performance, which is intended to ensure that the Project is completed within budget, on schedule, and in accordance with the Drawings and Specifications and other Contract requirements. While the partnering relationship will be multilateral in makeup and participation will be totally voluntary, the OWNER and CONTRACTOR agree to cooperate and use reasonable good faith efforts to discuss and resolve any and all Project issues and disputes. Section 01100, Special Project Procedures and/or Section 01200, Project Meetings contain additional information regarding the intent of the partnering relationship and responsibilities of the entities entering into the partnering charter.

14. ROCIP REQUIREMENTS

If the insurance on this Project will be under the Rolling Owner Controlled Insurance Program (ROCIP), the Bidder is directed to Section 00810, Supplemental General Conditions, Section 00820, Modifications to Bidding Requirements and Contract Forms, and the Project Safety Manual included with these contract documents for information and bidding requirements.

The Insurance Cost Form, Section 00425A must be accurately completed and submitted with the Bid to indicate insurance removed from Base Bid and Alternates. CONTRACTOR shall remove from the Bid the cost of insurance for the CONTRACTOR and Subcontractors of all tiers working on site.

The Rolling Owner Controlled Insurance Program Information, Section 00425 B, Contractor Affidavit of Receipt and Provision of ROCIP Information and Subcontractor Affidavit of Receipt and Provision of ROCIP Information for subcontractor(s) of all tiers identified in the MBE/WBE Compliance Plan must be accurately completed and submitted by the certified low bidder as a post bid submittal. Subcontractor Affidavits must be submitted throughout the duration of the Contract as Subcontractor(s) are added.

15. SIGNATURE REQUIREMENTS

The Bid and any subsequent supporting Bid documents and Contract must be executed in the Bidder's full name and legal entity status by an authorized representative of the Bidder. Accordingly, a partnership/joint venture must file its partnership/joint venture agreement, a corporation must file its articles and bylaws, a limited liability company must file its certificate of organization and article of organization and regulations, and a limited partnership must file not only limited partnership agreement and the certificate of limited partnership, but also the documentation for its general partner, and any Bidder must file a copy of any assumed name certificate, or such limited portion of such documents reasonably establishing signature authority.

16. CONTRACTOR EVALUATION

The Owner will review and evaluate the Contractor's Work and performance on the Project and provide the Contractor with a written Contractor Evaluation Report in accordance with City of Austin Administrative Rule R161-13.37. Rule R161-13.37 provides an appeal process. http://www.austintexas.gov/department/contract-management

17. TEXAS ETHICS COMMISSION CERTIFICATE OF INTERESTED PARTIES DISCLOSURE FORM

17.1 Definitions:

17.1.1 "Interested Party" – means a person who has a controlling interest in a Business Entity with whom the Owner contacts or who actively participates in facilitating the Contract or negotiating the terms of the Contract, including a broker, intermediary, adviser, or attorney for the Business Entity.

17.1.2 "Business entity" - includes an entity through which business is conducted with a governmental entity or state agency, regardless of whether the entity is a for-profit or nonprofit entity. The term does not include a governmental entity or state agency.

17.2 As a condition to entering the Contract, the Business Entity constituting the successful Bidder must provide a Texas Ethics Commission Certificate of Interested Parties Form to the Owner at the time the Business Entity/Bidder submits the signed Contract to the Owner in full compliance with the following requirements under which the successful Bidder shall:

17.2.1 Go to the Ethics Commission's website (www.ethics.state.tx.us),

17.2.2 Complete the "Interested Parties" information, in accordance with the requirements of the Texas Ethics Commission Rules published at Title 1, Part 2, Chapter 46, of the Texas Administrative Code and available on the referenced website,

17.2.3 Include the City's contract identification number,

17.2.4 Include a short description of the goods or services to be used by the City, and

17.2.5 Indicate whether each interested party has a controlling interest in the business entity, is an intermediary in the contract for which the disclosure is being filed, or both.

17.3 In accordance with the Commission Rules, the Certificate of Filing and completed Certificate of Interested Parties must be (i) printed, (ii) signed by an authorized agent of the business entity, and (iii) submitted to the City at the time of the submission of the signed contract to the City. The City then must notify the Ethics Commission in electronic format of receipt of the document within 30 days of contracting and the Commission will make the disclosure of interested parties available to the public on its website.

END

GEOTECHNICAL DATA
Section 00220

1. OVERVIEW

Depending on Project requirements, OWNER may have obtained geotechnical information, which may include laboratory test results and logs of borings from geotechnical consultants. That information will be included in this section and/or on the Drawings. The CONTRACTOR shall be familiar with the subsurface materials and conditions on the Project and shall be knowledgeable of how they will affect the Work. The following is a partial listing of sources of information available to the CONTRACTOR about subsurface materials and conditions: the geotechnical information provided by the OWNER; geologic maps, publications and reports available from the University of Texas Bureau of Economic Geology at the J.J. Pickle Research Center in Austin, Texas; subcontractors familiar with local ground conditions; and, local consulting geologists and geotechnical engineers. The CONTRACTOR may make their own subsurface investigations.

SUBSURFACE INVESTIGATION AND GEOTECHNICAL DATA REPORT FOR HARMON AVENUE AREA WATER & WASTEWATER RENEWAL, dated 6 JULY 2018, prepared by HOLT ENGINEERING, INC. is attached. The requirements in the Drawings and Specifications shall be used in the event of a conflict between this report and the Drawings and Specifications.

END

GEOTECHNICAL ENGINEERING
DRILLING & SAMPLING
FOUNDATION DESIGN

HOLT ENGINEERING, INC.

CONSTRUCTION INSPECTION
LABORATORY TESTING
MATERIALS TESTING

6 July 2018

Hejl, Lee & Associates, Inc.
321 Ed Schmidt Boulevard, Suite 100
Hutto, Texas 78634

Attn: Mr. Chien Lee, P.E.

Re.: Harmon Avenue Water & Wastewater Renewal (2231.298) File No: 05-17418
Airport Boulevard and 51st Street Area
Austin, Texas

Dear Mr. Lee:

Enclosed please find a copy of our Subsurface Investigation and Geotechnical Date Report for the above referenced project.

Should you have any questions concerning our report or if we can be of further service, please do not hesitate to call.

Sincerely,

Steve B. Johnson, P.E.
Geotechnical Division

Holt Engineering, Inc.
TBPE Firm Registration No. F-430

Enc.: Engineering Report
Invoice

2220 Barton Skyway • Austin, Texas • 78704 • Ph. (512) 447-8166 • Fax (512) 447-0852

SUBSURFACE INVESTIGATION

AND

GEOTECHNICAL DATA REPORT

FOR

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL (2231.298)

AIRPORT BOULEVARD & 51ST STREET AREA

AUSTIN, TEXAS

REPORT FOR:

HEJL, LEE & ASSOCIATES, INC.

321 ED SCHMIDT BOULEVARD, SUITE 100

HUTTO, TEXAS 78634

PREPARED BY:

STEVE B. JOHNSON, P.E.
MANAGER GEOTECHNCIAL DIVISION

HOLT ENGINEERING, INC.
TBPE FIRM REGISTRATION NO. F-430

STATE OF TEXAS
STEVE B. JOHNSON
74472
LICENSED
PROFESSIONAL ENGINEER

FILE NO. 05-17418
6 JULY 2018

TABLE OF CONTENTS

PAGE

INTRODUCTION 1
SCOPE 1
SUBSURFACE INVESTIGATION 2
LABORATORY INVESTIGATION 3
SITE DESCRIPTION 3
SUBSURFACE CONDITIONS 3
GROUNDWATER 6
REMARKS 6

APPENDIX

ITEM

GENERALIZED BORING LOCATION PLAN 1
GEOLOGIC FORMATION MAP 2
LOGS OF BORINGS (18) AND
BORING LOGS – TERMS & SYMBOLS 3
SUMMARY OF LABORATORY TEST RESULTS 4

SUBSURFACE INVESTIGATION

AND

GEOTECHNICAL DATA REPORT

FOR

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL (2231.298)

AIPORT BOULEVARD AND 51ST STREET AREA

AUSTIN, TEXAS

INTRODUCTION

A subsurface investigation was performed at the site of the proposed Harmon Avenue Area Water and Wastewater Renewal in Austin, Texas. Mr. Chien Lee, P.E. with Hejl, Lee and Associates Inc., authorized the investigation via email correspondence on 27 February 2018 in accordance with our proposal dated 10 October 2017. The purpose of this investigation was to determine subsurface materials and conditions along the proposed alignment in order to provide the engineer with characterizations of the subsurface soil, rock and groundwater conditions.

The project consists of replacing approximately 7,750 L.F. of water line and approximately 5,426 L.F. of wastewater line in the Harmon Avenue Area. The lines will be replaced at various depths below grade but no deeper than 10 feet below existing grade. The mains will be replaced primarily through typical open cut trenches.

SCOPE

1. Our investigation consisted of the following:
   - A. Drilling, logging and sampling 18 soil borings to a depth of 15 feet each below existing grades.
   - B. Obtaining soil samples and cores of subsurface materials for laboratory analysis.
   - C. Investigating existing in-place conditions of subsurface materials by visual examination and field tests.

HOLT ENGINEERING, INC. 2220 Barton Skyway – Austin, Texas – 78704 – Ph. (512) 447-8166 – Fax (512) 447-0852

D. Plugging all bore holes immediately following the drilling operations.

2. Samples of subsurface materials were analyzed as necessary in the field and laboratory by:

   A. Visual examination and classification

   B. Atterberg Limits Tests

   C. Unconfined Compression Tests

   D. Sieve Analyses

   E. Unit Dry Weight and Moisture Content

   F. Pocket Penetration Tests

   G. Rock Quality Designations (RQD) and Percent Core Recovery

A detailed discussion of each of the above items is presented in the following sections of our report. This Geotechnical Data Report (GDR) presents only a summary of the factual information gathered during the project investigation which includes the pertinent field and laboratory data.

SUBSURFACE INVESTIGATION

As mentioned above, subsurface materials along the proposed alignment were explored by a total of 18 soil borings drilled to a depth of 15 feet each below the existing ground surface. Borings were located on approximate 500-foot to 750-foot centers at the direction of the civil engineer. Locations of the borings are shown in the attached Generalized Boring Location Plan. It should be noted borings B-06, B-09, and B-12 were omitted due to existing utility conflicts.

All holes were logged in the field by an experienced driller familiar with Austin area geology under the direction of the geotechnical engineer. Grab samples were taken from the auger flights while undisturbed samples were taken using a Shelby tube sampler. Standard penetration tests were performed by using a 2-inch O.D. split-spoon sampler driven by a 140-pound hammer dropping a distance of 30 inches. The number of blows required to advance the split-spoon 12 inches is recorded on the attached soil-boring logs.

Continuous coring was performed in some of the rock encountered in our borings using

HOLT ENGINEERING, INC. 2220 Barton Skyway – Austin, Texas – 78704 – Ph. (512) 447-8166 – Fax (512) 447-0852

a Christensen NXB wireline system with an outside core diameter of 1-7/8 inches. Core samples were placed in core boxes in the sequence of recovery with the top of the core placed in the upper left-hand corner of the box. Core boxes were carefully labeled and transported to the lab for inspection and logging by the geotechnical engineer. Laboratory tests were run on selected soil and rock samples as described below.

LABORATORY INVESTIGATION

Samples of subsurface materials were examined and classified in the laboratory. Atterberg limits tests and minus 200-mesh sieve tests were performed on selected samples to establish index properties and grain size characteristics and to aid in the proper classification of materials. Existing conditions of the fine-grained soils were investigated by dry unit weight, moisture content, sieve analysis, unconfined compression and Atterberg limit tests. Selected samples of the rock were tested for unconfined compressive strength, moisture content and dry unit weight. Results our laboratory testing can be found in the Laboratory Test Results and Logs of Borings found in the Appendix.

SITE DESCRIPTION

The site of the proposed water and wastewater renewal is located in the Harmon Avenue Area in Austin, Texas. The surrounding area consists mainly of residential subdivision with some commercial development along the eastern portion of the alignment. The terrain generally slopes to the south.

SUBSURFACE CONDITIONS

Based on the "*Geological Map of the Austin Area, Texas*," published by the Bureau of Economic Geology, the site is located in the Upper Colorado River terrace deposits (Qucr) and Austin Group (Kau) geological formations. The Upper Colorado River terrace deposits are typically found on the surface and consist of light brown to reddish brown alluvial soils. These alluvial soils are made up of gravel, sand, silt, and clay. These soils overlie the Austin Group. The Austin Group formation consists of chalk, marly limestone, and massively bedded limestone rock. The limestone rock is weathered in the upper portion and with depth is harder

HOLT ENGINEERING, INC. 2220 Barton Skyway – Austin, Texas – 78704 – Ph. (512) 447-8166 – Fax (512) 447-0852

and more intact. The rock is light brown, tan, and gray in color. Locations of the borings are shown in the attached Geological Formation Map in the Appendix.

The soils encountered in our borings generally correspond with the above geological descriptions. A general description of the pavement section and soil conditions is given below in Table I and Table II, respectively. A detailed depiction of the soil conditions is given in the Logs of Borings found in the Appendix.

Table I: Summary of Asphalt, Base, and Fill Thickness for All Borings

Boring No.	Asphalt (in)	Base (in)	Fill Material	Boring No.	Asphalt (in)	Base (in)	Fill Material
B-01	2 ½	7 ½	-	B-12*	-	-	-
B-02	2 ½	7 ½	-	B-13	2 ¼	8 ¼	-
B-03	2	7 ½	-	B-14	3	8	-
B-04	2 ½	10	12.5" – 2.2'	B-15	3 ½	8 ½	-
B-05	4	6	-	B-16	3	5	8" – 1.3'
B-06*	-	-	-	B-17	2	9	-
B-07	3	7	-	B-18	2	7 ½	-
B-08	5	7	-	B-19	2	7 ½	-
B-09*	-	-	-	B-20	2 ½	7 ½	-
B-10	1	6	-	B-21	2 ½	9	-
B-11	2	9 ½	-				

*Note: Borings were omitted due to existing utility conflicts.

The base material consists of tan and light brown silt with limestone rock. The fill material consists of unclassified brown and light brown silty clay and silty sandy clay with varying amounts of limestone rock and tan silt layers.

HOLT ENGINEERING, INC.
2220 Barton Skyway – Austin, Texas – 78704 – Ph. (512) 447-8166 – Fax (512) 447-0852

Table II: Summary of Soil Conditions Below Pavement Section

Boring No.	Brown Clay	Tan & Light Brown Clay	Tan & Light Brown Sand	Tan Limestone Rock (Kau)
B-01	10" – 1.2'	1.2' – 5.5'	-	5.5' – 15.0'*
B-02	-	10" – 15.0'*	-	-
B-03	9 ½" – 4.3'	4.3' – 15.0'*	-	-
B-04	-	2.2' – 15.0'*	-	-
B-05	10" – 2.2'	2.2' – 15.0'*	-	-
B-06**	-	-	-	-
B-07	10" – 3.0'	3.0' – 12.5'	12.5' – 15.0'*	-
B-08	1.0' – 4.5'	4.5' – 15.0'*	-	-
B-09**	-	-	-	-
B-10	7" – 2.7'	2.7' – 9.0'	9.0' – 15.0'*	-
B-11	11 ½" – 3.3'	3.3' – 15.0'*	-	-
B-12**	-	-	-	-
B-13	10 ½" – 4.8'	4.8' – 15.0'*	-	-
B-14	11" – 3.0'	3.0' – 15.0'*	-	-
B-15	1.0' – 5.0'	5.0' – 15.0'*	-	-
B-16	1.2' – 2.5'	2.5' – 15.0'*	-	-
B-17	11" – 4.8'	4.8' – 12.5'	-	12.5' – 15.0'*
B-18	9 ½" – 1.5'	1.5' – 15.0'*	-	-
B-19	9 ½" – 2.5'	2.5' – 15.0'*	-	-
B-20	1.5' – 6.7'	6.7' – 13.0'	-	13.0' – 15.0'*
B-21	11 ½" – 2.2'	2.2' – 12.5'	12.5' – 15.0'*	-

*Note: Depth at which the borings were terminated.

**Note: Boring were omitted due to existing utility conflicts.

HOLT ENGINEERING, INC.
2220 Barton Skyway – Austin, Texas – 78704 – Ph. (512) 447-8166 – Fax (512) 447-0852

The brown clay may classify as either fat or lean clay. The brown fat clay is highly plastic with Liquid Limits (L.L.'s) ranging from 52 to 59 and plasticity indices (P.I.'s) ranging from 33 to 39. Unconfined compression test results in the brown fat clay ranged from 1.6 tsf to 4.0 tsf. The brown lean clay is moderate in plasticity with a L.L. of 45 and a P.I. of 27 and contains sand. An unconfined compression test result in the residual brown lean clay had a value of 2.1 tsf.

The tan and light brown clay may classify as either fat or lean clay. The tan and light brown fat clay is highly plastic with a L.L. of 55 and a P.I. of 35 and contains calcareous layers. The tan and light brown lean clay is low to moderate in plasticity with L.L's ranging from 21 to 46 and P.I.'s ranging from 7 to 28 and contain some sand and calcareous layers. Unconfined compression test results in the tan and light brown lean clay ranged from 2.6 tsf to 3.6 tsf.

The tan and light brown sand is low in plasticity with a L.L. of 16 and a P.I. of 3. These sands are loose to medium dense in consistency.

The tan limestone (Austin Formation) consists of tan limestone rock. The tan limestone rock is medium hard with clayey limestone or marl layers. The tan limestone rock had core recoveries ranging from 95% to 100%. The RQD in the tan limestone rock ranged from 37% to 88% and had an unconfined compression test result of 76.5 tsf

GROUNDWATER

Groundwater was not encountered during the drilling operation; however, groundwater can be found migrating in the alluvial soils and at the interface of the rock and fine-grained soils above. Groundwater seepage should be anticipated in excavations. The amount of seepage will be highly dependent on rainfall conditions in the weeks and months prior to construction.

REMARKS

This Geotechnical Data Report has been prepared in order to aid in the evaluation of

HOLT ENGINEERING, INC. 2220 Barton Skyway – Austin, Texas – 78704 – Ph. (512) 447-8166 – Fax (512) 447-0852

the project and to assist the design engineers in the design of the project. The soil and bedrock conditions described are based on a few widespread soil borings over a relatively large area. Variations are expected to occur between the borings. Any substantial changes in the horizontal or vertical alignment should be brought to our attention so that we may determine how this may affect our investigation.

The procedures, tests and recommendations of this investigation and report have been conducted and furnished in accordance with generally accepted professional engineering practices in the field of foundations, engineering soil mechanics and engineering geology. No other warranty is either expressed or implied.

HOLT ENGINEERING, INC.
2220 Barton Skyway – Austin, Texas – 78704 – Ph. (512) 447-8166 – Fax (512) 447-0852

APPENDIX

ITEM 1

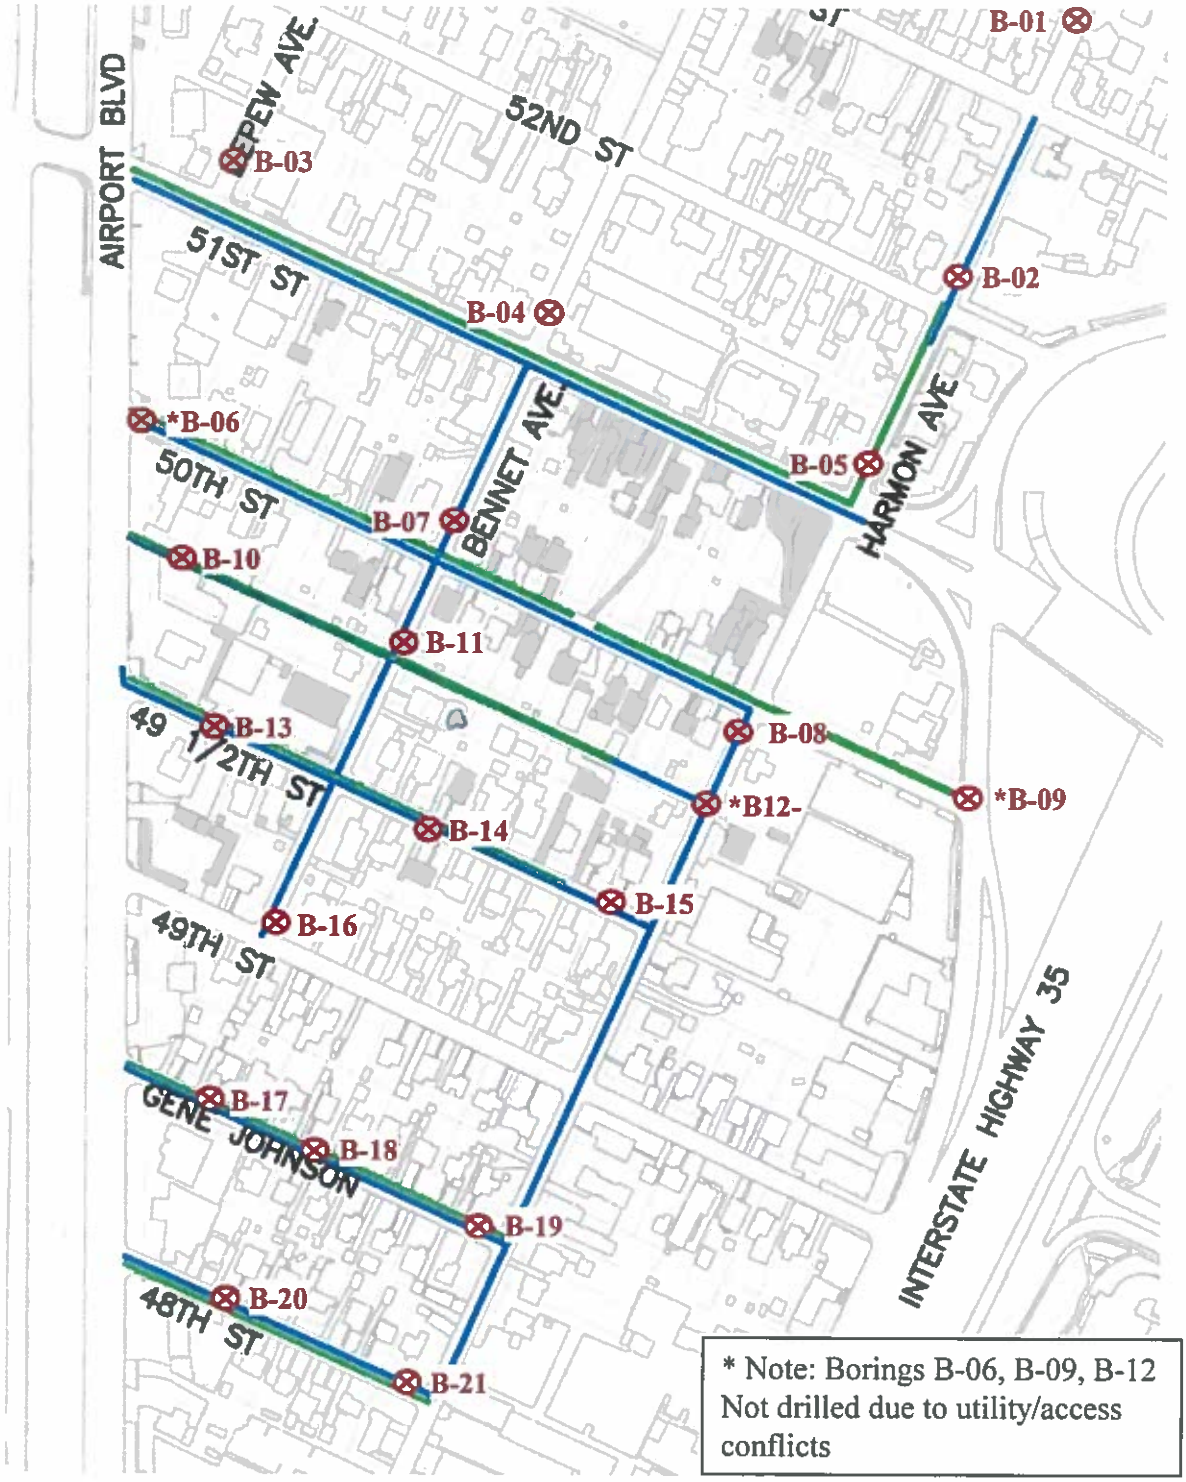

N

Not to Scale

GENERALIZED BORING LOCATION PLAN
HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD and 51st STREET
AUSTIN, TEXAS

File No 05-17418

HOLT ENGINEERING, INC.
2220 Barton Skyway ■ Austin, Texas 78704 ■ Ph. (512) 447-8166 ■ Fax (512) 447-0852

APPENDIX

ITEM 2

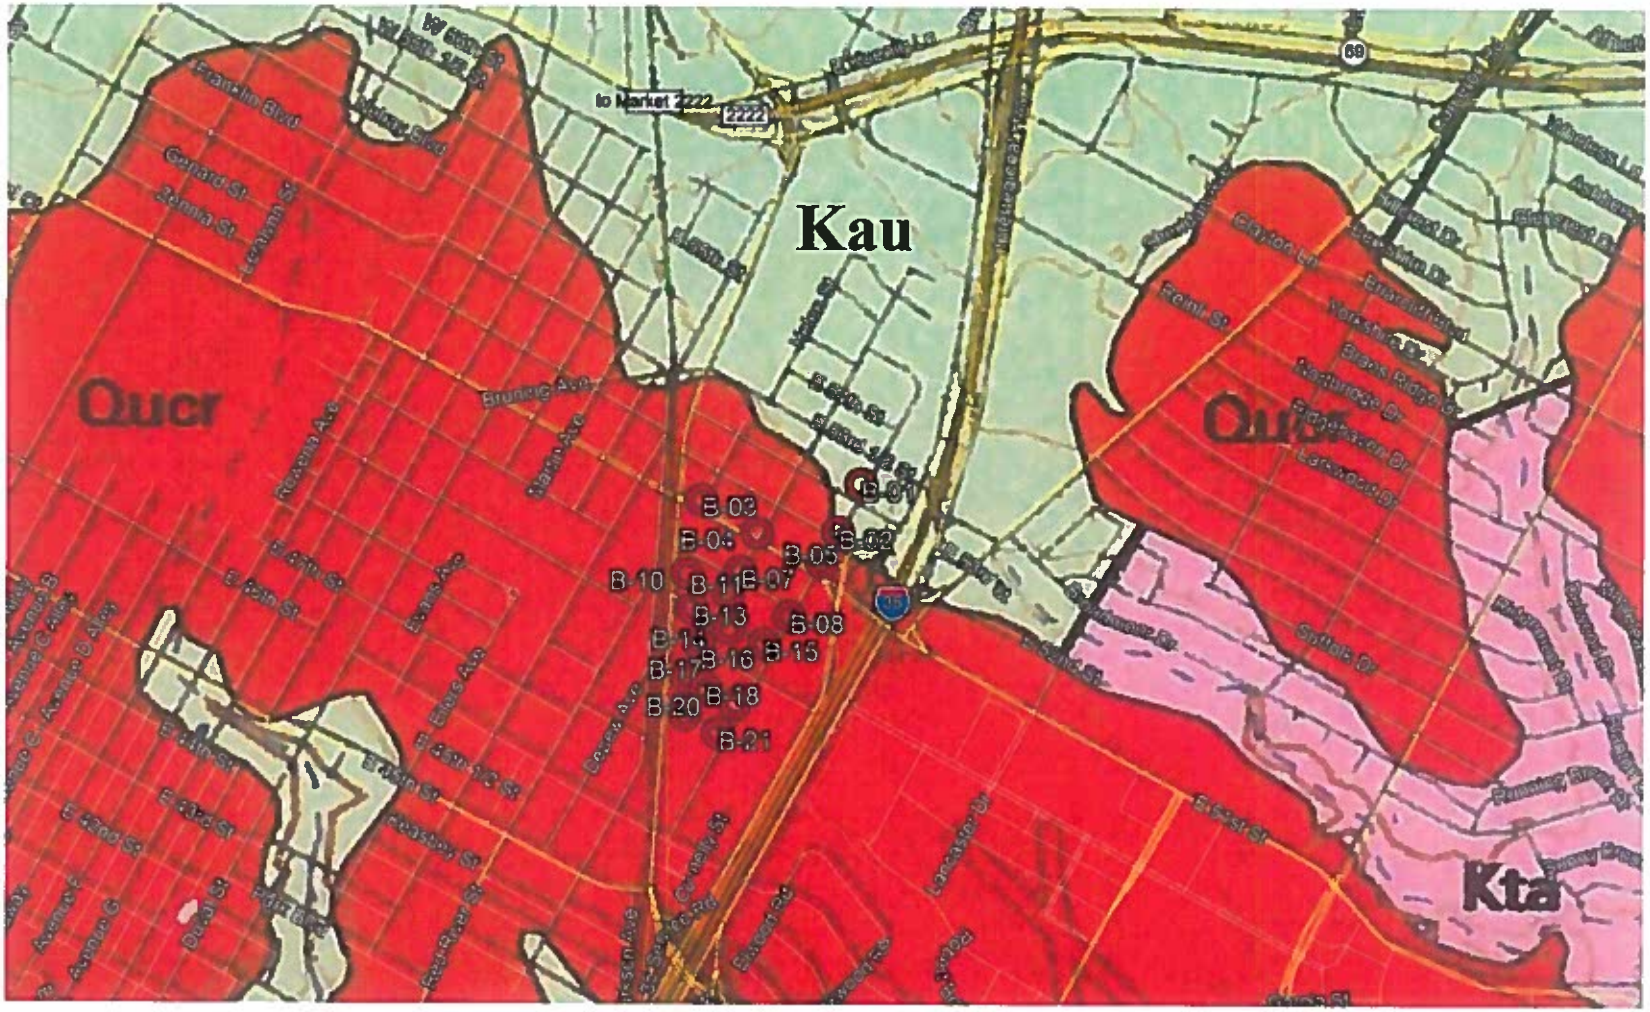
Kau
Qucr
Qusf
Kta
B-01
B-02
B-03
B-04
B-05
B-07
B-08
B-10
B-11
B-13
B-14
B-15
B-16
B-17
B-18
B-20
B-21
to Market 2222
2222
Brunig Ave
Harmon Ave
Airport Blvd
Franklin Blvd
Gerard St
Zenia St
Austin St
Hollis St
Frank St
Clayton Ln
Sylvia St
Lancaster Dr
Ridgemont Dr
Ridgecrest Dr
Ridgetop Dr
Ridgeview Dr
Ridgewood Dr
Rosewood Dr
Sunset Dr
Forest St
Lamar Blvd
Interstate 35
Interstate 35 Frontage Rd
Cameron Rd
Cameron Loop
Lockwood Rd
Lockwood Dr
Lockwood Ln
Bruton St
Hawthorn St
Hawthorn Ave
Rosewood Ave
Rosewood Ln
Rosewood Dr
Rosewood Cir
Rosewood Ct
Rosewood Pl
Rosewood Sq
Rosewood Ter
Rosewood Trl
Rosewood Way
Rosewood Wy
Rosewood Xing
Rosewood Yd
Rosewood Zn
Rosewood Zone
Rosewood Zone Ln
Rosewood Zone Rd
Rosewood Zone Sq
Rosewood Zone Ter
Rosewood Zone Trl
Rosewood Zone Wy
Rosewood Zone Xing
Rosewood Zone Yd
Rosewood Zone Zn
Rosewood Zone Zone
Rosewood Zone Zone Ln
Rosewood Zone Zone Rd
Rosewood Zone Zone Sq
Rosewood Zone Zone Ter
Rosewood Zone Zone Trl
Rosewood Zone Zone Wy
Rosewood Zone Zone Xing
Rosewood Zone Zone Yd
Rosewood Zone Zone Zn
Rosewood Zone Zone Zone
Rosewood Zone Zone Zone Ln
Rosewood Zone Zone Zone Rd
Rosewood Zone Zone Zone Sq
Rosewood Zone Zone Zone Ter
Rosewood Zone Zone Zone Trl
Rosewood Zone Zone Zone Wy
Rosewood Zone Zone Zone Xing
Rosewood Zone Zone Zone Yd
Rosewood Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zn
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ln
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Rd
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Sq
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Ter
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Trl
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Wy
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Xing
Rosewood Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Zone Yd
Rosewood Zone

APPENDIX

ITEM 3

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-01

DATE DRILLED : 05-08-18

BORING DEPTH : 15.0 FEET

DRILLER : John Webb

WATER LEVEL :

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10086958 EASTING: 3123962

ELEVATION : 647.0 FEET

DRILLING METHOD : 4" Flight Augers

LAT :

LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	% CORE RECOVERY	RQD (%)	DRILLING RATE (MIN./FT.)	CORE INTERVAL (FEET)	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2 1/2" Asphalt											
			7 1/2" Base Fill - tan silt w/ limestone fragments											
			FAT CLAY (CH), brown, silty											
			SANDY LEAN CLAY (CL), tan & light brown, clayey w/ thin very stiff layers					50/10"		14.4		25	10	63.0
5								50/2"						
			LIMESTONE, tan (Kau) -- 5.5'-6.8' - medium hard to hard w/ few thin fractured layers											
			-- 6.8'-10.0' - medium hard w/ thin marl & tan silt layers				7.0		76.5	8.9	134.1			
				95	37									
10			-- 10.0'-15.0' - solid				10.8							
				100	88									
15			Terminated @ 15 feet				15.0							
20														

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-02

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10086775 EASTING: 3123868

DATE DRILLED : 05-07-18	BORING DEPTH : 15.0 FEET
DRILLER : John Webb	WATER LEVEL :

ELEVATION : 651.3 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2 1/2" Asphalt							
			7 1/2" Base Fill - tan silt w/ limestone fragments							
			SANDY LEAN CLAY, tan & light brown, clayey, firm							
				15						
5				23		8.9		29	14	67.7
				9		7.4		22	8	61.6
10										
				8						
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-03

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10086965 EASTING: 3122793

DATE DRILLED : 05-08-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 655.0 FEET

DRILLING METHOD : 4" Flight Augers | LAT : | LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2" Asphalt							
			7 1/2" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, firm to stiff, getting lighter w/ depth		1.6	26.8	94.5	59	39	86.6
5			SANDY LEAN CLAY (CL), tan & light brown, sandy w/ calcareous deposits, firm	50/8"		14.7		33	17	68.8
			– 6.2'-7.0' - medium hard concretion							
10				20						
				17						
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-04

NOTES : NORTHING: 10086735 EASTING: 3123250

DATE DRILLED : 05-14-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 657.0 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2 1/2" Asphalt							
			10" Base Fill - tan silt w/ limestone fragments							
			Fill - Unclassified brown & light brown silty sandy clay w/ small to medium limestone rock							
			LEAN CLAY w/ SAND (CL), tan & light brown w/ calcareous deposits, firm							
5				7		17.5		27	12	73.9
10				22						
15				34						
			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

Holt Engineering Inc.
TBPE Firm Registration No. F-430

Job No. 05-17418

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-05

NOTES : NORTHING: 10086515 EASTING: 3123754

DATE DRILLED : 05-07-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 654.0 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			4" Asphalt							
			6" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, stiff							
			LEAN CLAY (CL), tan & light brown, clayey, w/ thick cemented layers -- Pocket penetrometer = 4.5+ -- 2.0'-3.0' - w/ cemented layers			7.0		35	19	26.6
5				23		8.9		30	14	60.3
			-- 9.0'-10.0' - w/ cemented layers	50/9"						
10										
				19						
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP_AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

Holt Engineering Inc.
TBPE Firm Registration No. F-430

Job No. 05-17418
Page 1 of 1

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-07

DATE DRILLED : 05-14-18	BORING DEPTH : 15.0 FEET
DRILLER : John Webb	WATER LEVEL :

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10086395 EASTING: 3123098

ELEVATION : 652.0 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
	3" Asphalt							
	7" Base Fill - tan silt w/ limestone fragments							
	FAT CLAY, brown, silty, sandy, becoming lighter w/ depth, firm to stiff							
	SANDY LEAN CLAY (CL), light brown, very silty, w/ calcareous deposits, firm to stiff		2.6	16.4	105.6	44	25	56.7
5		16						
10		25						
	SAND, tan & light brown, very silty, loose to medium dense	9						
15	Terminated @ 15 feet							
20								

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

Holt Engineering Inc.
TBPE Firm Registration No. F-430

Job No. 05-17418

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-08

NOTES : NORTHING: 10086089 EASTING: 3123514

DATE DRILLED : 05-07-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 652.0 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			5" Asphalt							
			7" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, getting lighter w/ depth, very stiff		4.0	18.7	101.8	57	37	85.0
5			FAT CLAY (CH), light brown, silty w/ thin calcareous layers, firm to stiff	17		19.5		55	35	85.8
10				19						
15				43						
			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP_AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-10

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10086370 EASTING: 3122686

DATE DRILLED : 05-31-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 644.0 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			1" Asphalt							
			6" Base Fill - tan & light brown silt w/ small to medium limestone rock & fragments							
			FAT CLAY W/ SAND (CH), brown, silty, becoming lighter w/ depth			17.5		58	38	71.8
			SANDY LEAN CLAY (CL), tan & light brown , silty, loose to medium dense w/ silty layers	14						
5				13		9.4		27	12	62.8
			SILTY SAND (SM), tan & light brown, silty, loose to medium dense w/ silty layers	13						
10				10		3.6		16	3	15.1
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-11

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10086218 EASTING: 3123007

DATE DRILLED : 05-10-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 648.0 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2" Asphalt							
			9 1/2" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, stiff, getting lighter w/ depth							
			-- Pocket penetrometer = 5.0+ tsf							
			SANDY LEAN CLAY (CL), tan & light brown, clayey w/ calcareous deposits, firm to stiff							
5				9		10.5		22	8	54.1
10				22						
15				16						
			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-13

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10086111 EASTING: 3122718

DATE DRILLED : 05-31-18	BORING DEPTH : 15.0 FEET
DRILLER : John Webb	WATER LEVEL :

ELEVATION : 641.0 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2 1/4" Asphalt							
			8 1/4" Base Fill - tan silt w/ limestone fragments							
			SANDY LEAN CLAY (CL), brown, silty, becoming lighter w/ depth, firm		2.1	19.7	101.6	45	27	63.8
5			SANDY LEAN CLAY (CL), tan & light brown w/ calcareous deposits, firm to stiff	7						
10				16		10.6		21	7	54.1
15				39						
			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

Holt Engineering Inc.
TBPE Firm Registration No. F-430

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-14

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10085943 EASTING: 3123049

DATE DRILLED : 05-30-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 646.3 FEET

DRILLING METHOD : 4" Flight Augers | LAT : | LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			3" Asphalt							
			8" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, sandy, becoming lighter w/ depth, firm to stiff							
			SANDY LEAN CLAY (CL), tan & light brown w/ calcareous deposits, firm to stiff	17						
5				16		9.2		26	11	64.0
				23						
10										
				26						
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-15

DATE DRILLED : 05-14-18	BORING DEPTH : 15.0 FEET
DRILLER : John Webb	WATER LEVEL :

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10085820 EASTING: 3123288

ELEVATION : 648.0 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			3 1/2" Asphalt							
			8 1/2" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, sandy, stiff							
			SANDY LEAN CLAY (CL), tan & light brown w/ calcareous deposits, firm to stiff	20		6.0		26	11	51.4
5			LEAN CLAY (CL), light brown, very silty w/ thick calcareous deposits, becoming less calcareous w/ depth, stiff to very stiff	20		17.0		45	27	89.0
				22						
10			-- 12.0-15.0' - very silty, more calcareous							
				50/8"						
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-16

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10085822 EASTING: 3122804

DATE DRILLED : 05-10-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 638.5 FEET

DRILLING METHOD : 4" Flight Augers | LAT : | LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			3" Asphalt							
			5" Base Fill - tan silt w/ limestone fragments							
			Fill - Unclassified brown & light brown silty clay w/ thin tan silt layers							
			FAT CLAY (CH), brown, silty, stiff							
			SANDY LEAN CLAY (CL), tan & light brown, clayey w/ calcareous deposits, firm to very stiff		3.6	13.3	110.2	39	22	63.7
5				13		14.0		27	12	80.0
				47						
10										
			-- 13.5-15.0' - w/ thin concretion layers	50/5"						
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-17

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10085553 EASTING: 3122705

DATE DRILLED : 05-10-18	BORING DEPTH : 15.0 FEET
DRILLER : John Webb	WATER LEVEL :

ELEVATION : 632.5 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2" Asphalt							
			9" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, sandy, stiff, getting lighter w/ depth							
5			LEAN SANDY CLAY (CL), tan & light brown w/ calcareous deposits, medium to stiff	21		12.7		23	8	70.5
10				29						
			LIMESTONE, MARL, tan, clayey, stiff (Kau)							
			LIMESTONE, tan, medium hard, solid (Kau)	50/3"						
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-18

DATE DRILLED : 05-09-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10085463 EASTING: 3122883

ELEVATION : 636.5 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2" Asphalt							
			7 1/2" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, firm							
			LEAN CLAY (CL), light brown, very silty, w/ thick calcareous deposits, firm to very stiff							
				13						
5										
				27		14.4		46	28	96.4
				50						
10										
				44						
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-19

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10085361 EASTING: 3123081

DATE DRILLED : 05-09-18	BORING DEPTH : 15.0 FEET
DRILLER : John Webb	WATER LEVEL :

ELEVATION : 641.3 FEET

DRILLING METHOD : 4" Flight Augers

LAT : LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2" Asphalt							
			7 1/2" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, firm							
			LEAN CLAY w/ SAND (CL), light brown, very silty w/ thick calcareous deposits, firm to stiff -- Pocket penetrometer = 4.5+ tsf							
5				14						
10				27						
15				42						
			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-20

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10085268 EASTING: 3122690

DATE DRILLED : 05-09-18 | BORING DEPTH : 15.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 628.5 FEET

DRILLING METHOD : 4" Flight Augers | LAT : | LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2 1/2" Asphalt							
			7 1/2" Base Fill - tan silt w/ limestone fragments							
			Fill - Unclassified brown & tan silty sandy clay w/ small to medium limestone rock & fragments			24.7		52	33	86.3
			FAT CLAY (CH), brown, silty, getting lighter w/ depth, firm							
			-- Pocket penetrometer = 2.0 tsf							
5			-- Pocket penetrometer = 2.6 tsf							
			LEAN CLAY (CL), tan & light brown, very stiff			12.6		30	14	87.0
10				50						
			LIMESTONE, MARL, tan, clayey, stiff to very stiff (Kau)	50/4"						
15			Terminated @ 15 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
AIRPORT BOULEVARD AND 51st STREET
AUSTIN, TEXAS

LOG OF BORING B-21

NOTES : Hole dry upon completion of drilling operation
NORTHING: 10085135 EASTING: 3122918

DATE DRILLED : 05-09-19 | BORING DEPTH : 13.0 FEET

DRILLER : John Webb | WATER LEVEL :

ELEVATION : 634.5 FEET

DRILLING METHOD : 4" Flight Augers | LAT : | LONG. :

DEPTH (feet)	GRAPHIC LOG	SAMPLE	SOIL DESCRIPTION	BLOWS PER FOOT	UCC STR. (TSF)	MOISTURE CONTENT (%)	DRY DENSITY (PCF)	LIQUID LIMIT(%)	PLASTICITY INDEX	% PASSING #200 SIEVE
			2 1/2" Asphalt							
			9" Base Fill - tan silt w/ limestone fragments							
			FAT CLAY (CH), brown, silty, sandy, becoming lighter w/ depth, stiff							
			LEAN CLAY (CL), light brown, very silty w/ calcareous deposits, stiff to very stiff		3.5	15.0	107.4	38	21	85.8
5				14						
			LEAN CLAY (CL), tan & light brown w/ thick calcareous deposits, firm							
10				48		10.1		29	14	92.9
			-- 12.0'-12.5' - very stiff							
			SAND, tan, silty, loose to medium dense							
15				11						
			Terminated @ 13 feet							
20										

LOG OF BORING 05-17418 - HARMON AVE AREA WATER & WWTP, AIRPORT BLVD-51ST ST.GPJ HOLT ENGINEERING.GDT 7/5/18

BORING LOGS – TERMS & SYMBOLS

SOIL TYPES

Silt	Clay	Sand	Silty Clay or Clayey Silt
Silty Sand	Clayey Sand	Gravel	Shale
Limestone	Rock/Fragments	Crushed limestone base	Tan Limestone w/Interbedded Silt Layers
Silty clay w/Gravel	Asphalt	Sandstone	Concrete

SAMPLER TYPES

Standard Penetration Test	Rock Core	Seamless Push Shelby Tube	Grab Sample

PARTICLE SIZE (ASTM D2487)

Boulders	>12 in.	Coarse Sand	5 mm – 2 mm	Silt	0.075 mm – 0.005 mm
Cobbles	12 in. – 3 in.	Medium Sand	2 mm – 0.4 mm	Clay	< 0.005 mm
Gravel	3 in. – 5 mm	Fine Sand	0.4 mm – 0.075 mm		

STRENGTH OF COHESIVE SOILS

CONSISTENCY	COMPRESSIVE STRENGTH (TSF)
Very Soft	< 0.25
Soft	0.25 to 0.50
Firm	0.50 to 1.0
Stiff	1.0 to 2.0
Very Stiff	2.0 to 4.0
Hard	> 4.0

DENSITY OF GRANULAR SOILS

NUMBER OF BLOWS PER FT., N	RELATIVE DENSITY
0 – 4	Very Loose
4 – 10	Loose
10 – 30	Medium Dense
30 – 50	Dense
Over 50	Very Dense

Structure Description (ASTM D2488)

Stratified	Alternating layers of varying material or color with layers at least 6 mm thick
Laminated	Alternating layers of varying material or color with the layers less than 6 mm thick
Fissured	Breaks along definite planes of fracture with little resistance to fracturing
Slickensided	Fracture planes appear polished or glossy, sometimes striated
Blocky	Cohesive soil that can be broken down into small angular lumps which resist further breakdown
Lensed	Inclusion of small pockets of different soils, such as small lenses of sand scattered through a mass of clay
Homogeneous	Same color and appearance throughout

Percentages of Sand & Gravel (ASTM D2488)

Trace	< 5%
Few	5% to 10%
Little	15% to 25%
Some	30% to 45%
Mostly	50% to 100%

Criteria for Describing Moisture Conditions (ASTM D2488)

Dry	Absence of moisture, dusty, dry to the touch
Moist	Damp but no visible water
Wet	Visible free water, usually soil is below water table

HOLT ENGINEERING, INC.
2220 Barton Skyway ■ Austin, Texas 78704 ■ Ph. (512) 447-8166 ■ Fax (512) 447-0852

APPENDIX

ITEM 4

SUMMARY OF LABORATORY TEST RESULTS

PROJECT: Harmon Avenue Area Water & Wastewater Renewal

JOB NO. 05-17418

DATE: 7/3/2018

BORING NO.	DEPTH IN FEET	UNIF. CLASSIF.	TYPE OF MATERIAL	MOISTURE CONTENT %	DRY DENSITY pcf	ATTERBERG TEST LL	ATTERBERG TEST PL	ATTERBERG TEST PI	COMPRESSION TSF	OTHER TESTS: Percent Passing #4	OTHER TESTS: Percent Passing #10	OTHER TESTS: Percent Passing #40	OTHER TESTS: Percent Passing -200
B-01	2.0 - 3.3	CH	SANDY LEAN CLAY, tan and light brown	14.4		25	15	10					63.0
	7.0 - 7.5		LIMESTONE, tan (Kau)	8.9	134.1				76.5				
B-02	5.0 - 7.0	CL	SANDY LEAN CLAY, tan and light brown	8.9		29	15	14					67.7
	8.0 - 10.0	CL	SANDY LEAN CLAY, tan and light brown	7.4		22	14	8					61.6
B-03	2.0 - 4.0	CH	FAT CLAY, brown, firm to medium stiff	26.8	94.5	59	20	39	1.6				86.6
	5.0 - 7.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	14.7		33	16	17					68.8
B-04	4.0 - 6.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	17.5		27	15	12					73.9
B-05	2.0 - 3.5	CL	SANDY LEAN CLAY, tan & light brown w/thick cemented layers	7.0		35	16	19					26.6
	4.0 - 6.0	CL	SANDY LEAN CLAY, tan & light brown w/thick cemented layers	8.9		30	16	14					60.3

SUMMARY OF LABORATORY TEST RESULTS

PROJECT: Harmon Avenue Area Water & Wastewater Renewal

JOB NO. 05-17418

DATE: 7/3/2018

BORING NO.	DEPTH IN FEET	UNIF. CLASSIF.	TYPE OF MATERIAL	MOISTURE CONTENT %	DRY DENSITY pcf	ATTERBERG TEST LL	ATTERBERG TEST PL	ATTERBERG TEST PI	COMPRESSION TSF	OTHER TESTS: Percent Passing #4	#10	#40	-200
B-07	3.0 - 4.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	16.4	105.6	44	18	26	2.6				56.7
B-08	2.0 - 4.0	CH	FAT CLAY, brown, firm to medium stiff	18.7	101.8	57	20	37	4.0				85.0
	5.0 - 7.0	CH	FAT CLAY, tan & light brown w/calcareous deposits	19.5		55	20	35					85.8
B-10	1.0 - 2.0	CH	FAT CLAY WITH SAND, brown, medium stiff	17.5		58	20	38					71.8
	5.0 - 7.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	9.4		27	15	12					62.8
	12.5 - 13.0		SAND, tan & Light Brown, loose to medium dense	3.6		16	13	3					15.1
B-11	5.0 - 7.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	10.5		22	14	8					54.1
B-13	2.0 - 4.0	CL	SANDY LEAN CLAY, brown, medium stiff	19.7	101.6	45	18	27	2.1				63.8
	8.0 - 10.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	10.6		21	14	7					54.1

SUMMARY OF LABORATORY TEST RESULTS

PROJECT: Harmon Avenue Area Water & Wastewater Renewal

JOB NO. 05-17418

DATE: 7/3/2018

BORING NO.	DEPTH IN FEET	UNIF. CLASSIF.	TYPE OF MATERIAL	MOISTURE CONTENT %	DRY DENSITY pcf	ATTERBERG TEST LL	ATTERBERG TEST PL	ATTERBERG TEST PI	COMPRESSION TSF	OTHER TESTS: Percent Passing #4	#10	#40	-200
B-14	5.0 - 7.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	9.2		26	15	11					64.0
B-15	2.0 - 4.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	6.0		26	15	11					51.4
	5.0 - 7.0	CL	SANDY LEAN CLAY, light brown w/calcareous deposits	17.0		45	18	27					89.0
B-16	2.0 - 4.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	13.3	110.2	39	17	22	3.6				63.7
	4.0 - 6.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	14.0		27	15	12					80.0
B-17	5.0 - 7.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	12.7		23	15	8					70.5
B-18	5.0 - 7.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	14.4		46	18	28					96.4
B-20	2.0 - 4.0	CH	FAT CLAY, brown, medium stiff	24.7		52	19	33					86.3
	7.0 - 8.5	CL	SANDY LEAN CLAY, tan & light brown, firm	12.6		30	16	14					87.0

SUMMARY OF LABORATORY TEST RESULTS

PROJECT: Harmon Avenue Area Water & Wastewater Renewal

JOB NO. 05-17418

DATE: 7/3/2018

BORING NO.	DEPTH IN FEET	UNIF. CLASSIF.	TYPE OF MATERIAL	MOISTURE CONTENT %	DRY DENSITY pcf	ATTERBERG TEST LL	ATTERBERG TEST PL	ATTERBERG TEST PI	COMPRESSION TSF	OTHER TESTS: Percent Passing #4	OTHER TESTS: Percent Passing #10	OTHER TESTS: Percent Passing #40	OTHER TESTS: Percent Passing -200
B-21	2.0 - 4.0	CL	LEAN CLAY, light brown, w/Ca;careous deposits	15.0	107.4	38	17	21					85.8
	8.0 - 10.0	CL	SANDY LEAN CLAY, tan & light brown w/calcareous deposits	10.1		29	15	14					92.9

UNIT PRICE BID FORM
Section 00300U

The undersigned, in compliance with the Invitation for Bids for construction of the following Project for the City of Austin, Texas:

Solicitation No.:	CLMC796
Project:	HARMON AVENUE AREA WATER AND WASTEWATER RENEWAL
CIP ID No.:	2231.298

Having examined the Project Manual, Drawings and Addenda, the site of the proposed Work and being familiar with all of the conditions surrounding construction of the proposed Project, having conducted all inquiries, tests and investigations deemed necessary and proper; hereby proposes to furnish all labor, permits, material, machinery, tools, supplies and equipment, and incidentals, and to perform all Work required for construction of the Project in accordance with the Project Manual, Drawings and Addenda within the time indicated.

Note: The Bidder will enter the line item subtotal in the "Amount" column below, which is the product of the estimated "Quantity" multiplied by the "Unit Price". Any mathematical errors will be corrected for the purpose of determining the correct Amount to be entered in the Bid Form. The Amounts, including any corrected Amounts, will then be totaled to determine the actual amount of the Bid.

WATER

Bid Item	Qty.	Unit	Item Description	Unit Price	Amount
430S-A	1,560	LF	PC CONCRETE CURB AND GUTTER (EXCAVATION)	$	$
432SR-5	220	SF	RECONSTRUCT CONCRETE SIDEWALK TO 5 INCH THICKNESS, INCLUDING REMOVAL OF EXISTING SIDEWALK	$	$
433-A	100	SF	TYPE 1 PC CONCRETE DRIVEWAY	$	$
509S-1	8,680	LF	TRENCH EXCAVATION SAFETY PROTECTIVE SYSTEMS (ALL DEPTHS)	$	$
510-AW 4" DIA-DI	20	LF	PIPE, 4" DIA., DUCTILE IRON, INCLUDING EXCAVATION AND BACKFILL	$	$
510-AW 6" DIA-C900	100	LF	PIPE, 6" DIA., PVC AWWA C900 DR14 (ALL DEPTHS), INCLUDING EXCAVATION AND BACKFILL	$	$
510-AW 6" DIA-DI	300	LF	PIPE, 6" DIA., DUCTILE IRON, INCLUDING EXCAVATION AND BACKFILL	$	$
510-AW 8" DIA-C900	7,500	LF	PIPE, 8" DIA., PVC AWWA C900 DR14 (ALL DEPTHS), INCLUDING EXCAVATION AND BACKFILL	$	$
510-AW 8" DIA-DI	740	LF	PIPE, 8" DIA., DUCTILE IRON, INCLUDING EXCAVATION AND BACKFILL	$	$
510-AWW 8" DIA	20	LF	PIPE, 8" DIA., PVC ASTM D3034 SDR-26 TYPE (ALL DEPTHS),	$	$

			INCLUDING EXCAVATION AND BACKFILL		
510-BW-S	139	EA	CONNECTING NEW SINGLE WATER SERVICE TO EXISTING PRIVATE SERVICE	$	$
510-BW-D	1	EA	CONNECTING NEW DOUBLE WATER SERVICE TO EXISTING PRIVATE SERVICE	$	$
SP-510-CP-W	29	EA	CUT & PLUG EXISTING W LINE	$	$
510-JW-6X6	8	EA	WET CONNECTION 6” X 6”	$	$
510-JW-8X6	2	EA	WET CONNECTION 8” X 6”	$	$
510-JW-8X8	3	EA	WET CONNECTION 8” X 8”	$	$
510-JW-8X12	4	EA	WET CONNECTION 8” X 12”	$	$
510-KW	3	TON	DUCTILE IRON FITTINGS	$	$
511S-A 4	1	EA	VALVES, GATE TYPE, 4” DIA	$	$
511S-A 6	12	EA	VALVES, GATE TYPE, 6” DIA	$	$
511S-A 8	36	EA	VALVES, GATE TYPE, 8” DIA	$	$
511S-B	12	EA	FIRE HYDRANTS	$	$
SP-511S-FH-R	9	EA	REMOVE & SALVAGE EXISTING FIRE HYDRANT	$	$
SP-511S-GV-A	18	EA	ABANDON EXISTING GATE VALVE IN PLACE	$	$
863S-4	11	EA	REFLECTORIZED PAVEMENT MARKERS (TYPE II-B-B)	$	$
SUBTOTAL WATER				**$**	

WASTEWATER

Bid Item	**Qty.**	**Unit**	**Item Description**	**Unit Price**	**Amount**
430S-A	1,330	LF	PC CONCRETE CURB AND GUTTER (EXCAVATION)	$	$
432SR-5	220	SF	RECONSTRUCT CONCRETE SIDEWALK TO 5 INCH THICKNESS, INCLUDING REMOVAL OF EXISTING SIDEWALK	$	$
433-A	1,490	SF	TYPE 1 PC CONCRETE DRIVEWAY	$	$
506SMWW	13	EA	STANDARD PRE-CAST MANHOLE W/PRE-CAST BASE, 4’ DIA	$	$
506SM1-WW	8	EA	STANDARD PRE-CAST MANHOLE W/CIP BASE, 4’ DIA	$	$
506SLWW	22	LVF	STRUCTURAL LINING OF EXIST WWMH (FOR WWMH REHAB)	$	$
506S-CN-WWMH	4	EA	CONNECTION TO EXISTING WASTEWATER MANHOLE	$	$
506S-CN-WWL	4	EA	CONNECTION TO EXISTING WASTEWATER LINE	$	$
506S-AB-WWMH	1	EA	ABANDON EXISTING WW MANHOLE	$	$

SP506S-AB-WWCO	2	EA	ABANDON EXISTING WW CLEANOUT	$	$
509S-1	5,680	LF	TRENCH EXCAVATION SAFETY PROTECTIVE SYSTEMS (ALL DEPTHS)	$	$
510-AWW 8" DIA	5,680	LF	PIPE, 8" DIA., PVC ASTM D3034 SDR-26 TYPE (ALL DEPTHS), INCLUDING EXCAVATION AND BACKFILL	$	$
510-BWW-S	114	EA	CONNECTING NEW SINGLE WASTEWATER SERVICE TO EXISTING PRIVATE SERVICE	$	$
510-BWW-D	10	EA	CONNECTING NEW DOUBLE WASTEWATER SERVICE TO EXISTING PRIVATE SERVICE	$	$
SP-510-CP-WW	10	EA	CUT & PLUG EXISTING WW LINE	$	$
SUBTOTAL WASTEWATER				**$**	

GENERAL

Bid Item	**Qty.**	**Unit**	**Item Description**	**Unit Price**	**Amount**
315S-A	24,900	SY	SURFACE MILLING	$	$
340S-B-2	19,500	SY	HOT MIX ASPHALTIC CONCRETE PAVEMENT, 2 INCHES, TYPE D	$	$
340S-B-3	5,400	SY	HOT MIX ASPHALTIC CONCRETE PAVEMENT, 3 INCHES, TYPE D	$	$
602S-D	549	SY	GRASS SODDING	$	$
610S-A	95	LF	PROTECTIVE FENCING TYPE A CHAIN LINK FENCE (TYPICAL APPLICATION-HIGH DAMAGE POTENTIAL)	$	$
610S-E	17	EA	TREE TRUNK PROTECTION (WOOD PLANKING)	$	$
SP632S	9	EA	STORM INLET SEDIMENT TRAP	$	$
642S	1,050	LF	SILT FENCE	$	$
700-TM	1	LS	TOTAL MOBILIZATION PAYMENT	$	$
802S	4	EA	CIP PROJECT SIGNS	$	$
803S-SF	7,338	LF	SAFETY FENCE	$	$
803S-CD	300	CD	BARRICADES, SIGNS, AND TRAFFIC HANDLING	$	$
SUBTOTAL GENERAL				**$**	

SUBTOTAL WATER		
SUBTOTAL WASTEWATER		
SUBTOTAL GENERAL		
BASE BID		**$**
	(Words)	(Figures)
Base Bid includes Trench Excavation Safety Systems & Special Shoring		

- The "Base Bid" amount must be used in the MBE/WBE Compliance Plan Summary Page to determine subcontractor participation levels for the established MBE/WBE procurement goals.
- The "Base Bid" amount becomes the bidder's "TOTAL BID" if allowances and/or alternates are not included.

ALLOWANCES:

Allowance No. 1:	Contaminated Soil and Water Removal	$	20,000
SUBTOTAL ALLOWANCES		$	20,000

BASE BID PLUS ALLOWANCES:		$

In the event of a mathematical error, the correct product, determined by using the "Unit Price" and "Quantity", and the correct sum, determined by totaling the correct line item Amounts, will prevail over the amount entered by the Bidder. The unit prices shown above will be the unit prices used to tabulate the Bid and used in the Contract, if awarded by the City.

Notes:

1. For a more detailed explanation of Bid allowances, see Section 01020.
2. MINIMUM WAGES: Workers on Project shall be paid not less than wage rates, including fringe benefits, as published by the Department of Labor (DOL) for Building Construction and Heavy and Highway Trades "AS APPLICABLE" and/or the minimum Wage required by City of Austin Ordinance No. 20160324-015, whichever is higher. The Total Minimum Wage required can be met using any combination of cash and non-cash qualified fringe benefits provided the cash component meets or exceeds the minimum wage required.

Optional Information on Bid Prices Submitted by Computer Printout: In lieu of handwritten unit prices in figures in ink on the Bid forms above, Bidders, at their option, may submit an original computer printout sheet bearing certification by, and signature for, the Bidding firm. The unit prices shown on acceptable printouts will be the unit prices used to tabulate the Bid and used in the Contract if awarded by the City. As a minimum, computer printouts must contain all information and in the format shown on the attached page: "Example of Bid Prices Submitted by Computer Printout" form.

If a computer printout is used, the Bidder must still execute that portion of the unit price Bid form which acknowledges the Bid Guaranty, Time of Completion, Liquidated Damages, and all addenda that may have been issued.

Bids with unit prices by computer printout may be rejected, if:

1. The computer printout does not include the required certification, set forth in the attached "Example".
2. The computer printout is not signed in the name of the firm to whom the Project Manual was issued.
3. The computer printout is non-responsive or otherwise omits required Bid items or includes items not shown on the Bid forms in the Project Manual.

4. The other required Bid documents issued by the City are not fully executed as provided above.
5. The signed Section 00300U is not returned with the signed computer printout.

If the Bid submitted by the Bidder contains both the form furnished by the City, completed according to the instructions, and also a computer printout, completed according to the instructions, unit prices of only one will be considered. In this situation, the unit Bid prices shown on the computer printout will be used to determine the Bid.

BID GUARANTY: A Bid guaranty must be enclosed with this Bid, as required in Section 00020, in the amount of not less than five percent (5%) of the total Bid. Following the Bid opening, submitted Bids may not be withdrawn for a period of ninety (90) Calendar Days. Award of Contract will occur within this period, unless mutually agreed between the parties. The Bid guaranty may become the property of the OWNER, or the OWNER may pursue any other action allowed by law, if:

- Bidder withdraws a submitted Bid within the period stated above;
- Bidder fails to submit the required post Bid information within the period specified in Section 00020 or 00100, or any mutually agreed extension of that period; or,
- Bidder fails to execute the Contract and furnish the prescribed documentation (bonds, insurance, etc.) needed to complete execution of the Contract within five (5) Working Days after notice of award, or any mutually agreed extension of that period.

GEOTECHNICAL BASELINE ACKNOWLEDGEMENT: The undersigned Bidder certifies that the Bidder has read and understands the Geotechnical Baseline Report (GBR), the Geotechnical Data Report, the Reflection Survey Report, and all other geological and geotechnical information and data as provided in the Contract Documents, including all Addenda. ***The Bidder acknowledges and agrees that the GBR represents the contractual statement of the subsurface conditions reasonably anticipated to be encountered during construction. The GBR will be used to evaluate whether subsurface conditions differ materially from those indicated in the GBR.***

TIME OF COMPLETION: The undersigned Bidder agrees to commence work on the date specified in the written "Notice to Proceed" to be issued by the OWNER and to substantially complete construction of the improvements, as required by the Project Manual, Drawings and Addenda for the Work within **two hundred and seventy (270) Calendar Days.**

If a Substantial Completion date has been specified, the Bidder further agrees to reach Final Completion within thirty (30) Calendar Days after Substantial Completion as required by the Project Manual, Drawings and Addenda for the work.

The Bidder further agrees that should the Bidder fail to <substantially> <finally> complete the Work within the number of days indicated in the Bid or as subsequently adjusted, Bidder shall pay the liquidated damages for each consecutive day thereafter as provided below; unless the OWNER elects to pursue any other action allowed by law.

WAIVER OF ATTORNEY FEES: In submitting the Bid, in consideration for the waiver of the Bidder's right to attorney's fees by the OWNER, the Bidder knowingly and intentionally agrees to and shall waive the right to attorney's fees under Section 271.153 of the Texas Local Government Code in any administrative proceeding, alternative dispute resolution proceeding, or litigation arising out of or connected to any Contract awarded pursuant to this solicitation process.

LIQUIDATED DAMAGES: The Bidder understands and agrees that the timely completion of the described Work is of the essence. The Bidder and OWNER further agree that the OWNER's actual damages for delay caused by failure to timely complete the Project are difficult, if not impossible to measure. However, with respect to the additional administrative and consultant costs to be incurred by OWNER, the reasonable estimate of such damages has been calculated and agreed to by OWNER and Bidder.

Therefore, the Bidder and the OWNER agree that for each and every Calendar Day the Work or any portion thereof, remains incomplete after the Substantial Completion date as established by the above paragraph, "Time of Completion", payment will be due to the Owner in the amount of **one thousand dollars ($1,000)** per Calendar Day as liquidated damages, not as a penalty, but for delay damages to the OWNER.

If both Substantial and Final Completion dates have been specified, the Bidder and the OWNER further agree that for each and every Calendar Day the Work or any portion thereof, remains incomplete after the Final Completion date as established by the above paragraph, "Time of Completion", payment will be due to the OWNER in the amount of **five hundred dollars ($500) per Calendar Day** as liquidated damages, not as a penalty, but for delay damages to the OWNER. Such amount shall be deducted by the OWNER from any Contract payment due.
In the event of a default or breach by the CONTRACTOR and demand is made upon the surety to complete the project, in accordance with the Contract Documents, the surety shall be liable for liquidated damages pursuant to the Contract Documents in the same manner as the CONTRACTOR would have been.

MINOR INFORMALITY: OWNER reserves the right to reject any or all Bids and to waive any minor informality in any Bid or solicitation procedure (a minor informality is one that does not affect the competitiveness of the Bids).

ADDENDUM: The undersigned acknowledges receipt of the following addenda:

Addendum No. 1 dated		Received	
Addendum No. 2 dated		Received	
Addendum No. 3 dated		Received	
Addendum No. 4 dated		Received	

BID DOCUMENT EXECUTION AND ACKNOWLEDGEMENT: The undersigned Bidder certifies that the Bidder has read and understands Section 00020 Invitation for Bids, Section 00100 Instructions to Bidders, and all other requirements applicable to the Bidding process provided in the Bid and Contract Documents.

BIDDER's CERTIFICATION OF NON-COLLUSION, NON-CONFLICT OF INTEREST, AND ANTI-LOBBYING (Section 00440): The undersigned Bidder, by its signature, represents and certifies that it has read and can affirmatively swear and subscribe to the statements in Section 00440 Non-Collusion, Non-Conflict of Interest, and Anti-Lobbying Certification. If the Bidder cannot affirmatively swear and subscribe to any of the statements in Section 00440, Bidder represents and certifies that it has provided a detailed written explanation with its Bid on separate pages annexed hereto. The undersigned Bidder further certifies that it has not in any way directly or indirectly had communication restricted in the City Code Chapter 2-7, Article 6 (Anti-Lobbying and Procurement) during the No-Lobbying Period as defined in Chapter 2-7.

BIDDER's CERTIFICATION AS TO NONRESIDENT PROVISIONS (Section 00475): The undersigned Bidder certifies that it has read Section 00475 Nonresident Bidder

Provisions and **Bidder certifies that Bidder is a resident of** _____ (*Bidder must write in the blank the state of which Bidder is a resident*).

Bidder will initial the blank set forth below to represent and certify that the Bidder has completed and enclosed the corresponding Bid Documents with the Bid.

_____ MBE/WBE Compliance Document

<u>The undersigned, by their signature, represents that they are submitting a binding offer and are authorized to bind the respondent to fully comply with the solicitation documents contained herein. The Respondent, by submitting and signing below, certifies that they have received and read all sections of the entire solicitation document including all revisions, addenda and documents incorporated by reference, and agree to be bound by the terms therein.</u>

_____
Corporate Secretary, *if Bidder is a Corporation

_____
Bidder

_____
Email for Secretary

_____
Authorized Signature/Print Name

(Seal)

_____
Title

_____
Date

_____
Address

_____
Telephone Number / FAX Number

_____
Email for Person Signing Bid

_____
Email for Bidder's Primary Contact Person

EXAMPLE: BID PRICES SUBMITTED BY COMPUTER PRINTOUT

Project Name:					
CIP ID #:					
IFB #:					
Bid Item #	Bid Item Description	Unit	Qty	Unit Bid Price	Total Amount
Proposal:				Total	

(YOUR FIRM'S NAME) certifies that the unit prices shown on this completed computer printout for all of the Bid items and the alternates contained in this proposal are the unit prices intended and that its Bid will be tabulated using these unit prices and no other information from this printout. (YOUR FIRM'S NAME) acknowledges and agrees that the total Bid amount shown will be read as its total Bid. In the event of a mathematical error, the correct product, determined by using the "Unit Price" and "Quantity", and the correct sum, determined by totaling the correct line item Amounts, will prevail over the amount entered by the Bidder.

Signed: _____

Title: _____ Date: _____

END

STATEMENT OF BIDDERS EXPERIENCE

Section 00400

Project Name:	HARMON AVENUE AREA WATER AND WASTEWATER RENEWAL
Name of Bidder:	
Solicitation Number:	CLMC796
CIP ID Number:	2231.298

Bidder must complete all Attachments to Section 00400 clearly and comprehensively. If necessary, responses may be continued on separately attached sheets.

To be considered a responsive and responsible bidder, the apparent three (3) low Bidders must complete and submit within three (3) working days of notification of low bidder status Attachments A through I in accordance with Article 11, Section 00100. Contractor Performance Evaluations for previous work with the City will be included in the assessment of the Bidder's experience. Any information in Attachments A through I and in the Contractor's Performance Evaluations that indicates the Bidder or a "Subcontractor" is not responsible or that might negatively impact a Bidder's ability to complete the Work within the Contract Time and for the Contract Price may result in the Bid being rejected.

The Bidder is responsible for the accuracy and completeness of all of the information provided by the Bidder or a proposed Subcontractor in response to this Invitation for Bids.

POST-BID SUBMITTALS

ATTACHMENT A – BIDDER'S INFORMATION

ATTACHMENT B – EXPERIENCE REQUIREMENTS (GENERAL CONTRACTOR)

ATTACHMENT C – PROJECT MANAGER AND SUPERINTENDENT EXPERIENCE

ATTACHMENT D – EXPERIENCE REQUIREMENTS (SPECIFIC CONSTRUCTION OR TECHNICAL EXPERIENCE)

ATTACHMENT E – AVAILABLE EQUIPMENT

ATTACHMENT F – AVAILABLE WORKFORCE

ATTACHMENT G – CURRENT PROJECTS

ATTACHMENT H – COMPLETED PROJECTS

ATTACHMENT I – BIDDER'S AUTHENTICATION

ATTACHMENT A
BIDDER'S INFORMATION

Attention Bidder: Complete and return within three (3) days of notification of the three (3) low bidders' status.

Solicitation Number:	CLMC796
CIP ID Number:	2231.298

A.	**Name of Bidder:**	
B.	**Bidder's Permanent Address:**	
C.	**Bidder's Phone Number:**	
D.	**Number of years in business under current company name:**	

(Note: Bidder must have been in existence for a minimum of one (1) year under its current company name. Changes in company name during the experience period are acceptable, if the continuity of the company can be demonstrated. Attach separate documentation, if applicable.)

If Bidder answers "Yes" for <u>any</u> of questions E through H, Bidder must attach separate sheets with a brief description or explanation of the answer and provide pertinent contact information (parties' names, addresses and telephone numbers).

E.	**Has the Bidder ever defaulted on a contract?**	❒ **Yes**	❒ **No**
F.	**Are there currently any pending judgements, claims, or lawsuits against the Bidder?**	❒ **Yes**	❒ **No**
G.	**Does Bidder currently have any pending claims, judgements or lawsuits against any prior client?**	❒ **Yes**	❒ **No**
H.	**Is the Bidder or its principals involved in any bankruptcy or reorganization proceedings?**	❒ **Yes**	❒ **No**

ATTACHMENT B
EXPERIENCE REQUIREMENTS (GENERAL CONTRACTOR)

Attention Bidder: Complete and return within three (3) days of notification of the three (3) low bidders' status.

Solicitation Number:	CLMC796
CIP ID Number:	2231.298

GENERAL CONTRACTOR EXPERIENCE:

Bidder must list and describe Bidder's (not proposed subcontractors') construction experience as a general contractor for a minimum of three (3) successfully completed projects of comparable size, scope and complexity to the Work described in the Contract Documents. Bidder should refer to the Section 01010 Summary of Work, subsection 1.2 Description of Work, to determine what is reasonably comparable. Decisions on "comparability" are at the complete discretion of the OWNER.

Bidder must have completed the projects within the past five (5) years.

Attention Bidder: Duplicate this form for each of the three (3) projects.

PROJECT NO. _____		
Name of Project:		
Location:		
OWNER's Name and Address:		
OWNER's Contact Person (Print):		
Phone/Fax No.		
Initial Contract Price:		
Final Contract Price:		
Contract Start Date: *(Date of Notice to Proceed)*		
Contract Time:	Calendar Days:	Working Days:
Contract Substantial Completion Date:		
Actual Substantial Completion Date:		
If contract time extensions were added to the contract as a result of Bidder's responsibilities, provide a short explanation of each:		
Project Description and why it is comparable to this Contract:		

ATTACHMENT C
PROJECT MANAGER & SUPERINTENDENT EXPERIENCE

Attention Bidder: Complete and return within three (3) days of notification of the three (3) low bidders' status.

Name of Bidder:	
Solicitation Number:	CLMC796
CIP ID Number:	2231.298

Bidder must attach resumes for the Project Manager and Superintendent who will be assigned to this project. The resumes must demonstrate that these individuals have worked on at least three (3) similar, successfully completed projects in the capacity of Project Manager or Superintendent, or other responsible supervisory capacity, as applicable, during the last 10 years.

Project Manager (name): _____

Superintendent (name): _____

Note: Attach Resumes & Experience

Attention Bidder: Complete and return within three (3) days of notification of the three (3) low bidders' status.

SPECIFIC CONSTRUCTION EXPERIENCE (GENERAL CONTRACTOR OR SUBCONTRACTOR PERFORMING THE WORK)

Bidder must provide the following project history information for each Construction Experience requirement listed below. OWNER may in its reasonable discretion deem the provided experience information insufficient and reject the Bid.

For each Construction Experience item listed below, list and describe the applicable Construction Experience for a minimum of three (3) successfully completed projects of comparable size, scope, and complexity to the Work described for this project. Comparability requirements may be spread among the three (3) projects per item submitted, e.g. One Project may demonstrate comparable size, another Project may demonstrate comparable scope and another may demonstrate comparable complexity. Decisions on "comparability" are at the complete discretion of the OWNER.

The Work must have been performed within the past five (5) years.

Bidder must provide all requested information in a complete, clear, and accurate manner. If necessary, additional information may be provided on separate attached sheets. Failure to provide any requested information may cause the Bid to be rejected by OWNER as non-responsive.

If the Bidder proposes to fulfill any specific construction experience requirement with subcontracted resources, the applicable Subcontractor must be included in the Bidder's Original MBE/WBE Compliance Plan. Failure to include subcontractors on the MBE/WBE Compliance Plan may render your bid non-responsive.

SPECIFIC CONSTRUCTION EXPERIENCE ITEMS REQUIRED:

ITEM 1. Furnish and/or installation of water and wastewater line within right of way.
ITEM 2. Abandonment of existing water and wastewater line within right of way.
ITEM 3. Working around other existing dry utility.

The Bidder shall complete and duplicate the following specific Construction Experience Form as required to provide the requested documentation for a minimum of three (3) successfully completed projects for each of the above specific Construction Experience requirements.

CONSTRUCTION EXPERIENCE DOCUMENTATION FORM	
EXPERIENCE ITEM NUMBER:	
Project Number:	
Does Bidder plan to self-perform this work?	☐ **Yes** ☐ **No**
If "NO", provide the following Subcontractor's information:	
Company's Address:	

Permanent Address:		
Phone No.		
# of years Subcontractor has been in business under current company name:		
Name of Project:		
Location:		
OWNER's Name:		
OWNER's Address:		
OWNER's Contact Person (Print):		
Phone/Fax No.:		
Initial Contract Price:		
Final Contract Price:		
Contract Start Date: *(Date of Notice to Proceed)*		
Contract Time:	Calendar Days:	Working Days:
Contract Substantial Completion Date:		
Actual Substantial Completion Date:		
If contract time extensions were added to the contract as a result of Bidder's responsibilities, provide a short explanation of each:		
Project Description and why it is comparable to this Contract:		

ATTACHMENT E
AVAILABLE EQUIPMENT LIST

Attention Bidder: Complete and return within three (3) days of notification of the three (3) low bidders' status.

Name of Bidder:	
Solicitation Number:	CLMC796
CIP ID Number:	2231.298

Provide a list of equipment that is available to the CONTRACTOR or its Subcontractor(s) and is specifically intended to be used on the Work under this Contract. Also indicate whether the equipment is owned or will be leased by the CONTRACTOR and/or Subcontractor(s).

EQUIPMENT	**OWNED OR LEASED**	**COMMITTED TO ANOTHER PROJECT?** (Yes / No)	**AVAILABLE / RELEASE DATE**

Use additional pages, as necessary

ATTACHMENT F
AVAILABLE WORKFORCE

Attention Bidder: Complete and return within three (3) days of notification of the three (3) low bidders' status.

Name of Bidder:	
Solicitation Number:	CLMC796
CIP ID Number:	2231.298

Provide a list of the available workforce for the various disciplines and crafts required for the Work on this Project, including the number of work crews, and number and worker classification for each equipment operator, mechanic, and laborer for that portion of the Work that Bidder will actually perform.

Number of Anticipated Work Crews: _____

DISCIPLINE OR CRAFT	NO. OF EMPLOYEES	COMMITTED TO ANOTHER PROJECT? (Yes / No)	AVAILABLE / RELEASE DATE
Professional (specify)			
Superintendent			
Technical (specify)			
Skilled Workers (specify)			
Semiskilled Workers (specify)			
Equipment Operators (list)			
Other			

Use additional pages, as necessary

ATTACHMENT G
CURRENT PROJECT LISTING (INCLUDING ALL CITY OF AUSTIN PROJECTS)

Attention Bidder: Complete and return within three (3) days of notification of the three (3) low bidders' status.

Name of Bidder:	
Solicitation Number:	CLMC796
CIP ID Number:	2231.298

Provide a list of <u>all current projects</u>, including *<u>all City of Austin projects</u>*. Include the following for all jobs that Bidder is currently committed to or has currently underway: brief statement regarding the job type; estimated project duration; project contact; and project description.

Name of Project:		
Location:		
Type of Job:		
City of Austin Job?	☐ **Yes**	☐ **No**
Project Start Date		
Estimated Completion Date:		
Project Contact:		
Brief Description:		

Name of Project:		
Location:		
Type of Job:		
City of Austin Job?	☐ **Yes**	☐ **No**
Project Start Date		
Estimated Completion Date:		
Project Contact:		
Brief Description:		

ATTACHMENT H
COMPLETED PROJECTS (INCLUDING ALL CITY OF AUSTIN PROJECTS)

Attention Bidder: Complete and return within three (3) days of notification of the three (3) low bidders' status.

Name of Bidder:	
Solicitation Number:	CLMC796
CIP ID Number:	2231.298

Provide a list of <u>all completed projects</u>, including <u>all City of Austin projects</u> that Bidder has completed in the past five (5) years by calendar year (or life of company if less than five (5) years). Include the following: a brief statement regarding the job type, the estimated project duration, project contact, and project description.

Calendar Year of _____

Name of Project:		
Location:		
Type of Job:		
City of Austin Job?	☐ **Yes**	☐ **No**
Project Duration:		
Project Contact:		
Brief Description:		

Name of Project:		
Location:		
Type of Job:		
City of Austin Job?	☐ **Yes**	☐ **No**
Project Duration:		
Project Contact:		
Brief Description:		

Use additional pages as necessary to achieve a representative listing covering 5 years

ATTACHMENT I
BIDDERS AUTHENTICATION

(Attention Bidder: Complete and return within three (3) days of notification of the three (3) low bidders' status)

Solicitation Number:	CLMC796
CIP ID Number:	2231.298

THE STATE OF TEXAS
COUNTY OF TRAVIS

I certify that my responses and the information provided in Attachments A-H are true and correct to the best of my personal knowledge and belief and that I have made no willful misrepresentations in this Section, nor have I withheld any relevant information in my statements and answers to questions. I am aware that any information given by me in this Section may be investigated and I hereby give my full permission for any such investigation and I fully acknowledge that any misrepresentations or omissions in my responses and information may cause my bid to be rejected.

Bidder's full name and entity status:

_____
Company's Name

_____
Signature, Authorized Representative of Bidder

_____
Title

_____
Date

END

CERTIFICATE OF NON-SUSPENSION OR DEBARMENT

Section 00405

Solicitation Number: _____ (to be filled in by Contractor)

The City of Austin is prohibited from contracting with or making prime or sub-awards to parties that are suspended or debarred or whose principals are suspended or debarred from Federal, State, or City of Austin Contracts. Covered transactions include procurement contracts for goods or services equal to or in excess of $25,000.00 and all non-procurement transactions. This certification is required for all bidders on all City of Austin Contracts to be awarded with values equal to or in excess of $25,000.00 and all non-procurement transactions.

The CONTRACTOR hereby certifies that its firm and its principals are not currently suspended or debarred from bidding on any Federal, State, or City of Austin Contracts.

Contractor's full name and entity status:

_____

_____
(Name/Signature of Authorized Official)

_____
Title

_____
Date

END

BIDDER'S SAFETY EXPERIENCE
(To Be Submitted Post-Bid)

Solicitation Number: _____ (to be filled in by Contractor)

NAME OF BIDDER: _____

Pursuant to Section 252.0435 of the Local Government Code, the OWNER will consider the safety records of bidders prior to awarding a City contract. Upon request, a bidder is required to provide information to demonstrate the safety and health performance of their company. The information obtained from a bidder or from other sources will be used to determine the bidder's safety record, and will not automatically be used to exclude the bidder from selection for this or any future procurement. The OWNER will consider the responses to this Section 00410 document separately when making a discretionary determination of whether to disqualify a bidder, and may also consider the cumulative impact of the information generated by the bidder's responses in making the determination. Bidders are responsible for reviewing the safety records of proposed subcontractors.

Upon notification from the OWNER, the three (3) apparent low bidders are required to provide the following information:

WORKERS' COMPENSATION EXPERIENCE MODIFICATION RATE DATA			
Provide bidder's Workers' Compensation **Experience Modification Rate (EMR)** Data using the loss experience that occurred within the past five years. Attach bidder's NCCI workers compensation experience rating sheets for the past five (5) years.		**Policy Year**	**EMR**
	Current EMR:		
	1 Year Ago:		
	2 Years Ago:		
	3 Years Ago:		
	4 Years Ago:		
Bidder's initialing here certifies that bidder does not have an EMR: _____ *(Submit a copy of bidder's Insurance Loss Run Reports for the last five years if bidder does not have an EMR.)*			
Bidder may include additional information explaining any circumstances that may have affected the company's EMR rate.			
Evaluation: Bidders with a 5-year EMR average that exceeds the 5-year industry average EMR by more than 25% may be deemed non-responsive.			

REGULATORY NOTICE AND CITATION HISTORY DATA	
Provide bidder's information regarding regulatory **OSHA and/or Environmental Protection Agency Notices and Citations** as follows: Describe federal, state, city/municipal or county OSHA notices of noncompliance or citations issued to or received by the bidder within the past three years or any notices from any environmental protection agency, including any notices or citations from any state agency or local government responsible for enforcing environmental protection or other health and safety laws or regulations of any state of the United States, received within the past three years.	**Provide a description of each on the OSHA/EPA form on the following page to include:** • Date of Citation/Notices • Issuing agency • Standard cited • Level of violation (i.e. serious, willful) • Dates and brief description(s) of the event(s) • Brief description(s) of actions taken to correct the violation(s) • Current status (Open, Closed, Contested) • If Closed, date of Closure • If Open, estimated date of Closure
Bidder may include additional information explaining any related circumstances.	
Evaluation: Information may be verified by referring to respective agency. More than two serious or more than one willful or repeated violation (investigation completed) within the past three years may deem the Bidder non-responsive.	

OSHA and/or Environmental Protection Agency Notices Within Past Three Years						
Date of Citation or Notice	Issuing Agency	Violation Level (i.e. serious, willful)	Brief description of event	Brief description of actions taken to correct violation(s)	Current Status (Open, Closed, Contested)	Closed Date, or if Open, estimated Close Date

INJURY AND ILLNESS INCIDENCE RATE DATA	
Provide bidder's ***Total Case Incidence Rate(s) (TCIR)** for the 3 most recent calendar years. Attach bidder's OSHA 300 and 300A logs for the past 3 years.	**TCIR Rates:** Current Rate: _____ 1 Year Ago: _____ 2 Years Ago: _____
DAYS AWAY, RESTRICTED, AND TRANSFER RATE DATA	
Provide bidder's ****Days Away, Restricted, and Transfer Rate(s) (DART)** for the three most recent calendar years.	**DART Rates:** Current Rate: _____ 1 Year Ago: _____ 2 Years Ago: _____
Bidder may include additional information explaining any circumstances that may have affected the submitted rates and/or their associated three year trends.	
Evaluation: Rates will be compared to the most recently published Bureau of Labor Statistics (BLS) national average for the Standard Industrial Classification code (SIC) or North American Industrial Classification Systems (NAICS) code for the construction industry. For consideration of another code within the construction industry, the Bidder must provide the code and justification. Bidders with a 3-year TCIR or DART average that exceeds the 3-year TCIR or DART industry average may be deemed non-responsive.	

**TCIR – To calculate the calendar year TCIR, determine the total number of all recordable injuries and illnesses that occurred during the year in question, divide that total by the total number of hours worked by all employees during that year, and multiply the result by 200,000.*

*** DART – To calculate the calendar year DART, determine the total number of recordable injuries and illnesses resulting in days away from work, restricted work activity, and/or job transfer that occurred during the year in question, divide that total by the total number of hours worked by all employees during that year, and multiply the result by 200,000.*

ACKNOWLEDGEMENT

THE STATE OF TEXAS

COUNTY OF TRAVIS

I certify that my responses and the information I have provided are true and correct to the best of my personal knowledge and belief and I have made no willful misrepresentations in this, or withheld any relevant information in my statements. I am aware that any information given by me in response to this Section 00410 may be investigated and I hereby give my full permission for any such investigations, and I fully acknowledge that any misrepresentations or omissions in my responses and information may cause my bid to be rejected or cause any contract based on misrepresentations to be cancelled.

Contractor's full name and entity status:

_____

_____
(Name/Signature of Authorized Official)

_____
Title

_____
Date

END

NON-COLLUSION, NON-CONFLICT OF INTEREST AND ANTI-LOBBYING

State of Texas

County of Travis

The term **"Bidder"**, as used herein, includes the individual or business entity submitting the bid includes the directors, officers, partners, managers, members, principals, owners, agents, representatives, employees, other parties in interest of the Bidder, and anyone or any entity acting for or on behalf of the Bidder, including a subcontractor in connection with this bid.

The terms **"City"** and **"Owner"** are synonymous.

1. **Anti-Collusion Statement.** The Bidder has not and will not in any way directly or indirectly:

   a. colluded, conspired, or agreed with any other person, firm, corporation, bidder or potential bidder to the amount of this bid or the terms or conditions of this bid.
   b. paid or agreed to pay any other person, firm, corporation bidder or potential bidder any money or anything of value in return for assistance in procuring or attempting to procure a contract or in return for establishing the prices in the attached bid or the bid of any other bidder.

2. **Preparation of Invitation for Bid and Contract Documents**. The Bidder has not received any compensation or a promise of compensation for participating in the preparation or development of the underlying bid or contract documents., In addition, the Bidder has not otherwise participated in the preparation or development of the underlying bid or contract documents, except to the extent of any comments or questions and responses in the bidding process, which are available to all bidders, so as to have an unfair advantage over other bidders, provided that the Bidder may have provided relevant product or process information to a consultant in the normal course of its business.

3. **Participation in Decision Making Process.** The Bidder has not participated in the evaluation of bids or proposals or other decision making process for this solicitation, and, if Bidder is awarded a contract hereunder, no individual, agent, representative, consultant or sub contractor or consultant associated with Bidder, who may have been involved in the evaluation or other decision making process for this solicitation, will have any direct or indirect financial interest in the Contract, provided that the Bidder may have provided relevant product or process information to a consultant in the normal course of its business.

4. **Present Knowledge.** Bidder is not presently aware of any potential or actual conflicts of interest regarding this solicitation, which either enabled Bidder to obtain an advantage over other bidders or would prevent Bidder from advancing the best interests of OWNER in the course of the performance of the Contract.

5. **City Code.** As provided in Sections 2-7-61 through 2-7-65 of the City Code, no individual with a substantial interest in Bidder is a City official or employee or is related to any City official or employee within the first or second degree of consanguinity or affinity.

6. **Chapter 176 Conflict of Interest Disclosure.** In accordance with Chapter 176 of the Texas Local Government Code, the Bidder:

   a. does not have an employment or other business relationship with any local government officer of OWNER or a family member of that officer that results in the officer of family member receiving taxable income;
   b. has not given a local government officer of OWNER one or more gifts, other than gifts of food lodging transportation or entertainment accepted as a guest, that have an aggregate value of more than $100 in the twelve-month period preceding the date the officer becomes aware of the execution of the Contract or that OWNER is considering doing business with the Bidder; and
   c. does not have a family relationship with a local government officer of OWNER in the third degree of consanguinity or the second degree of affinity.

   As required by Chapter 176, Bidder must file the Conflicts of Interest Questionnaire with the Purchasing Department no later than the seventh business day after the commencement of contract discussions or negotiations with the City or the submission of a Bid, response to a request for proposals, or other writing related to a potential contract with OWNER. The questionnaire must be updated not later than the seventh day after the date of an event that would make a statement in the questionnaire inaccurate or incomplete. There are statutory penalties for failure to comply with Chapter 176.

7. **Anti-Lobbying Ordinance.** On June 14, 2018, the Austin City Council adopted Ordinance No. 20180614-056 replacing Chapter 2.7, Article 6 of the City Code relating to Anti-Lobbying and Procurement. The policy defined in this Code applies to Solicitations for goods and/or services requiring City Council approval under City Charter Article VII, Section 15 (Purchase Procedures). The City requires Offerors submitting Offers on this Solicitation to certify that the Offeror has not in any way directly or indirectly had communication restricted in the ordinance section 2-7-104 during the No-Lobbying Period as defined in the Ordinance. The text of the City Ordinance is included in Section 00100 of this solicitation and is also posted on the Internet at:

   https://assets.austintexas.gov/purchase/downloads/New_ALO_Ordinance_No_20180614-056.pdf

8. **Texas Government Code Chapter 2270.** The City is prohibited from contracting with any "company", for goods and services unless the following verification is included in this contract.

   If CONTRACTOR qualifies as a "company", then CONTRACTOR verifies that it: (a) does not "boycott Israel"; and (b) will not "boycott Israel" during the term of this contract. For the purposes of this Section only, the terms "company" and "boycott Israel" have the meaning assigned by Texas Government Code Section 2270.001. CONTRACTOR's obligations under this Section, if any exist, will automatically cease or be reduced to the extent that the requirements of Texas Government Code Chapter 2270 are subsequently repealed, reduced, or declared unenforceable or invalid in whole or in part by any court or tribunal of competent jurisdiction or by the Texas Attorney General, without any further impact on the validity or continuity of this contract.

NOTE: THE ABOVE STATE LAW HAS RECENTLY BEEN TEMPORARILY ENJOINED. HOWEVER, IF THIS INJUNCTION IS LIFTED OR STAYED BY A COURT OR OTHER ENTITY OF COMPETENT JURISDICTION, THIS SECTION WILL BE AN ENFORCEABLE AND REQUIRED TERM OF YOUR CONTRACT WITH THE CITY. IF YOU DISAGREE WITH THE ABOVE PROVISION OF THE CONTRACT, PLEASE STRIKE THROUGH IT OR INDICATE YOUR OBJECTION ON THIS PAGE. YOUR BID WILL NOT BE AFFECTED BY STRIKING THROUGH THIS PROVISION AT THIS TIME. STRIKING THROUGH THE PROVISION OR STATING YOUR OBJECTION TO IT WILL NOT CAUSE THE CITY TO REJECT YOUR BID.

If the Bidder cannot affirmatively swear and subscribe to the forgoing statements, the Bidder shall provide a detailed written explanation on separate pages to be included with Bid.

END

NONRESIDENT BIDDER PROVISIONS

Section 00475

Solicitation Number: _____ (to be filled in by Contractor)

Bidder must answer the following questions in accordance with Vernon's Texas Statutes and Codes Annotated Government Code § 2252.002, as amended:

A. Is the bidder that is making and submitting this bid a "resident bidder" or a "non-resident bidder"?

Answer: _____

(1) Texas Resident Bidder - A bidder whose principal place of business is in Texas and includes a Contractor whose ultimate parent company or majority owner has its principal place of business in Texas.

(2) Nonresident Bidder - A bidder who is not a Texas Resident Bidder.

B. If the Bidder is a "Nonresident Bidder", does the state, in which the Nonresident Bidder's principal place of business is located, have a law requiring a Nonresident Bidder of that state to bid a certain amount or percentage under the bid of a Resident Bidder of that state in order for the nonresident bidder of that state to be awarded a contract on his bid in such state?

Answer: ❒ Yes ❒ No Which state? _____

If the answer to Question B is "yes", then what amount or percentage must a Texas Resident Bidder bid under the bid price of a Resident Bidder of that state in order to be awarded a contract on such bid in said state?

Answer: _____

END

AGREEMENT SECTION
Section 00500

STATE OF TEXAS
COUNTY OF TRAVIS

THIS AGREEMENT is made and entered into by and between the City of Austin, Texas, a municipal corporation, organized and existing under laws of State of Texas, acting through its City Manager or other duly authorized designee, hereinafter referred to as the "OWNER," and _____, of the City of _____, County of _____, and State of_____, hereinafter referred to as the "CONTRACTOR."

In consideration of the promises, performances, payments and agreements set forth herein CONTRACTOR hereby agrees to commence and complete the following Project:
_____
_____
and all Work in accordance with the Project Manual, Drawings and Addenda, which are incorporated herein by reference and made a part hereof and which have been prepared by _____ and approved by OWNER, and OWNER agrees to pay the CONTRACTOR the total amount of:

$	
(Figures)	**(Words)**

The CONTRACTOR hereby agrees to commence work on the date specified in the written "Notice to Proceed" to be issued by the OWNER and to <substantially> <finally> complete construction of the improvements, as required by the Project Manual, Drawings and Addenda for the Work within _____ (___) <Working> <Calendar> Days. <If a Substantial Completion date has been specified, the CONTRACTOR further agrees to reach Final Completion within <_____> (<___>) <Working> <Calendar> Days after Substantial Completion as required by the Project Manual, Drawings and Addenda for the work.> Waiver of any breach of this Contract shall not constitute waiver of any subsequent breach.

In consideration of the award and execution of this Contract, and in consideration of the waiver of its right to attorney's fees by the OWNER, the CONTRACTOR knowingly and intentionally waives its right to attorney's fees under Section 271.153 of the Texas Local Government Code in any administrative proceeding, alternative dispute resolution proceeding, or litigation arising out of or connected to this Contract.

OWNER agrees to pay CONTRACTOR from available funds for performance of the Contract in accordance with the Bid and the provisions of the Contract Documents, subject to additions and deductions, as provided therein.

The OWNER's payment obligations are payable only and solely from funds available for the purposes of this Agreement.

Although drafted by OWNER, this Agreement, in event of any disputes over its meaning or application, shall be interpreted fairly and reasonably, and neither more strongly for nor against either party.

This Agreement is executed to be effective upon the date of the last party to sign.

SAMPLE

<u>The undersigned, by their signature, represents that they are authorized to bind the Contractor to fully comply with the Contract. The Contractor, by signing below, acknowledge that they have read the entire contract and agree to be bound by the terms contained herein.</u>

OWNER	§	**CONTRACTOR**
By:_____ (Signature)	§	**By:**_____ (Signature)
_____ Date	§	_____ Date
_____ Title of Signatory	§	_____ Printed Name of Signatory
	§	_____ Title of Signatory, Authorized Rep
	§	ATTEST (as applicable)
	§	_____ ***Corporate Secretary of Corporate Bidder or Corporate General Partner**

END

SAMPLE

PERFORMANCE BOND
Section 00610

STATE OF TEXAS
COUNTY OF _____

Bond No. _____
C.I.P. ID No. _____

Project Name_____

Know All Men By These Presents: That _____ of the City of _____, County of _____, and State of _____, as Principal, and _____, a solvent company authorized under laws of the State of Texas to act as surety on bonds for principals, are held and firmly bound unto _____ (OWNER), in the penal sum of _____U.S. Dollars ($ _____U.S.) for payment whereof, well and truly to be made, said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, by these presents:

Conditions of this Bond are such that, whereas, Principal has entered into a certain written contract with OWNER, dated the _____ day of _____, _____, which Agreement is hereby referred to and made a part hereof as fully and to the same extent as if copied at length herein.

Now, therefore, the condition of this obligation is such, that if said Principal shall faithfully perform said Agreement and shall in all respects duly and faithfully observe and perform all and singular covenants, conditions and agreements in and by said contract agreed and covenanted by Principal to be observed and performed, and according to true intent and meaning of said Agreement hereto annexed, then this obligation shall be void; otherwise to remain in full force and effect. If OWNER notifies Principal and Surety the OWNER is considering declaring Principal in default, Surety agrees to meet with OWNER and Principal no later than fifteen days after receipt of such notice to discuss methods of performing the Work of the Contract.

Provided, however, that this bond is executed pursuant to provisions of Chapter 2253, Texas Government Code as amended and all liabilities on this bond shall be determined in accordance with provisions of said Article to same extent as if it were copied at length herein.

Surety, for value received, stipulates and agrees that no change in Contract Time or Contract Amount shall in anywise affect its obligation on this bond, and it does hereby waive notice of any such change in Contract Time or Contract Amount.

In witness whereof, said Principal and Surety have signed and sealed this instrument this _____day of _____, _____.

_____	_____
Principal	Surety
By_____	By_____
(Signature)	(Signature)
Title_____	Title_____
Address_____	Address_____
_____	_____

SAMPLE

_____ _____

Telephone _____ Fax_____
E-Mail Address _____

Name and address of Resident Agent of Surety:
_____
_____

Note: Bond shall be issued by a solvent Surety company authorized to do business in Texas, and shall meet any other requirements established by law or by OWNER pursuant to applicable law. A copy of surety agent's "Power of Attorney" must be attached hereto.

END

SAMPLE

PAYMENT BOND
Section 00620

STATE OF TEXAS
COUNTY OF _____

Bond No. _____
C.I.P. ID No. _____

Project Name: _____

Know All Men By These Presents: That _____ of the City of _____, County of _____, and State of _____ as Principal, and _____, a solvent company authorized under laws of the State of Texas to act as surety on bonds for principals, are held and firmly bound unto _____ (OWNER), and all Subcontractors, workers, laborers, mechanics and suppliers as their interests may appear, all of whom shall have right to sue upon this bond in the penal sum of _____ U.S. Dollars ($_____ U.S.) for payment whereof, well and truly to be made, said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, by these presents:

Conditions of this Bond are such that, whereas, Principal has entered into a certain written contract with OWNER, dated the _____ day of _____, _____, which Agreement is hereby referred to and made a part hereof as fully and to the same extent as if copied at length herein.

Now, therefore, condition of this obligation is such, that if the said Principal shall well and truly pay all Subcontractors, workers, laborers, mechanics, and suppliers, all monies to them owing by said Principals for subcontracts, work, labor, equipment, supplies and materials done and furnished for the construction of improvement of said Agreement, then this obligation shall be and become null and void; otherwise to remain in full force and effect.

Provided, however, that this bond is executed pursuant to provisions of Chapter 2253, Texas Government Code as amended and all liabilities on this bond shall be determined in accordance with provisions of said Article to same extent as if it were copied at length herein.

Surety, for value received, stipulates and agrees that no change in Contract Time or Contract Amount shall in anywise affect its obligation on this bond, and it does hereby waive notice of any such change in Contract Time or Contract Amount.

In witness whereof, said Principal and Surety have signed and sealed this instrument this _____day of _____, _____.

_____	_____
Principal	Surety
By_____ (Signature)	By_____ (Signature)
Title_____	Title_____

Address_____ Address_____
_____ _____
_____ _____

Telephone_____Fax_____

E-Mail Address _____

Name and address of Resident Agent of Surety:
_____
_____

Note: Bond shall be issued by a solvent Surety company authorized to do business in Texas, and shall meet any other requirements established by law or by OWNER pursuant to applicable law. A copy of surety agent's "Power of Attorney" must be attached hereto.

END

NON-DISCRIMINATION AND NON-RETALIATION CERTIFICATE

Section 00630

City of Austin, Texas
Equal Employment/Fair Housing Office

To: City of Austin, Texas, ("OWNER")

Our firm conforms to the Code of the City of Austin Section 5-4-2 as reiterated below:

Chapter 5-4. Discrimination in Employment by City Contractors.

Sec. 4-2 Discriminatory Employment Practices Prohibited. (B) As an Equal Employment Opportunity (EEO) employer, the Contractor will conduct its personnel activities in accordance with established federal, state and local EEO laws and regulations and agrees:

(1) Not to engage in any discriminatory employment practice defined in this chapter.
(2) To take affirmative action to ensure that applicants are employed, and that employees are treated during employment, without discrimination being practiced against them as defined in this chapter. Such affirmative action shall include, but not be limited to: all aspects of employment, including hiring, placement, upgrading, transfer, demotion, recruitment, recruitment advertising; selection for training and apprenticeship, rates of pay or other forms of compensation, and layoff or termination.
(3) To post in conspicuous places, available to employees and applicants for employment, notices to be provided by OWNER setting forth the provisions of this chapter.
(4) To state in all solicitations or advertisements for employees placed by or on behalf of Contractor, that all qualified applicants will receive consideration for employment without regard to race, creed, color, religion, national origin, sexual orientation, gender identity, disability, veteran status, sex or age.
(5) To obtain a written statement from any labor union or labor organization furnishing labor or service to Contractors in which said union or organization has agreed not to engage in any discriminatory employment practices as defined in this chapter and to take affirmative action to implement policies and provisions of this chapter.
(6) To cooperate fully with OWNER's Equal Employment/Fair Housing Office in connection with any investigation or conciliation effort of said Equal Employment/Fair Housing Office to ensure that the purpose of the provisions against discriminatory employment practices are being carried out.
(7) To require compliance with provisions of this chapter by all subcontractors having fifteen or more employees who hold any subcontract providing for expenditure of $2,000.00 or more in connection with any contract with OWNER subject to the terms of this chapter.

For the purposes of this Bid and any resulting Contract, Contractor adopts the provisions of the City's Minimum Standard Nondiscrimination and Non-Retaliation Policy as set forth below.

City of Austin
Minimum Standard Non-Discrimination and Non-Retaliation in Employment Policy

As an Equal Employment Opportunity (EEO) employer, the Contractor will conduct its personnel activities in accordance with established federal, state and local EEO laws and regulations.

The Contractor will not discriminate against any applicant or employee based on race, creed, color, national origin, sex, age, religion, veteran status, gender identity, disability, or sexual orientation. This policy covers all aspects of employment, including hiring, placement, upgrading, transfer, demotion, recruitment, recruitment advertising, selection for training and apprenticeship, rates of pay or other forms of compensation, and layoff or termination.

The Contractor agrees to prohibit retaliation, discharge or otherwise discrimination against any employee or applicant for employment who has inquired about, discussed or disclosed their compensation.

Further, employees who experience discrimination, sexual harassment, or another form of harassment should immediately report it to their supervisor. If this is not a suitable avenue for addressing their complaint, employees are advised to contact another member of management or their human resources representative. No employee shall be discriminated against, harassed, intimidated, nor suffer any reprisal as a result of reporting a violation of this policy. Furthermore, any employee, supervisor, or manager who becomes aware of any such discrimination or harassment should immediately report it to executive management or the human resources office to ensure that such conduct does not continue.

Contractor agrees that to the extent of any inconsistency, omission, or conflict with its current non-discrimination and non- retaliation employment policy, the Contractor has expressly adopted the provisions of the City's Minimum Non-Discrimination Policy contained in Section 5-4-2 of the City Code as set forth above and the City's Non-Retaliation Policy, as the Contractor's Non-Discrimination and Non-Retaliation Policy or as an amendment to such Policy and such provisions are intended to not only supplement the Contractor's policy, but will also supersede the Contractor's policy to the extent of any conflict.

UPON CONTRACT AWARD, THE CONTRACTOR SHALL PROVIDE A COPY TO THE CITY OF THE CONTRACTOR'S NON-DISCRIMINATION AND NON-RETALIAITON POLICY ON COMPANY LETTERHEAD, WHICH CONFORMS IN FORM, SCOPE, AND CONTENT TO THE CITY'S MINIMUM NON-DISCRIMINATION AND NON-RETALIATION POLICY, AS SET FORTH HEREIN, ***OR*** *THIS NON-DISCRIMINATION AND NON-RETALIATION POLICY, WHICH HAS BEEN ADOPTED BY THE CONTRACTOR FOR ALL PURPOSES (THE FORM OF WHICH HAS BEEN APPROVED BY THE CITY'S EQUAL EMPLOYMENT/FAIR HOUSING OFFICE), WILL BE CONSIDERED THE CONTRACTOR'S NON-DISCRIMINATION AND NON-RETALIATION POLICY WITHOUT THE REQUIREMENT OF A SEPARATE SUBMITTAL.*
(http://austintexas.gov/page/bid-docs).

Sanctions:

Our firm understands that non-compliance with Chapter 5-4 may result in sanctions, including termination of the contract and suspension or debarment from participation in future City contracts until deemed compliant with the requirements of Chapter 5-4.

Term:
The Contractor agrees that this Section 00630 Non-Discrimination and Non-Retaliation Certificate or the Contractor's separate conforming policy, which the Contractor has executed and filed with the Owner, will remain in force and effect for one year from the date of filing. The Contractor further agrees that, in consideration of the receipt of continued Contract payments, the Contractor's Non-Discrimination Policy will automatically renew from year-to-year for the term of the underlying Contract.

END

TITLE VI ASSURANCES APPENDIX A

Section 00631

Solicitation Number: _____ (to be filled in by Contractor)

During the performance of this contract, the contractor, for itself, its assignees and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

1. Compliance with Regulations: The contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Nondiscrimination in Federally-assisted programs of the U.S. Department of Transportation, the Federal Highway Administration, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

2. Nondiscrimination: The contractor, with regard to the work performed by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate either directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 C.F.R. part 21.

3. Solicitations for Subcontracts, Including Procurements of Materials and Equipment: In all solicitations, either by competitive bidding or negotiation made by the contract for work to be performed under a subcontract, including procurements of materials or leases of equipment, each potential subcontractor or supplier shall be notified by the contractor of the contractor's obligations under this contract and the Acts and the Regulations relative to Nondiscrimination on the grounds of race, color, or national origin.

4. Information and Reports: The contractor shall provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its book, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the Federal Highway Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish this information the contractor will so certify to the Recipient, or the Federal Highway Administration, as appropriate, and will set forth what efforts it has made to obtain the information.

5. Sanctions for Noncompliance: In the event of the contractor's noncompliance with the Nondiscrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the Federal Highway Administration may determine to be appropriate, including, but not limited to:

   (a) withholding of payments to the contractor under the contract until the contractor complies, and or
   (b) cancelling, terminating or suspending a contract, in whole or in part.

6. Incorporation of Provisions: The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with respect to any subcontract or procurement as the Recipient or the Federal Highway Administration may direct as a means of enforcing such provisions including sanctions for non-compliance: Provided, that if a

contractor becomes involved in, or is threatened with, litigation with a subcontractor or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

(Source: DOT 1050.2A, Updated DOT Standard Title VI Assurances and Non-Discrimination Provisions 10/22/2013. Must be inserted into every contract/agreement regardless of funding sources.)

Contractor's full name and entity status:

_____

_____
(Name/Signature of Authorized Official)

_____
Title

_____
Date

END

TITLE VI ASSURANCES APPENDIX E
Section 00632

Solicitation Number: _____ (to be filled in by Contractor)

During the performance of this contract, the contractor (hereinafter includes consultants), for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees to comply with the following nondiscrimination statutes and authorities; including but not limited to:

Pertinent Nondiscrimination Authorities:

1. Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d et seq., 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 C.F.R. Part 21.

2. The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C.§ 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);

3. Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 et seq.), (prohibits discrimination on the basis of sex);

4. Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 et seq.), as amended, (prohibits discrimination on the basis of disability); and 49 C.F.R. Part 27;

5. The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 et seq.), (prohibits discrimination on the basis of age);

6. Airport and Airway Improvement Act of 1982, (49 U.S.C. § 4 71, Section 4 7123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);

7. The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, subrecipients and contractors, whether such programs or activities are Federally funded or not);

8. Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;

9. The Federal Aviation Administration's Nondiscrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);

10. Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures nondiscrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;

11. Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of limited English proficiency (LEP).

12. To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);

13. Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1681 et seq).

(Source: DOT 1050.2A, Updated DOT Standard Title VI Assurances and Non-Discrimination Provisions 10/22/2013. Must be inserted into every contract/agreement regardless of funding sources.)

Contractor's full name and entity status:

_____

_____
(Name/Signature of Authorized Official)

_____
Title

_____
Date

END

CERTIFICATE OF INSURANCE

Section 00650

This Certificate shall be completed by a licensed insurance agent:

Name and Address of Agency:

_____

_____

_____

Phone: _____ / _____

Name and Address of Insured:

_____

_____

_____

Phone: _____/ _____

Prime or Sub-Contractor?: _____

Name of Prime Contractor, if different from Insured: _____

City of Austin Reference:

Project Name:

C.I.P. No.:

Project Location:

Managing Dept.:

Contract No.:

Project Mgr.:

Insurers Affording Coverages:

Insurer A: _____

Insurer B: _____

Insurer C: _____

Insurer D: _____

INSR LTR	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFE-CTIVE DATE (MM/DD/YYYY)	POLICY EXPIR-ATION DATE (MM/DD/YYYY)	LIMITS OF LIABILITY	
	Commercial General Liability Policy As defined in the Policy, does the Policy provide:				Each Occurrence	$
					General Aggregate	$
	☐ Yes ☐ No -- Completed Operations/Products				Completed Operations /Products Aggregate	$
	☐ Yes ☐ No -- Contractual Liability				Personal & Advertising Injury	$
	☐ Yes ☐ No -- Explosion				Deductible or Self Insured Retention	$
	☐ Yes ☐ No -- Collapse					
	☐ Yes ☐ No -- Underground					
	☐ Yes ☐ No -- Contractors/ Subcontractors Work					
	☐ Yes ☐ No -- Aggregate Limits per Project Form CG 2503					
	☐ Yes ☐ No -- Additional Insured Form – CG 2010 and CG2037					
	☐ Yes ☐ No -- 30 Day Notice of Cancellation Form – CG 0205					
	☐ Yes ☐ No -- Waiver of Subrogation Form – CG 2404					
	Pollution/ Environmental Impairment Policy				Occurrence	$
					Aggregate	$

INSR LTR	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFE-CTIVE DATE (MM/DD/YYYY)	POLICY EXPIR-ATION DATE (MM/DD/YYYY)	LIMITS OF LIABILITY	
	Auto Liability Policy As defined in the Policy, does the Policy provide:				CSL	$
					Bodily Injury (Per Accident)	$
	☐ Yes ☐ No -- Any Auto				Bodily Injury (Per Person)	$
	☐ Yes ☐ No -- All Owned Autos				Property Damage (Per Accident)	$
	☐ Yes ☐ No -- Non-Owned Autos					
	☐ Yes ☐ No -- Hired Autos					
	☐ Yes ☐ No -- Waiver of Subrogation – CA0444					
	☐ Yes ☐ No -- 30 Day Notice of Cancellation – CA0244					
	☐ Yes ☐ No -- Additional Insured – CA2048					
	☐ Yes ☐ No -- MCS 90					
	Excess Liability ☐ Umbrella Form ☐ Excess Liability Follow Form				Occurrence	$
					Aggregate	$
	Workers Compensation and Employers Liability As defined in the Policy, does the Policy provide:				☐ Statutory	
					Each Accident	$
	☐ Yes ☐ No -- Waiver of Subrogation – WC420304				Disease – Policy Limit	$
	☐ Yes ☐ No -- 30 Day Notice of Cancellation – WC420601				Disease – Each Employee	$
	Is a Builders Risk or Installation Insurance Policy provided? ☐ Yes ☐ No					$
	☐ Yes ☐ No -- Is the City shown as loss payee/mortgagee?					
	Professional Liability As defined in the Policy, does the Policy provide:				Each Claim	$
	☐ Yes ☐ No -- 30 Day Notice of Cancellation Retroactive Date: _____				Deductible or Self Insured Retention	$

This form is for informational purposes only and certifies that policies of insurance listed above have been issued to insured named above and are in force at this time. Not withstanding any requirements, term or condition of any contract or other document with respect to which this certificate may be issued or may pertain, insurance afforded by policies described herein is subject to all terms, exclusions and conditions of such policies.

CERTIFICATE HOLDER:

DATE ISSUED: _____

City of Austin
Capital Contracting Office
P.O. Box 1088
Austin, Texas 78767

_____
AUTHORIZED REPRESENTATIVE SIGNATURE
Licensed Insurance Agent

END

TEXAS SALES AND USE TAX EXEMPTION CERTIFICATE

City of Austin, Texas

P.O. Box 1088

Austin, Texas 78767

CONTRACTOR / PURCHASER: _____

Street Address: _____

City, State, ZIP Code: _____

PROJECT: _____

Project Manager: _____

FDU No.: _____

CIP ID No.: _____

Description of items to be purchased or as described on the attached order or invoice:

_____

_____

The Contractor may purchase all labor, materials, supplies, and equipment to be incorporated in the City of Austin realty, including easements, or completely consumed at the Project jobsite and services required by or integral to the performance of the contract for the Project without paying sales or use tax in accordance with State Comptroller Rule 3.291.

Contractor/Purchaser claims this exemption for the following reason: This contract is to be performed for the City of Austin, a tax exempt entity under the Texas Tax Code.

I understand that I will be liable for payment of sales and use taxes which may become due for failure to comply with the provisions of the Tax Code. I also understand that it is a criminal offense to give an exemption certificate to the contractor for taxable items that I know, at the time of purchase, will be used in a manner other than that expressed in this certificate and depending on the amount of tax evaded, the offense may range from a Class B misdemeanor to a felony of the second degree.

City of Austin, Texas	Title	Date
Elaine Hart ELAINE HART	DEPUTY CITY MANGER/CHIEF FINANCIAL OFFICER	January 11, 2019

CONTRACTOR/PURCHASER: _____

By: _____

Title: _____

Date: _____

NOTE: This certificate cannot be issued for the purchase, lease, or rental of a motor vehicle.

THIS CERTIFICATE DOES NOT REQUIRE A NUMBER TO BE VALID. Sales and Use Tax "Exemption Numbers" or "Tax Exempt" Numbers do not exist. This certificate should be furnished to the supplier. Do not send the completed certificate to the Comptroller of Public Accounts.

End

NON-USE OF ASBESTOS AFFIDAVIT (CONTRACTOR PRIOR TO CONSTRUCTION)

Section 00680

STATE OF TEXAS
COUNTY OF TRAVIS

BEFORE ME, the undersigned authority, personally appeared the Affiant who, being by me first duly sworn, upon oath deposed and stated:

"My name is _____, hereinafter known as Affiant. "I am over the age of 18 years and I have never been convicted of a crime. I am the _____of_____ hereinafter known as CONTRACTOR.

"I am fully competent to make this affidavit. I have personal knowledge of the facts set forth below and they are all true and correct.

"WHEREAS CONTRACTOR has submitted a bid to the City of Austin as the Prime CONTRACTOR and anticipates being awarded a contract for the construction of _____located at_____, Austin, Texas, hereinafter known as Project, for the City of Austin, Texas, hereinafter known as OWNER, and "WHEREAS asbestos in a dust form is a recognized health hazard, and "WHEREAS the OWNER desires not to have any asbestos containing materials used or incorporated into the construction of the Project; "THEREFORE the CONTRACTOR affirms and understands the following:

1. The CONTRACTOR, any person, firm or organization representing or represented by the CONTRACTOR, or employed by the CONTRACTOR shall not cause or allow any material to be incorporated into the construction of the project, or allow any building material on the project site that is an asbestos containing material or any other material defined as containing asbestos by any laws, rules or regulations promulgated by the United States Government, the State of Texas or any governmental organization or agency operating under the authority of either of those entities.

2. Realizing that there might be some materials in which a satisfactory non-asbestos containing material could not be obtained, the Consultant has received prior approval from the OWNER before specifying any such asbestos containing material. Those approved materials are the only asbestos containing materials that are exempt from the above prohibition.

3. The CONTRACTOR certifies and affirms their understanding that if any asbestos containing materials not approved by the City of Austin for inclusion into the Project, are determined, as a result of any inspection and sample analysis performed by an individual(s) and/or firm(s) certified and/or licensed to perform such inspection by the United States Government and/or the State of Texas, to have been incorporated into the construction of the Project, or brought onto the site of the Project, the OWNER shall look to the CONTRACTOR for reimbursement of any and all costs incurred in the removal and/or other abatement of said asbestos containing materials.

4. CONTRACTOR further understands that OWNER shall also look to the CONTRACTOR for any and all damages to OWNER which result from the inability of the OWNER to use any portion or all of the Project due to the incorporation of asbestos containing materials that have not been approved by OWNER.

5. CONTRACTOR further understands that OWNER will pursue reimbursement of any said cost and compensation for any said damages from the CONTRACTOR by any and every means within OWNER's right and power.

Signature of Affiant: _____

STATE OF TEXAS
COUNTY OF TRAVIS

ON _____, 20___, personally appeared_____ and been duly sworn by me, subscribed to the foregoing affidavit and has stated that the facts stated therein are true and correct.

_____
Notary Public, State of Texas

_____
Printed Name of Notary

My Commission Expires:_____

END

NON-USE OF ASBESTOS AFFIDAVIT (CONTRACTOR AFTER CONSTRUCTION)

Section 00681

STATE OF TEXAS
COUNTY OF TRAVIS

BEFORE ME, the undersigned authority, personally appeared the Affiant who, being by me first duly sworn, upon oath deposed and stated:

"My name is _____, hereinafter known as Affiant. "I am over the age of 18 years and I have never been convicted of a crime. I am the _____of_____ hereinafter known as CONTRACTOR.

"I am fully competent to make this affidavit. I have personal knowledge of the facts set forth below and they are all true and correct.

"WHEREAS CONTRACTOR was awarded a Contract for, and was the Prime CONTRACTOR for the construction of _____ located at _____, Austin, Texas, hereinafter known as Project, for the City of Austin, Texas, hereinafter known as OWNER, and "WHEREAS asbestos in a dust form is a recognized health hazard, and "WHEREAS the OWNER desires not to have any asbestos containing materials used or incorporated into the construction of the Project; "THEREFORE the CONTRACTOR affirms and understands the following:

1. The CONTRACTOR, any person, firm or organization representing or represented by the CONTRACTOR, or employed by the CONTRACTOR has not caused or allowed any material to be incorporated into the construction of the project, or allowed any building material on the project site that is an asbestos containing material or any other material defined as containing asbestos by any laws, rules or regulation promulgated by the United States Government, the State of Texas or any governmental organization or agency operating under the authority of either of those entities.

2. Realizing that there were some materials in which a satisfactory non-asbestos containing material could not be obtained, the Consultant received prior approval from the OWNER before specifying any such asbestos containing material. Those approved materials were the only asbestos containing materials incorporated into the construction of the Project and are listed below, with their locations:

_____

_____

_____

3. The CONTRACTOR certifies and affirms their understanding that if any asbestos containing materials not approved by the City of Austin for inclusion into the Project, are determined, as a result of any inspection and sample analysis performed by an individual(s) and/or firm(s) certified and/or licensed to perform such inspection by the United States Government and/or the State of Texas, to have been incorporated into the construction of the Project, or brought onto the site of the Project, the OWNER shall look to the CONTRACTOR for reimbursement of any and all costs incurred in the removal and/or other abatement of said asbestos containing materials.

4. CONTRACTOR further understands that OWNER shall also look to the CONTRACTOR for any and all damages to OWNER which result from the inability of the OWNER to use any portion or all of the Project due to the incorporation of asbestos containing materials that have not been approved by OWNER.

5. CONTRACTOR further understands that OWNER will pursue reimbursement of any said cost and compensation for any said damages from the CONTRACTOR by any and every means within OWNER's right and power.

Signature of Affiant:_____

STATE OF TEXAS
COUNTY OF TRAVIS

On _____, 20___, personally appeared_____ and been duly sworn by me, subscribed to the foregoing affidavit and has stated that the facts stated therein are true and correct.

_____
Notary Public, State of Texas

_____
Printed Name of Notary

My Commission Expires: _____

END

Bidding Requirements, Contract Forms and Conditions of the Contract

GENERAL CONDITIONS OF THE CONTRACT

Section 00700

General Conditions Table of Contents

ARTICLE 1 - DEFINITIONS 2
ARTICLE 2 - PRELIMINARY MATTERS 6
ARTICLE 3 - CONTRACT DOCUMENTS: INTENT, AMENDING, REUSE 8
ARTICLE 4 - AVAILABILITY OF LANDS; SUBSURFACE AND PHYSICAL CONDITIONS; REFERENCE POINTS 9
ARTICLE 5 - BONDS AND INSURANCE 12
ARTICLE 6 - CONTRACTOR'S RESPONSIBILITIES 15
ARTICLE 7 - OTHER WORK 27
ARTICLE 8 - OWNER'S RESPONSIBILITIES 28
ARTICLE 9 - ENGINEER/ARCHITECT'S STATUS DURING CONSTRUCTION 29
ARTICLE 10 - CHANGES IN THE WORK 30
ARTICLE 11 - CHANGE OF CONTRACT AMOUNT 33
ARTICLE 12 - CHANGE OF CONTRACT TIMES 35
ARTICLE 13 - TESTS AND INSPECTIONS; CORRECTION, REMOVAL OR ACCEPTANCE OF DEFECTIVE WORK 37
ARTICLE 14 - PAYMENTS TO CONTRACTOR AND COMPLETION 40
ARTICLE 15 - SUSPENSION OF WORK AND TERMINATION 46
ARTICLE 16 - DISPUTE RESOLUTION 49
ARTICLE 17 - MISCELLANEOUS 52

ARTICLE 1 – DEFINITIONS

Whenever used in these General Conditions or in the other Contract Documents the following terms have the meanings indicated which are applicable to both the singular and plural thereof:

1.1 Addendum - Written instruments issued by the Contract Awarding Authority which clarify, correct or change the bidding requirements or the Contract Documents prior to the Due Date. "Addenda" is the plural form of Addendum.

1.2 Agreement - Prescribed form, Section 00500.

1.3 Alternative Dispute Resolution - The process by which a disputed Claim may be settled if the OWNER and the CONTRACTOR cannot reach an agreement between themselves, as an alternative to litigation.

1.4 Bid - A complete, properly signed response to an Invitation for Bid that, if accepted, would bind the Bidder to perform the resultant Contract.

1.5 Bidder - A person, firm, or entity that submits a Bid in response to a Solicitation. Any Bidder may be represented by an agent after submitting evidence demonstrating the agent's authority. The agent cannot certify as to his own agency status.

1.6 Bid Documents - The advertisement or Invitation for Bids, instructions to Bidders, the Bid form, the Contract Documents and Addenda.

1.7 Calendar Day - Any day of the week; no days being excepted. Work on Saturdays, Sundays, and/or Legal Holidays shall be coordinated with OWNER.

1.8 Change Directive - A written directive to CONTRACTOR, signed by OWNER, ordering a change in the Work and stating a proposed basis for adjustment, if any, in the Contract Amount or Contract Time, or both. A Change Directive may be used in the absence of total agreement on the terms of a Change Order. A Change Directive does not change the Contract Amount or Contract Time, but is evidence that the parties expect that the change directed or documented by a Change Directive will be incorporated in a subsequently issued Change Order.

1.9 Change Orders - Written agreements entered into between CONTRACTOR and OWNER authorizing an addition, deletion, or revision to the Contract, issued on or after the Execution Date of the Agreement.

1.10 Claim - A written demand seeking, as a matter of right, adjustment or interpretation of Contract terms, payment of money, extension of time or other relief with respect to the terms of the Contract.

1.11 Contract - The binding legal agreement between the OWNER and the CONTRACTOR. The Contract represents the entire and integrated agreement between OWNER and CONTRACTOR for performance of the Work, as evidenced by the Contract Documents.

1.12 Contract Amount - The moneys payable by OWNER to CONTRACTOR for completion of the Work in accordance with the Contract Documents.

1.13 Contract Awarding Authority - A City department authorized to enter into Contracts on behalf of the City.

1.14 Contract Documents - Project Manual, Drawings, Addenda and Change Orders.

1.15 Contract Time - The number of days allowed for completion of the Work as defined by the Contract. When any period is referred to in days, it will be computed to exclude the first and include the last day of such period. A day of twenty-four hours measured from midnight to the next midnight will constitute a day.

1.16 CONTRACTOR - The individual, firm, corporation, or other business entity with whom OWNER has entered into the Contract for performance of the Work.

1.17 Critical Path - The longest series of tasks that runs consecutively from the beginning to the end of the project, as determined by duration and workflow sequence. This longest path sets the managerial standard for how quickly a project can be completed, given appropriate resources.

1.18 Drawings - Those portions of the Contract Documents which are graphic representations of the scope, extent and character of the Work to be furnished and performed by CONTRACTOR and which have been approved by OWNER. Drawings may include plans, elevations, sections, details, schedules and diagrams. Shop Drawings are not Drawings as so defined.

1.19 Due Date - The date and time specified for receipt of Bids.

1.20 Engineer/Architect (E/A) - The OWNER's design professional identified as such in the Contract. The titles of "Architect/Engineer," "Architect" and "Engineer" used in the Contract Documents shall read the same as Engineer/Architect (E/A). Nothing contained in the Contract Documents shall create any contractual or agency relationship between E/A and CONTRACTOR.

1.21 Equal - The terms "equal" or "approved equal" shall have the same meaning.

1.22 Execution Date - Date of last signature of the parties to the Agreement.

1.23 Field Order - A written order issued by Owner's Representative which orders minor changes in the Work and which does not involve a change in the Contract Amount or the Contract Time.

1.24 Final Completion - The point in time when OWNER determines that all Work has been completed and final payment to CONTRACTOR will be made in accordance with the Contract Documents.

1.25 Force Account - a basis of payment for the direct performance of Work with payment based on the actual cost of the labor, equipment and materials furnished and consideration for overhead and profit as set forth in Section 11.5.

1.26 Inspector - The authorized representative of any regulatory agency that has jurisdiction over any portion of the Work.

1.27 Invitation for Bid (IFB) - a Solicitation requesting pricing for a specified Good or Service which has been advertised for Bid in a newspaper and/or the Internet.

1.28 Legal Holidays

1.28.1 The following are recognized by the OWNER:

Holiday	Date Observed
New Year's Day	January 1
Martin Luther King, Jr.'s Birthday	Third Monday in January
President's Day	Third Monday in February
Memorial Day	Last Monday in May
Independence Day	July 4
Labor Day	First Monday in September
Veteran's Day	November 11
Thanksgiving Day	Fourth Thursday in November
Friday after Thanksgiving	Friday after Thanksgiving
Christmas Eve	December 24
Christmas Day	December 25

1.28.2 If a Legal Holiday falls on Saturday, it will be observed on the preceding Friday. If a Legal Holiday falls on Sunday, it will be observed on the following Monday.

1.28.3 Christmas Eve is observed only if it falls on a Monday through Thursday. If Christmas Eve falls on a Friday, that day is observed as the Christmas Day holiday.

1.29 Milestones - A significant event specified in the Contract Documents relating to an intermediate completion date or time prior to Substantial Completion of all the Work.

1.30 Notice to Proceed - A Written Notice given by OWNER to CONTRACTOR fixing the date on which the Contract Times will commence to run and on which CONTRACTOR shall start to perform CONTRACTOR's obligations under the Contract Documents.

1.31 OWNER - City of Austin, Texas, a municipal corporation, home rule city and political subdivision organized and existing under the laws of the State of Texas, acting through the City Manager or his/her designee, officers, agents or employees to administer design and construction of the Project.

1.32 Owner's Representative - The designated representative of the OWNER. The Owner's Representative will be identified at the pre-construction conference.

1.33 Partial Occupancy or Use - Use by OWNER of a substantially completed part of the Work for the purpose for which it is intended (or a related purpose) prior to Substantial Completion of all the Work, provided OWNER and CONTRACTOR have accepted in writing the responsibilities assigned to each of them for payments, retainage if any, security, maintenance, utilities, corrective work, insurance and warranties.

1.34 Project - The subject of the Work and its intended result.

1.35 Project Manual - That portion of the Contract Documents which may include the following: introductory information; bidding requirements, Contract forms and General and Supplemental General Conditions; General Requirements; Specifications; Drawings; MBE/WBE or DBE Procurement Program Package; Project Safety Manual; and Addenda.

1.36 Resident Project Representative - The authorized representative of E/A who may be assigned to the site or any part thereof.

1.37 Shop Drawings - All drawings, diagrams, illustrations, schedules and other data or information which are specifically prepared or assembled by or for CONTRACTOR and submitted by CONTRACTOR as required by the Contract Documents.

1.38 Specifications - Those portions of the Contract Documents consisting of written technical descriptions as applied to the Work, which set forth to CONTRACTOR, in detail, the requirements which must be met by all materials, equipment, construction systems, standards, workmanship, equipment and services in order to render a completed and useful project.

1.39 Solicitation - Solicitation means, as applicable, an Invitation for Bid or a Request for Proposal.

1.40 Substantial Completion - The stage in the progress of the Work when the Work, or designated portion thereof, is sufficiently complete in accordance with the Contract Documents so OWNER can occupy or utilize the Work for its intended use, as evidenced by a Certificate of Substantial Completion approved by OWNER.

1.41 Subcontractor - An individual, firm, corporation, or other business entity having a direct contract with CONTRACTOR for the performance of a portion of the Work under the Contract.

1.42 Sub-Subcontractor - A person or entity who has a direct or indirect contract with a Subcontractor to perform a portion of the work.

1.43 Superintendent - The representative of CONTRACTOR authorized in writing to receive and fulfill instructions from the Owner's Representative, and who shall supervise and direct construction of the Work.

1.44 Supplemental General Conditions - The part of the Contract Documents which amends or supplements the General Conditions. All General Conditions which are not so amended or supplemented remain in full force and effect.

1.45 Supplier - An individual or entity having a direct contract with CONTRACTOR or with any Subcontractor to furnish materials or equipment to be incorporated in the Work by CONTRACTOR or any Subcontractor.

1.46 Time Extension Request - An approved request for time extension on a form acceptable to OWNER.

1.47 Work - The entire completed construction, or the various separately identifiable parts thereof, required to be furnished under the Contract Documents.

1.48 Working Day - Any day of the week, not including Saturdays, Sundays, or Legal Holidays in which conditions under the CONTRACTOR's control will permit work for a continuous period of not less than seven (7) hours between 7:00 a.m. and 6:00 p.m. If other contract documents reduce the continuous period available for work to less than seven (7) hours, those reduced hours shall be considered a Working Day. Upon agreement with Owner's Representative, work on Saturdays, Sundays, and/or Legal Holidays may be allowed and will be considered a Working Day.

1.49 Working Hours

1.49.1 Working Day Contract: All Work shall be done between 7:00 a.m. and 6:00 p.m. unless otherwise authorized by Owner's Representative. However, emergency work may be done without prior permission as indicated in paragraph 6.11.5. If night Work is authorized and conditions under CONTRACTOR's control will permit Work for a continuous period of not less than seven (7) hours between 12:00 a.m. and 11:59 p.m. it will be considered a Working Day. Night Work may be revoked at any time by OWNER if CONTRACTOR fails to maintain adequate equipment and supervision for the prosecution and control of the night Work.

1.49.2 Calendar Day Contract: All Work shall be done between 7:00 a.m. and 6:00 p.m. unless authorized by Owner’s Representative. However, emergency work may be done without prior permission as indicated in paragraph 6.11.5. Night Work may be revoked at any time by OWNER if CONTRACTOR fails to maintain adequate equipment and supervision for the prosecution and control of the night Work.

1.50 Written Notice - Written communication between OWNER and CONTRACTOR. Written Notice shall be deemed to have been duly served if delivered in person to Owner's Representative or CONTRACTOR's duly authorized representative, or if delivered at or sent by registered or certified mail to the attention of Owner's Representative or CONTRACTOR's duly authorized representative at the last business address known to the party giving notice.

ARTICLE 2 - PRELIMINARY MATTERS

2.1 Delivery of Agreement, Bonds, Insurance, etc.: Within five (5) Working Days after written notification of award of Contract, CONTRACTOR shall deliver to OWNER signed Agreement, Bond(s), Insurance Certificate(s) and other documentation required for execution of Contract.

2.2 Copies of Documents: OWNER shall furnish to CONTRACTOR (1) copy of the executed Project Manual, one (1) set of Drawings and one (1) copy of the Contract Documents in .pdf format. Additional copies will be furnished, upon request, at the cost specified in the Supplemental General Conditions."

2.3 Commencement of Contract Times; Notice to Proceed: The Contract Time(s) will begin to run on the day indicated in the Notice to Proceed. Notice to Proceed will be given at any time within sixty (60) calendar days after the Execution Date of the Agreement, unless extended by written agreement of the parties.

2.4 Before Starting Construction:

2.4.1 No Work shall be done at the site prior to the preconstruction conference without OWNER's approval. Before undertaking each part of the Work, CONTRACTOR shall carefully study the Contract Documents to check and verify pertinent figures shown thereon compare accurately to all applicable field measurements. CONTRACTOR shall promptly report in writing to Owner's Representative any conflict, error, ambiguity or discrepancy which CONTRACTOR may discover and shall obtain a written interpretation or clarification from Owner's Representative before proceeding with any Work affected thereby. CONTRACTOR shall be liable to OWNER for failure to report any conflict, error, ambiguity or discrepancy in the Contract Documents of which CONTRACTOR knew or reasonably should have known.

2.4.2 It is mutually agreed between CONTRACTOR and OWNER that successful completion of the Work within the Contract completion date is of primary importance. Therefore, the CONTRACTOR hereby agrees to submit to the Owner's Representative for review and approval, or acceptance, as appropriate, all information requested within this section, including a Baseline Schedule, no later than five working days prior to the preconstruction conference. The Owner's Representative will schedule the preconstruction conference upon the timely submittal of the required documents, unless time is extended by written mutual agreement. CONTRACTOR will submit the following:

.1 A proposed Baseline Schedule developed using Microsoft Project software, unless otherwise approved by Owner's Representative ("Baseline Schedule") to confirm that all Work will be completed within the Contract time. The Baseline Schedule must (i) indicate the times (number of days or dates) for starting and completing the various stages of the Work, including any Milestones specified in the Contract Documents, (ii) identify the Critical Path for completing the Work, (iii) identify when all Subcontractors will be utilized, and (iv) take into consideration any limitations on Working Hours, including baseline Rain Days on Calendar Day Contracts, and (v) be prepared accordance with Section 01310, Schedules and Reports, if applicable; otherwise in accordance with Section 01300, Submittals. This Baseline Schedule, a copy of which shall be made available at the job site(s), must contain sufficient detail to indicate that the CONTRACTOR has properly identified required Work elements and tasks, has provided for a sufficient and proper workforce and integration of Subcontractors, has provided sufficient

resources and has considered the proper sequencing of the Work required to result in a successful Project that can be completed within the Contract time;

.2 An organizational chart showing the principals and management personnel who will be involved with the Work, including each one's responsibilities for the Work;

.3 To the extent not set forth in the Section 00400 Statement of Contractor's Experience, a complete listing of the CONTRACTOR's employees proposed for the Work. List each one by name and job title, and show length of employment with CONTRACTOR;

.4 To the extent not set forth in the Section 00410 Statement of Bidder's Safety Experience, a discussion and confirmation of the CONTRACTOR's commitment to safety by providing a copy of its employee's safety handbook and the safety records for the past three years of CONTRACTOR's proposed project manager and Superintendent;

.5 A preliminary schedule of Shop Drawing and sample submittals;

.6 A preliminary schedule of values for all of the Work, subdivided into component parts in sufficient detail to serve as the basis for progress payments during construction. Such prices will be deemed to include an appropriate amount of overhead and profit applicable to each item of Work;

.7 To the extent not set forth in the Section 00400 Statement of Contractor's Experience, a letter designating CONTRACTOR's Superintendent and project manager, and a confirmation of past project experience for the CONTRACTOR's Superintendent and project manager specifically intended for the Work;

.8 A letter from CONTRACTOR and Subcontractor(s) listing salaried specialists. A salaried specialist is anyone except an hourly worker whose wage rate is governed by Section 00830 of this agreement;

.9 A letter designating the project's Safety Representative along with a copy of their Department of Labor-issued OSHA card proving completion of the OSHA 30-hour Construction Safety and Health training class in the OSHA Outreach Training Program;

.10 If applicable, an excavation safety system plan;

.11 If applicable, a plan illustrating proposed locations of temporary facilities;

.12 A completed Non-Use of Asbestos Affidavit (Prior to Construction);

.13 A letter designating the Texas Registered Professional Land Surveyor for layout of the Work, if the Work requires the services of a surveyor; and

.14 Copies of the Department of Labor-issued OSHA cards proving completion of the OSHA 10-hour Construction Safety and Health training class in the OSHA Outreach Training Program for each worker (defined as a person covered by a prevailing wage determination) that will initially be on site. Note that workers must possess other OSHA-required training as the work dictates in accordance with the OSHA Act; and specifically, the contractor must meet the required provisions in 509S Excavation Safety Systems required prior to commencing excavation;

.15 A certificate of worker's compensation insurance coverage for all persons providing services on the Project (refer to 5.2.1.3 in Section 00700 for definition of persons providing services on the Project);

.16 A Construction Equipment Emissions Reduction Plan.

2.4.3 Neither the acceptance nor the approval of any of the submittals required in paragraph 2.4.2, above, will constitute the adoption, affirmation, or direction of the CONTRACTOR'S means and methods.

2.5 Preconstruction Conference: Prior to commencement of Work at the site, CONTRACTOR must attend a preconstruction conference with Owner's Representative and others, as set forth in Division 1. Additionally, prior to commencement of work, the CONTRACTOR shall host a preconstruction conference for the Subcontractors identified on the originally approved compliance plan, Owner's Representative and others, as set forth in Division 1. The CONTRACTOR shall notify all Subcontractors five (5) working days prior to the preconstruction conference. If the CONTRACTOR has included Subcontractors in the initial preconstruction conference, the additional Subcontractor preconstruction conference will not be required.

2.6 Initially Acceptable Schedules: Unless otherwise provided in the Contract Documents, CONTRACTOR shall obtain approval of Owner's Representative on the Baseline Schedule submitted in accordance with paragraph 2.4.2.1 and Division 1 before the first progress payment will be made to CONTRACTOR. The Baseline Schedule must provide for an orderly progression of the designated portion of the Work to completion within any specified Milestones and Contract Times. Acceptance of the schedule by Owner's Representative will neither impose on Owner's Representative responsibility or liability for the sequencing, scheduling or progress of the Work nor interfere with or relieve CONTRACTOR from CONTRACTOR's full responsibility for such Work. CONTRACTOR's schedule of Shop Drawings and sample submissions must provide an acceptable basis for reviewing and processing the required submittals. CONTRACTOR's schedule of values must conform to the requirements set forth in Division 1.

ARTICLE 3 - CONTRACT DOCUMENTS: INTENT, AMENDING, REUSE

3.1 Intent:

3.1.1 The intent of the Contract Documents is to include all information necessary for the proper execution and timely completion of the Work by CONTRACTOR. The CONTRACTOR will execute the Work described in and reasonably inferable from the Contract Documents as necessary to produce the results indicated by the Contract Documents. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all. In cases of disagreement, the following order of precedence shall generally govern (top item receiving priority of interpretation):

Signed Agreement
Addendum to the Contract Documents, including approved changes
Supplemental General Conditions
General Conditions
Other Bidding Requirements and Contract Forms
Special Provisions to the Standard Technical Specifications
Special Specifications
Standard Technical Specifications

Drawings (figured dimensions shall govern over scaled dimensions)
Project Safety Manual (if applicable),

with the understanding that a common sense approach will be utilized as necessary so that the Contract Documents produce the intended response.

3.1.2 Unless otherwise stated in the Contract Documents, words that have well-known technical or construction industry meanings are used in the Contract Documents in accordance with such recognized meanings.

3.2 **Reporting and Resolving Discrepancies:** If, during the performance of the Work, CONTRACTOR discovers any conflict, error, ambiguity or discrepancy within the Contract Documents or between the Contract Documents and any provisions of any such law or regulation applicable to the performance of the Work or of any such standard, specification, manual or code or instructions of any Supplier, CONTRACTOR shall report it to Owner's Representative in writing at once, and CONTRACTOR shall not proceed with the Work affected thereby until an amendment or supplement to the Contract Documents has been issued by one of the methods indicated in paragraph 3.3.1 or 3.3.2. CONTRACTOR shall be liable to OWNER for failure to report any such conflict, error, ambiguity or discrepancy of which CONTRACTOR knew or reasonably should have known.

3.3 **Modifying and Supplementing Contract Documents:**

3.3.1 The Contract Documents may be modified to provide for additions, deletions, and revisions in the Work or to modify the terms and conditions by change order or contract amendment.

3.3.2 In addition, the requirements of the Contract Documents may be supplemented, and minor variations and deviations in the Work may be authorized, in one or more of the following ways:

.1 Field Order.

.2 Review of a Shop Drawing or sample.

.3 Written interpretation or clarification.

3.4 Reuse of Documents Prohibited: CONTRACTOR and any Subcontractor or Supplier or other person or organization performing or furnishing any of the Work under a direct or indirect contract with OWNER: (i) shall not have or acquire any title to or ownership rights in any of the Drawings, Specifications or other documents (or copies of any thereof) prepared by or bearing the seal of E/A or E/A's consultant, and (ii) shall not reuse any of such Drawings, Specifications, other documents or copies on extensions of the Project or any other project without written consent of OWNER and E/A.

3.5 In the event of the breach by the OWNER or CONTRACTOR of any of its obligations under the Contract, so as to support a claim by the other party, the provisions of this Contract will be equitably construed to allow the resolution of such a claim and all of the other provisions of this Contract shall continue in full force and effect as to the rights, responsibilities, and remedies of the OWNER and CONTRACTOR.

ARTICLE 4 - AVAILABILITY OF LANDS; SUBSURFACE AND PHYSICAL CONDITIONS; REFERENCE POINTS

4.1 **Availability of Lands:** The OWNER will provide access to all land and interests in land required for the Work and will notify CONTRACTOR of any restrictions in such access. CONTRACTOR may make a claim if OWNER fails to provide timely access to the Work.

CONTRACTOR must obtain any additional temporary construction facilities, stockpiling or storage sites not otherwise provided.

4.2 Subsurface and Physical Conditions:

4.2.1 CONTRACTOR specifically represents that it has carefully examined the plans, the geotechnical report, if any, and the site of the proposed Work and is thoroughly familiar with all of the conditions surrounding construction of the Project, having had the opportunity to conduct any and all additional inquiry, tests and investigation that he/she deems necessary and proper. CONTRACTOR acknowledges the receipt of the geotechnical report, if any, and agrees that the report, while it is an accurate record of the geotechnical conditions at the boring locations, is not a guarantee of specific site conditions which may vary between boring locations.

4.2.2 CONTRACTOR must notify OWNER in writing as soon as reasonably possible, but no later than three (3) calendar days, if unforeseen conditions are encountered at the site which are (i) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or (ii) unknown physical conditions of an unusual nature, that differ materially from those normally encountered in the type of work being performed under this Contract. CONTRACTOR may not disturb the conditions until OWNER conducts an investigation. Owner's Representative and E/A will promptly investigate such conditions with E/A. If it is determined that such conditions differ materially and cause an increase or decrease in the CONTRACTOR's cost of or time required for performance of any part of the Work, Owner’s Representative will recommend an equitable adjustment in the Contract Amount or Contract Time, or both. If it is determined that such conditions are not materially different from those indicated in the Contract Documents, Owner’s Representative will notify CONTRACTOR in writing of such findings and the Contract will not be adjusted. CONTRACTOR may dispute such a determination in accordance with Article 16.

4.2.3 Notwithstanding any other provision of this Contract, CONTRACTOR is solely responsible for the location and protection of any and all public utility lines and utility customer service lines in the Work area. "Public utility lines" means the utility distribution and supply system, and "utility customer service lines" means the utility lines connecting customers to the utility distribution and collection system. Generally, existing utility customer service line connections are not shown on the Drawings. CONTRACTOR shall notify "One Call" and exercise due care to locate, mark, uncover and otherwise protect all such lines in the construction zone and any of CONTRACTOR's work or storage areas. CONTRACTOR's responsibility for the location and protection of utilities is primary and nondelegable. CONTRACTOR shall indemnify or reimburse such expenses or costs (including fines that may be levied against OWNER) that may result from unauthorized or accidental damage to all public lines and utility customer service lines in the work area. OWNER reserves the right to repair any damage CONTRACTOR causes to such utilities at CONTRACTOR's expense. If a public line and/or customer service line is damaged by CONTRACTOR, CONTRACTOR shall give verbal notice within one (1) hour and written notice within twenty-four (24) hours to the Owner’s Representative.

4.2.4 CONTRACTOR shall take reasonable precaution to avoid disturbing primitive records and antiquities of archaeological, paleontological or historical significance. No objects of this nature shall be disturbed without written permission of OWNER and Texas Historical Commission. When such objects are uncovered unexpectedly,

CONTRACTOR shall stop all Work in close proximity and notify Owner's Representative and Texas Historical Commission of their presence and shall not disturb them until written permission and permit to do so is granted. All primitive rights and antiquities uncovered on OWNER's property shall remain property of State of Texas, Texas Historical Commission conforming to Texas Natural Resources Code. If it is determined by OWNER, in consultation with Texas Historical Commission, that exploration or excavation of primitive records or antiquities on Project site is necessary to avoid loss, CONTRACTOR shall cooperate in salvage work attendant to preservation. If the Work stoppage or salvage work causes an increase in CONTRACTOR's cost of, or time required for, performance of the Work, the Contract Amount and/or Contract Time will be equitably adjusted.

4.3 Reference Points: Unless otherwise specified, all control lines and bench marks suitable for use in layout will be furnished by OWNER. Lay out of the Work shall be performed in accordance with Division 1. Controls, bench marks and property boundary markers shall be carefully preserved by CONTRACTOR by use of flags, staffs or other visible devices and in case of destruction or removal by CONTRACTOR or its employees, such controls and bench marks shall be replaced by a Registered Professional Land Surveyor at CONTRACTOR's expense. City of Austin survey monuments damaged by CONTRACTOR will be reestablished by OWNER at CONTRACTOR's expense.

4.4 Hazardous Materials:

4.4.1 To the extent provided by applicable law, OWNER shall be responsible for any hazardous material uncovered or revealed at the site which was not shown, indicated or identified in the Contract Documents to be within the scope of the Work and which may present a substantial danger to persons or property exposed thereto in connection with the Work at the site. CONTRACTOR shall immediately notify Owner's Representative of any suspected hazardous materials encountered before or during performance of the Work and shall take all necessary precautions to avoid further disturbance of the materials.

4.4.2 CONTRACTOR shall be responsible for any hazardous materials brought to the site by CONTRACTOR, Subcontractor, Suppliers or anyone else for whom CONTRACTOR is responsible.

4.4.3 No asbestos-containing materials shall be incorporated into the Work or brought on Project site without prior approval of OWNER. The CONTRACTOR shall not knowingly use, specify, request or approve for use any asbestos containing materials or lead-based paint without the OWNER'S written approval. When a specific product is specified, the CONTRACTOR shall endeavor to verify that the product does not include asbestos containing material.

4.4.4 Refer to Division 1 for hazardous material definitions and procedures.

.1 Unless otherwise expressly provided in the Contract Documents to be part of the Work, CONTRACTOR is not responsible for any unexpected Hazardous Materials encountered at the site. Upon encountering any Hazardous Conditions, CONTRACTOR must stop Work immediately in the affected area and duly notify OWNER and, if required by applicable law or regulations, all government or quasi-government entities with jurisdiction over the Project or site.

.2 Upon receiving notice of the presence of suspected Hazardous Materials, OWNER shall take the necessary measures required to ensure that the Hazardous Materials are remediated or rendered harmless. Such necessary measures shall include OWNER retaining qualified independent experts to (i)

ascertain whether Hazardous Materials have actually been encountered, and, if they have been encountered, (ii) prescribe the remedial measures that OWNER must take either to remove the Hazardous Materials or render the Hazardous Materials harmless.

.3 CONTRACTOR shall be obligated to resume Work at the affected area of the Project only after OWNER's Representative provides written certification that (i) the Hazardous Materials have been removed or rendered harmless and (ii) all necessary approvals have been obtained from all government and quasi-government entities having jurisdiction over the Project or site. The CONTRACTOR shall be responsible for continuing the Work in the unaffected portion of the Project and site.

.4 CONTRACTOR will be entitled, in accordance with these General Conditions, to an adjustment in its Contract Amount and/or Contract Time(s) to the extent CONTRACTOR's cost and/or time of performance have been adversely impacted by the presence of Hazardous Materials.

.5 Notwithstanding the preceding provisions of this Section 4.1, OWNER is not responsible for Hazardous Materials introduced to the Site by CONTRACTOR, Subcontractors or anyone for whose acts they may be liable. CONTRACTOR shall indemnify, defend and hold harmless OWNER and OWNER's officers, directors, employees and agents from and against all claims, losses, damages, liabilities and expenses, including attorneys' fees and expenses, arising out of or resulting from those hazardous materials introduced to the site by CONTRACTOR, Subcontractors or anyone for whose acts they may be liable.

4.4.5 CONTRACTOR shall be responsible for use, storage and remediation of any hazardous materials brought to the Site by CONTRACTOR, Subcontractors, Suppliers or anyone else for whom CONTRACTOR is responsible.

ARTICLE 5 - BONDS AND INSURANCE

5.1 Surety and Insurance Companies: All bonds and insurance required by the Contract Documents shall be obtained from solvent surety or insurance companies that are duly licensed by the State of Texas and authorized to issue bonds or insurance policies for the limits and coverages required by the Contract Documents. The bonds shall be in a form acceptable to OWNER and shall be issued by a surety which complies with the requirements of Texas Insurance Code, Title 12, Chapter 3503. The surety must obtain reinsurance for any portion of the risk that exceeds 10% of the surety's capital and surplus. For bonds exceeding $100,000, the surety must also hold a certificate of authority from the U.S. Secretary of the Treasury or have obtained reinsurance for any liability in excess of $1,000,000 from a reinsurer that is authorized as a reinsurer in Texas or holds a certificate of authority from the U.S. Secretary of the Treasury. In the event that the proposed surety for a contract award in excess of $100,000 does not hold a certificate of authority from the U.S. Secretary of the Treasury and/or its proposed reinsurer does not hold a certificate of authority from the U.S. Secretary of the Treasury, the OWNER may require additional financial solvency information from the Bidder/Contractor and the proposed surety company and/or reinsurer as part of the 00400 Statement of Bidders Experience and determination of bidder responsibility in the award of the Contract.

5.2 Workers' Compensation Insurance Coverage:

5.2.1 Definitions:

.1 Certificate of coverage ("certificate") - A copy of a certificate of insurance, a certificate of authority to self-insure issued by the commission, or a coverage agreement (DWC-81, DCW-82, DCW-83, or DCW84), showing statutory workers' compensation insurance coverage for the person's or entity's employees providing services on the Project, for the duration of the Project.

.2 Duration of the Project - includes the time from the beginning of the Work on the Project until the CONTRACTOR's/ person's Work on the Project has been completed and accepted by OWNER.

.3 Persons providing services on the Project ("subcontractor" in Texas Labor Code, Section 406.096) - includes all persons or entities performing all or part of the services the CONTRACTOR has undertaken to perform on the Project, regardless of whether that person contracted directly with the CONTRACTOR and regardless of whether that person has employees. This includes, without limitation, independent contractors, Subcontractors, leasing companies, motor carriers, owner-operators, employees of any such entity, or employees of any entity which furnishes persons to provide services on the Project. "Services" include, without limitation, providing, hauling, or delivering equipment or materials, or providing labor, transportation, or other service related to a project. "Services" does not include activities unrelated to the Project, such as food/beverage vendors, office supply deliveries, and delivery of portable toilets.

5.2.2 CONTRACTOR shall provide coverage, based on proper reporting of classification codes and payroll amounts and filing of any coverage agreements, which meets the statutory requirements of Texas Labor Code, Section 401.011(44) for all employees of the CONTRACTOR providing services on the Project, for the duration of the Project.

5.2.3 CONTRACTOR must provide a certificate of coverage to OWNER prior to being awarded the Contract.

5.2.4 If the coverage period shown on the CONTRACTOR's current certificate of coverage ends during the duration of the Project, the CONTRACTOR must, prior to the end of the coverage period, file a new certificate of coverage with OWNER showing that coverage has been extended.

5.2.5 CONTRACTOR shall obtain from each person providing services on the Project, and provide to OWNER:

.1 A certificate of coverage, prior to that person beginning Work on the Project, so OWNER will have on file certificates of coverage showing coverage for all persons providing services on the Project; and

.2 No later than seven (7) days after receipt by CONTRACTOR, a new certificate of coverage showing extension of coverage, if the coverage period shown on the current certificate of coverage ends during the duration of the Project.

5.2.6 CONTRACTOR shall retain all required certificates of coverage for the duration of the Project and for one (1) year thereafter.

5.2.7 CONTRACTOR shall notify OWNER in writing by certified mail or personal delivery, within ten (10) days after CONTRACTOR knew or should have known, of any change that materially affects the provision of coverage of any person providing services on the Project.

5.2.8 CONTRACTOR shall post on each Project site a notice, in the text, form and manner prescribed by the Texas Workers' Compensation Commission, informing all persons providing services on the Project that they are required to be covered, and stating how a person may verify coverage and report lack of coverage.

5.2.9 CONTRACTOR shall contractually require each person with whom it contracts to provide services on a Project, to:

.1 Provide coverage, based on proper reporting of classification codes and payroll amounts and filing of any coverage agreements, which meets the statutory requirements of Texas Labor Code, Section 401.011(44) for all of its employees providing services on the Project, for the duration of the Project;

.2 Provide to CONTRACTOR, prior to that person beginning Work on the Project, a certificate of coverage showing that coverage is being provided for all employees of the person providing services on the Project, for the duration of the Project;

.3 Provide CONTRACTOR, prior to the end of the coverage period, a new certificate of coverage showing extension of coverage, if the coverage period shown on the current certificate of coverage ends during the duration of the Project;

.4 Obtain from each other person with whom it contracts, and provide to CONTRACTOR: a) a certificate of coverage, prior to the other person beginning Work on the Project; and b) a new certificate of coverage showing extension of coverage, prior to the end of the coverage period, if the coverage period shown on the current certificate of coverage ends during the duration of the Project;

.5 Retain all required certificates of coverage on file for the duration of the Project and for one (1) year thereafter;

.6 Notify OWNER in writing by certified mail or personal delivery, within ten (10) days after the person knew or should have known, of any change that materially affects the provision of coverage of any person providing services on the Project; and

.7 Contractually require each person with whom it contracts, to perform as required by paragraphs 5.2.9.1 - 5.2.9.7, with the certificates of coverage to be provided to the person for whom they are providing services.

5.2.10 By signing this Contract or providing or causing to be provided a certificate of coverage, CONTRACTOR is representing to OWNER that all employees of the CONTRACTOR who will provide services on the Project will be covered by workers' compensation coverage for the duration of the Project, that the coverage will be based on proper reporting of classification codes and payroll amounts, and that all coverage agreements will be filed with the appropriate insurance carrier or, in the case of a self-insured, with the Texas Worker’s Compensation Commission's Division of Self- Insurance Regulation. Providing false or misleading information may subject CONTRACTOR to administrative penalties, criminal penalties, civil penalties, or other civil actions.

5.2.11 CONTRACTOR's failure to comply with any of these provisions is a breach of Contract by CONTRACTOR which entitles OWNER to declare the Contract void if CONTRACTOR does not remedy the breach within ten (10) days after receipt of notice of breach from OWNER.

5.3 Other Bond and Insurance Requirements: For additional insurance requirements, refer to the Supplemental General Conditions.

5.4 Bonds:

5.4.1 General.

.1 Bonds, when required, shall be executed on forms furnished by or acceptable to OWNER. All bonds signed by an agent must be accompanied by a certified copy of such agent's authority to act.

.2 If the surety on any bond furnished by CONTRACTOR is declared bankrupt or becomes insolvent or its right to do business is terminated in the State of Texas or it ceases to meet the requirements of the preceding paragraph, CONTRACTOR shall within ten (10) days thereafter substitute another bond and surety, both of which must be acceptable to OWNER.

.3 When Performance Bonds and/or Payment Bonds are required, each shall be issued in an amount of one hundred percent (100%) of the Contract Amount as security for the faithful performance and/or payment of all CONTRACTOR's obligations under the Contract Documents. Performance Bonds and Payment Bonds shall be issued by a solvent surety company authorized to do business in the State of Texas, and shall meet any other requirements established by law or by OWNER pursuant to applicable law. Any surety duly authorized to do business in Texas may write Performance and Payment Bonds on a project without reinsurance to the limit of ten percent (10%) of its capital and surplus. Such a surety must reinsure any obligations over ten percent (10%).

5.4.2 Performance Bond.

.1 If the Contract Amount exceeds $100,000, CONTRACTOR shall furnish OWNER with a Performance Bond in the form set out in Section 00610.

.2 If the Contract Amount exceeds $25,000 but is less than or equal to $100,000, CONTRACTOR shall furnish OWNER with a Performance Bond in the form set out in Section 00610, unless the original Contract Time is 60 Calendar Days/40 Working Days or less, in which case CONTRACTOR can agree to the following terms and conditions for payment in lieu of providing a Performance Bond: no moneys will be paid to CONTRACTOR until completion and acceptance of the Work by OWNER; CONTRACTOR shall be entitled to receive 95% of the Contract Amount following Final Completion, and the remaining 5% of the Contract Amount following the one (1) year warranty period.

.3 If the Contract Amount is less than or equal to $25,000, CONTRACTOR will not be required to furnish a Performance Bond; provided that no moneys will be paid to CONTRACTOR until completion and acceptance of the Work by OWNER under the following terms and conditions: CONTRACTOR shall be entitled to receive 95% of the Contract Amount following Final Completion, and the remaining 5% of the Contract Amount following the one (1) year warranty period.

.4 If a Performance Bond is required to be furnished, it shall extend for the one (1) year warranty period.

5.4.3 Payment Bond.

.1 If the Contract Amount exceeds $50,000, CONTRACTOR shall furnish OWNER with a Payment Bond in the form set out in Section 00620.

.2 If the Contract Amount is less than or equal to $50,000, CONTRACTOR will not be required to furnish a Payment Bond; provided that no moneys will be paid to CONTRACTOR until completion and acceptance of the Work by OWNER under the terms and conditions specified in paragraph 5.4.2.3.

5.4.4 **Maintenance Bond:** If the Contract Documents contemplate a period of maintenance beyond the one (1) year contractual warranty period, OWNER agrees that any bond to be required for such maintenance work will be in the amount of the maintenance work during any extended maintenance period.

ARTICLE 6 - CONTRACTOR'S RESPONSIBILITIES

6.1 Supervision and Superintendence:

6.1.1 CONTRACTOR shall supervise, inspect and direct the Work competently and efficiently, devoting such attention thereto and applying such skills and expertise as may be necessary to perform the Work in accordance with the Contract Documents. CONTRACTOR shall be solely responsible for the means, methods, techniques, sequences and procedures of construction. CONTRACTOR shall be responsible to see that the completed Work complies accurately with the Contract Documents.

6.1.2 CONTRACTOR shall have a competent, qualified Superintendent on the Work at all times that work is in progress. To be qualified, at a minimum, the Superintendent must be effective at (a) communicating both verbally and in writing with the OWNER's representative; (b) receiving and fulfilling instructions from the Owner's Representative; (c) supervising and directing the construction of the Work; (d) reading and interpreting the plans and specifications; (e) writing, preparing and submitting necessary paperwork; and (f) understanding work sequencing and scheduling. The Superintendent will be CONTRACTOR's representative on the Work and shall have the authority to act on the behalf of CONTRACTOR. All communications given to the Superintendent shall be as binding as if given to CONTRACTOR. Either CONTRACTOR or the Superintendent shall provide a cellular telephone number and an emergency and home telephone number at which one or the other may be reached if necessary when work is not in progress. The Superintendent must be an employee of the CONTRACTOR, unless such requirement is waived in writing by the Owner's Representative. If the CONTRACTOR proposes a management structure with a Project Manager supervising, directing, and managing construction of the work in addition to or in substitution of a Superintendent, the requirements of these Construction Documents with respect to the Superintendent shall likewise apply to any such Project Manager.

.1 CONTRACTOR shall present the resume of the proposed Superintendent to the Owner's Representative showing evidence of experience and successful superintendence and direction of work of a similar scale and complexity. If, in the opinion of the Owner's Representative, the proposed Superintendent does not indicate sufficient experience in line with the Work, he/she will not be allowed to be the designated Superintendent for the Work.

.2 The Superintendent shall not be replaced without Written Notice to Owner's Representative. If CONTRACTOR deems it necessary to replace the Superintendent, CONTRACTOR shall provide the necessary information for approval, as stated above, on the proposed new Superintendent.

.3 A qualified substitute Superintendent may be designated in the event that the designated Superintendent is temporarily away from the Work, but not to exceed a time limit acceptable to the Owner's Representative. CONTRACTOR shall replace the Superintendent upon OWNER's request in the event the Superintendent is unable to perform to OWNER's satisfaction.

6.2 Labor, Materials and Equipment:

6.2.1 CONTRACTOR shall maintain a work force adequate to accomplish the Work within the Contract Time. CONTRACTOR agrees to employ only orderly and competent workers, skillful in performance of the type of Work required under this Contract. CONTRACTOR, Subcontractors, Sub-subcontractors, and their employees may not use or possess any alcoholic or other intoxicating beverages, illegal drugs or controlled substances while on the job or on OWNER's property, nor may such workers be intoxicated, or under the influence of alcohol or drugs, on the job. Subject to the applicable provisions of Texas law, CONTRACTOR, Subcontractors, Sub-subcontractors, and their employees may not use or possess any firearms or other weapons while on the job or on OWNER'S property. If OWNER or Owner's Representative notifies CONTRACTOR that any worker or representative of Contractor is incompetent, disorderly, abusive, or disobedient, has knowingly or repeatedly violated safety regulations, has possessed any firearms in contravention of the applicable provisions of Texas law, or has possessed or was under the influence of alcohol or drugs on the job, CONTRACTOR shall immediately remove such worker or representative, including an officer or owner of CONTRACTOR, from performing Contract Work, and may not employ such worker or representative again on Contract Work without OWNER's prior written consent. CONTRACTOR shall at all times maintain good discipline and order on or off the site in all matters pertaining to the Project. Workers on Project shall be paid not less than wage rates, including fringe benefits, as published by the Department of Labor (DOL) for Building Construction and Heavy and Highway Trades "AS APPLICABLE" and/or the minimum wage required by City of Austin Ordinance No. 20160324-015, whichever is higher. The Total Minimum Wage required can be met using any combination of cash and non-cash qualified fringe benefits provided the cash component meets or exceeds the minimum wage required.

6.2.2 Unless otherwise specified in Division 1, CONTRACTOR shall provide and pay for all materials, equipment, labor, transportation, construction equipment and machinery, tools, appliances, fuel, power, light, heat, telephone, water, sanitary facilities, temporary facilities and all other facilities and incidentals necessary for the furnishing, performance, testing, start-up and completion of the Work.

6.2.3 All materials and equipment shall be of good quality and new (including new products made of recycled materials, pursuant to Section 361.426 of the Texas Health & Safety Code), except as otherwise provided in the Contract Documents. If required by Owner's Representative, CONTRACTOR shall furnish satisfactory evidence (reports of required tests, manufacturer's certificates of compliance with material requirements, mill reports, etc.) as to the kind and quality of materials and equipment. All materials and equipment shall be applied, installed, connected, erected, used, cleaned and conditioned in accordance with instructions of the applicable Supplier, except as otherwise provided in the Contract Documents.

6.2.4 Substitutes and "Approved Equal" Items:

.1 Whenever an item of material or equipment is specified or described in the Contract Documents by using the name of a proprietary item or the name of a particular Supplier, the specification or description is intended to establish the

type, function and quality required. Unless the specification or description contains words reading that no like, equivalent or "approved equal" item or no substitution is permitted, other items of material or equipment of other Suppliers may be submitted by CONTRACTOR, at CONTRACTOR'S sole risk, including disruptions to the Critical Path of the Progress Schedule, to E/A through Owner's Representative under the following circumstances:

.1.1 "Approved Equal": If in E/A's sole discretion an item of material or equipment proposed by CONTRACTOR is functionally equal to that named and sufficiently similar so that no change in related Work will be required, it may be considered by E/A as an "approved equal" item, in which case review of the proposed item may, in E/A's sole discretion, be accomplished without compliance with some or all of the requirements for evaluation of proposed substitute items. CONTRACTOR shall provide E/A with the documentation required for E/A to make its determination.

.1.2 Substitute Items: If in E/A's sole discretion an item of material or equipment proposed by CONTRACTOR does not qualify as an "approved equal" item under subparagraph 6.2.4.1.1, it will be considered a proposed substitute item. CONTRACTOR shall submit sufficient information as provided in Division 1 to allow E/A to determine that the item of material or equipment proposed is essentially equivalent to that named and a substitute therefor.

.2 Substitute Construction Methods and Procedures: If a specific means, method, technique, sequence or procedure of construction is shown or indicated in and expressly required by the Contract Documents, CONTRACTOR may, at CONTRACTOR'S sole risk, including disruptions to the Critical Path of the Progress Schedule, with prior approval of E/A furnish or utilize a substitute means, method, technique, sequence, or procedure of construction. CONTRACTOR shall submit sufficient information to Owner's Representative to allow E/A, in E/A's sole discretion, to determine that the substitute proposed is equivalent to that expressly called for by the Contract Documents. The procedure for review by E/A will be same as that provided for substitute items in Division 1.

.3 E/A's Evaluation: E/A will be allowed a reasonable time within which to evaluate each proposal or submittal made pursuant to subparagraphs 6.2.4.1.1 and 6.2.4.1.2. E/A will be the sole judge of acceptability. No "approved equal" or substitute shall be ordered, installed, or utilized until E/A's review is complete, which will be evidenced by either a Change Order or completion of the Shop Drawing review procedure. OWNER may require CONTRACTOR to furnish at CONTRACTOR's expense a special performance guarantee or other surety bond with respect to any "approved equal" or substitute or for any other delay or disruption to the Critical Path of the Project Schedule attributable to any such substitution. OWNER shall not be responsible for any delay due to review time for any "approved equal" or substitute.

.4 CONTRACTOR's Expense: All data and documentation to be provided by CONTRACTOR in support of any proposed "approved equal" or substitute item will be at CONTRACTOR's expense.

.5 The approval of the E/A will not relieve the CONTRACTOR from primary responsibility and liability for the suitability and performance of any proposed substitute item, method or procedure and will not relieve CONTRACTOR from

its primary responsibility and liability for curing defective Work and performing warranty work, which the CONTRACTOR shall cure and perform, regardless of any claim the CONTRACTOR may choose to advance against the E/A or manufacturer.

6.2.5 CONTRACTOR agrees to assign to OWNER any rights it may have to bring antitrust suits against its Suppliers for overcharges on materials incorporated in the Project growing out of illegal price fixing agreements. CONTRACTOR further agrees to cooperate with OWNER should OWNER wish to prosecute suits against Suppliers for illegal price fixing.

6.3 Progress Schedule: Unless otherwise provided in Division 1, CONTRACTOR shall adhere to the Baseline Schedule established in accordance with paragraph 2.6 as it may be adjusted from time to time as provided below:

6.3.1 CONTRACTOR shall submit to Owner's Representative for review and approval any proposed adjustments in the Progress Schedule that will not change the Contract Times or Milestones on a monthly basis. Any such proposed adjustments must be substantiated with documentation of any changes to the underlying logic of the Progress Schedule. CONTRACTOR's Progress Schedule must show how the CONTRACTOR will consistently advance the progress of the Work in accordance with the Critical Path of the Work and the Contract Time or Milestones. Such adjustments will conform generally to the Progress Schedule then in effect and additionally will comply with any provisions of Division 1 applicable thereto.

6.3.2 Proposed adjustments in the Progress Schedule that will change the Contract Times or Milestones shall be submitted in accordance with the requirements of Article 12. Any such proposed adjustments must be substantiated with documentation of any changes to the underlying logic of the Progress Schedule. Such adjustments may only be made by a Change Order or Time Extension Request in accordance with Article 12.

6.4 Concerning Subcontractors, Suppliers and Others:

6.4.1 Assignment: CONTRACTOR agrees to retain direct control of and give direct attention to the fulfillment of this Contract. CONTRACTOR agrees not to, by Power of Attorney, or otherwise, assign said Contract without the prior written consent of OWNER. In addition, without OWNER'S written consent, the CONTRACTOR will not subcontract the performance of the entire Work or the supervision and direction of the Work.

6.4.2 Award of Subcontracts for Portions of the Work: CONTRACTOR shall not employ any Subcontractor, Supplier or other person or organization, whether initially or as a substitute, against whom OWNER may have reasonable objection. OWNER will communicate such objections by Written Notice. If OWNER requires a change without good cause of any Subcontractor, person or organization previously accepted by OWNER, the Contract Amount shall be increased or decreased by the difference in the cost occasioned by any such change, and appropriate Change Order shall be issued. CONTRACTOR shall not substitute any Subcontractor, person or organization that has been accepted by OWNER, unless the substitute has been accepted in writing by OWNER. No acceptance by OWNER of any Subcontractor, Supplier or other person or organization shall constitute a waiver of any right of OWNER to reject defective Work.

6.4.3 CONTRACTOR shall enter into written agreements with all Subcontractors and Suppliers which specifically binds the Subcontractors or Suppliers to the applicable terms and conditions of the Contract Documents for the benefit of OWNER and E/A.

The OWNER reserves the right to specify that certain requirements shall be adhered to by all Subcontractors and Sub-subcontractors as indicated in other portions of the Contract Documents and these requirements shall be made a part of the agreement between CONTRACTOR and Subcontractor or Supplier. Subject to and in accordance with the above requirements, the CONTRACTOR must provide and will be deemed for all purposes to have provided in its contracts with major Subcontractors or Suppliers on the Project (those contracts of more than $10,000) the following specific provision: alternative dispute resolution (paragraphs 16.2 and 16.3), which shall be mandatory in the event of a subcontractor or supplier claim and a prerequisite for the submission of any derivative claim. The CONTRACTOR's standard subcontract form is subject to the OWNER's review and approval. The OWNER may request and the CONTRACTOR will provide within five (5) working days a copy of any subcontract requested by the OWNER.

6.4.4 CONTRACTOR shall be fully responsible to OWNER for all acts and omissions of the Subcontractors, Suppliers and other persons and organizations performing or furnishing any of the Work under a direct or indirect contract with CONTRACTOR just as CONTRACTOR is responsible for CONTRACTOR's own acts and omissions. Nothing in the Contract Documents shall create for the benefit of any such Subcontractor, Supplier or other person or organization any contractual relationship between OWNER and any such Subcontractor, Supplier or other person or organization, nor shall it create any obligation on the part of OWNER or E/A to pay or to see to the payment of any moneys due any such Subcontractor, Supplier or other person or organization except as may otherwise be required by laws and regulations.

6.4.5 CONTRACTOR shall be solely responsible for efficiently scheduling and coordinating the Work of Subcontractors, Suppliers and other persons and organizations performing or furnishing any of the Work under a direct or indirect contract with CONTRACTOR in order to avoid any delays or inefficiencies in the prosecution of the Work. CONTRACTOR shall require all Subcontractors, Suppliers and such other persons and organizations performing or furnishing any of the Work to communicate with Owner's Representative through CONTRACTOR.

6.4.6 The divisions and sections of the Specifications and the identifications of any Drawings shall not control CONTRACTOR in dividing or delineating the Work to be performed by any specific trade.

6.4.7 CONTRACTOR shall pay each Subcontractor and Supplier their appropriate share of payments made to CONTRACTOR not later than ten (10) Calendar Days of CONTRACTOR's receipt of payment from OWNER. Upon request from Owner, the CONTRACTOR has two (2) Working Days to provide documentation verifying Payment to Subcontractor(s). The CONTRACTOR is required to notify the Subcontractor(s) in writing of rejection of Application for Payment within two (2) Working Days following notification by Owner. Failure of CONTRACTOR to make payments to Subcontractors or for labor, materials or equipment in accordance to this contract, may be cause to reject future Bids by the CONTRACTOR in accordance with Section 00100 9.B.4 and may be cause to reject payment in accordance with 00700 14.4.1.3.

6.4.8 To the extent allowed by Texas law, the OWNER shall be deemed to be a third party beneficiary to each subcontract and may, if OWNER elects, following a termination of the CONTRACTOR, require that the Subcontractor(s) perform all or a portion of unperformed duties and obligations under its subcontract(s) for the benefit of the OWNER, rather than the CONTRACTOR; however, if the OWNER requires any such performance by a Subcontractor for the OWNER's direct benefit, then the OWNER

shall be bound and obligated to pay such Subcontractor the reasonable value for all Work performed by such Subcontractor to the date of the termination of the CONTRACTOR, less previous payments, and for all Work performed thereafter. In the event that the OWNER elects to invoke its right under this section, OWNER will provide notice of such election to the CONTRACTOR and the affected Subcontractor(s).

6.5 Patent Fees and Royalties:

6.5.1 CONTRACTOR shall be responsible at all times for compliance with applicable patents or copyrights encompassing, in whole or in part, any design, device, material, or process utilized, directly or indirectly, in the performance of the Work or the formulation or presentation of its Bid.

6.5.2 CONTRACTOR shall pay all royalties and license fees and shall provide, prior to commencement of Work hereunder and at all times during the performance of same, for lawful use of any design, device, material or process covered by letters, patent or copyright by suitable legal agreement with the patentee, copyright holder, or their duly authorized representative whether or not a particular design, device, material, or process is specified by OWNER.

6.5.3 CONTRACTOR shall defend all suits or claims for infringement of any patent or copyright and shall save OWNER harmless from any loss or liability, direct or indirect, arising with respect to CONTRACTOR's process in the formulation of its Bid or the performance of the Work or otherwise arising in connection therewith. OWNER reserves the right to provide its own defense to any suit or claim of infringement of any patent or copyright in which event CONTRACTOR shall indemnify and save harmless OWNER from all costs and expenses of such defense as well as satisfaction of all judgments entered against OWNER.

6.5.4 OWNER shall have the right to stop the Work and/or terminate this Agreement at any time in the event CONTRACTOR fails to disclose to OWNER that CONTRACTOR's work methodology includes the use of any infringing design, device, material or process.

6.6 Permits, Fees: Unless otherwise provided in the Supplemental General Conditions, CONTRACTOR shall obtain and pay for all construction permits, licenses and fees required for prosecution of the Work.

6.7 Laws and Regulations:

6.7.1 CONTRACTOR shall give all notices and comply with all laws and regulations applicable to furnishing and performing the Work, including arranging for and obtaining any required inspections, tests, approvals or certifications from any public body having jurisdiction over the Work or any part thereof. Except where otherwise expressly required by applicable laws and regulations, neither OWNER nor E/A shall be responsible for monitoring CONTRACTOR's compliance with any laws and regulations.

6.7.2 Maintaining clean water, air and earth or improving thereon shall be regarded as of prime importance. CONTRACTOR shall plan and execute its operations in compliance with all applicable Federal, State and local laws and regulations concerning control and abatement of water pollution and prevention and control of air pollution.

6.7.3 If CONTRACTOR performs any Work knowing or having reason to know that it is contrary to laws or regulations, CONTRACTOR shall bear all claims, costs, losses and damages arising therefrom; however, it shall not be CONTRACTOR's primary responsibility to make certain that the Specifications and Drawings are in accordance

with laws and regulations, but this does not relieve CONTRACTOR of CONTRACTOR's obligations under Article 3.

6.8 Taxes:

6.8.1 CONTRACTOR shall pay only those sales, consumer, use and other similar taxes required to be paid by CONTRACTOR in accordance with the laws and regulations of the State of Texas in the performance of this public works contract.

6.8.2 OWNER is an exempt organization as defined by Chapter 11 of the Property Tax Code of Texas and is thereby exempt from payment of Sales Tax under Chapter 151, Limited Use Sales, Excise and Use Tax, Texas Tax Code, and Article 1066 (C), Local Sales and Use Tax Act, Revised Civil Statutes of Texas.

6.9 Use of Premises:

6.9.1 CONTRACTOR shall confine construction equipment, the storage of materials and equipment and the operations of workers to the site and land and areas identified in and permitted by the Contract Documents and other land and areas permitted by laws and regulations, right-of-way, permits and easements, and shall not unreasonably encumber the premises with construction equipment or other materials or equipment. CONTRACTOR shall assume full responsibility for any damage to any such land or area, or to the owner or occupant thereof or of any adjacent land or areas, resulting from the performance of the Work. Should any claim be made by any such owner or occupant because of or in connection with the performance of the Work, CONTRACTOR shall promptly settle with such other party by negotiation or otherwise resolve the claim by arbitration or other dispute resolution proceeding or at law. CONTRACTOR shall indemnify, defend and hold harmless OWNER, E/A, E/A'S Consultants and anyone directly or indirectly employed by any of them from and against all claims, costs, losses and damages (including court costs and reasonable attorney’s fees) arising out of or resulting from any claim or action, legal or equitable, brought by any such owner or occupant against OWNER, E/A or any other party indemnified hereunder to the extent caused by or based upon performance of the work or failure to perform the Work.

6.9.2 During the progress of the Work and on a daily basis, CONTRACTOR shall keep the premises free from accumulations of waste materials, rubbish and other debris resulting from the Work. At the completion of the Work, CONTRACTOR shall remove all waste materials, rubbish and debris from and about the premises as well as all tools, appliances, construction equipment and machinery and surplus materials. CONTRACTOR shall leave the site clean and ready for occupancy by OWNER at Substantial Completion of the Work. CONTRACTOR shall, at a minimum, restore to original condition all property not designated for alteration by the Contact Documents. If the CONTRACTOR fails to clean up at the completion of the Work, OWNER may do so and the cost thereof will be charged against the CONTRACTOR.

6.9.3 CONTRACTOR shall not load nor permit any part of any structure to be loaded in any manner that will endanger the structure, nor shall CONTRACTOR subject any part of the Work or adjacent property to stresses or pressures that will endanger it.

6.10 Record Documents: CONTRACTOR shall maintain in a safe place at the site, or other location acceptable to OWNER, one (1) record copy of all Drawings, Specifications, Addenda, Change Orders, Change Directives, Field Orders and written interpretations and clarifications (issued pursuant to paragraph 9.5) in good order and annotated to show all changes made during construction. These record documents together with all final samples and all final Shop Drawings will be available to OWNER and E/A for reference during performance of the

Work. Upon Substantial Completion of the Work, these record documents, samples and Shop Drawings shall be promptly delivered to Owner's Representative.

6.11 Safety and Protection:

6.11.1 CONTRACTOR shall be responsible for initiating, maintaining and supervising all safety precautions and programs in connection with the Work. Upon request, and prior to installation of measures, CONTRACTOR shall submit a site security plan for approval by OWNER. By reviewing the plan or making recommendations or comments, OWNER will not assume liability nor will CONTRACTOR be relieved of liability for damage, injury or loss. CONTRACTOR shall take all necessary precautions for the safety of and shall provide the necessary protection to prevent damage, injury or loss to:

.1 all persons on the Work site or who may be affected by the Work;

.2 all the Work and materials and equipment to be incorporated therein, whether in storage on or off the site; and

.3 other property at the site or adjacent thereto, including, but not limited to, trees, shrubs, lawns, walks, pavements, roadways, structures, utilities and underground facilities not designated for removal, relocation or replacement in the course of construction.

6.11.2 CONTRACTOR shall comply with all applicable laws and regulations of any public body having jurisdiction for safety of persons or property or to protect them from damage, injury or loss; and shall erect and maintain all necessary safeguards for such safety and protection. CONTRACTOR shall notify owners of adjacent property and of underground facilities, and utility owners when prosecution of the Work may affect them, and shall cooperate with them in the protection, removal, relocation and replacement of their property. All damage, injury or loss to any property referred to in paragraph 6.11.1.2 and 6.11.1.3 caused, directly or indirectly, in whole or in part, by CONTRACTOR, Subcontractor, Supplier or any person or organization directly or indirectly employed by any of them to perform or furnish any of the Work or anyone for whose acts any of them may be liable, shall be remedied by CONTRACTOR (except damage or loss attributable to the fault of Drawings or Specifications or to the acts or omissions of OWNER, or E/A, or E/A's consultant or anyone employed by any of them or anyone for whose acts any of them may be liable, and not attributable, directly or indirectly, in whole or in part, to the faults or negligence of CONTRACTOR or any Subcontractor, Supplier or other person or organization directly or indirectly employed by any of them). CONTRACTOR's duties and responsibilities for safety and protection of the Work shall continue until such time as all the Work is completed and Owner's Representative has issued a notice to OWNER and CONTRACTOR in accordance with Article 14 that the Work is acceptable (except as otherwise expressly provided in connection with Substantial Completion). Without limitation, CONTRACTOR shall comply with the following specific provisions:

It shall be the duty and responsibility of CONTRACTOR and all of its subcontractors to be familiar with and comply with 29 USC Section 651, et seq., the Occupational Safety and Health Act of 1970, as amended ("OSHA") and to enforce and comply with all provisions of this Act.

The CONTRACTOR and all of its subcontractors shall comply with all applicable requirements of Subpart P of Part 1926 of 29 C.F.R, OSHA Safety and Health Standards, Texas Health and Safety Code Section 756.023, as amended, and shall submit a unit price for the particular excavation safety systems to be utilized by the Contractor for all excavations which exceed a depth of five feet (5').

Before commencing any excavation which will exceed a depth of five feet (5'), the CONTRACTOR shall provide the Owner with detailed plans and specifications regarding the safety systems to be utilized. Said plans and specifications shall include a certification from a Texas licensed professional engineer indicating full compliance with the OSHA provisions cited above.

6.11.3 Safety Representative: CONTRACTOR shall designate in writing a qualified and experienced safety representative (the "Safety Representative") at the site whose duties and responsibilities shall include safety training; identifying and mitigating hazardous conditions and unsafe work practices; and developing, maintaining and supervising the implementation of safe work practices and safety programs as deemed necessary and appropriate for the Project. The term "Safety Representative" includes any designated Safety Supervisor, Superintendent or Safety Manager. The Safety Representative shall exercise due diligence in the execution of all Project related safety duties. Upon request of OWNER, CONTRACTOR shall provide certifications or other acceptable documentation of the Safety Representative's qualifications. The following requirements will be effective as of September 1, 2010:

.1 The Safety Representative shall present certification of completion of the OSHA 30-hour Construction Industry Training Outreach Program described at: http://www.osha.gov/dte/outreach/construction_generalindustry/construction.html

.2 The Safety Representative shall verify that all construction workers (defined as persons covered by a prevailing wage determination) on the job site, whether employed by the CONTRACTOR or subcontractors, have completed the OSHA 10-hour Construction Industry Training Outreach Program described at: http://www.osha.gov/dte/outreach/construction_generalindustry/construction.html. The Safety Representative must receive a certificate of training completion before allowing a worker on site and shall have all such certificates available for inspection by the OWNER.

.3 The Safety Representative shall ensure that workers, including designated competent persons, have completed all applicable OSHA specific or other training needed to perform their job assignments. Training topics applicable to the scope of the current Project may include, but are not limited to, scaffolds, fall protection, cranes, excavations, electrical safety, tools, concrete and masonry construction, steel erection, operation of motor vehicles and mechanized equipment.

.4 The Safety Representative shall post notice on the site of the Work stating that all workers shall have completed OSHA Construction Industry Training. The Owner may require, and the Safety Representative should consider providing a means of readily identifying workers who have completed the required training to monitor compliance with these requirements.

.5 The Safety Representative shall ensure that all required OSHA and Workers Compensation notices to workers are posted in English and Spanish at one or more conspicuous locations on the work site.

6.11.4 Hazard Communication Programs: CONTRACTOR shall be responsible for coordinating any exchange of material safety data sheets or other hazard communication information required to be made available to or exchanged between or among employers at the site in accordance with laws and regulations.

6.11.5 Emergencies:

.1 In emergencies affecting the safety or protection of persons or the Work at the site or adjacent thereto, CONTRACTOR, without special instruction or authorization from OWNER or E/A, is obligated to act reasonably to prevent threatened damage, injury or loss and to mitigate damage or loss to the Work. CONTRACTOR shall give Owner's Representative telephone notification as soon as reasonably practical and a prompt written notice if CONTRACTOR believes that any significant changes in the Work or variations from the Contract Documents have been caused thereby. If Owner's Representative determines that a change in the Contract Documents is required because of the action taken by CONTRACTOR in response to such an emergency, a Change Directive or Change Order will be issued to document the consequences of such action; otherwise OWNER will not be responsible for CONTRACTOR's emergency action.

.2 Authorized agents of CONTRACTOR shall respond immediately to call-out at any time of any day or night when circumstances warrant the presence on Project site of CONTRACTOR or his agent to protect the Work or adjacent property from damage, restriction or limitation or to take such action or measures pertaining to the Work as may be necessary to provide for the safety of the public. Should CONTRACTOR and/or their agent fail to respond and take action to alleviate such an emergency situation, OWNER may direct other forces to take action as necessary to remedy the emergency condition, and OWNER will deduct any cost of such remedial action from the funds due CONTRACTOR under this Contract.

.3 In the event there is an accident involving injury to any individual or damage to any property on or near the Work, CONTRACTOR shall provide to Owner's Representative verbal notification within one (1) hour and written notification within twenty-four (24) hours of the event and shall be responsible for recording the location of the event and the circumstances surrounding the event through photographs, interviewing witnesses, obtaining medical reports, police accident reports and other documentation that describes the event. Copies of such documentation shall be provided to Owner's Representative, for OWNER's and E/A's records, within forty-eight (48) hours of the event. Contractor shall cooperate with OWNER on any OWNER investigation of any such incident.

6.11.6 Rest Breaks:

.1 Except as provided in subsection 6.11.6.2 below, an employee performing construction activity at a construction site is entitled to a rest break of not less than ten (10) minutes for every four (4) hours worked. No employee may be required to work more than 3.5 hours without a rest break. A rest break means a break from work within working hours, excluding meal breaks, during which an employee may not work. A rest break shall be scheduled as near as possible to the midpoint of the work period.

.2 An employee is not entitled to a rest break under subsection 6.11.6.1 on any day the employee works less than 3.5 hours or spends more than half of his or her work time engaged in non-strenuous labor in a climate controlled environment.

.3 A sign describing the requirements of this Section 6.11.6 in English and Spanish shall be posted by the employer in each establishment subject to the requirement of a rest break in a conspicuous place or places where notices to

employees are customarily posted, in accordance with the OWNER's then current rules for size, content, and location of such signage.

.4 The violation of Ordinance No. 20100729-047, enacted July 29, 2010, which establishes the rest break requirements set forth above, may be enforced with criminal penalties and civil remedies, as set forth in the Ordinance.

6.11.7 If the Contractor fails to carry out the Work in accordance with the Contract Documents so that a safety violation has occurred, the Owner may order the Contractor to stop the Work or any portion thereof, until the cause for such order has been eliminated. However, the right of the Owner to stop the Work under this paragraph shall not give rise to a duty on the part of the Owner to supervise the Contractor's Work or to control the Contractor's means and methods or to exercise this right for the benefit of the Contractor or any other person or entity. All time lost due to Project shut down will be the Contractor's sole responsibility, will be charged against the Contract Time, and the Contractor will be responsible for any and all expenses incurred. This provision is in addition to and supplemental to the applicable provisions of the Project's ROCIP Safety Manual.

6.11.8 Confined Space Program

.1 Contractor acknowledges and agrees that the Owner is temporarily transferring management and control of the site of the Work to the Contractor for the purpose of constructing the Project. The Contractor's responsibilities to manage the Work includes the responsibility to manage the property for purposes of compliance with 29 CFR 1926 subpart AA. To the best of Owner's knowledge and belief, Owner has provided the following information in the plans and specifications and other Contract Documents: (i) the location of each known permit space, (ii) the hazards or potential hazards in each space or the reason it is a permit space; and (iii) any precautions that the Owner or any previous contractor has implemented for the protection of employees in the permit space. This transfer will result in the Contractor being both the host employer and the controlling contractor for this portion of the Work.

6.12 Continuing the Work: CONTRACTOR shall carry on the Work and adhere to the Progress Schedule during all disputes or disagreements with OWNER. No Work shall be delayed or postponed pending resolution of any disputes or disagreements, except as OWNER and CONTRACTOR may otherwise agree in writing.

6.13 CONTRACTOR's General Warranty and Guarantee:

6.13.1 CONTRACTOR warrants and guarantees to OWNER that all Work will conform to the plans and specifications, be performed in a good and workmanlike manner in accordance with the Contract Documents and will not be defective. This warranty will survive the termination or expiration of the Contract. CONTRACTOR's warranty and guarantee hereunder excludes defects or damage caused by:

.1 abuse, modification or improper maintenance or operation by persons other than CONTRACTOR, Subcontractors or Suppliers; or

.2 normal wear and tear under normal usage.

6.13.2 CONTRACTOR's obligation to perform and complete the Work in a good and workmanlike manner in accordance with the Contract Documents shall be absolute. None of the following will constitute an acceptance of Work that is not in accordance

with the Contract Documents or a release of CONTRACTOR's obligation to perform the Work in accordance with the Contract Documents:

.1 observations by Owner's Representative and/or E/A;

.2 recommendation of any progress or final payment by Owner's Representative;

.3 the issuance of a certificate of Substantial Completion or any payment by OWNER to CONTRACTOR under the Contract Documents;

.4 use or occupancy of the Work or any part thereof by OWNER;

.5 any acceptance by OWNER or any failure to do so;

.6 any review of a Shop Drawing or sample submittal;

.7 any inspection, test or approval by others; or

.8 any correction of defective Work by OWNER.

6.14 INDEMNIFICATION:

6.14.1 CONTRACTOR shall defend, indemnify and hold harmless OWNER, E/A, E/A'S Consultants and Sub consultants and their respective officers, directors, partners, employees, agents and other Consultants and any of them (the "INDEMNIFIED PARTIES") from and against all claims, costs, losses and damages (including but not limited to all fees and charges of engineers, architects, attorneys and other professionals and all court or arbitration or other dispute resolution costs) arising out of or resulting from the performance of the Work, provided that any such claim, cost, loss or damage:

.1 Is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the work itself), including the loss of use resulting therefrom, and

.2 Is caused in whole or in part by any negligent act or omission of CONTRACTOR, any Subcontractor, any Supplier, any person or organization directly or indirectly employed by any of them to perform or furnish any of the work or anyone for whose acts any of them may be liable, regardless of whether or not caused in part by any negligence or omission of the INDEMNIFIED PARTIES hereunder or whether liability is imposed upon such INDEMNIFIED PARTY by laws and regulations regardless of the negligence of any such person or entity.

In the event that indemnification of the INDEMNIFIED PARTIES is prohibited by law, CONTRACTOR shall nonetheless be solely responsible for any liability arising out of or resulting from the performance of the Work, subject to the limitations set forth above, and shall indemnify and hold harmless the remaining INDEMNIFIED PARTIES, who may be legally indemnified, from such liability of the CONTRACTOR and the associated costs described above.

6.14.2 The indemnification obligation under paragraph 6.14.1 shall not be limited in any way by any limitation on the amount or type of damages, or compensation or benefits payable by or for CONTRACTOR or any such Subcontractor, Supplier or other person or organization under workers' compensation acts, disability benefit acts or other employee benefit acts.

6.14.3 The obligations of CONTRACTOR under paragraph 6.14.1 shall not extend to the liability of OWNER, E/A, E/A's consultants, and their officers, directors, partners, employees or agents caused primarily by negligent preparation of maps, drawings,

surveys, designs or specifications upon which is placed the applicable state-authorized design professional seal of OWNER's, E/A's or E/A's consultant's officers, directors, partners, employees or agents.

6.14.4 In the event CONTRACTOR fails to follow OWNER's directives concerning use of the site, scheduling or course of construction, or engages in other conduct which proximately causes damage to property based on inverse condemnation or otherwise, then and in that event, CONTRACTOR shall indemnify OWNER against all costs resulting from such claims.

6.14.5 In the event CONTRACTOR unreasonably delays progress of the work being done by others on the site so as to cause loss for which OWNER becomes liable, then CONTRACTOR shall indemnify OWNER from and reimburse OWNER for such loss.

6.15 Survival of Obligations: All representations, indemnifications, warranties and guarantees made in, required by or given in accordance with the Contract Documents, as well as all continuing obligations indicated in the Contract Documents, will survive final payment, completion and acceptance of the Work and termination or completion of the Agreement.

6.16 Losses from Natural Causes: Unless otherwise specified, all loss or damage to CONTRACTOR arising out of the nature of the Work to be done or from action of the elements, floods or from unforeseeable circumstances in prosecution of the Work or from unusual obstructions or difficulties which may be encountered in prosecution of the Work, shall be sustained and borne by CONTRACTOR at its own cost and expense.

6.17 Notice of Claim: Should CONTRACTOR suffer injury or damage to person or property because of any error, omission or act of OWNER or of any of OWNER's employees or agents or others for whose acts OWNER is liable, a Claim must be made to the other party within thirty (30) calendar days of the event giving rise to such injury or damage. The provisions of this paragraph 6.17 shall not be construed as a substitute for or a waiver of the provisions of any applicable statute of limitations or statute of repose.

6.18 Liquidated Damages: CONTRACTOR or its Surety shall be liable for liquidated damages for the failure of the CONTRACTOR to timely complete the Work or any portion thereof within the Contract Time.

ARTICLE 7 - OTHER WORK

7.1 OWNER may perform other work related to the Project at the site by OWNER's own forces, or let other contracts therefor, or have other work performed by utility owners. CONTRACTOR and OWNER agree to and shall use best efforts to cooperate and coordinate the Work with others performing work and other work related to the Project in order to avoid conflicts and delays in the Work. If CONTRACTOR believes that delay or additional cost is involved because of such action by OWNER, CONTRACTOR may make a Claim as provided in Article 11 or 12.

7.2 CONTRACTOR shall afford other contractors who are in a contract with OWNER and each utility owner (and OWNER, if OWNER is performing the additional work with OWNER's employees) proper and safe access to the site and a reasonable opportunity for the introduction and storage of materials and equipment and the execution of such other work and shall properly connect and coordinate the Work with theirs. Unless otherwise provided in the Contract Documents, CONTRACTOR shall do all cutting, fitting and patching of the Work that may be required to make its several parts come together properly and integrate

with such other work. CONTRACTOR shall not endanger any work of others by cutting, excavating or otherwise altering their work and will only cut or alter their work with the written consent of Owner's Representative and the other contractors whose work will be affected. CONTRACTOR shall promptly remedy damage wrongfully caused by CONTRACTOR to completed or partially completed construction or to property of the OWNER or separate contractors.

7.3 If the proper execution or results of any part of CONTRACTOR's Work depends upon work performed by others under this Article 7, CONTRACTOR shall inspect such other work and promptly report to Owner's Representative in writing any delays, defects or deficiencies in such other work that render it unavailable or unsuitable for the proper execution and results of CONTRACTOR's Work. CONTRACTOR's failure to report will constitute an acceptance of such other work as fit and proper for integration with CONTRACTOR's Work except for latent or non-apparent defects and deficiencies in such other work.

7.4 OWNER shall provide for coordination of the activities of the OWNER's own forces and of each separate contractor with the Work of CONTRACTOR, who shall cooperate with them. CONTRACTOR shall participate with other separate contractors and Owner's Representative in reviewing their construction Progress Schedules when directed to do so. On the basis of such review, CONTRACTOR shall make any revisions to the construction Progress Schedule deemed necessary after a joint review and mutual agreement. The agreed upon construction Progress Schedules shall then constitute the Progress Schedules to be used by CONTRACTOR, separate contractors and OWNER until subsequently revised.

7.5 Costs caused by delays or by improperly timed activities or defective construction shall be borne by the party responsible therefor.

ARTICLE 8 - OWNER'S RESPONSIBILITIES

8.1 Prior to the start of construction, OWNER will designate in writing a person or entity to act as Owner's Representative during construction. Except as otherwise provided in these General Conditions, OWNER shall issue all communications to CONTRACTOR through Owner's Representative.

8.2 OWNER will not supervise, direct, control or have authority over or be responsible for CONTRACTOR's means, methods, techniques, sequences or procedures of construction or the safety precautions and programs incident thereto. OWNER is not responsible for any failure of CONTRACTOR to comply with laws and regulations applicable to furnishing or performing the Work. OWNER is not responsible for CONTRACTOR's failure to perform or furnish the Work in accordance with the Contract Documents. Failure or omission of OWNER to discover, or object to or condemn any defective Work or material shall not release CONTRACTOR from the obligation to properly and fully perform the Contract.

8.3 OWNER is not responsible for the acts or omissions of CONTRACTOR, or of any Subcontractor, any Supplier, or of any other person or organization performing or furnishing any of the Work. CONTRACTOR acknowledges and agrees that OWNER'S direction to perform Work in accordance with the approved Progress Schedule is not a demand for acceleration or a dictation of CONTRACTOR'S means or methods.

8.4 Information or services under the OWNER's control shall be furnished by the OWNER with reasonable promptness to avoid delay in orderly progress of the Work. The OWNER shall have a reasonable amount of time to investigate site conditions, review submittals, analyze requests for changes, and to make other decisions in the orderly administration of the Contract. CONTRACTOR must notify the OWNER in writing, if the time for the investigation,

review, analysis of any submittals, required for changes or otherwise required for OWNER'S decision, impacts in any way the Critical Path of the approved Progress Schedule.

8.5 The foregoing are in addition to other duties and responsibilities of the OWNER enumerated herein and especially those in respect to Article 4 (Availability of Lands; Subsurface and Physical Conditions; Reference Points), Article 7 (Other Work) and Article 14 (Payments to CONTRACTOR and Completion).

8.6 **Notice of Claim:** Should OWNER suffer injury or damage to person or property because of any error, omission or act of CONTRACTOR or of any of CONTRACTOR's employees or agents or others for whose acts CONTRACTOR is liable, a Claim will be made to the other party within thirty (30) calendar days of receipt of actual or constructive notice of the event giving rise to such injury or damage. The provisions of this paragraph 8.6 shall not be construed as a substitute for or a waiver of the provisions of any applicable statute of limitations or statute of repose.

ARTICLE 9 - ENGINEER/ARCHITECT'S STATUS DURING CONSTRUCTION

9.1 E/A's Authority and Responsibilities:

9.1.1 The duties and responsibilities and the limitations of authority of E/A during construction, as set forth in the Contract Documents, may be assigned or assumed by the OWNER, but shall not be extended without written consent of OWNER and/or E/A. The assignment of any authority, duties or responsibilities to E/A under the Contract Documents, or under any agreement between OWNER and E/A, or any undertaking, exercise or performance thereof by E/A, is intended to be for the sole and exclusive benefit of OWNER and not for the benefit of CONTRACTOR, Subcontractor, Supplier, or any other person or organization, or for any surety or employee or agent of any of them.

9.1.2 E/A will not supervise, direct, control or have authority over or be responsible for CONTRACTOR's means, methods, techniques, sequences or procedures of construction, or the safety precautions and programs incident thereto. E/A is not responsible for any failure of CONTRACTOR to comply with laws and regulations applicable to the furnishing or performing the Work. E/A is not responsible for CONTRACTOR's failure to perform or furnish the Work in accordance with the Contract Documents. Failure or omission of E/A to discover, or object to or condemn any defective Work or material shall not release CONTRACTOR from the obligation to properly and fully perform the Contract.

9.1.3 E/A is not responsible for the acts or omissions of CONTRACTOR, or of any Subcontractor, any Supplier, or of any other person or organization performing or furnishing any of the Work.

9.1.4 If OWNER and E/A agree, E/A will review the final Application for Payment and accompanying documentation and all maintenance and operating instructions, schedules, guarantees, bonds and certificates of inspection, tests and approvals and other documentation required to be delivered by Article 14, but only to determine generally that their content complies with the requirements of, and in the case of certificates of inspections, tests and approvals that the results certified indicate compliance with, the Contract Documents.

9.1.5 The limitations upon authority and responsibility set forth in this paragraph 9.1 shall also apply to E/A's Consultants, Resident Project Representative and assistants.

9.2 E/A as Owner's Representative: E/A may be designated as the Owner's Representative under paragraph 8.1.

9.3 Visits to Site: If OWNER and E/A agree, E/A will make visits to the site at intervals appropriate to the various stages of construction as E/A deems necessary in order to observe as an experienced and qualified design professional the progress that has been made and the quality of the various aspects of CONTRACTOR's executed Work. Based on information obtained during such visits and observations, E/A will endeavor for the benefit of OWNER to determine, in general, if the Work is proceeding in accordance with the Contract Documents. E/A will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. E/A's efforts will be directed toward providing for OWNER a greater degree of confidence that the completed Work will conform generally to the Contract Documents. On the basis of such visits and on-site observations, E/A will keep OWNER informed of the progress of the Work and will endeavor to guard OWNER against defective Work. E/A's visits and on-site observations are subject to all the limitations on E/A's authority and responsibility set forth in paragraph 9.1.

9.4 Resident Project Representative: If OWNER and E/A agree, E/A will furnish a Resident Project Representative to assist E/A in providing more continuous observation of the Work. The responsibilities and authority and limitations of any such Resident Project Representative and assistants will be as provided in paragraph 9.1 and in the Supplemental General Conditions. OWNER may designate another representative or agent to represent OWNER at the site who is not E/A, E/A's consultant, agent or employee.

9.5 Clarifications and Interpretations: E/A may determine that written clarifications or interpretations of the requirements of the Contract Documents (in the form of drawings or otherwise) are necessary. Such written clarifications or interpretations will be consistent with the intent of and reasonably inferable from the Contract Documents, will be issued with reasonable promptness by Owner's Representative and will be binding on OWNER and CONTRACTOR. If OWNER or CONTRACTOR believes that a written clarification or interpretation justifies an adjustment in the Contract Amount or the Contract Times, OWNER or CONTRACTOR may make a Claim therefor as provided in Article 11 or 12.

9.6 Rejecting Defective Work: E/A will recommend that OWNER disapprove or reject Work which E/A believes to be defective, or believes will not produce a completed Project that conforms to the Contract Documents or will prejudice the integrity of the design concept of the completed Project as a functioning whole as indicated by the Contract Documents.

9.7 Shop Drawings: Refer to Division 1 for E/A's authority concerning Shop Drawings.

ARTICLE 10 - CHANGES IN THE WORK

10.1 Changes:

10.1.1 Without invalidating the Contract and without notice to any surety, OWNER may, at any time or from time to time, order additions, deletions or revisions in the Work. Such changes in the Work will be authorized by Change Order, Change Directive or Field Order. In the event that the OWNER and the CONRACTOR are unable to negotiate the terms of a Change Order for the performance of additional Work, the OWNER may, at its election, perform such additional Work with its own forces or with another contractor and such work will be considered "Other Work" in accordance with Article 7.

10.1.2 Changes in the Work shall be performed under applicable provisions of the Contract Documents, and CONTRACTOR shall proceed promptly, unless otherwise

provided in the Change Order, Change Directive or Field Order. CONTRACTOR's proposals for changes in the Contract Amount and/or Contract Time shall be submitted within ten (10) Calendar Days of request by Owner's Representative, including impacts to the approved Progress Schedule, unless Owner's Representative grants an extension. OWNER will review each proposal and respond to CONTRACTOR within ten (10) Calendar Days. After review by OWNER, CONTRACTOR shall provide any supporting data requested by Owner's Representative within seven (7) Calendar Days, unless Owner's Representative grants an extension. OWNER will determine within seven (7) Calendar Days whether to pursue the change in Work.

10.1.3 CONTRACTOR shall not be entitled to an increase in the Contract Amount or an extension of the Contract Times with respect to any Work performed that is not required by the Contract Documents as amended, modified and supplemented as provided in paragraphs 3.3.1 and 3.3.2, except in the case of an emergency as provided in paragraph 6.11.5 or in the case of uncovering Work as provided in paragraph 13.4.

10.1.4 Except in the case of an emergency as provided in paragraph 6.11.5, a Change Order or Change Directive is required before CONTRACTOR commences any activities associated with a change in the Work which, in CONTRACTOR 's opinion, will result in a change in the Contract Amount and/or Contract Times.

10.1.5 If notice of any change affecting the general scope of the Work or the provisions of the Contract Documents (including, but not limited to, Contract Amount or Contract Times) is required by the provisions of any Bond to be given to a surety, the giving of any such notice will be CONTRACTOR's responsibility, and the amount of each applicable Bond will be adjusted accordingly.

10.2 Change Orders:

10.2.1 OWNER and CONTRACTOR shall execute appropriate written Change Orders covering:

.1 a change in the Work;

.2 the amount of the adjustment in the Contract Amount, if any; and

.3 the extent of the adjustment in the Contract Time, if any.

10.2.2 An executed Change Order shall represent the complete, equitable, and final amount of adjustment in the Contract Amount and/or Contract Time owed to CONTRACTOR or OWNER as a result of the occurrence or event causing the change in the Work encompassed by the Change Order.

10.3 Change Directives:

10.3.1 Without invalidating the Contract, OWNER may, by written Change Directive, using the Force Account method, order changes in the Work within the general scope of the Contract consisting of additions, deletions or other revisions, the Contract Amount and Contract Time being adjusted as necessary. "Force Account" means a basis of payment for the direct performance of Work with payment based on the actual cost of the labor, equipment and materials furnished and consideration for overhead and profit as set forth in Section 11.5, below. A Change Directive shall be used in the absence of complete and prompt agreement on the terms of a Change Order. Where practicable, any items of Work that may be agreed upon, prior to the performance of Work under this Section, will be included in a separate

Change Order. For example, the cost of the installation of additional asphalt may be agreed upon based on the unit prices in the Bid.

10.3.2 If the Change Directive provides for an adjustment to the Contract Amount, the adjustment shall be based on the method provided in paragraph 11.5.

10.3.3 A Change Directive shall be effective immediately and shall be recorded later by preparation and execution of an appropriate Change Order.

10.3.4 Upon receipt of a Change Directive, CONTRACTOR shall promptly proceed with the change in the Work involved, provided, prior to the commencement of any Work under this section, the CONTRACTOR must submit its proposed Work plan, anticipated schedule, and a list of its work force and equipment proposed to be used in the Work for OWNER'S approval. Upon such approval, CONTRACTOR must promptly commence and make continuous progress in the Work. The OWNER reserves the right to withhold payment for low production or lack of progress.

10.4 Field Order:

10.4.1 Owner's Representative may authorize minor variations in the Work from the requirements of the Contract Documents which do not involve an adjustment in the Contract Amount or the Contract Times and are compatible with the design concept of the completed Project as a functioning whole as indicated by the Contract Documents. These shall be accomplished by written Field Order and shall be binding on OWNER and on CONTRACTOR who shall perform the Work involved promptly.

10.4.2 If CONTRACTOR believes that a Field Order would require an adjustment in the Contract Amount and/or Contract Times, CONTRACTOR shall make a prompt written request to Owner's Representative for a Change Order. Any request by CONTRACTOR for an adjustment in Contract Amount and/or Contract Times must be made in writing prior to beginning the work covered by the Field Order.

10.5 No Damages for Delay: CONTRACTOR shall receive no compensation for delays or hindrances to the Work, except when direct and unavoidable extra cost to CONTRACTOR is caused by failure of OWNER to provide information or material, if any, which is to be furnished by OWNER or access to the Work and only to the extent that such acts continue after the CONTRACTOR furnishes OWNER with written notice of such failure. When such extra compensation is claimed a written statement thereof shall be presented by CONTRACTOR to OWNER and if by OWNER found correct shall be approved. If delay is caused by specific orders given by OWNER to stop work or by performance of extra Work or by failure of OWNER to provide material or necessary instructions for carrying on the Work, then such delay will entitle CONTRACTOR to an equivalent extension of time, CONTRACTOR's application for which shall, however, be subject to approval of OWNER. No such extension of time shall release CONTRACTOR or surety on its performance bond from all CONTRACTOR's obligations hereunder which shall remain in full force until discharge of the Contract. In no event shall the CONTRACTOR be entitled to any compensation or recovery of any special damages in connection with any delays, including without limitation: consequential damages, lost opportunity costs, impact damages, or other similar damages. The OWNER'S exercise of any of its rights or remedies under the Contract Documents (including without limitation ordering changes in the Work, or directing suspension, rescheduling, or correction of the Work), regardless of the extent or frequency of the OWNER'S exercise of such rights or remedies, shall not be construed as active interference in the CONTRACTOR'S performance of the Work. Except as otherwise provided herein, an extension of Contract Time, to the extent permitted under Article 12, shall be the sole remedy of the CONTRACTOR for any acknowledged delays.

ARTICLE 11 - CHANGE OF CONTRACT AMOUNT

11.1 The Contract Amount is stated in the Agreement and, including authorized adjustments, is the total amount payable by OWNER to CONTRACTOR for performance of the Work under the Contract Documents.

11.2 The original Contract Amount may not be increased by more than twenty-five percent (25%) and it may not be decreased more than twenty-five percent (25%) without the consent of the CONTRACTOR to such decrease, except in the event of a termination for convenience under paragraph 15.2 or the failure of the City Council to appropriate sufficient funding for the Project, in which events it is agreed that the consent of the CONTRACTOR will not be required.

11.3 The Contract Amount shall only be changed by a Change Order. Any claim for an adjustment in the Contract Amount shall be made by Written Notice delivered by the party making the Claim to the other party promptly (but in no event later than thirty (30) calendar days) after the start of the occurrence or event giving rise to the Claim and stating the general nature of the Claim. Notice of the amount of the Claim with supporting data shall be delivered within thirty (30) calendar days after Written Notice of Claim is delivered by claimant, and shall represent that the adjustment claimed covers all known amounts to which claimant is entitled as a result of said occurrence or event. If OWNER and CONTRACTOR cannot otherwise agree, all Claims for adjustment in the Contract Amount shall be determined as set out in Article 16.

11.4 Determination of Value of Work:

11.4.1 The value of any Work covered by a Change Order for an adjustment in the Contract Amount will be determined by one or more of the following methods:

.1 by application of unit prices contained in the Contract Documents to the quantities of the items involved.

.2 by a mutually agreed unit price, or lump sum properly itemized and supported by sufficient substantiating data, including documentation by subcontractors performing the work, to permit evaluation.

.3 by cost of Work plus CONTRACTOR's fee for all overhead costs and profit (determined as provided in paragraph 11.5).

.4 No cost will be included in the change order for time spent preparing the change order, nor will costs be included for an estimate of time to negotiate the change order costs for machinery, tools, or equipment as described in subparagraph 11.5.3

11.4.2 Before using the method described in paragraph 11.4.1.3, OWNER and CONTRACTOR agree to negotiate a Change Order using the methods identified in paragraphs 11.4.1.1 and 11.4.1.2, as appropriate, to determine the adjustment in the Contract Amount.

11.5 **Cost of Work:** If neither of the methods defined in paragraphs 11.4.1.1 nor 11.4.1.2 can be agreed upon before a change in the Work is commenced which will result in an adjustment in the Contract Amount, then the change in the Work will be performed by Change Directive, using the Force Account method, and payment will be made as follows:

11.5.1 For all personnel, CONTRACTOR will receive actual field cost wage rates for each hour that said personnel are actually engaged in such Work, as substantiated by its certified payroll, to which will be added an amount equal to twenty-five percent

(25%) of the sum thereof as compensation for CONTRACTOR's total overhead, profit, and small tools. No separate charge will be made by CONTRACTOR or its Subcontractor(s) for organization or overhead expenses. In no case will the rate of wage be less than the minimum shown in the Contract for a particular category. CONTRACTOR will also receive an amount equal to 55% of the wages paid personnel, excluding the 25% compensation provided above, for CONTRACTOR's and any effected Subcontractor's cost of premiums on public liability insurance, workers' compensation insurance, social security and unemployment insurance. No charge for superintendence will be made unless considered necessary and ordered by OWNER.

11.5.2 CONTRACTOR will receive the actual cost, including freight charges, of the materials used and installed on such Work, to which costs will be added a sum equal to twenty-five percent (25%) thereof as compensation for CONTRACTOR's and any affected Subcontractor's total overhead and profit. In case material invoices indicate a discount may be taken, the actual cost will be the invoice price minus the discount.

11.5.3 For machinery, trucks, power tools, or other similar equipment (the "equipment") agreed to be necessary by OWNER and CONTRACTOR, OWNER will allow CONTRACTOR the Regional and Model Year adjusted Monthly Ownership Cost divided by 176 plus the Hourly Estimated Operating Costs as given in the latest edition of the "Rental Rate Blue Book" as published by EquipmentWatch (1-800-669-3282) for each hour that said equipment is in use on such work. The established equipment rates will be paid for each hour that the equipment is utilized in the Work. In the event that the equipment is used intermittently during the Work, full payment for an eight-hour day will be made if the equipment is not idle more than four (4) hours of the day. If the equipment is idle more than four (4) hours in a day, then payment will be made only for the actual hours worked. No additional compensation will be allowed on the equipment for CONTRACTOR's or any affected Subcontractor's overhead and profit. OWNER may accept an actual rental invoice in lieu of the method of calculation set forth in paragraph 11.5.3 for equipment rented exclusively for Force Account Work or for equipment not included in the Rental Rate Blue Book.

11.5.4 For Subcontractors, CONTRACTOR will receive the approved actual invoice cost plus 5% as compensation for CONTRACTOR's total overhead and profit.

11.5.5 CONTRACTOR will receive an additional 1% of the total of 11.5.1, 11.5.2, 11.5.3, and 11.5.4 as compensation for increased bond costs.

11.5.6 The compensation, as herein provided for, shall be received by CONTRACTOR and any affected Subcontractor as payment in full for work done by Change Directive and will include use of small tools, and total overhead expense and profit. CONTRACTOR and Owner's Representative shall compare records of work done by Change Directive at the end of each day. Copies of these records will be made upon forms provided for this purpose by OWNER and signed by both Owner's Representative and CONTRACTOR, with one copy being retained by OWNER and one by CONTRACTOR. Refusal by CONTRACTOR to sign these records within two (2) working days of presentation does not invalidate the accuracy of the record.

11.6 Unit Price Work:

11.6.1 Where the Contract Documents provide that all or part of the Work is to be unit price Work, initially the Contract Amount will be deemed to include for all unit price work an amount equal to the sum of the established unit price for each separately

identified item of unit price work times the estimated quantity of each item as indicated in the Bid. The estimated quantities of items of unit price work are not guaranteed and are solely for the purpose of comparison of Bids and determining an initial Contract Amount. Determinations of the actual quantities and classifications of unit price work performed by CONTRACTOR will be made by Owner's Representative. Owner's Representative will review with CONTRACTOR the preliminary determinations on such matters before rendering a written decision thereon (by recommendation of an Application for Payment or otherwise).

11.6.2 When "plan quantity" is indicated for a Bid item, CONTRACTOR shall be paid amount specified in the Contract Documents without any measurements.

11.6.3 Each unit price will be deemed to include an amount considered by CONTRACTOR to be adequate to cover CONTRACTOR's overhead and profit for each separately identified item.

11.6.4 A Major Item is any individual Bid item in the Bid that has a total cost equal to or greater than five percent (5%) of the original Contract Amount or $50,000, whichever is greater, computed on the basis of Bid quantities and Contract unit prices.

11.6.5 OWNER or CONTRACTOR may make a Claim for an adjustment in the Contract Amount in accordance with Article 11 if:

.1 the actual quantity of any Major Item should become as much as twenty percent (20%) more than or twenty percent (20%) less than that in the Bid; or

.2 CONTRACTOR presents documentation contesting accuracy of "plan quantity" and Owner's Representative verifies quantity and determines original value is in error by five percent (5%) or more;

Provided, however, in the event a Major Item is reduced by twenty percent (20%) or more of the amount in the Bid, no additional Article 11 profit or overhead will be added, if, due to other additions in the Work, the net value of the Contract Amount is not reduced.

ARTICLE 12 - CHANGE OF CONTRACT TIMES

12.1 Working Day and Calendar Day Contracts:

12.1.1 The Contract Times (or Milestones) may only be changed by Change Order or Time Extension Request duly executed by both CONTRACTOR and Owner's Representative. Any claim for an adjustment of the Contract Times (or Milestones) shall be made by Written Notice delivered by the party making the Claim to the other party promptly (but in no event later than thirty (30) calendar days after the start of the occurrence or event giving rise to the delay) and stating the general nature of the delay. Notice of the extent of the delay with supporting data shall be delivered within thirty (30) calendar days after Written Notice of Claim is delivered by claimant, and shall represent that the adjustment claimed is the entire adjustment to which claimant is entitled as a result of said occurrence or event. If OWNER and CONTRACTOR cannot otherwise agree, all Claims for adjustment in the Contract Times (or Milestones) shall be determined as set out in Article 16. No Claim for an adjustment in the Contract Times (or Milestones) will be valid if not submitted in accordance with the requirements of this paragraph.

12.1.2 When CONTRACTOR is at fault and OWNER stops the Work, so that corrections in the Work can be made by CONTRACTOR, no extension in time will be allowed.

12.1.3 When CONTRACTOR is prevented from completing any part of the Work within the Contract Times (or Milestones) due to delay beyond the control of both OWNER and CONTRACTOR, an extension of the Contract Times (or Milestones) in an amount equal to the time lost due to such delay shall be CONTRACTOR's sole and exclusive remedy for such delay. If performance by the CONTRACTOR or OWNER is interrupted by any occurrence not occasioned by its own conduct, whether such occurrence be an act of god or the result of war, riot, civil commotion, sovereign conduct, or the conduct of a third party, then such performance will be excused for a period of time necessary to remedy its effects, provided, however, in such an event, a conference will be held within three (3) business days to establish a proposed new Progress Schedule for the Project.

12.1.4 OWNER will consider time extension requests and may grant CONTRACTOR an extension of time because of:

.1 Changes ordered in the work which justify additional time.

.2 Failure of materials or products being at the Project site due to delays in transportation or failures of Suppliers, which are not the result of CONTRACTOR's, Subcontractor's or Supplier's negligence. The request for an extension of time shall be supported by a citation of acts demonstrating that the delays are beyond CONTRACTOR's control, including, but not limited to, CONTRACTOR's efforts to overcome such delays documented as follows:

a) Copy of purchase order for delayed item(s) indicating date ordered by CONTRACTOR/ Subcontractor and date purchase order received by Supplier.

b) If item(s) require Shop Drawings or other submittal information in accordance with the Contract Documents, provide record of date submittal(s) forwarded to Owner's Representative, date submittal(s) returned to CONTRACTOR, and date submittal(s) forwarded to Supplier.

c) Copy of document(s) from Supplier, on Supplier's letterhead, indicating date(s) item(s) would be ready for shipment and/or actual shipment date(s).

d) Copies of all correspondence between CONTRACTOR / Subcontractor and Supplier indicating CONTRACTOR / Subcontractor's efforts to expedite item(s).

e) If item(s) are being purchased by a Subcontractor, provide correspondence, meeting notes, etc., that reflect CONTRACTOR's efforts with the Subcontractor to expedite delivery of the item(s).

.3 When acts of OWNER, E/A, utility owners or other contractors employed by OWNER delay progress of work through no fault of CONTRACTOR. The CONTRACTOR will only be entitled to an extension of time for delays that affect the Critical Path of the Work and that are not caused by the CONTRACTOR.

.4 When CONTRACTOR is delayed by strikes, lockouts, fires, losses from natural causes, or other unavoidable cause or causes beyond CONTRACTOR's control.

12.2 Calendar Day Contracts:

12.2.1 Under a Calendar Day Contract, CONTRACTOR may be granted an extension of time because of unusual inclement weather, including but not limited to unusual rainfall events, which are beyond the normal rainfall recorded and expected for Austin, Texas. However, the CONTRACTOR will not be granted an extension of time for "normal rainfall", as described below.

12.2.2 "Unusual Inclement Weather" is defined as a rain event or other weather related event which occurs at the site and is of sufficient magnitude to prevent CONTRACTOR from performing units of Work critical to maintaining the Progress Schedule.

12.2.3 Baseline Rain Day Determination. "Normal rainfall" compiled by the State climatologist, based on U.S. Weather Bureau Records for Austin, Texas, is considered a part of the Calendar Day Contract, and is not a justification for an extension of time. Listed below are the number of days in each month for which no compensatory days for rainfall events ("Rain Days") in such months may be claimed:

January..... 8 days

February..... 8 days

March..... 7 days

April..... 7 days

May..... 9 days

June..... 6 days

July..... 5 days

August..... 5 days

September..... 7 days

October..... 7 days

November..... 7 days

December..... 7 days

Rain Days in addition to the baseline Rain Day determination described above will be measured with the Owner's Representative's approval at the nearest operational public weather data collection facility to the site, including but not limited to the OWNER's early warning flood gauge system.

12.2.4 CONTRACTOR may receive credit in any month for Unusual Inclement Weather, and specifically for any Rain Days in that month which exceed the number of Rain Days allocated to that month, if a Claim is made in accordance with paragraph 12.1.1 and the weather event meets the definition for "Unusual Inclement Weather", and as applicable, "Rain Day" and such claimed day is a day on which Work critical to maintaining the Progress Schedule is scheduled to be performed and is otherwise capable of being performed.

ARTICLE 13 - TESTS AND INSPECTIONS; CORRECTION, REMOVAL OR ACCEPTANCE OF DEFECTIVE WORK

13.1 Notice of Defects: Prompt notice of all defective Work of which OWNER or E/A has actual knowledge will be given to CONTRACTOR. All defective Work may be rejected, corrected or accepted as provided in Article 13. CONTRACTOR must give OWNER and E/A prompt notice of any defective Work of which CONTRACTOR has actual knowledge.

13.2 Access to Work: OWNER, E/A, E/A's Consultants, other representatives and personnel of OWNER, independent testing laboratories and governmental agencies having jurisdiction will have access to the Work at reasonable times for observing, inspecting and testing. CONTRACTOR shall provide them proper and safe conditions for such access, and advise them of CONTRACTOR's site safety procedures and programs so that they may comply therewith as applicable.

13.3 Tests and Inspections:

13.3.1 CONTRACTOR shall give timely notice of readiness of the Work for all required inspections, tests or approvals, and shall cooperate with inspection and testing personnel to facilitate required inspections or tests.

13.3.2 OWNER shall employ and pay for services of an independent testing laboratory to perform all inspections, tests or approvals required by the Contract Documents except:

.1 for inspections, tests or approvals covered by paragraphs 13.3.3 and 13.3.4 below;

.2 that costs incurred for tests or inspections conducted pursuant to paragraph 13.4.3 shall be paid as provided in paragraph 13.4.3;

.3 for reinspecting or retesting defective Work, including any associated costs incurred by the testing laboratory for cancelled tests or standby time; and

.4 as otherwise specifically provided in the Contract Documents.

13.3.3 If laws or regulations of any public body having jurisdiction require any Work (or part thereof) specifically to be inspected, tested or approved by an employee or other representative of such public body, CONTRACTOR shall assume full responsibility for arranging and obtaining such inspections, tests or approvals, pay all costs in connection therewith and furnish Owner's Representative the required certificates of inspection or approval.

13.3.4 CONTRACTOR shall also be responsible for arranging and obtaining and shall pay all costs in connection with any inspections, tests or approvals required for OWNER's and E/A's review of submittals covering materials, equipment, and mix designs to be incorporated in the Work.

13.3.5 All testing laboratories shall meet the requirements of ASTM E-329.

13.4 Uncovering Work:

13.4.1 If any Work (or the work of others) that is to be inspected, tested or approved is covered by CONTRACTOR without written concurrence of Owner's Representative, or if any Work is covered contrary to the written request of Owner's Representative, it must, if requested by Owner's Representative, be uncovered and recovered at CONTRACTOR's expense.

13.4.2 Uncovering Work as provided in paragraph 13.4.1 shall be at CONTRACTOR's expense unless CONTRACTOR has given Owner's Representative timely notice of CONTRACTOR's intention to cover the same and Owner's Representative has not acted within five (5) working days to such notice.

13.4.3 If Owner's Representative considers it necessary or advisable that covered Work be observed, inspected or tested, CONTRACTOR shall uncover, expose or otherwise make available for observation, inspection or testing that portion of the Work in question, furnishing all necessary labor, material and equipment. If it is found that such Work is defective, CONTRACTOR shall pay all claims, costs, losses and damages caused by, arising out of or resulting from such uncovering, exposure, observation, inspection and testing and of satisfactory replacement or reconstruction (including but not limited to all costs of repair or replacement of work of others); and OWNER shall be entitled to an appropriate decrease in the Contract Amount, and may make a Claim therefor as provided in Article 11. If, however, such Work is not found to be defective, CONTRACTOR shall be allowed an increase in the Contract Amount or an extension of the Contract Times (or Milestones), or both, directly attributable to such uncovering, exposure, observation, inspection, testing, replacement and reconstruction; and CONTRACTOR may make a Claim therefor as provided in Articles 11 and 12.

13.5 OWNER May Stop the Work:

13.5.1 If the Work is defective, or CONTRACTOR fails to supply sufficient skilled workers, suitable materials, and/or equipment; or fails to furnish or perform the Work in such a way that the Work in progress or the completed Work will conform to the Contract Documents, OWNER may order CONTRACTOR to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, this right of OWNER to stop the Work shall not give rise to any duty on the part of OWNER to exercise this right for the benefit of CONTRACTOR or any surety or other party.

13.5.2 If CONTRACTOR fails to correct defective Work or submit a satisfactory plan to take corrective action, with procedure and time schedule, OWNER may order CONTRACTOR to stop the Work, or any portion thereof, until cause for such order has been eliminated, or take any other action permitted by this Contract. A notice to stop the Work, based on defects, shall not stop calendar or working days charged to the Project.

13.6 Correction or Removal of Defective Work: If required by OWNER, CONTRACTOR shall promptly, as directed, either correct all defective Work, whether or not fabricated, installed or completed, or, if the Work has been rejected by Owner's Representative, remove it from the site and replace it with Work that is not defective. CONTRACTOR shall correct or remove and replace defective Work, or submit a plan of action detailing how the deficiency will be corrected, within the time frame identified in the notice of defective Work. CONTRACTOR shall pay all claims, costs, losses and damages caused by or resulting from such correction or removal (including but not limited to all costs of repair or replacement of work of others).

13.7 Warranty period:

13.7.1 If within one year after the date of Substantial Completion or such longer period of time as may be prescribed by laws or regulations or by the terms of any applicable special guarantee required by the Contract Documents or by any specific provision of the Contract Documents (e.g. paragraph 14.11.2), any Work, including work performed after the Substantial Completion date, is found to be defective,

CONTRACTOR shall promptly, without cost to OWNER and in accordance with OWNER's written instructions:

(i) correct such defective Work, or, if it has been rejected by OWNER, remove it from the site and replace it with Work that is not defective, and

(ii) satisfactorily correct or remove and replace any damage to other Work or the work of others resulting therefrom.

If CONTRACTOR does not promptly comply with the terms of such instructions, or in an emergency where delay would cause serious risk of loss or damage, OWNER may have the defective Work corrected or the rejected Work removed and replaced, and all claims, costs, losses and damages caused by or resulting from such removal and replacement (including but not limited to all costs of repair or replacement of work of others) will be paid by CONTRACTOR. The warranty period will be deemed to be renewed and recommenced in connection with the completed items of Work requiring correction.

13.7.2 In special circumstances where a particular item of equipment is placed in continuous service before Substantial Completion of all the Work, the warranty period for that item may start to run from an earlier date if so provided in the Contract Documents.

13.7.3 If correction of defective Work will affect the function or use of the facility CONTRACTOR shall not proceed with correction of defective Work without prior coordination and approval of OWNER.

13.7.4 The obligations of the CONTRACTOR to perform warranty work will survive the acceptance of the Work and any termination of the Contract.

13.8 Acceptance of Defective Work: If, instead of requiring correction or removal and replacement of defective Work, OWNER decides to accept it, OWNER may do so. CONTRACTOR shall pay all claims, costs, losses and damages attributable to OWNER's evaluation of and determination to accept such defective Work. If any such acceptance occurs prior to recommendation of final payment, a Change Order will be issued incorporating the necessary revisions in the Contract Documents and compensating OWNER for the diminished value of the defective Work. If the acceptance occurs after such recommendation, an appropriate amount will be paid by CONTRACTOR to OWNER after a calculation by OWNER of the diminution in value of the defective Work.

13.9 OWNER May Correct Defective Work: If CONTRACTOR fails within a reasonable time after Written Notice of OWNER to correct defective Work, or to remove and replace rejected Work, or if CONTRACTOR fails to perform the Work in accordance with the Contract Documents, or if CONTRACTOR fails to comply with any other provision of the Contract Documents, OWNER may, after seven (7) calendar days' Written Notice to CONTRACTOR, correct and remedy any such deficiency. If, in the opinion of the Owner's Representative, significant progress has not been made during this seven (7) calendar day period to correct the deficiency, the OWNER may exercise any actions necessary to remedy the deficiency. In exercising the rights and remedies under this paragraph, OWNER shall proceed expeditiously. In connection with such corrective and remedial action, OWNER may exclude CONTRACTOR from all or part of the site, take possession of all or part of the Work, and suspend CONTRACTOR's services related thereto, and incorporate in the Work all materials and equipment stored at the site or for which OWNER has paid CONTRACTOR but which are stored elsewhere. CONTRACTOR shall allow OWNER, its agents and employees, OWNER's other contractors, E/A and E/A's consultants access to the site to enable OWNER to exercise the rights and remedies under this paragraph. All claims, costs, losses and damages incurred or sustained by OWNER in exercising such rights and remedies will be charged

against CONTRACTOR and a Change Order will be issued incorporating the necessary revisions in the Contract Documents with respect to the Work. Such claims, costs, losses and damages will include but not be limited to all costs of repair or replacement of work of others destroyed or damaged by correction, removal or replacement of CONTRACTOR's defective Work. CONTRACTOR shall not be allowed an extension of the Contract Times (or Milestones), or claims of damage because of any delay in the performance of the Work attributable to the exercise by OWNER of OWNER's rights and remedies hereunder.

ARTICLE 14 - PAYMENTS TO CONTRACTOR AND COMPLETION

14.1 Application for Progress Payment:

14.1.1 Within 45 days from when the work was performed by the Contractor and Subcontractors, but not more often than once a month, CONTRACTOR shall submit to Owner's Representative for review an Application for Payment, in a form acceptable to OWNER, filled out and signed by CONTRACTOR covering the Work completed as of the date of the Application and accompanied by such supporting documentation as is required by the Contract Documents.

14.1.2 Such applications shall not include requests for payment on account of changes in the Work which have been properly authorized by Change Directives but not yet included in Change Orders.

14.1.3 Such applications shall not include requests for payment of amounts the CONTRACTOR does not intend to pay to a Subcontractor or Supplier because of a dispute or other reason.

14.1.4 If payment is requested on the basis of materials or equipment not incorporated in the Work but delivered and suitably stored at the site or at another location agreed to in writing, the Application for Payment shall be accompanied by such bills of sale, data and other procedures satisfactory to OWNER substantiating OWNER’s title to such materials or equipment or otherwise protecting OWNER’s interest. Payment on account of such materials or equipment will not include any amount for CONTRACTOR’s overhead or profit or relieve CONTRACTOR of its obligation to protect and install such materials or equipment in accordance with the requirements of the Contract and to restore damaged or defective Work. If materials or equipment are stored at another location, at the direction of the OWNER they shall be stored in a bonded and insured facility, accessible to E/A and OWNER, and shall be clearly marked as property of OWNER. Title to materials delivered to the site of the Work or a staging area will pass to OWNER upon payment by OWNER without the necessity for further documentation. Risk of loss will not pass to OWNER until acceptance.

14.1.5 Where the original Contract Amount is less than $400,000, OWNER will pay CONTRACTOR total amount of approved Application for Payment, less ten percent (10%) of amount thereof, which ten percent (10%) will be retained until final payment, less all previous payments and less all other sums that may be retained by OWNER under the terms of this Agreement. Where the original Contract Amount is $400,000 or more, OWNER will pay CONTRACTOR total amount of approved Application for Payment, less five percent (5%) of amount thereof, which five percent (5%) will be retained until final payment, less all previous payments and less all other sums that may be retained by OWNER under the terms of this Agreement. In either case, if the Work is near completion and delay occurs due to no fault or neglect of CONTRACTOR, OWNER may pay a portion of the retained

amount to CONTRACTOR. CONTRACTOR, at OWNER's option, may be relieved of the obligation to complete the Work and, thereupon, CONTRACTOR shall receive payment of the balance due under the Contract subject to the conditions stated under paragraph 15.2. A Subcontractor may submit a written request to the CONTRACTOR and Project Manager requesting release of retainage for work by the Subcontractor that has been completed and approved. The Project Manager will evaluate the request and if it is approved, the Project Manager will request the CONTRACTOR to include the request for release of an appropriate amount of retainage in the next Pay Application.

14.1.6 Applications for Payment shall include the following documentation:

.1 updated Progress Schedule;

.2 monthly subcontractor report;

.3 any other documentation required under the Supplemental General Conditions.

14.2 CONTRACTOR's Warranty of Title: CONTRACTOR warrants and guarantees that title to all Work, materials and equipment covered by any Application for Payment, whether incorporated in the Project or not, will pass to OWNER free and clear of all Liens no later than the time of payment to CONTRACTOR.

14.3 Review of Applications for Progress Payment:

14.3.1 Owner's Representative will, within seven (7) calendar days after receipt of each Application for Payment, either indicate a recommendation for payment and forward the Application for processing by OWNER, or return the Application to CONTRACTOR indicating Owner's Representative's reasons for refusing to recommend payment. In the latter case, CONTRACTOR shall make the necessary corrections and resubmit the Application.

14.3.2 Owner's Representative's recommendation of any payment requested in an Application for Payment will constitute a representation by Owner's Representative, based upon Owner's Representative's on-site observations of the executed Work and on Owner's Representative's review of the Application for Payment and the accompanying data and schedules, that to the best of Owner's Representative's knowledge, information and belief:

.1 the Work has progressed to the point indicated; and

.2 the quality of the Work is generally in accordance with the Contract Documents (subject to an evaluation of the Work as a functioning whole prior to or upon Substantial Completion, to the results of any subsequent tests called for in the Contract Documents, to a final determination of quantities and classifications for unit price Work, and to any other qualifications stated in the recommendation).

14.3.3 By recommending any such payment, Owner's Representative will not thereby be deemed to have represented that:

.1 exhaustive or continuous on-site inspections have been made to check the quality or the quantity of the Work;

.2 examination has been made to ascertain how or for what purpose CONTRACTOR has used money previously paid on account of the Contract Amount;

.3 CONTRACTOR's construction means, methods, techniques, sequences or procedures have been reviewed; or

.4 that there may not be other matters or issues between the parties that might entitle CONTRACTOR to be paid additionally by OWNER or entitle OWNER to withhold payment to CONTRACTOR.

14.4 Decisions to Withhold Payment:

14.4.1 OWNER may withhold or nullify the whole or part of any payment to such extent as may be necessary on account of:

.1 defective Work not remedied;

.2 third party Claims filed or reasonable evidence indicating probable filing of such Claims;

.3 failure of CONTRACTOR to make payments properly to Subcontractors for labor, materials or equipment;

.4 reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Amount;

.5 damage to OWNER or another contractor;

.6 reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay;

.7 failure of CONTRACTOR to submit a schedule of values in accordance with the Contract Documents;

.8 failure of CONTRACTOR to submit a submittal schedule in accordance with the Contract Documents;

.9 failure of CONTRACTOR to submit and update a construction Progress Schedule in accordance with the Contract Documents;

.10 failure of CONTRACTOR to maintain a record of changes on drawings and documents;

.11 failure of CONTRACTOR to maintain weekly payroll reports and, as applicable, provide copies of reports in a timely manner upon request of OWNER;

.12 failure of CONTRACTOR to submit monthly subcontractor reports;

.13 CONTRACTOR's neglect or unsatisfactory prosecution of the Work, including failure to clean up;

.14 failure of CONTRACTOR to comply with the Austin City Code, Chapter 2-9-A, as amended, "Minority-Owned and Women-Owned Business Enterprise Procurement Program;" or

.15 failure of CONTRACTOR to comply with any provision of the Contract Documents.

14.4.2 When the above reasons for withholding payment are removed, CONTRACTOR shall resubmit a statement for the value of Work performed. Payment will be made within thirty (30) calendar days of receipt of approved Application for Payment.

14.4.3 Subcontractors may request Partial Payment when the OWNER withholds payment of an invoice to the CONTRACTOR for any reason listed in Section 14.4.1. If payment is withheld by the OWNER, the CONTRACTOR shall notify all affected Subcontractors within two (2) working days of notice that payment is being withheld. Upon notification, Subcontractors may submit a formal written request

for Partial Payment to the CONTRACTOR and OWNER. If directed by the OWNER, the CONTRACTOR shall within three (3) working days resubmit to the OWNER an invoice for the same period that includes only the work performed by the requesting Subcontractors during this period. The OWNER will review this resubmitted invoice in accordance with Section 14.3.1. Upon receipt of payment for the resubmitted invoice, CONTRACTOR shall pay the subcontractor within ten (10) Calendar Days in accordance with Section 6.4.7.

14.5 Delayed Payments: Should OWNER fail to make payment to CONTRACTOR of sum named in any Application for Payment within thirty (30) calendar days after the day on which OWNER received the mutually acceptable Application for Payment, then OWNER will pay to CONTRACTOR, in addition to sum shown as due by such Application for Payment, interest thereon at the rate specified in Government Code, Section 2251.025(b) from date due until fully paid, which shall fully liquidate any injury to CONTRACTOR growing out of such delay in payment.

14.6 Arrears: No money shall be paid by OWNER upon any claim, debt, demand or account whatsoever, to any person, firm or corporation who is in arrears to City for taxes; and City shall be entitled to counterclaim and automatically offset against any such debt, claim, demand or account in the amount of taxes so in arrears and no assignment or transfer of such debt, claim, demand or account after said taxes are due, shall affect the right of OWNER to so offset said taxes, and associated penalties and interest if applicable, against the same.

14.7 Substantial Completion:

14.7.1 When the CONTRACTOR considers that the Work, or a portion thereof which the OWNER agrees to accept separately, is substantially complete, the CONTRACTOR shall notify Owner's Representative and request a determination as to whether the Work or designated portion thereof is substantially complete. If Owner's Representative does not consider the Work substantially complete, Owner's Representative will notify CONTRACTOR giving reasons therefor. After performing any required Work, CONTRACTOR shall then submit another request for Owner's Representative to determine Substantial Completion. If Owner's Representative considers the Work substantially complete, Owner's Representative will prepare and deliver a certificate of Substantial Completion which shall establish the date of Substantial Completion, shall include a punch list of items to be completed or corrected before final payment, shall establish the time within which CONTRACTOR shall finish the punch list, and shall establish responsibilities of the OWNER and CONTRACTOR for security, maintenance, heat, utilities, damage to the Work, warranty and insurance. Failure to include an item on the punch list does not alter the responsibility of CONTRACTOR to complete all Work in accordance with the Contract Documents. If a Certificate of Occupancy is required by public authorities having jurisdiction over the Work, said certificate shall be issued before the Work or any portion thereof is considered substantially complete. The certificate of Substantial Completion shall be signed by OWNER and CONTRACTOR to evidence acceptance of the responsibilities assigned to them in such certificate.

14.7.2 OWNER shall have the right to exclude CONTRACTOR from the Work after the date of Substantial Completion, but OWNER will allow CONTRACTOR reasonable access to complete or correct items on the punch list and complete warranty work.

14.8 Partial Utilization: Use by OWNER, at OWNER's option, of any substantially completed part of the Work which: (i) has specifically been identified in the Contract Documents, or (ii) OWNER and CONTRACTOR agree constitutes a separately functioning and usable part of the Work that can be used by OWNER for its intended purpose without significant interference

with CONTRACTOR's performance of the remainder of the Work, may be accomplished prior to Substantial Completion of all the Work in accordance with the following:

14.8.1 OWNER at any time may request CONTRACTOR to permit OWNER to use any such part of the Work which OWNER believes to be ready for its intended use and substantially complete. If CONTRACTOR agrees that such part of the Work is substantially complete, CONTRACTOR shall certify to Owner's Representative that such part of the Work is substantially complete and request Owner's Representative to issue a certificate of substantial Completion for that part of the Work. CONTRACTOR at any time may notify Owner's Representative that CONTRACTOR considers any such part of the Work ready for its intended use and substantially complete and request Owner's Representative to issue a certificate of Substantial Completion for that part of the Work. The provisions of paragraphs 14.7.1 and 14.7.2 will apply with respect to certification of Substantial Completion of that part of the Work and the division of responsibility in respect thereof and access thereto.

14.8.2 Such partial utilization is authorized by public authorities having jurisdiction over the Work.

14.9 Final Inspection: Upon Written Notice from CONTRACTOR that the entire Work or an agreed portion thereof is complete, Owner's Representative will make a final inspection with CONTRACTOR and provide Written Notice of all particulars in which this inspection reveals that the Work is incomplete or defective. CONTRACTOR shall immediately take such measures as are necessary to complete such Work or remedy such deficiencies.

14.10 Final Application for Payment: CONTRACTOR may make application for final payment following the procedure for progress payments after CONTRACTOR has completed all such corrections to the satisfaction of Owner's Representative and delivered the following documents:

14.10.1 Affidavit by CONTRACTOR certifying the payment of all debts and claims;

14.10.2 Three (3) complete operating and maintenance manuals, each containing maintenance and operating instructions, schedules, guarantees, and other documentation required by the Contract Documents;

14.10.3 Record documents (as provided in paragraph 6.10);

14.10.4 Consent of surety, if any, to final payment. If surety is not provided, complete and legally effective releases or waivers (satisfactory to OWNER) of all claims arising out of or filed in connection with the Work;

14.10.5 Certificate evidencing that insurance required by the Supplemental General Conditions will remain in force after final payment and through the warranty period;

14.10.6 Non-Use of Asbestos Affidavit (After Construction);

14.10.7 Subcontractor report and all other documentation necessary for evaluation of CONTRACTOR’s fulfillment of the Contract MBE/WBE or DBE goals;

14.10.8 Documentation of notice to claimants, to the extent applicable and subject to subparagraph 14.11.4;

14.10.9 Proof of performance Bond extension through warranty period, if a performance Bond was required; and

14.10.10 Any other documentation called for in the Contract Documents.

14.11 Final Payment and Acceptance:

14.11.1 If, on the basis of observation of the Work during construction, final inspection, and review of the final Application for Payment and accompanying documentation as required by the Contract Documents, Owner's Representative is satisfied that the Work has been completed and CONTRACTOR's other obligations under the Contract Documents have been fulfilled and there are no outstanding claims, Owner's Representative will recommend the final Application for Payment and thereby notify the OWNER, who will pay to CONTRACTOR the balance due CONTRACTOR under the terms of the Contract. If the sole remaining unfinished item to complete the Work is the reestablishment of vegetation, CONTRACTOR may execute a revegetation letter with fiscal posted (letter of credit) to ensure completion of this item. This Work must be accomplished within one hundred twenty (120) Calendar Days of the date of Final Completion of the Work. When the permanent erosion control has been established, OWNER will initiate an inspection for final acceptance of the erosion controls. If the revegetation is not completed within the one hundred twenty (120) Calendar Days, OWNER, at its option, may complete the Work using the posted fiscal.

14.11.2 If the Contract measures Contract Time to Final Completion, rather than Substantial Completion, Owner's Representative will issue a letter of final acceptance to CONTRACTOR which establishes the Final Completion date and initiates the one-year warranty period. If the sole remaining unfinished item to complete the Work is the reestablishment of vegetation and CONTRACTOR has executed a revegetation letter with fiscal posted (letter of credit) to ensure completion of this item, the Owner’s Representative will issue a letter of conditional acceptance to CONTRACTOR which established the Final Completion date and initiates the one-year warranty period.

14.11.3 Final payment is considered to have taken place when CONTRACTOR or any of its representatives negotiates OWNER's final payment check, whether labeled final or not, for cash or deposits check in any financial institution for its monetary return.

14.11.4 The OWNER will withhold funds sufficient to cover the amount of any unresolved contract claims from final payment for six months under the following limited conditions:

.1 CONTRACTOR must provide written notice to the claimant (via certified mail or hand delivery) that (i) OWNER will hold funds in the amount of the disputed claim for six (6) months from the date of the receipt of the notice and (ii) CONTRACTOR and the claimant have certain alternative dispute resolution rights; and

.2 CONTRACTOR must provide OWNER with a copy of the receipted notice.

Provided the claimant has received notice under this section, OWNER will release the withheld funds, if the CONTRACTOR provides a bond in substantial compliance with the provisions of Section 52.231 of the Texas Property Code; when the OWNER receives a settlement or release of the claim with accompanying instructions regarding payment; upon resolution of the claim in litigation, if suit is filed within such six (6) month period and the OWNER receives written notice of such filing; or when such six (6) month period has passed, if no such bond, settlement, release, or notice of filing of suit have been received. The above provisions notwithstanding, if efforts to timely resolve a disputed claim are not being made to OWNER’S reasonable satisfaction, OWNER may, in its complete discretion, file an interpleader action and deposit the withheld funds in the registry

of a court of competent jurisdiction. In addition, CONTRACTOR must include a provision in each of its subcontracts that the prevailing party in any litigation arising thereunder will be entitled to recover its costs of court and reasonable attorney's fees.

14.12 Waiver of Claims: The making and acceptance of final payment will constitute:

14.12.1 a waiver of claims by OWNER against CONTRACTOR, except claims arising from unsettled claims, from defective Work appearing after final inspection, from failure to comply with the Contract Documents or the terms of any warranty specified therein, or from CONTRACTOR's continuing obligations under the Contract Documents; and

14.12.2 a waiver of all claims by CONTRACTOR against OWNER other than those previously made in writing and still unsettled.

ARTICLE 15 - SUSPENSION OF WORK AND TERMINATION

15.1 OWNER May Suspend Work Without Cause: At any time and without cause, OWNER may suspend the Work or any portion thereof for a period of not more than ninety (90) calendar days by Written Notice to CONTRACTOR which will fix the date on which the Work will be resumed. CONTRACTOR shall resume the Work on the date so fixed. CONTRACTOR shall be allowed an adjustment in the Contract Amount or an extension of the Contract Times, or both, directly attributable to any such suspension if CONTRACTOR makes an approved Claim therefor as provided in Articles 11 and 12.

15.2 OWNER May Terminate Without Cause: Upon seven (7) calendar days' Written Notice to CONTRACTOR, OWNER may, without cause and without prejudice to any right or remedy of OWNER, elect to terminate the Agreement. In such case, CONTRACTOR shall be paid (without duplication of any items):

15.2.1 for completed and acceptable Work executed in accordance with the Contract Documents prior to the effective date of termination;

15.2.2 for reasonable demobilization costs; and

15.2.3 for anticipated profits on completed and accepted Work not previously paid and not included in separate pay items calculated to date of termination but not for anticipated profit on the entire Contract not previously paid, unabsorbed overhead, or lost opportunity.

15.3 OWNER May Terminate With Cause:

15.3.1 Upon the occurrence of any one or more of the following events:

.1 if CONTRACTOR persistently fails to perform the Work in accordance with the Contract Documents;

.2 if CONTRACTOR disregards laws or regulations of any public body having jurisdiction;

.3 if CONTRACTOR disregards the authority of Owner's Representative;

.4 if CONTRACTOR makes fraudulent statements;

.5 if CONTRACTOR fails to maintain a work force adequate to accomplish the Work within the Contract Time;

.6 if CONTRACTOR fails to make adequate progress and endangers successful completion of the Contract; or

.7 if CONTRACTOR otherwise violates in any substantial way any provisions of the Contract Documents;

OWNER may, after giving CONTRACTOR (and the surety, if any) seven (7) calendar days Written Notice terminate the services of CONTRACTOR. OWNER, at its option, may proceed with negotiation with surety for completion of the Work. Alternatively, OWNER may under these circumstances exclude CONTRACTOR from the site and take possession of the Work (without liability to CONTRACTOR for trespass or conversion), incorporate in the Work all materials and equipment stored at the site or for which OWNER has paid CONTRACTOR but which are stored elsewhere, and finish the Work as OWNER may deem expedient. In such case CONTRACTOR shall not be entitled to receive any further payment until the Work is finished. If the unpaid balance of the Contract Amount exceeds all claims, costs, losses and damages sustained by OWNER arising out of or resulting from completing the Work, such excess will be paid to CONTRACTOR. If such claims, costs, losses and damage exceed such unpaid balance, CONTRACTOR or surety shall pay the difference to OWNER. In the event that a termination for cause is found to be wrongful, the termination shall be converted to a termination without cause as set forth in Section 15.2 and CONTRACTOR'S remedy for wrongful termination is limited to the recovery of the payments permitted for termination without cause as set forth in Section 15.2.

15.3.2 Where CONTRACTOR's services have been so terminated by OWNER, the termination will not affect any rights or remedies of OWNER against CONTRACTOR and surety then existing or which may thereafter accrue. Any retention or payment of moneys due CONTRACTOR by OWNER will not release CONTRACTOR from liability. In the event OWNER terminates Contract with cause, OWNER may reject any and all Bids submitted by CONTRACTOR for up to three (3) years after the date of such termination. These sanctions will be administered in accordance with the City of Austin Purchasing Office Probation, Suspension, and Debarment Procedures for Vendors, which include notice and an opportunity for a hearing.

15.4 CONTRACTOR May Stop Work or Terminate: If through no act or fault of CONTRACTOR, the Work is suspended for a period of more than ninety (90) calendar days by OWNER or under an order of court or other public authority, or (except during disputes) Owner's Representative fails to forward for processing any mutually acceptable Application for Payment within thirty (30) calendar days after it is submitted, or (except during disputes) OWNER fails for sixty (60) calendar days after it is submitted to pay CONTRACTOR any sum finally determined by OWNER to be due, then CONTRACTOR may, upon seven (7) calendar days' Written Notice to OWNER, and provided OWNER does not remedy such suspension or failure within that time, terminate the Agreement and recover from OWNER payment on the same terms as provided in paragraph 15.2. In lieu of terminating the Agreement and without prejudice to any other right or remedy, if (except during disputes) Owner's Representative has failed to forward for processing any mutually acceptable Application for Payment within thirty (30) calendar days after it is submitted, or (except during disputes) OWNER has failed for sixty (60) calendar days after it is submitted to pay CONTRACTOR any sum finally determined by OWNER to be due, CONTRACTOR may upon seven (7) calendar days' Written Notice to OWNER stop the Work until payment of all such amounts due CONTRACTOR, including interest thereon. The provisions of this paragraph 15.4 are not intended to preclude CONTRACTOR from making a Claim under Articles 11 and 12 for an increase in Contract Amount or Contract Times or otherwise for expenses or damage directly attributable to CONTRACTOR's stopping Work as permitted by this paragraph.

15.5 Discretionary Notice to Cure: In its complete discretion, OWNER may, but is not required to, provide a Notice to Cure to CONTRACTOR and its surety to cure an event of default described above and/or an anticipatory breach of contract and, if required by OWNER, to attend a meeting with OWNER, regarding the Notice to Cure, the event of default, and/or the anticipatory breach of contract. The Notice to Cure will set forth the time limit in which the cure is to be completed or commenced and diligently prosecuted. Upon receipt of any Notice to Cure, CONTRACTOR shall prepare a report describing its program and measures to affect the cure of the event of default and/or anticipatory breach of contract within the time required by the Notice to Cure. The CONTRACTOR'S report must be delivered to OWNER at least three (3) days prior to any requested meeting with the OWNER and surety.

15.6 Bankruptcy: If CONTRACTOR declares bankruptcy or is adjudged bankrupt or makes an assignment for the benefit of creditors or if a receiver is appointed for the benefit of creditors or if a receiver is appointed by reason of CONTRACTOR'S insolvency, CONTRACTOR may be unable to perform this Contract in accordance with the Contract requirements. In such an event, OWNER may demand CONTRACTOR or its successor in interest provide OWNER with adequate assurance of CONTRACTOR'S future performance in accordance with the terms and conditions of the Contract. If CONTRACTOR fails to provide adequate assurance of future performance to OWNER'S reasonable satisfaction within ten (10) days of such a request, OWNER may terminate the CONTRACTOR'S services for cause or without cause, as set forth above. If CONTRACTOR fails to provide timely adequate assurance of its performance and actual performance, OWNER may prosecute the Work with its own forces or with other contractors on a time and material or other appropriate basis and the cost of which will be charged against the Contract balance.

15.7 Duty to Mitigate: In the event of any termination or suspension under this Contract, the CONTRACTOR agrees to and shall take all reasonable actions to mitigate its damages and any and all claims which may be asserted against the OWNER.

15.8 Responsibility during Demobilization: While demobilizing, the CONTRACTOR will take all necessary and reasonable actions to preserve and protect the Work, the site and other property of the OWNER or others at the site.

ARTICLE 16 - DISPUTE RESOLUTION

16.1 Filing of Claims:

16.1.1 Claims arising from the circumstances identified in paragraphs 3.2, 4.1, 4.2.2, 4.2.4, 6.4.2, 6.11.5.2, 6.17, 7.5, 8.6, 9.5, 10.4.2, 13.4.3, 13.8, 13.9, 15.1, 15.2, 15.3, or 15.4, or other occurrences or events, shall be made by Written Notice delivered by the party making the Claim to the other party within thirty (30) calendar days after the start of the occurrence or event giving rise to the Claim and stating the general nature of the Claim. Notice of the amount of the Claim with supporting data shall be delivered in writing within thirty (30) calendar days after Written Notice of Claim is delivered by claimant and shall represent that the adjustment claimed covers all known amounts and/or extensions of time to which claimant is entitled.

16.1.2 Within thirty (30) calendar days of receipt of notice of the amount of the Claim with supporting data, Owner's Representative and CONTRACTOR shall meet to discuss the Claim, after which an offer of settlement or notification of no settlement offer will be made to claimant. If claimant is not satisfied with the proposal presented, claimant shall have thirty (30) calendar days in which to: (i)

submit additional supporting data requested by the other party; (ii) modify the initial Claim; or (iii) request Alternative Dispute Resolution.

16.2 Alternative Dispute Resolution:

16.2.1 If a dispute exists concerning a Claim, the parties agree to use the following procedure prior to pursuing any other available remedies. OWNER reserves the right to include the E/A as a party.

16.2.2 Negotiating with Previously Uninvolved Personnel: Either party may make a written request for a meeting to be held between representatives of each party within fourteen (14) Calendar Days of the request or such later period that the parties may agree to. Each party shall endeavor to include, at a minimum, one (1) previously uninvolved senior level decision maker (an owner, officer, or employee of each organization) empowered to negotiate on behalf of their organization. If a previously uninvolved senior level decision maker is unavailable due to the size of the CONTRACTOR'S organization or any other reason, the CONTRACTOR shall nonetheless provide an appropriate senior level decision maker for the meeting. The purpose of this and any subsequent meetings will be good faith negotiations of the matters constituting the dispute. Negotiations shall be concluded within thirty (30) Calendar Days of the first meeting, unless mutually agreed otherwise. This step may be waived by a written agreement signed by both parties, in which event the parties may proceed directly to mediation as described below.

16.2.3 Mediation:

.1 If the procedure described in 16.2.2 proves unsuccessful or is waived pursuant to its terms, the parties shall initiate the mediation process. OWNER and CONTRACTOR agree to select within thirty (30) calendar days a mediator trained in mediation skills, to assist with resolution of the dispute. OWNER and CONTRACTOR agree to act in good faith in the selection of the mediator and to give consideration to qualified individuals nominated to act as mediator. Nothing in this agreement prevents the parties from relying on the skills of a person who also is trained in the subject matter of the dispute and/or a contract interpretation expert. Should the parties fail to agree on a mediator within thirty (30) calendar days of initiation of the mediation process, the parties agree to ask the Travis County Dispute Resolution Center to select a qualified individual, which selection shall be binding on the parties.

.2 Mediation is a forum in which an impartial person, the mediator, facilitates communication between parties to promote reconciliation, settlement, or understanding among them. The parties hereby agree that mediation, at a minimum, shall provide for (i) conducting an on-site investigation, if appropriate, by the mediator for fact gathering purposes, (ii) a meeting of all parties for the exchange of points of view and (iii) separate meetings between the mediator and each party to the dispute for the formulation of resolution alternatives. The parties agree to participate in mediation in good faith for up to thirty (30) calendar days from the date of the first mediation session, unless mutually agreed otherwise. Should the parties fail to reach a resolution of the dispute through mediation, then each party is released to pursue other remedies available to them.

16.3 Resolution of Disputes between Contractor and Subcontractor or Supplier: If a dispute exists concerning a claim between a CONTRACTOR and a Subcontractor or Supplier, the CONTRACTOR agrees to participate with such Subcontractor and/or Supplier in a

process substantially paralleling the steps set out in paragraphs 16.1 and 16.2 above, including the delivery of written notices, submission of supporting data, negotiation with previously uninvolved personnel, and, if such alternative dispute resolution process is unsuccessful, mediation between the parties to the claim. If the CONTRACTOR and Subcontractor or Supplier agreement provides an alternative dispute resolution process, which provides substantially equivalent rights to those set forth herein, it may be followed, unless the CONTRACTOR and affected Subcontractor or Supplier agree to follow the process outlined above. The OWNER is not a party to the alternative dispute resolution process between the CONTRACTOR and Subcontractor or Supplier and will not pay any costs incurred in the process. Each party will be responsible for its own expenses incurred in the process, which will include an equal share of the mediation expenses, unless otherwise determined by the mediator. NOTICE: THE PROCESS SET FORTH HEREIN IS NOT A SUBSTITUTE FOR THE STATUTORY PAYMENT BOND CLAIM PROCESS.

16.4 Claim Calculation:

16.4.1 Delay Claims: The intent of paying for delay damages is to reimburse the CONTRACTOR for actual expense arising out of a compensable delay. No profit or force account markups, other than labor burden, will be allowed for delay claims by the CONTRACTOR seeking reimbursement for expenses arising out of an alleged event of delay. No consequential damages will be allowed to the CONTRACTOR in connection with any claimed delays. If the CONTRACTOR requests compensation for delay damages and the delay is determined to be compensable, then standby equipment costs and project overhead compensation will be based on the duration of the compensable delay and the following:

.1 Standby equipment costs will not be allowed during periods when the equipment would have otherwise been idle. Standby equipment time will not exceed more than eight (8) hours per twenty-four (24) hour day, forty (40) hours per week, and one hundred seventy-six (176) hours per month. Standby equipment costs will be paid at 50 percent (50%) of the applicable Rental Rate Blue Book rates and calculated by dividing the monthly rate by one hundred seventy-six (176), multiplying the result by the number of standby hours and multiplying that number by the regional adjustment factor and the rate adjustment factor contained in the Blue Book. Operating costs will not be allowed.

.2 Project overhead will be determined from actual costs that the CONTRACTOR will be required to document. Project overhead is defined as the administrative and supervisory expenses incurred at the work site and will not include home office overhead.

16.4.2 General: Except as limited with respect to delay claims, as set forth above, the criteria set forth in Section 11.4.1 may be used as a basis to calculate an adjustment in the Contract Amount in the resolution of a claim, provided that there will be no compensation for home office overhead.

16.5 MBE/WBE Program Progressive Sanctions: CONTRACTOR is subject to progressive sanctions for failure of CONTRACTOR to comply with Austin City Code, Chapter 2-9A, as amended: "Minority-owned and Women-owned Business Enterprise Procurement Program." Available sanctions for Program violations are set forth in Program rules adopted by the Small and Minority Business Resources Department (SMBR), as amended, and may include the following progressive sanctions for Program violations within a rolling 24-month period: (i) a period of probation for up to six (6) months for the first violation (ii) a period of suspension from bidding for up to 24 months for the second violation, and (iii) a period of debarment for up to five (5) years for the third violation. If the CONTRACTOR engages in

more than one of the violations listed below at any given time, OWNER has the discretion to determine whether such actions should be counted as multiple violations of the MBE/WBE Ordinance. Program violations include:

.1 providing false or misleading information to the OWNER in connection with the submission of a Bid, responses to request for qualifications or Proposals, Good Faith Efforts documentation, post award compliance or other Program operations;

.2 substituting M/WBE Subcontractors without first receiving approval for such substitutions;

.3 failure to comply with the approved Compliance Plan without an approved request for a change, an approved Change Order or other approved change to the Contract;

.4 violation of any other provision of the "Minority-owned and Women-owned Business Enterprise Procurement Program";

.5 providing false or misleading information to the OWNER in connection with an application for or challenge to certification, recertification or decertification as a MBE/WBE; and

.6 bid shopping.

The Progressive Sanctions will be administered in accordance with the City of Austin Purchasing Office Probation, Suspension, and Debarment Procedures for Vendors, which includes notice and an opportunity for a hearing.

ARTICLE 17 – MISCELLANEOUS

17.1 Venue: In the event of any suit at law or in equity involving the Contract, venue shall be exclusively in Travis County, Texas and the laws of the State of Texas shall apply to the interpretation and enforcement of the Contract.

17.2 Extent of Agreement: This Contract represents the entire and integrated agreement between the OWNER and CONTRACTOR with respect to the subject matter hereof and supersedes all prior negotiations, representations or agreements, either written or oral.

17.3 Cumulative Remedies: The rights and remedies available to the parties are not to be construed in any way as a limitation of any rights and remedies available to any or all of them which are otherwise imposed or available by laws or regulations, by special warranty or guarantees or by other provisions of the Contract Documents, and the provisions of this paragraph will be as effective as if repeated specifically in the Contract Documents in connection with each particular duty, obligation, right and remedy to which they apply. Specifically, the OWNER is not required to only assess liquidated damages, and OWNER may elect to pursue its actual damages resulting from the failure of the CONTRACTOR to complete the Work in accordance with the requirements of the Contract Documents.

17.4 Severability: If any word, phrase, clause, sentence or provision of the Contract, or the application of same to any person or set of circumstances is for any reason held to be unconstitutional, invalid or unenforceable, that finding shall only effect such word, phrase, clause, sentence or provision, and such finding shall not affect the remaining portions of this

Contract; this being the intent of the parties in entering into the Contract; and all provisions of the Contract are declared to be severable for this purpose.

17.5 Independent Contractor: The Contract shall not be construed as creating an employer/employee relationship, a partnership, or a joint venture. CONTRACTOR is an independent contractor and CONTRACTOR's services shall be those of an independent contractor. CONTRACTOR agrees and understands that the Contract does not grant any rights or privileges established for employees of OWNER.

17.6 Prohibition of Gratuities: OWNER may, by Written Notice to CONTRACTOR, terminate the Contract without liability if is determined by OWNER that gratuities were offered or given by CONTRACTOR or any agent or representative of CONTRACTOR to any officer or employee of OWNER with a view toward securing the Contract or securing favorable treatment with respect to the awarding or amending or the making of any determinations with respect to the performing of such Contract. In the event the Contract is terminated by OWNER pursuant to this provision, OWNER shall be entitled, in addition to any other rights and remedies, to recover or withhold the amount of the cost incurred by CONTRACTOR in providing such gratuities.

17.7 Prohibition Against Personal Interest in Contracts: No officer, employee, independent consultant, or elected official of OWNER who is involved in the development, evaluation, or decision-making process of the performance of any solicitation shall have a financial interest, direct or indirect, in the Contract resulting from that solicitation. Any violation of this provision, with the knowledge, expressed or implied, of CONTRACTOR shall render the Contract voidable by OWNER.

17.8 OWNER'S Right to Audit:

17.8.1 Records means all records generated by or on behalf of CONTRACTOR and each Subcontractor and Supplier of CONTRACTOR, whether paper, electronic, or other media, which are in any way related to performance of or compliance with this Contract, including, without limitation:

.1 accounting records;

.2 written policies and procedures;

.3 subcontract files (including proposals of successful and unsuccessful Bidders, Bid recaps, etc.);

.4 original estimates and estimating work sheets;

.5 correspondence;

.6 Change Order files (including documentation covering negotiated settlements);

.7 back charge logs and supporting documentation;

.8 general ledger entries detailing cash and trade discounts earned, insurance rebates and dividends;

.9 lump sum agreements between CONTRACTOR and any Subcontractor or Supplier;

.10 records necessary to evaluate: Contract compliance, Change Order pricing, and any Claim submitted by CONTRACTOR or any of its payees; and

.11 any other CONTRACTOR record that may substantiate any charge related to this Contract.

17.8.2 CONTRACTOR shall allow OWNER'S agent or its authorized representative to inspect, audit, and/or reproduce, or all three, all Records generated by or on behalf of CONTRACTOR and each Subcontractor and Supplier, upon OWNER'S written request. Further, CONTRACTOR shall allow OWNER'S agent or authorized representative to interview any of CONTRACTOR'S employees, all Subcontractors and all Suppliers, and all their respective employees.

17.8.3 CONTRACTOR shall retain all its Records, and require all its Subcontractors and Suppliers to retain their respective Records, during this Contract and for three (3) years after final payment, until all audit and litigation matters that OWNER has brought to the attention of CONTRACTOR are resolved, or as otherwise required by law, whichever is longer. OWNER'S right to inspect, audit, or reproduce Records, or interview employees of CONTRACTOR or its respective Subcontractors or Suppliers exists during this Contract, and for three (3) years after final payment, until all audit and litigation matters that OWNER has brought to CONTRACTOR'S attention are resolved, or as otherwise required by law, whichever is longer, and at no cost to OWNER, either from CONTRACTOR or any of its Subcontractors or Suppliers that may furnish Records or make employees available for interviewing.

17.8.4 CONTRACTOR must provide sufficient and accessible facilities during its normal business hours for OWNER to inspect, audit, or reproduce Records, or all three, and to interview any person about the Records.

17.8.5 CONTRACTOR shall insert these requirements in each written contract between CONTRACTOR and any Subcontractor or Supplier and require each Subcontractor and Supplier to comply with these provisions.

17.9 Survival: The terms and conditions of this Contract, which contemplate a period of time beyond completion or termination will survive such completion or termination and not be merged therein or otherwise terminated.

17.10 No Waiver: The waiver of any provision of this Contract will not be deemed to be a waiver of any other provision of this Contract. No waiver of any provision of this Contract will be deemed to constitute a continuing waiver unless expressly provided in writing, nor will a waiver of any default be deemed a waiver of any subsequent defaults of the same type. The failure at any time to enforce this Contract, whether the default is known or not, shall not constitute a waiver or estoppel of the right to do so.

17.11 Conditions Precedent to Right to Sue: Notwithstanding anything herein to the contrary, the CONTRACTOR will have at least 90 days to give notice of a claim for damages as a condition precedent to the right to sue on the Contract, subject to the contractual claim and alternative dispute resolution processes set forth herein.

17.12 Waiver of Trial by Jury: OWNER and CONTRACTOR agree that they have knowingly waived the right to trial by jury and have instead agreed that, in the event of any litigation arising out of or connected to this Contract, to proceed with a trial before the court, unless both parties subsequently agree otherwise in writing.

17.13 Contractor Evaluation: The Owner will review and evaluate the Contractor's Work and performance on the Project and provide the Contractor with a written Contractor Evaluation Report in accordance with City of Austin Administrative Rule R161-13.37. Rule R161-13.37 provides an appeal process.

http://www.austintexas.gov/department/contract-management

End

The Supplemental General Conditions contained herein amend or supplement the General Conditions, Section 00700.

ARTICLE 1 – DEFINITIONS

Add to the following definition:

1.20 Engineer/Architect (E/A): The OWNER's design professional for this contract is:

Name: **Hejl, Lee & Associates, Inc.**
Mr. Effendy, P.E.
Address: **206 Taylor Street**
Hutto, TX 78634
512-642-3292

Add the following definitions:

1.51 Allowance - Allowance is defined as "a not-to-be-exceeded amount", either individually or in the aggregate, which is established between the Owner and the Contractor as part of its Bid Proposal when the precise scope of a particular line item(s) has not been defined to a level which is adequate for the Contractor to provide a definitive line item pricing for that particular scope of Work. The use of any Allowances by the Contractor will be subject to the Owner's sole approval and it is the Owner's intent to minimize the use of Allowances to the fullest extent possible. For any Allowances which the Owner allows the Contractor to use, the following rules shall apply: (i) Allowances shall cover the cost to the Contractor of the Cost of Work; (ii) Contractor's overhead and profit associated with the stated Allowance shall be included in the Allowance; and (iii) upon completion of the portion of the Work subject to an Allowance, the Contract Amount for that portion of the Work will be adjusted based upon the approved actual cost of the Work, which will not exceed the approved aggregate amount of the Allowances.

1.52 Mobilization Prompt Payment Program - The Owner's Mobilization Prompt Payment Program, will allow bimonthly payments during "critical mobilization stages" as specified in the Contract Documents by the Prime Contractor. The Mobilization Prompt Payment Program will only apply to projects with a construction cost greater than $2,000,000.

ARTICLE 2 - PRELIMINARY MATTERS

Add the following modification to the end of 2.4.2.1:

.**1** The Baseline Schedule and schedule submittals for Projects in the Mobilization Prompt Payment Program must identify periods of 'critical mobilization.' The periods of critical mobilization will include the first two months of the Contract Time and additional periods identified by the Contractor and approved by Owner when peak Subcontractor mobilization will occur.

Delete 2.4.2.10 in its entirety and replace with the following:

.10 If applicable, a Plan for Excavation Safety Systems per Standard Specification 509s;

ARTICLE 5 - BONDS AND INSURANCE

5.3 Other Bond and Insurance Requirements:

5.3.1 CONTRACTOR Provided Insurance

5.3.1.1 General Requirements.

.1 CONTRACTOR shall carry insurance in the types and amounts indicated below for the duration of the Contract, which shall include items owned by OWNER in the care, custody and control of CONTRACTOR prior to and during construction and warranty period.

.2 CONTRACTOR must complete and forward the Certificate of Insurance, Section 00650, to OWNER before the Contract is executed as verification of coverage required below. CONTRACTOR shall not commence Work until the required insurance is obtained and until such insurance has been reviewed by OWNER. Approval of insurance by OWNER shall not relieve or decrease the liability of CONTRACTOR hereunder and shall not be construed to be a limitation of liability on the part of CONTRACTOR. CONTRACTOR must also complete and forward the Certificate of Insurance, Section 00650, to OWNER whenever a previously identified policy period has expired as verification of continuing coverage.

.3 CONTRACTOR's insurance coverage is to be written by companies authorized to do business in the State of Texas at the time the policies are issued and shall be written by companies with A.M. Best ratings of B+VII or better, except for hazardous material insurance which shall be written by companies with A.M. Best ratings of A- or better.

.4 All endorsements naming the OWNER as additional insured, waivers, and notices of cancellation endorsements as well as the Certificate of Insurance shall indicate: City of Austin, Capital Contracting Office, P.O. Box 1088, Austin, Texas 78767.

.5 The "other" insurance clause shall not apply to the OWNER where the OWNER is an additional insured shown on any policy. It is intended that policies required in the Contract, covering both OWNER and CONTRACTOR, shall be considered primary coverage as applicable.

.6 If insurance policies are not written for amounts specified below, CONTRACTOR shall carry Umbrella or Excess Liability Insurance for any differences in amounts specified. If Excess Liability Insurance is provided, it shall follow the form of the primary coverage.

.7 OWNER shall be entitled, upon request and without expense, to receive certified copies of policies and endorsements thereto and may make any reasonable requests for deletion or revision or modification of particular policy terms, conditions, limitations, or exclusions except where policy provisions are established by law or regulations binding upon either of the parties hereto or the underwriter on any such policies.

.8 OWNER reserves the right to review the insurance requirements set forth during the effective period of this Contract and to make reasonable adjustments to insurance coverage, limits, and exclusions when deemed necessary and prudent by OWNER based upon changes in statutory law, court decisions, the claims history of the industry or financial condition of the insurance company as well as CONTRACTOR.

.9 CONTRACTOR shall not cause any insurance to be canceled nor permit any insurance to lapse during the term of the Contract or as required in the Contract.

.10 CONTRACTOR shall be responsible for premiums, deductibles and self-insured retentions, if any, stated in policies. All deductibles or self-insured retentions shall be disclosed on the Certificate of Insurance.

.11 CONTRACTOR shall provide OWNER thirty (30) days written notice of erosion of the aggregate limits below occurrence limits for all applicable coverages indicated within the Contract.

.12 If OWNER owned property is being transported or stored off-site by CONTRACTOR, then the appropriate property policy will be endorsed for transit and storage in an amount sufficient to protect OWNER's property.

.13 The insurance coverages required under this contract are required minimums and are not intended to limit the responsibility or liability of CONTRACTOR.

5.3.1.2 Business Automobile Liability Insurance. Provide coverage for all owned, non-owned and hired vehicles. The policy shall contain the following endorsements in favor of OWNER:

a) Waiver of Subrogation endorsement CA 0444;
b) 30 day Notice of Cancellation endorsement CA 0244; and
c) Additional Insured endorsement CA 2048.

Provide coverage in the following types and amounts:

.1 A minimum combined single limit of $500,000 per occurrence for bodily injury and property damage. Alternate acceptable limits are $250,000 bodily injury per person, $500,000 bodily injury per occurrence and at least $100,000 property damage liability each accident.

5.3.1.3 Workers' Compensation And Employers' Liability Insurance. Coverage shall be consistent with statutory benefits outlined in the Texas Workers' Compensation Act (Section 401). CONTRACTOR shall assure compliance with this Statute by submitting two (2) copies of a standard certificate of coverage (e.g. ACCORD form) to Owner's Representative for every person providing services on the Project as acceptable proof of coverage. The Certificate of Insurance, Section 00650, must be presented as evidence of coverage for CONTRACTOR. CONTRACTOR's policy shall apply to the State of Texas and include these endorsements in favor of OWNER:

a) Waiver of Subrogation, form WC 420304; and
b) 30 day Notice of Cancellation, form WC 420601.

The minimum policy limits for Employers' Liability Insurance coverage shall be as follows:

.1 $100,000 bodily injury per accident, $500,000 bodily injury by disease policy limit and $100,000 bodily injury by disease each employee.

5.3.1.4 Commercial General Liability Insurance. The Policy shall contain the following provisions:

a) Contractual liability coverage for liability assumed under the Contract and all contracts relative to this Project.
b) Completed Operations/Products Liability for the duration of the warranty period.
c) Explosion, Collapse and Underground (X, C & U) coverage.
d) Independent Contractors coverage (Contractors/ Subcontractors work).
e) Aggregate limits of insurance per project, endorsement CG 2503.
f) OWNER listed as an additional insured, endorsements CG 2010 and CG 2037 or equivalent.
g) 30 day notice of cancellation in favor of OWNER, endorsement CG 0205.
h) Waiver of Transfer of Recovery Against Others in favor of OWNER, endorsement CG 2404.

Provide coverages A&B with minimum limits as follows:

.1 A combined bodily injury and property damage limit of $500,000 per occurrence.

5.3.1.5 Professional Liability Insurance. For Work which requires professional engineering or professional survey services to meet the requirements of the Contract, including but not limited to excavation safety systems, traffic control plans, and construction surveying, the CONTRACTOR or Subcontractors, responsible for performing the professional services shall provide Professional Liability Insurance with a minimum limit of $500,000 per claim and in the aggregate to pay on behalf of the assured all sums which the assured shall become legally obligated to pay as damages by reason of any negligent act, error, or omission committed with respect to all professional services provided in due course of the Work of this Contract. CONTRACTOR's policy shall include the following endorsement in favor of the OWNER:

a) 30 day Notice of Cancellation endorsement CA 0244

ARTICLE 6 - CONTRACTOR'S RESPONSIBILITIES

6.6 Permits, Fees: *Add the following*:

OWNER will obtain and pay for the following permits, licenses and/or fees:

6.6.1 Site Development Permit.

6.6.2 Building Permit(s). OWNER's responsibility for obtaining and paying for the Building Permit(s) shall be limited to the following where applicable: the required Electrical Service (Aid of Construction) Fee, Water and Wastewater Tap Fees, Water and Wastewater Capital Recovery Fees, and Septic Permit Fee. The OWNER's responsibility for obtaining and paying for the Building Permit(s) excludes securing and paying for the following where applicable: Driveway Permit (Concrete) Fee, Electrical Permit, Mechanical Permit, Plumbing Permit, Water Engineering Inspection Fee, Temporary Use of Right-of Way Permit, the gas company's Gas Yard Line Contribution Fee, and any other permits/fees not listed above.

6.7 Laws and Regulations: *Add the following 6.7.4*:

6.7.4 This Work is subject to the Texas Pollution Discharge Elimination System (TPDES) permitting requirements for the installation and maintenance of temporary and permanent

erosion and sediment controls and storm water pollution prevention measures throughout the construction period.

OWNER has prepared a Storm Water Pollution Prevention Plan (SWPPP). Reference Section 01096 for this SWPPP.

OWNER shall file the Owner's Notice of Intent and Notice of Termination to the Texas Commission on Environmental Quality (TCEQ). OWNER shall pay the TPDES storm water application fee.

CONTRACTOR's responsibilities are as follows.

.1 File a Notice of Intent (NOI) form with the TCEQ at least two (2) days prior to start of construction activity and pay for the permit. Form is available from OWNER or on the Internet at:
http://www.tceq.state.tx.us/assets/public/permitting/waterquality/forms/20022.pdf

The form shall be mailed or submitted online to the TCEQ. If submitting online, the web address is https://www6.tceq.state.tx.us/steers/. If CONTRACTOR has not already registered to use the TCEQ online application submittal service, it will take up to ten (10) Working Days to receive a user name and password. CONTRACTOR shall take this timeframe into consideration if applying online. A Time Extension shall not be granted for this timeframe. The mailing address is:

Texas Commission on Environmental Quality
Storm Water & General Permits Team; MC-228
P.O. Box 13087
Austin, TX 78711-3087

A copy of the completed Notice of Intent (NOI) form must also be mailed to the local Municipal Separate Storm Sewer Systems (MS4) representative:

TPDES Program Coordinator
City of Austin – WPD – ERM
P.O. Box 1088
Austin, TX 78767

.2 Obtain a signed certification statement from all Subcontractors responsible for implementing the erosion and sediment control measures. This statement shall indicate that the Subcontractor understands the permit requirements. The certified statement forms shall be attached to and become part of the SWPPP.

.3 Post a notice near the main entrance of the Work with the following information.

a) The TPDES permit number for the Work or a copy of the NOI if a permit number has not yet been assigned,
b) The name and telephone number of a local contact person,
c) A brief description of the Work, and
d) The location of the SWPPP if the site is inactive or does not have an on-site location to store the plan.

If posting this information near a main entrance is infeasible due to safety concerns, the notice must be posted in a local public building. If the Work is linear (pipeline, highway, etc.), the notice must be placed in a publicly accessible location near where construction is

actively underway and moved as necessary. For linear Work, multiple postings of the information may be required by OWNER (e.g. postings at both ends of the Work).

.4 Maintain all erosion and sediment control measures and other protective measures identified in the SWPPP in effective operating condition.

.5 Perform inspections every five (5) working days and after every ½ inch rainfall event, noting the following observations on an inspection form provided by OWNER:

a) Locations of discharges of sediment or other pollutants from the site.
b) Locations of storm water / erosion / sedimentation controls that are in need of maintenance.
c) Locations of storm water / erosion / sedimentation controls that are not performing, failing to operate, or are inadequate.
d) Locations where additional storm water / erosion / sedimentation controls are needed.

.6 Maintain at Work site at all times a copy of the SWPPP (with all updates, as described below) and inspection reports.

.7 Update the SWPPP as necessary to comply with TPDES permitting requirements, which includes noting changes in erosion / sedimentation controls and other best management practices that are part of the SWPPP and which may be necessary due to the results of inspection reports. Any SWPPP revisions or updates must be signed and certified by a Certified Professional in Erosion and Sedimentation Control (CPESC) or a Registered Professional Engineer. If the SWPPP includes engineering calculations, then SWPPP must be sealed and signed by a Registered Professional Engineer.

.8 File a Notice of Termination with the TCEQ within thirty (30) days of final stabilization on all portions of the Work site. Form is available from OWNER or on the Internet at:
http://www.tceq.state.tx.us/assets/public/permitting/waterquality/forms/20023.pdf.

The NOTICE shall be mailed to:

Storm Water & General Permits Team; MC-228
P.O. Box 13087
Austin, TX 78711-3087
(512) 239-4671

.9 Upon completion of the Work, provide TPDES records to OWNER.

ARTICLE 13 - TESTS AND INSPECTIONS; CORRECTION, REMOVAL OR ACCEPTANCE OF DEFECTIVE WORK

13.7 Warranty Period: *Add the following*:

13.7.5 OWNER will utilize a "Warranty Item Form" (attached at the end of this Section) for the purpose of providing Written Notice of warranty defects to CONTRACTOR. CONTRACTOR shall date, sign, complete and return the form to OWNER when the defect is corrected, including such information on or attached to the form to describe the nature of the repairs or corrections that were made. If the defect cannot be corrected in seven (7)

Calendar Days, CONTRACTOR shall provide a written explanation to the Owner's Representative describing the repairs needed and the time required to complete the repairs.

ARTICLE 14 - PAYMENTS TO CONTRACTOR AND COMPLETION

14.1 Application for Progress Payment: *Delete 14.1.1 and replace with the following (changes to the original text are identified by underlining)*:

14.1.1 No more often than once a month, unless authorized as part of the Mobilization Prompt Payment Program, CONTRACTOR shall submit to Owner's Representative for review a completed and executed Application for Payment, in a form acceptable to OWNER, covering the Work completed as of the date of the Application and not previously paid and accompanied by such supporting documentation as required by the Contract Documents.

Add the following paragraph to 14.1.1:

.1 Mobilization Prompt Payment Program. During critical mobilization periods, as identified by the CONTRACTOR and as approved by OWNER in accordance with 00700 2.4.2.1 of this Contract, CONTRACTOR shall submit bi-monthly Applications for Payment. The additional Pay Applications will include any costs accrued during the periods of critical mobilization. The Program will allow the CONTRACTOR and Subcontractors to invoice for costs as they are accrued during periods of critical mobilization. The CONTRACTOR shall submit bimonthly invoices to the OWNER for such costs. The CONTRACTOR shall pay Subcontractors for costs within 10 days of receipt of payment from OWNER.

14.1 Application for Progress Payment: *Delete 14.1.6.3 and replace with the following*:

.3 Contract time statement form signed by CONTRACTOR and Owner's Representative. If CONTRACTOR does not agree with the number of accumulated days charged, CONTRACTOR shall file a Claim in accordance with Article 16.1, Filing of Claims.

14.7 Substantial Completion: *Reference 14.7.1, add the following*:

14.7.1.1 For water and wastewater lines construction, Substantial Completion means that the Work, including all testing and disinfection, has been completed and accepted and the line(s) placed into service. A certificate of Substantial Completion will not be issued. Work that remains after Substantial Completion could include the final pavement of roadways, adjustment of structures to final grade and revegetation. Owner's Representative will issue a notice specifying what portion of the Work is partially completed for the purpose of payment and what Work remains to be done on the portion being accepted as Substantially Complete. This subsection 14.7.1.1 changes the 00700 General Conditions definition of Substantial Completion.

14.8 Partial Utilization: *Delete 14.8.1 and replace with the following (changes to the original text are identified by underlining)*:

14.8.1 OWNER at any time may request CONTRACTOR to permit OWNER to use any such part of the Work which OWNER believes to be ready for its intended use and substantially complete. If CONTRACTOR agrees that such part of the Work is substantially complete, CONTRACTOR will certify to Owner's Representative that such part of the Work is substantially complete and request Owner's Representative to issue a notice specifying what

portion of the Work is substantially complete for the purpose of payment and what Work remains to be done on the portion being accepted. CONTRACTOR at any time may notify Owner's Representative that CONTRACTOR considers any such part of the Work ready for its intended use and substantially complete and request Owner's Representative to issue a notice specifying what portion of the Work is partially completed for the purpose of payment and what Work remains to be done on the portion being accepted. The provisions of paragraphs 14.7.1 and 14.7.2 will apply with respect to the notice specifying what portion of the Work is partially completed for the purpose of payment and what Work remains to be done on the portion being accepted."

14.11 Final Payment and Acceptance: *Add the following to paragraph 14.11.1*:

If the sole remaining, unfinished item of the Work is revegetation or other permanent erosion control, including, if applicable, tree mitigation, (collectively, the "revegetation"), the CONTRACTOR may execute a zero-cost "Revegetation Change Order" for such Work and post fiscal security acceptable to Owner to ensure completion of the revegetation.

The fiscal security will be a bond, letter of credit, or cash escrow in a form promulgated by OWNER and posted with OWNER's Watershed Protection Department.

Upon receipt of the executed Revegetation Change Order and fiscal security, the Owner's Representative will issue a conditional letter of final acceptance to the CONTRACTOR for the Work, excluding the revegetation, which establishes the Final Completion Date for that Work and initiates the one year warranty period.

This revegetation must be accomplished within 120 Calendar Days of the date of Final Completion of the balance of the Work or such other stipulated time for completion directed in the Change Order. When the revegetation has been established, OWNER will inspect for final acceptance of that portion of the Work and, as applicable, initiate the one year warranty period for that Work.

If the revegetation is not completed within 120 Calendar Days or such other time set forth in the Change Order, the OWNER, at its option, may complete the Work using the posted fiscal security.

END

WARRANTY ITEM NO. _____ (PROJECT NAME)

The General Conditions of the Contract require that Warranty Defects be corrected within 7 days after written notice is received.

TO: _____
contractor name address / telephone / fax / email

ATTENTION OF: _____

FROM: _____
project manager name / address / telephone / fax / email

PROJECT: _____
name / location / CIP ID number

END OF ONE YEAR WARRANTY:_____

SUBJECT:_____
[ ] If checked, the damage requires immediate attention. The Contractor has been called.
[ ] If checked, the Consultant has been asked to consult with the Contractor on the problem.

PLEASE CORRECT OR REPAIR THE FOLLOWING ITEM(S):

DATE OF REQUEST_____ **SIGNATURE** _____
Project Manager

xc:
[ ] _____Phone No._____
[ ] _____Phone No._____
[ ] _____Phone No._____
[ ] _____Phone No._____

RESPONSE FROM CONTRACTOR: DATE CORRECTION WAS MADE:_____

The Contractor must endeavor to correct the defect within 7 calendar days after written notice is given. If the defect cannot be corrected in that time, Contractor shall provide a written explanation to the Owner's Representative describing the repairs needed and the time required to complete the repairs.

Description of corrections made:

DATE OF REPLY_____SIGNATURE_____
When the repair is complete, the contractor should return a copy to each of the following:
[ ] _____Phone No._____
[ ] _____Phone No._____
[ ] _____Phone No._____
[ ] _____Phone No._____
END

WAGE RATES AND PAYROLL REPORTING
Section 00830

1. PAYMENT

1.1 Classification Definitions, Building and Heavy and Highway

1.1.1 Definitions for Building Construction and Heavy and Highway classifications shall conform to the current "Occupational Information Network (O*NET)" as approved by the U.S. Department of Labor. For interpretive guidance, the Core Task list in O*NET will be used to make prevailing wage determinations. Final classification of workers will be made by the OWNER.

1.2 Minimum Wages

1.2.1 Workers on Project shall be paid not less than wage rates, including fringe benefits, as published by the Department of Labor (DOL) or the $15.00 minimum wage required by City of Austin Ordinance No. 20160324-015, whichever is higher. The Total Minimum Wage required can be met using any combination of cash and non-cash qualified fringe benefits provided the cash component meets or exceeds the $15.00 minimum wage required.

1.2.2 Such wage rates shall be used throughout the Contract. If a classification is to be used, which is not listed in the attached wage rates, CONTRACTOR shall submit to OWNER rates and classification proposed for use, for approval, prior to performance of the Work.

1.2.3 All laborers and mechanics working upon the Work for this Project shall be paid unconditionally and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by Secretary of Labor under the Copeland Act, Title 29 CFR, Part 3) full wages accrued and when due, computed at rates not less than wage rates bound herein pertaining to type of Work being performed. When Work is of such a nature that both Building and Heavy and Highway wage scales are incorporated into contract, CONTRACTOR shall pay wage rates to mechanics or laborers performing Work in more than one classification at the rate indicated for each classification for time actually worked as determined by area practice applicable to type (Site Construction Crafts or Building Construction Crafts) of Work being performed without regards to skill. Salaried specialists (project superintendent and administrative personnel only) in the permanent employment of CONTRACTOR do not fall under any Wage Classification. A supervisor/foreman who is not exempt under 29 CFR Part 541 and who spends more than a substantial amount of time (20 percent) in a given workweek as a laborer or mechanic must be paid the applicable Wage Rate for the classification of work performed for all hours engaged in such work as a laborer or mechanic.

1.2.4 Wage rates shall be posted by CONTRACTOR at site(s) of Work in prominent, easily accessible places where they can be seen by all workers. The following shall also be posted by the CONTRACTOR: City of Austin wage contact posters (English and Spanish), City of Austin Equal Employment Opportunity posters (English and Spanish), Workers' Compensation Notice (English and Spanish), Texas Payday Law (English and Spanish), City Rest Break Ordinance

(English and Spanish), City of Austin Non-Discrimination Statement (related to Title VI of the Civil Rights Act), and Federal Notices, as appropriate.

1.3 Overtime Requirements

1.3.1 No CONTRACTOR, Subcontractor, or Sub-subcontractor contracting for any part of contract Work which may require or involve the employment of laborers or mechanics shall require or permit any laborer or mechanic in any workweek in which he is employed on such Work, to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times their basic rate of pay for all hours in excess of forty hours in such workweek.

1.3.2 Overtime wages must be calculated using the Adjusted Wage Rate specified in the Wage Rate Determination or the actual basic rate of pay, whichever is higher.

2. APPRENTICES

2.1 Locally and Federally Funded Projects

2.1.1 The terms journeyman and apprentice apply to both union and independent workers, and are not intended to imply that these positions are union workers only.

2.1.2 Apprentices and Trainees will be permitted to work as such only when they are registered, individually, under a bonafide Apprenticeship or Trainee program registered with the Bureau of Apprenticeship and Training, United States Department of Labor. The allowable ratio of Apprentices or Trainees to journeymen in any craft classification shall not be greater than the ratio permitted to CONTRACTOR as stated in the registered apprenticeship program standards. Any employee listed on a payroll at an Apprentice or Trainee wage rate, who is not registered as above, shall be paid the wage rate provided in Contract for Work employee actually performed. CONTRACTOR, Subcontractor, or Subsubcontractor shall furnish to OWNER written evidence of registration of his program for Apprentices and Trainees as well as of the appropriate ratios and wage rates, for the area of construction prior to using any Apprentices or Trainees on this Contract.

3. WITHHOLDING PAYMENTS

3.1 OWNER may withhold or cause to be withheld from CONTRACTOR as much of the accrued payments as necessary to pay laborers and mechanics employed by CONTRACTOR, Subcontractors, or Sub-subcontractors the amount of wages required to comply with the Contract. In the event of nonpayment of wages to laborers or mechanics working on the site of the Work of this Contract, OWNER may, after Written Notice to CONTRACTOR, take such action as may be necessary to cause suspension of any further payments or advance of funds to CONTRACTOR until such violations have ceased and until restitution has been made. Payments may also be withheld if CONTRACTOR fails to maintain weekly payroll reports or fails to provide copies in a timely manner upon request of Owner.

4. PAYROLLS

4.1 CONTRACTOR shall keep records showing:

4.1.1 The name, address and occupation of each worker employed by the CONTRACTOR or subcontractor(s) in the construction of the public work.

4.1.2 The actual per diem wages paid to each worker

4.1.3 Employee Certification. CONTRACTOR, all levels of Subcontractors shall identify in writing, the classification agreed to by all laborers and mechanics employed by them in the execution of the Contract, and pay not less than rates specified in the attached Wage Rate Determination(s). Contractor shall prepare a completed form for the signature of Employee and a witness shall sign the form in the presence of Employee. If work performed by worker is different than the trade classification agreed upon, the worker shall be paid for that work no less than the minimum prevailing wage for that specified trade.

4.1.4 Payroll Deduction Authorization Form. CONTRACTOR, Subcontractor, and Sub subcontractor shall prepare for employee signature a payroll deduction authorization form to identify all payroll deductions excluding those required by statute, such as federal income taxes, Medicare and social security.

4.2 The record shall be open at all reasonable hours to inspection by the officers and agents of the Owner as requested. CONTRACTOR will be responsible to provide copies of records as requested by the Owner within two (2) working days. Payrolls relating to this Work shall be maintained during term of Contract and preserved for a period of three (3) years thereafter by CONTRACTOR for all laborers and mechanics working on the Work.

4.3 A Statement of Compliance, a letter signed and dated by party responsible for supervising the payment of persons employed by CONTRACTOR or subcontractor shall accompany payrolls required by Owner. The Statement of Compliance letter shall identify but is not limited to:

4.3.1 Name of signatory party and title

4.3.2 Name of project, payroll period and

4.3.3 Name of CONTRACTOR or Subcontractor

4.4 The signed letter attests that the payroll complies with 29CFR issued by the Secretary of Labor.

4.5 Federal Funding. In the event that federal funding is used:

4.5.1 Contractor and all levels of Subcontractors shall submit weekly certified payroll reports and signed wage compliance statements to the Owner's designated office no later than seven (7) calendar days after the scheduled payday.

4.5.2 Contractors and all levels of Subcontractors shall pay all "mechanics and laborers" not less often than once per week, for work performed the previous week.

4.5.3 Submit to the Owner's designated office Standard Form 1413, Statement and Acknowledgement, from each subcontractor prior to the subcontractor performing work on the project.

5. NONCOMPLIANCE

5.1 According to Chapter 2258 Texas Government Code Title 10A, a CONTRACTOR or subcontractor(s) who violates this section shall pay to the political subdivision on whose behalf the contract is made, $60 for each worker employed for each calendar day or part of the day that the worker is paid less than the wage rates stipulated in the contract. A public body shall use any money collected under this section to offset the costs incurred in the administration of this chapter.

5.2 Confirmed Disciplinary action taken by CONTRACTOR against employees who provide information during an interview or investigation by the Owner on wages received, may result in suspension or debarment from consideration of award of City contracts.

6. AREA PRACTICE

6.1 Heavy and Highway Construction Rates shall be used on this Project, unless the Project consists primarily of Building Construction and Building Construction Rates are to be used.

6.1.1 Building Construction consists generally of all aspects of construction of buildings, which are sheltered enclosures with walk-in access for the purpose of housing persons, machinery, equipment or supplies, including without limitation the installation of utilities and equipment, both above and below grade level, as well as incidental demolition, grading, utilities, paving and other site work. Buildings need not be "habitable" to be classified as Building Construction and the installation of heavy machinery and/or equipment will not generally change a Building Construction project's classification.

6.1.2 The determination of Building Construction Wage Rates includes all construction trades and work necessary to complete a building, regardless of the number of contracts involved, so long as all such contracts are closely related in purpose, time and place.

6.2 For projects that involve both Building Construction and Heavy and Highway trades, the following classifications shall be used:

6.2.1 A multiple classification shall be used if Building Construction items are more than 20% of the Heavy and Highway project cost.

6.2.2 A multiple classification shall be used if Heavy and Highway Construction items are more than 20% of the Building Construction Project cost.

6.3 Split classifications/multiple wage rate schedules: When construction work requires that an employee perform work under multiple classifications or multiple wage scales, the employer must pay that worker (at least) the highest prevailing wage or the employer payroll records must accurately set forth the times spent performing the work of each classification and under each scale. For those projects that involve both Building Construction and Heavy and Highway trades, the Heavy and Highway wage rates may only be applied to workers when engaged in site work at least five (5) feet beyond the building.

7. TEXAS OPEN RECORDS ACT

7.1 Unless covered by an exception to mandatory disclosure under the Texas Public Information Act, Chapter 552, Texas Government Code, any and all documents submitted to the City of Austin become Public Records and are, therefore, subject to public disclosure.

Wage Rates for This Project Are Attached

END

WAGE RATE DETERMINATION

Heavy and Highway
County Name: TRAVIS

Wages based on DOL General Decision: TX170016 01/04/2019 TX19 and City of Austin Ordinance #20160324-015

DOL Rate column is for information only. The Total Minimum Wage Rate is derived from the Adjusted Wage Rate Required pursuant to City Ordinance, and can be met using any combination of cash and non-cash qualified fringe benefits, provided the cash component is at least $15.00/hour.

Classification	**DOL Rate** For info Only	**Adjusted Wage Rate Required** Pursuant to City Ordinance	**Total Minimum Wage Rate Required**
Agricultural Tractor Operator	$12.69	$15.00	$15.00
Asphalt Distributor Operator	$15.55	$15.55	$15.55
Asphalt Paving Machine Operator	$14.36	$15.00	$15.00
Asphalt Raker	$12.12	$15.00	$15.00
Boom Truck Operator	$18.36	$18.36	$18.36
Broom or Sweeper Operator	$11.04	$15.00	$15.00
Cement Mason/Concrete Finisher	$12.56	$15.00	$15.00
Concrete Pavement Finishing Machine Operator	$15.48	$15.48	$15.48
Crane, Hydraulic, 80 tons or less	$18.36	$18.36	$18.36
Crane, Lattice Boom, 80 tons or less	$15.87	$15.87	$15.87
Crane, Lattice Boom, over 80 tons	$19.38	$19.38	$19.38
Crawler Tractor	$15.67	$15.67	$15.67
Directional Drilling Locator	$11.67	$15.00	$15.00
Directional Drilling Operator	$17.24	$17.24	$17.24
Electrician	$26.35	$26.35	$26.35
Excavator 50,000 lbs. or less	$12.88	$15.00	$15.00
Excavator, over 50,000 lbs.	$17.71	$17.71	$17.71
Flagger	$10.60	$15.00	$15.00
Form Builder/Form Setter - Paving & Curb	$12.94	$15.00	$15.00
Form Builder/Form Setter - Structures	$12.87	$15.00	$15.00
Foundation Drill Operator, Truck Mounted	$16.93	$16.93	$16.93
Front End Loader Operator, 3CY or less	$13.04	$15.00	$15.00
Front End Loader, over 3CY	$13.21	$15.00	$15.00

Laborer, Common	$10.60	$15.00	$15.00
Laborer, Utility	$12.27	$15.00	$15.00
Loader/Backhoe Operator	$14.12	$15.00	$15.00
Mechanic	$17.10	$17.10	$17.10
Milling Machine	$14.18	$15.00	$15.00
Motor Grader Operator - Fine Grade	$18.51	$18.51	$18.51
Motor Grader Operator, Rough	$14.63	$15.00	$15.00
Painter - Structures	$18.34	$18.34	$18.34
Pavement Marking Machine Operator	$19.17	$19.17	$19.17
Pipelayer	$12.79	$15.00	$15.00
Reclaimer/Pulverizer	$12.88	$15.00	$15.00
Reinforcing Steel Setter	$14.00	$15.00	$15.00
Roller Operator, Asphalt	$12.78	$15.00	$15.00
Roller Operator, Other	$10.60	$15.00	$15.00
Scraper Operator	$12.27	$15.00	$15.00
Servicer	$14.51	$15.00	$15.00
Spreader Box Operator	$14.04	$15.00	$15.00
Structural Steel Worker	$19.29	$19.29	$19.29
Traffic Signal Installer/Light Pole Worker	$16.00	$16.00	$16.00
Trenching Machine Operator, Heavy	$18.48	$18.48	$18.48
Truck Driver Tandem Axle Semi-Trailer	$12.81	$15.00	$15.00
Truck Driver, Lowboy/Float	$15.66	$15.66	$15.66
Truck Driver, Single Axle	$11.79	$15.00	$15.00
Truck Driver, Off Road Hauler	$11.88	$15.00	$15.00
Truck Driver, Single or Tandem Axle Dump	$11.68	$15.00	$15.00
*Welders	$15.97	$15.97	$15.97
Work Zone Barricade Servicer	$11.85	$15.00	$15.00

The Wage Compliance information detailed below was excerpted from DOL General Decision TX170016 or other sources.

1. ADDITIONAL TRADE INFORMATION

Unlisted classifications needed for work not listed within the scope of the classifications listed may be added upon the advance approval of Contract Procurement. CONTRACTOR shall submit to City of Austin Contract Procurement the following: classification, a bona fide definition of work to be performed and a proposed wage with sample payrolls conforming to area practice **prior** to the start of the job for that type of work. Proposed trade may not be performed by any trade already listed.

2. WAGES

The Total Minimum Wage Rate may be met by any combination of cash wages and credible "bona fide" fringe benefits paid for by the employer. Overtime must be used in computing overtime pay. Wages must be calculated using the Total Minimum Wage Rate specified in the Wage Rate Determination or the actual basic rate of pay, whichever is higher.

City of Austin Ordinance No. 2016324-015 requires that construction workers are paid a minimum Wage of at least $15.00/hour. The cash portion of their compensation must meet or exceed this amount.

3. PROPER DESIGNATION OF TRADE

A work classification from the Prevailing Wage Poster for each worker must be made based on the actual type of work he/she performed on the job. In summary the work performed, not the "title" determines the correct worker classification and wage. Each worker must be paid no less than the adjusted wage rate on the wage decision for that classification **regardless** of his/her level of skill (exclusive of a bona fide apprentice currently registered in a DOL approved apprentice program - proof of individual registration must be supplied in advance to the City of Austin).

4. SPLIT CLASSIFICATION

If a firm has employees that perform work in more than one classification, it can pay the adjusted wage rates specified for each classification ONLY if it maintains accurate time records showing the amount of time spent in each classification. If accurate time records are not maintained, these employees must be paid the highest adjusted wage rate of all the classifications of work performed by each worker. Accurate time records tracking how many hours a worker performed the work of one trade and then switched to another trade must be accounted for on a daily basis and reflected on Employer Certified Payroll accordingly.

---

*WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

In the listing above, the "SU" designation means that rates listed under the identifier do not reflect collectively bargained wage and fringe benefit rates. Other designations indicate unions whose rates have been determined to be prevailing.

5. WAGE DETERMINATION APPEALS PROCESS

5.1 Has there been an initial decision in the matter? This can be:

- **.1** An existing published wage determination
- **.2** A survey underlying a wage determination
- **.3** A Wage and Hour Division letter setting forth a position on a wage determination

matter

.4 A conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in **.2** and **.3** should be followed.

5.2 With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determination
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W. Washington, DC 20210

5.3 If the answer to the question in **.1** is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W. Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

5.4 If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W. Washington, DC 20210

5.5 All decisions by the Administrative Review Board are final.

END

CONSTRUCTION TRAINING PROGRAM REQUIREMENTS

Section 00840

The **City of Austin Construction Training Program (the "Program")** is intended to train workers on City of Austin's construction projects in order to develop a pool of qualified, ready-to-work skilled and semi-skilled construction workers. This training commitment is not intended and shall not be used to discriminate against any applicant.

Training Requirement. Establishment of the Construction Training Requirement for each project will be based on project scope, dollar amount, and opportunities available to achieve the trainingrequirements. The requirements will be established either prior to solicitation, or during contract negotiations, using the criteria in Charts A and B. Program requirements will be subject to availability of Trainees and Graduates.

Chart A - Evaluation Criteria
1. Material cost vs labor cost 2. Scope of work 3. Schedule of values (a comprehensive list of work for a particular project) 4. Project duration and schedule 5. Unique aspects of the project 6. Available training programs for the specific training plan 7. Workforce determined by the number of workers that will be on the project enough days to establish a training program.

Chart B – Construction Training Requirements	
Estimated Construction Cost	**Apprentice/ On-the-Job Training (OJT) /Construction Ready (CR) Trainee Requirements**
$500K to $2.5M	2 – Construction Ready Trainees*
Over $2.5M to $5M	4 - Construction Ready Trainees*
Over $5M to $10M	6 - Construction Ready Trainees*
Over $10M (Significant Budget)	OJT/Apprentice/Graduate/Trainee Minimum 15%

*These requirements may also be satisfied by workers enrolled in or graduated from DOL registered/approved training programs.

1. **DEFINITIONS**

1.1 *Capital Contracting Office (CCO)* – The City of Austin's Office responsible for administering the Construction Training Program

1.2 *City's Approved Minimum Wage Rate* – a minimum wage rate established by the City of Austin for workers performing construction activities on City of Austin contracts

1.3 *Construction-Ready Trainee* - a graduate or current trainee of a Pipeline training program, enrollee or graduate of a DOL-registered Apprenticeship Program, enrollee or graduate of a DOL-approved Training Program, and/or an enrollee or graduate of a DOL-certified Bilingual Training Program.

1.4 *Pipeline* - group of organizations that provide pre-employment, pre-apprentice, or apprentice readiness training related to construction

1.5 *Training Plan:* a plan identifying how a contractor intends to meet its training requirement, subject to OWNER's review and approval

1.6 *Construction Training Program Reporting Form* – a form provided by the OWNER which documents the contractor's training activities and/or hours worked for each trainee

2. **TRAINING REQUIREMENT**

2.1 The Construction Ready Trainee requirement for this project is four (4).

3. **CONTRACTOR'S RESPONSIBILITIES**

3.1 Prior to the execution of the contract, the CONTRACTOR shall provide a Training Plan for OWNER's approval, specifying how the CONTRACTOR intends to satisfy the contract requirement. The CONTRACTOR will have fulfilled its responsibilities under Section 00840 of the contract by having complied with the CONTRACTOR's Training Plan approved by the OWNER.

3.2 In the event that a CONTRACTOR subcontracts a portion of the contract work, CONTRACTOR shall determine if the requirements of the program will be assumed by the subcontractor(s). The CONTRACTOR should ensure that this training provision is made applicable to such subcontract; however, the CONTRACTOR shall retain the responsibility for meeting the training requirements imposed by this provision.

3.3 Trainee must be paid at least the City's Approved Minimum Wage Rate.

3.4 OWNER will provide a list of available Pipeline organizations. The CONTRACTOR shall contact those Pipeline organizations as needed in order to recruit workers for the program.

3.5 The CONTRACTOR shall submit a Construction Training Program Reporting Form to CCO for each trainee. This shall indicate the number of hours worked for the previous month. If a trainee is terminated or resigns, the CONTRACTOR is required to make a reasonable effort to replace the trainee within 30 calendar days.

3.6 Prior to a worker performing work on the project, the CONTRACTOR must submit to CCO a completed Employee Certification Form for each Trainee.

3.7 **CONTRACTOR's Reasonable Efforts to Comply.** The CONTRACTOR will be responsible for demonstrating the steps taken to meet the trainee requirement. If CONTRACTOR has fewer trainees employed on the project than specified in the Training Plan, the CONTRACTOR must submit evidence of recruitment efforts, including:

3.7.1 contacts made to OWNER for a current list of approved training providers
3.7.2 log of applicants contacted
3.7.3 log of training organizations contacted
3.7.4 documented outreach efforts made to all available training organizations (per current OWNER list) to satisfy the requirement
3.7.5 documentation of CONTRACTOR's recruitment efforts performed until program requirements are met or project is complete as part of the Construction Training Program Reporting Form

4. **NON-COMPLIANCE**

4.1 Lack of demonstrated reasonable effort to comply with the Construction Training Program may be considered a breach of contract.

Notice to Bidders: *This form, Addendum, Section 00900, is included for your information only. If an actual Addendum is issued for this project, the format shown below will be used. Additionally, issued addenda will be bound at the beginning of the Project Manual following the Table of Contents at the time of contract execution.*

ADDENDUM NO. _____

Date _____, _____

City of Austin

Project Name _____

C.I.P. No. _____ IFB No.: _____

This Addendum forms a part of the Contract and corrects or modifies original Bid Documents, dated _____, ____ (*first advertisement date)*. **Acknowledge receipt of this addendum in space provided on bid form.** Failure to do so may subject bidder to disqualification.

A. Project Manual Revisions:

B. Drawing Revisions:

This addendum consists of ____ page(s)/sheet(s).

_____
Approved by OWNER

_____
Approved by ENGINEER/ARCHITECT (as applicable per license requirements)

END

SAMPLE

The Work of this Contract includes sustainability requirements as shown in the Division 1 Sections 01352 and/or 01505 and all other applicable specification sections. It is the intent of the Owner to work in partnership with the Contractor in implementing sustainable construction practices to the greatest extent possible.

PART 1 - GENERAL

1.1 Related Documents:

Drawings and general provisions of Contract, including General Conditions, Section 00700, and Supplemental General Conditions, Section 00810, and Division 1 requirements.

1.2 DESCRIPTION OF WORK

1.21 Scope of Work

A. This section describes the Project in general and provides an overview of the extent of the Work to be performed by the CONTRACTOR. Detailed requirements and extent of Work is stated in the applicable Specification Sections and shown on the Drawings. CONTRACTOR shall, except as otherwise specifically stated herein or in any applicable part of these Contract Documents, provide and pay for all labor, materials, equipment, tools, construction equipment, and other facilities and services necessary for proper execution, testing, and completion of the Work.

B. Any part or item of the Work which is reasonably implied or normally required to make the installation satisfactorily operable shall be performed by the CONTRACTOR and the expense thereof shall be included in the applicable unit prices or lump sum prices bid for the Work. It is the intent of these Specifications to provide the OWNER with the complete system. All miscellaneous appurtenances and other items of Work that are incidental to meeting the intent of the Specifications shall be considered as having been included in the applicable unit prices or lump sum prices bid for the Work even though these appurtenances and items may not be specifically called for in the Bid Documents.

C. The Work shall include furnishing all tools, labor, materials, equipment, and miscellaneous items necessary for the complete construction of approximately 8,085 linear feet of 8-inch water main and 5,427 LF of 8-inch wastewater lines.

1.22 Location of Project

A. The Project location is generally bounded by 53rd Street on the north, IH-35 & Harmon Avenue on the east, E. 48th Street on the south, and Airport Blvd. on the west. The project location/route is shown on the Drawings.

1.23 Contractor's Responsibilities

A. Execute all Work, including excavation, installing pipe, backfill, miscellaneous concrete and testing. The Work of this Contract is specified in the City of Austin Standard Specifications, Special Provisions and Special Specifications listed in the Table of Contents.

B. Secure all construction-related permits, other than those provided by OWNER as described in paragraph 6.6 of Section 00810, Supplemental General Conditions, and pay for the same.

C. Arrange for the necessary temporary water and electric service and pay for these services and all water and electricity consumed during the construction Work.

D. Provide adequate temporary sanitary facilities.

1.24 Easements and Rights-Of-Way

CONTRACTOR shall confine his construction operations within the limits indicated on the Drawings, and shall use due care in placing construction tools, equipment, excavated materials, and pipeline materials and supplies so as to cause the least possible damage to property and interference with traffic. If the CONTRACTOR requires additional easement for his operations, the CONTRACTOR is solely responsible for acquisition and maintenance of the easement. No additional compensation will be provided by the OWNER.

A. Easements - Easements across private property are indicated on the Drawings. CONTRACTOR shall set stakes to mark the boundaries of construction easement across private property. The stakes shall be protected and maintained until completion of construction and cleanup.

B. Rights-of-Way - Permits for Work in rights-of-way shall be obtained by the CONTRACTOR. All Work performed and all operations of CONTRACTOR, his employees, or subcontractors, within the limits of railroad and highway rights-of-way, shall be in conformity with the requirements and be under the control (through OWNER) of the railroad or highway authority owning, or having jurisdiction over and control of, the right-of-way in each case.

1.25 Operation of Existing Facilities

Existing water and wastewater facilities shall be kept in continuous operation throughout the construction period. No interruption will be permitted which adversely affects the degree of service provided. Provided permission is obtained from OWNER in advance, portions of the existing facilities may be taken out of service for short periods corresponding with periods of minimum service demands.

CONTRACTOR shall provide temporary facilities and make temporary modifications as necessary to keep the existing facilities in operation during the construction period.

1.26 Connections to Existing Facilities

Unless otherwise specified or indicated, CONTRACTOR shall make all necessary connections to existing facilities including structures, drain lines, and utilities. In each case, CONTRACTOR shall receive permission from OWNER or the owning utility prior to undertaking connections. CONTRACTOR shall protect facilities against deleterious substances and damage.

Connections to existing facilities which are in service shall be thoroughly planned in advance, and all required equipment, materials and labor shall be on hand at the time of undertaking the connection. Work shall proceed continuously (around the clock) if necessary to complete

connections in the minimum time. Operation of valves or other appurtenances on existing utilities, when required, shall be by or under the direct supervision of the owning utility.

1.27 Unfavorable Construction Conditions

No portion of the Work shall be constructed under conditions which adversely affect the quality or efficiency thereof, unless special means or precautions are taken by CONTRACTOR to perform the Work in a proper and satisfactory manner.

END

GEOTECHNICAL ACKNOWLEDGEMENT: The CONTRACTOR has read and understands the Geotechnical Report (GR), the Geotechnical Data Report, the Reflection Survey Report, and all other geological and geotechnical information and data as provided in the Contract Documents, including all Addenda. The CONTRACTOR acknowledges and agrees that the GR represents the contractual statement of the subsurface conditions reasonably anticipated to be encountered during construction. The GR will be used to evaluate whether subsurface conditions differ materially from those indicated in the GR.

Signatures

CONTRACTOR agrees that this Work Assignment is a Contract Document and that work performed and payments made pursuant to this Work Assignment shall be subject to the terms and conditions of all other Contract Documents for the Contract referenced above, unless otherwise noted. The CONTRACTOR shall be paid for work described in this Work Assignment, in whole or in part, based on the unit/unit costs as provided in the Bid Form, Section 00300-IDIQ and all Change Orders.

The undersigned, by their signature, represents that they are submitting a binding offer and are authorized to bind the respondent to fully comply with the contract documents contained herein.

CONTRACTOR	Signature/Title:	Date:

Notice to Proceed

When executed by the OWNER and delivered to the CONTRACTOR, the CONTRACTOR is authorized to proceed with Work as described in this Work Assignment, for the amount indicated above, in accordance with the contract referenced above and incorporated herein.

Project Manager	Signature:	Date:
Capital Contracting Office	Signature:	Date:
Inspector	Signature:	Date:
Inspector Supervisor *(required when changes are made to previous Work Assignment)*	Signature:	Date:

Capital Contracting Office

Subcontractor Utilization Form

Contract Development and Administration Division

Project Manager _____ / **Contract Number** _____

Project Location: _____ **Assignment Number** _____

Date: _____ **Submitted by:** _____ **Firm:** _____

Firm	Type	Description of Work	Amount $
<Your Firm Here>		<Brief Description of work to be performed>	$0.00
<Subcontractor 1>		<Brief Description of work to be performed>	$0.00
<Subcontractor 2>		<Brief Description of work to be performed>	$0.00
<Subcontractor 3>		<Brief Description of work to be performed>	$0.00
<Subcontractor 4>		<Brief Description of work to be performed>	$0.00
<Subcontractor 5>		<Brief Description of work to be performed>	$0.00
<Subcontractor 6>		<Brief Description of work to be performed>	$0.00
<Subcontractor 7>		<Brief Description of work to be performed>	$0.00
<Subcontractor 8>		<Brief Description of work to be performed>	$0.00
<Subcontractor 9>		<Brief Description of work to be performed>	$0.00
<Subcontractor 10>		<Brief Description of work to be performed>	$0.00
		TOTAL	**$0.00**

MBE/WBE PARTICIPATION

Please calculate participation percentages for each category, based upon the total dollar amount for certified firms in the specified category divided by the Total Amount of the assignment

	Non - Certified	African American	Hispanic	/ Native American		WBE
This Assignment	***0.00%***	***0.00%***	***0.00%***	***0.00%***		***0.00%***
Compliance Plan	**0.00%**	**0.00%**	**0.00%**	**0.00%**		**0.00%**

See next page for approval signatures

Please provide an explanation for any categories where participation for this assignment is less than the approved Compliance Plan percentages:

I certify that the information listed above has been reviewed and is accurate to the best of my knowledge.

Firm Representative _____ **Date** _____

FOR COA USE ONLY
I have reviewed the Contractor utilization and MBE/WBE participation for this assignment. A copy of this form will be forwarded to the appropriate SMBR Representative

Project Manager: _____ **Date**

PART 1 – GENERAL

1.1 RELATED DOCUMENTS

Applicable portions of the Project Manual including but not limited to the Drawings and Specifications.

1.2 SUMMARY

This Section includes administrative and procedural requirements governing allowances.

Definition:

Allowances. "'Allowance' is defined as "a not-to-be-exceeded amount", either individually or in the aggregate, which is established between the Owner and the CONTRACTOR as part of the bid documents when the precise scope of a particular line item(s) has not been defined to a level which is adequate for the CONTRACTOR to provide a definitive line item pricing for that particular scope of Work.

1.3 COORDINATION

At the earliest practical date after award of the Contract, the Contractor shall advise Owner of the date when final selection and purchase of each product or Work described by an Allowance must be completed to avoid delaying the Work.

Coordinate Allowance items with other portions of the Work. Furnish templates as required to coordinate installation.

1.4 PROCEDURES

Submit cost proposals for purchase of products or work included in Allowances in the form specified for Change Orders.

Coordinate and process submittals for Allowance items in accordance with Section 01300 as for other portions of the Work.

The use of any Allowances by the CONTRACTOR will be subject to the Owner's sole approval and it is the Owner's intent to minimize the use of Allowances to the fullest extent possible.

For any Allowances which the Owner allows the CONTRACTOR to use, the following rules shall apply: (i) the Allowance shall cover the cost to the CONTRACTOR of the cost of Work, as defined in the Agreement and the CONTRACTOR's portion of overhead and profit associated with the stated Allowance; and (iii) upon completion of the portion of the Work subject to an Allowance, the Contract Amount for that portion of the Work will be adjusted based upon the approved actual Cost of the Work, including the proportionate overhead and profit, provided however that the total amount of payments under the Allowances will not exceed the approved aggregate amount of the Allowances.

PART 2 – PRODUCTS

NOT USED

PART 3 – EXECUTION

3.1 SCHEDULE OF ALLOWANCES

Allowance No. 1 – Contaminated Soil and Water Removal $20,000

The allowance shall be used to remove contaminated soil and water encounter during construction as defined and outlined in Special Specification SS4150

3.2 PAYMENT

Once the cost proposal for the Allowance has been incorporated into the Contract by Change Order, Payment for the Allowance will be based upon either the unit prices or a schedule of values provided with the proposal and incorporated in the Change Order.

END

1. CONTRACTOR shall perform all layout work to transfer all controls for grades, lines, levels and measurements from a minimum of two reference points provided by OWNER. All survey work will be performed under the direct supervision of a Texas Registered Professional Land Surveyor (RPLS).

2. Within 5 work days of the Notice To Proceed date, or within 10 Working Days of initiating work based on the approved Schedule in a new area of the Project, the CONTRACTOR shall survey and stake the locations of all proposed improvements behind the curb and within the ROW (examples: manholes, storm inlets, fire hydrants, etc.), or any other improvements identified by the OWNER'S REPRESENTATIVE, for the purpose of identifying the nature and location of these improvements to the adjacent property owner(s). The OWNER'S REPRESENTATIVE will identify to the CONTRACTOR the improvements to be staked.

3. OWNER will not stake for construction and will not be on site for survey layout activities, except to perform quality control checks.

4. CONTRACTOR shall be required to set elevation hubs (blue tops) for subgrade and base course on centerline, at quarter points and curb lines or edge of pavement at intervals not exceeding 50 feet.

5. The construction plans will include horizontal and vertical control points. References to approved COA benchmarks used in establishing controls on the drawings will be provided by the Owner's E/A. In addition, on building projects and/or projects not built within an existing public ROW, a boundary survey will be supplied together with a legal description of the property and all easements where Work will take place.

6. CONTRACTOR shall submit construction staking layout sheets sealed by a Professional Engineer or Registered Professional Land Surveyor registered in the State of Texas. CONTRACTOR shall use a qualification based selection process consistent with the Professional Services Procurement Act, Chapter 2254.004 of the Texas Government Code, when securing the services of a Professional Engineer or Registered Professional Land Surveyor. It is a violation of State Law to solicit bids for the services of a Professional Engineer of Registered Professional Land Surveyor.

   6.1 Any discrepancies found with the construction documents' dimensional layout will be corrected. CONTRACTOR shall assure that the Owner's Representative and E/A are notified so that the appropriate actions are taken to correct the Contract drawings.

   6.2 All Work shall be done to the lines, grades and elevations indicated on the drawings. Information concerning basic horizontal and vertical control points will be provided by the E/A, <**Hejl, Lee & Associates, Inc.>**. These points shall be used as the datum basis under this Contract.

   6.3 All work to transfer all controls for grades, lines, levels, layout and measurements shall be performed under the supervision of a Texas Registered Professional Land Surveyor, provided by the CONTRACTOR. Such work shall conform to the standards for construction staking in the most recent edition of the Texas Society of Professional Surveyors Manual of Practice for Land Surveying, Category 5, Sections 1-12 inclusive.

6.4 The **centerline and** offset centerline stakes will be set at no greater than fifty (50) foot intervals **and at points of alignment or grade changes**. References to lines and grades as established by the CONTRACTOR's surveyor shall be in reference to these stake lines. The CONTRACTOR is required to provide a sealed statement from his RPLS that the controls are correct and the site layout has been done by their professional staff.

6.5 The CONTRACTOR shall place grade stakes and submit construction staking layout sheets. The CONTRACTOR shall allow a minimum of ten (10) days after submission to the Owner's Representative for review of construction staking layout sheets. Construction staking layout sheets shall include, at a minimum, the information contained in the form included at the end of this section. No Work shall be performed without Owner's Representative review and return to CONTRACTOR of construction staking layout sheets. The Owner's Representative, E/A and the CONTRACTOR shall review the survey controls on the ground.

6.6 Prior to any excavation, the CONTRACTOR shall establish the elevation to top of ground at **centerline of the pipe as well as cuts and offset stakes** at the distance deemed appropriate by the CONTRACTOR to preclude disturbance of offset stakes during construction.

6.7 The CONTRACTOR shall furnish, without charge, experienced personnel and such calibrated survey equipment, tools, stakes, and other materials that the Owner's Representative may require in establishing or checking control points, or in checking survey, layout, and measurement work performed by the CONTRACTOR.

6.8 The CONTRACTOR shall keep the Owner's Representative informed in a reasonable time in advance of the times and places at which he wishes to do work, so that any checking deemed necessary by the OWNER may be done with minimum inconvenience to the E/A and minimum delay to the CONTRACTOR. Surveying will be coordinated between the Owner's Representative and CONTRACTOR in a manner convenient to both.

6.9 During layout, CONTRACTOR shall field verify the elevation and alignment of all tie-in points to existing infrastructure. This work shall be performed sufficiently in advance of construction so that any conflicts may be resolved without delay. Any work done without being properly located may be ordered removed and replaced at the CONTRACTOR's expense.

6.10 The CONTRACTOR shall carefully preserve all monuments, benchmarks, reference points, and stakes. In case of the destruction thereof, the CONTRACTOR shall bear the cost of replacement and shall be responsible for any mistake or loss of time that may be caused. Permanent monuments or benchmarks, which must be removed or disturbed, shall be protected until properly referenced for relocation. The CONTRACTOR shall furnish materials and assistance for the proper replacement of such monuments or benchmarks.

6.11 The CONTRACTOR shall satisfy himself before commencing work as to the meaning and correctness of all survey control stakes, marks, etc., and no claim will be entertained by the OWNER for or on account of any alleged inaccuracies, unless the CONTRACTOR notifies the OWNER in writing before commencing the affected Work.

7. As needed for necessary documentation of the work progress, the CONTRACTOR shall maintain and/or protect offset or survey staking for the duration of the project. Any

re-staking required to meet this requirement shall be done at the CONTRACTOR'S expense.

8. This item is subsidiary to the work as a whole.

See attached "Construction Staking Layout Sheet"

End

CONSTRUCTION STAKING LAYOUT SHEET

Project Name: _____ **Date:** _____
C.I.P. ID#: _____ **Instrument No.:** _____
Person Recording: _____ **Weather Conditions:** _____
Crew Members: _____
General Purpose & Scope of Survey: _____

STATION	B.S.	H.I.	F.S.	LEVEL LOOP ELEVATION	ROD READING	HUB ELEVATION AT STATION	(TARGET) (eg., pipe invert) ELEVATION	C - CUT OR F - FILL	% GRADE	NOTES: INDICATE WHETHER CENTERLINE HUB OR _____ FT. OFFSET HUB

DEFINITIONS

General: Basic Contract definitions are included in the General Conditions, Section 00700 included herein.

Approved: The term approved, when used in conjunction with the Owner's Representative's action on the CONTRACTOR'S submittals, applications, and requests, is limited to the Owner's Representative's duties and responsibilities as stated in the Conditions of the Contract. A stamp reading "No Exceptions Taken" shall have the same intent as "Approved".

Furnish: The term furnish means supply and deliver to the Project site, ready for unloading, unpacking, assembly, installation, and similar operations.

Indicated: The term indicated refers to graphic representations, notes, or schedules on the Drawings, or other paragraphs or schedules in the Specifications, and similar requirements in the Contract Documents. Terms such as shown, noted, scheduled, and specified are used to help the reader locate the reference. There is no limitation on location.

Install: The term install describes operations at the Project site including the actual unloading, unpacking, assembly, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.

Installer: An Installer is the CONTRACTOR or another entity engaged by the CONTRACTOR, either as an employee, subcontractor, or contractor of lower tier, to perform a particular construction activity, including installation, erection, application, and similar operations. Installers are required to be experienced in operations they are engaged to perform.

Project Site: The space available to the CONTRACTOR for performing construction activities either exclusively or in conjunction with others performing other work as part of the Project. The extent of the Project site is shown on the Drawings and may or may not be identical with the description of the land on which the Project is to be built.

Provide: The term provide means to furnish and install, complete and ready for the intended use.

Regulations: The term regulations includes laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, as well as rules, conventions, and agreements within the construction industry that control performance of the Work.

Trades: Using terms such as carpentry is not intended to imply that certain construction activities must be performed by accredited or unionized individuals of a corresponding generic name, such as carpenter. It also does not imply that requirements specified apply exclusively to trades persons of the corresponding generic name.

INDUSTRY STANDARDS

Applicability of Standards: Except where the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.

Publication Dates: Comply with the standards in effect as of the date of the Contract Documents.

Conflicting Requirements: Where compliance with two or more standards is specified and where the standards may establish different or conflicting requirements for minimum quantities or quality levels, refer to the Owner's Representative for a decision before proceeding.

Copies of Standards: Each entity engaged in construction on the Project is required to be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.

Abbreviations and Names: Trade association names, titles of general standards, and names and titles of government agencies are frequently abbreviated. Where such acronyms or abbreviations are used in the

Specifications or other Contract Documents, they mean the recognized name of the trade association, standards-generating organization, authority having jurisdiction, or other entity applicable to the context of the text provision. Refer to the "Encyclopedia of Associations," published by Gale Research Co., available in most libraries.

AA	Aluminum Association
AABC	Associated Air Balance Council
AAMA	American Architectural Manufacturer's Association
AAN	American Association of Nurserymen.
AASHTO	American Association of State Highway and Transportation Officials.
AATCC	American Association of Textile Chemists and Colorists
ACI	American Concrete Institute
ACIL	American Council of Independent Laboratories
ACPA	American Concrete Pipe Association
ADC	Air Diffusion Council
AFBMA	Anti-Friction Bearing Manufacturers Association
AGA	American Gas Association
AGC	Associated General Contractors of America
AGMA	American Gear Manufacturers Association
AHA	American Hardboard Association
AHAM	Association of Home Appliance Manufacturers
AI	Asphalt Institute
AIA	American Institute of Architects
AIHA	American Industrial Hygiene Association
AISC	American Institute of Steel Construction
AISI	American Iron and Steel Institute
AITC	American Institute of Timber Construction.
ALCA	Associated Landscape Contractors of America
ALI	Associated Laboratories, Inc.
ALSC	American Lumber Standards Committee
AMCA	Air Movement and Control Association
ANSI	American National Standards Institute.
AOAC	Association of Official Analytical Chemists

AOSA	Association of Official Seed Analysts
APA	American Plywood Association
API	American Petroleum Institute.
AREA	American Railroad Engineers Association
ARI	Air Conditioning and Refrigeration Institute
ARMA	Asphalt Roofing Manufacturers Association
ASA	Acoustical Society of America
ASA	American Standards Association.
ASC	Adhesive and Sealant Council
ASCE	American Society of Civil Engineers
ASHRAE	American Society of Heating, Refrigerating & Air Conditioning Engineers
ASME	American Society of Mechanical Engineers
ASPE	American Society of Plumbing Engineers
ASSE	American Society of Sanitary Engineering
ASTM	American Society for Testing and Materials.
AWCMA	American Window Covering Manufacturers Association
AWG	American Wire Gage
AWI	Architectural Woodwork Institute
AWPA	American Wood Preservers Association
AWPB	American Wood Preservers Bureau
AWPI	American Wood Preservers Institute
AWS	American Welding Society
AWWA	American Water Works Association
BHMA	Builders Hardware Manufacturers Association
BIA	Brick Institute of America
BIFMA	Business and Institutional Furniture Manufacturers Association
CAGI	Compressed Air and Gas Institute
CAUS	Color Association of the United States
CBM	Certified Ballast Manufacturers
CCC	Carpet Cushion Council

CDA	Copper Development Association
CE	Corps of Engineers
CFR	Code of Federal Regulations
CGA	Compressed Gas Association
CISCA	Ceiling and Interior Systems Construction Association
CISPI	Cast Iron Soil Pipe Institute
CPSC	Consumer Product Safety Commission
CRI	Carpet and Rug Institute
CRSI	Concrete Reinforcing Steel Institute
CS	Commercial Standard of NBS (U.S. Dept. of Commerce)
CTI	Ceramic Tile Institute
DFPA	Douglas Fir Plywood Association
DHI	Door and Hardware Institute
DLPA	Decorative Laminate Products Association
DOC	U.S. Department of Commerce
DOT	Department of Transportation
ECSA	Exchange Carriers Standards Association
EIA	Electronic Industries Association
EIMA	Exterior Insulation Manufacturers Association
EJMA	Expansion Joint Manufacturers Association
EPA	Environmental Protection Agency
FAA	Federal Aviation Administration
FCC	Federal Communications Commission
FGMA	Flat Glass Marketing Association
FHA	Federal Housing Administration
FM	Factory Mutual Research Organization
FS	Federal Specifications
FSC	Forest Stewardship Council
FTI	Facing Tile Institute
GA	Gypsum Association
GSA	General Services Administration

HEI	Heat Exchange Institute
HI	Hydronics Institute
H.I.	Hydraulic Institute
HMA	Hardwood Manufacturers Association
HPMA	Hardwood Plywood Manufacturers Association
IBD	Institute of Business Designers
ICEA	Insulated Cable Engineers Association, Inc.
IEEE	Institute of Electrical and Electronic Engineers, Inc.
IESNA	Illuminating Engineering Society of North American
IGCC	Insulating Glass Certification Council
ILI	Indiana Limestone Institute of America
IMSA	International Municipal Signal Association
IRI	Industrial Risk Insurers
ISA	Instrument Society of America
ITE	Institute of Transportation Engineers
LEED™	Leadership in Energy and Environmental Design
LIA	Lead Industries Association, Inc.
LPI	Lightning Protection Institute
MBMA	Metal Building Manufacturer's Association
MCAA	Mechanical Contractors Association of America
MFMA	Maple Flooring Manufacturers' Association
MIA	Marble Institute of America
ML/SFA	Metal Lath/Steel Framing Association
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry
MUTCD	Texas Department of Transportation Manual on Uniform Traffic Control Devices
NAAMM	National Association of Architectural Metal Manufacturers
NAIMA	North American Insulation Manufacturers Association
NAPA	National Asphalt Pavement Association
NBFU	National Board of Fire Underwriters

NBGQA	National Building Granite Quarries Association
NBS	National Bureau of Standards (U.S. Dept. of Commerce)
NCMA	National Concrete Masonry Association
NCRPM	National Council on Radiation Protection and Measurements
NCSPA	National Corrugated Steel Pipe Association
NEC	National Electrical Code (Published by NFPA)
NECA	National Electrical Contractors Association
NEII	National Elevator Industry, Inc.
NEMA	National Electrical Manufacturers Association
NETA	International Electrical Testing Association
N.F.P.A.	National Forest Products Association
NFPA	National Fire Protection Association
NHLA	National Hardwood Lumber Association
NIST	National Institute of Standards and Technology
NLGA	National Lumber Grades Authority
NOFMA	National Oak Flooring Manufacturers Association
NPA	National Particleboard Association
NPCA	National Paint and Coatings Association
NRCA	National Roofing Contractors Association
NWMA	National Woodwork Manufacturers Association
OSHA	Occupational Safety and Health Administration
PCA	Portland Cement Association
PCI	Precast/Prestressed Concrete Institute
PDI	Plumbing and Drainage Institute
PE	Professional Engineer
REA	Rural Electrification Administration
RFCI	Resilient Floor Covering Institute
RMA	Rubber Manufacturing Association
RPLS	Registered Professional Land Surveyor
SDI	Steel Deck Institute
S.D.I.	Steel Door Institute

SFPA	Southern Forest Products Association
SGCC	Safety Glazing Certification Council
SIGMA	Sealed Insulating Glass Manufacturers Association
SJI	Steel Joist Institute
SMACNA	Sheet Metal and Air Conditioning Contractors National Association
SPIB	Southern Pine Inspection Bureau
SPRI	Single Ply Roofing Institute
SSPC	Steel Structures Painting Council
SSPMA	Sump and Sewage Pump Manufacturers Association
SWI	Steel Window Institute
SWPA	Submersible Wastewater Pump Association
TCA	Tile Council of America
TEX TEST	TxDOT Laboratory Test
TIMA	Thermal Insulation Manufacturers Association
TPI	Truss Plate Institute
TxDOT	Texas Department of Transportation
UL	Underwriters Laboratory, Inc.
USDA	U. S. Department of Agriculture
USGBC	U. S. Green Building Council
USPS	U. S. Postal Service
WCLIB	West Coast Lumber Inspection Bureau
WCMA	Wallcovering Manufacturers Association
WIC	Woodwork Institute of California
WLPDIA	Western Lath, Plaster, Drywall Industries Association
WRI	Wire Reinforcement Institute
WSC	Water Systems Council
WSFI	Wood and Synthetic Flooring Institute
WWPA	Western Wood Products Association
W.W.P.A.	Woven Wire Products Association

END

STORM WATER POLLUTION PREVENTION PLAN (SWPPP)

The Storm Water Pollution Prevention Plan for this project is attached.

STORM WATER POLLUTION PREVENTION PLAN
FOR CONSTRUCTION ACTIVITIES

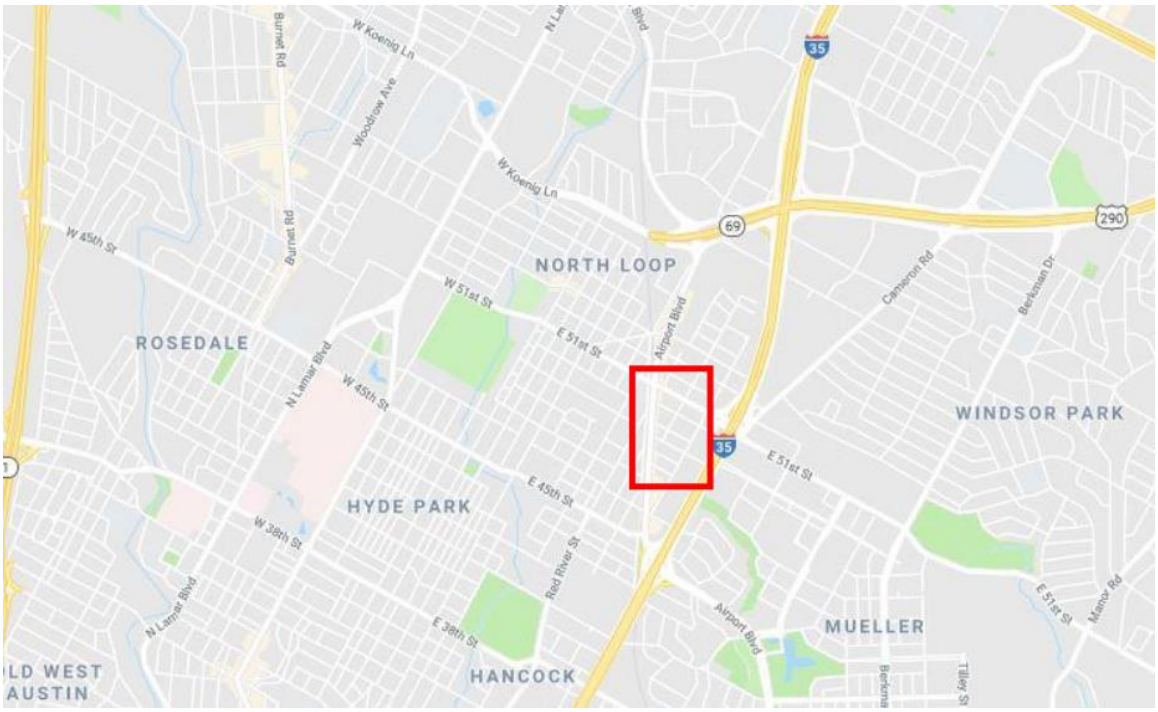

08/07/2019

PROJECT LOCATION
COA GRID K-25, K-26
MAPSCO #555-R&V

PROJECT NAME
Harmon Avenue Area
Water & Wastewater Renewal

SITE PLAN/DEVELOPMENT PERMIT NO.

PLAN DATE AUGUST 2019

Table of Contents

SECTION 1: SITE EVALUATION, ASSESSMENT, AND PLANNING
1.1 Project/Site Information
1.2 Contact Information/Responsible Parties
1.3 Soils, Slopes, Vegetation, and Current Drainage Patterns
1.4 Receiving Waters
1.5 Site Features and Sensitive Areas to be Protected
1.6 Endangered Species Certification
1.7 Maps and Photographs

SECTION 2: CONSTRUCTION ACTIVITIES AND SITE MANAGEMENT PRACTICES
2.1 Nature and Sequence of Construction Activity
2.2 Construction Site Estimates
2.3 Phasing and Construction Sequence Plan
2.4 Potential Sources of Pollution

SECTION 3: GRADING AND EROSION/SEDIMENT CONTROL BMPs
3.1 Minimize Disturbed Area and Protect Natural Features and Soil
3.2 Control Stormwater Flowing onto and through the Project
3.3 Stabilize Soils
3.4 Protect Slopes
3.5 Protect Storm Drain Inlets
3.6 Establish Perimeter Controls and Sediment Barriers
3.7 Retain Sediment On-Site
3.8 Establish Stabilized Construction Exits
3.9 Additional BMPs

SECTION 4: GOOD HOUSEKEEPING BMPs
4.1 Material Handling and Waste Management
4.2 Establish Proper Building Material Staging Areas
4.3 Designate Washout Areas
4.4 Establish Proper Equipment/Vehicle Fueling and Maintenance Practices
4.5 Control Equipment/Vehicle Washing
4.6 Spill Prevention and Control Plan
4.7 Any Additional BMPs
4.8 Allowable Non-Stormwater Discharge Management

SECTION 5: SELECTING POST-CONSTRUCTION BMPs

SECTION 6: INSPECTIONS
6.1 Inspections
6.2 Delegation of Authority
6.3 Corrective Action Log

SECTION 7: RECORDKEEPING AND TRAINING
7.1 Recordkeeping
7.2 Log of Changes to the SWPPP
7.3 Training

SECTION 8: PERMANENT STABILIZATION

SECTION 9: CERTIFICATION AND NOTIFICATION

SECTION 1: SITE EVALUATION, ASSESSMENT, AND PLANNING

1.1 Project/Site Information

Project/Site Name: HARMON AVENUE AREA WATER & WASTEWATER RENEWAL
Project Street/Location: Harmon Avenue from E 51st St to E 48th St
City: Austin State: Texas ZIP Code: 78751
County: Travis
City of Austin Permit Number (complete when assigned):
_____
City of Austin Case Manager (complete when assigned):
_____

TPDES project or permit tracking number*:

Latitude: Longitude:
30º 18' 32" N, 97 º 42' 47" W

Method for determining latitude/longitude:
____USGS topographic map (specify scale:_____) ____EPA Web site ____GPS
Other (please specify): Google Earth

Is the project located in Indian country? _____Yes __X__No
If yes, name of Reservation, or if not part of a Reservation, indicate "not applicable."

Is this project considered a federal facility? _____Yes ___X_No

TPDES project or permit tracking number*: _____
**(This is the unique identifying number assigned to your project by your permitting authority after you have applied for coverage under the appropriate Texas Pollutant Discharge Elimination System (TPDES) construction general permit.)*

1.2 Contact Information/Responsible Parties

Owner(s):
Austin Water Utility
City of Austin, Texas
P.O. Box 1088
Austin, Texas 78767

Operator(s)*: *Not applicable for City of Austin permit
N/A

Project Manager(s) or Site Supervisor(s):
Tomas Rodriguez, P.E., C.F.M.
City of Austin, Public Works Department
505 Barton Springs Rd., Suite 900
Austin, Texas 78704
Phone: (512) 974-9385

SWPPP Contact(s):
CAS Consulting and Services, Inc.
7908 Cameron Road
Austin, Texas 78754
Phone: (512) 836-2388
Fax: (512) 836-4515

This SWPPP was prepared by:
CAS Consulting and Services, Inc.
7908 Cameron Road
Austin, Texas 78754
Phone: (512) 836-2388
Fax: (512) 836-4515

Subcontractor(s)*: *Not applicable for City of Austin permit
N/A

Emergency 24-Hour Contact:
TBD

1.3 Soils, Slopes, Vegetation, and Current Drainage Patterns

Soil type(s): Lewisville silty clay

Slopes (describe current slopes and note any changes due to grading or fill activities): Slopes range from 0% to 2%

Drainage Patterns (describe current drainage patterns and note any changes dues to grading or fill activities):

Drainage is generally sheet flow and gutter flow with large drainage areas (>1 acre) feeding to curb cuts and then to storm sewer system. Drainage Patterns will be undisturbed as there are no grading or fill activities proposed.

Vegetation: No vegetation in roadways, mowed grassland with interspersed trees and shrubs between curb and ROW.

Other: N/A

1.4 Receiving Waters

Description of receiving waters: Runoff from the site flows to Boggy Creek (Segment 1428A) and then to Colorado River Segment 1428. There are no wetland areas on the site; none classified as US Army Corps of Engineers jurisdictional wetland and none classified as City of Austin jurisdictional wetlands.

Description of storm sewer systems: Roadways in the project area have curb and gutter to collect surface runoff and funnel it via curb cuts to underground storm sewers that terminate in concrete headwalls at nearby open channels.

Description of impaired waters or waters subject to TMDLs: N/A

Other: N/A

1.5 Site Features and Sensitive Areas to be Protected

Describe unique features that are to be preserved: N/A

Describe critical environmental features that are to be preserved: N/A
Describe measures to protect these features: N/A

1.6 Endangered Species Certification

Are endangered or threatened species and critical habitats on or near the project area?
_____Yes __**X**__No

Describe how this determination was made: N/A

If yes, describe the species and/or critical habitat: N/A

If yes, describe or refer to documentation that determines the likelihood of an impact on Identified species and/or habitat and the steps taken to address that impact. (Note, if species are on or near your project site, EPA strongly recommends that the site operator work closely with the appropriate field office of the U.S. Fish and Wildlife Service or National Marine Fisheries Service. For concerns related to state or tribal listing of species, please contact a state or tribal official.)

1.7 Maps and Photographs

See construction plan sheets.

SECTION 2: CONSTRUCTION ACTIVITIES AND SITE MANAGEMENT PRACTICES

2.1 Nature and Sequence of Construction Activity

Describe the general scope of the work for the project, major phases of construction, etc:

The project includes installing approximately 8,000 feet of water line and 5,400 feet of wastewater line. No portion of this project is located within the 100-year flood plain per Federal Emergency Management Agency Flood Insurance Rate Map Community Panel 48453CO465 J, dated January 6, 2016. Environmental and sedimentation controls will be installed and maintained by the contractor as required.

Sequence of Construction: 1. Install temporary erosion/sedimentation controls. 2. Install stabilized construction entrances. 3. Construct project improvements. 4. Restore and revegetate disturbed areas. 5. Remove temporary erosion/controls after revegetation is established.

What is the function of the construction activity?
___Residential___ Commercial__ _ Industrial___ Road Construction__X_ Linear Utility
____Other (please specify):
Estimated Project Start Date: July 2019
Estimated Project Completion Date: July 2020

2.2 Construction Site Estimates

The following are estimates of the construction site.

Total project area:	6.771	acres
Construction site area to be disturbed:	6.771	acres
Limits of construction:	6.771	acres
Percentage impervious area before construction:	70	%
Runoff coefficient before construction:	0.70	
Percentage impervious area after construction:	70	%
Runoff coefficient after construction:	0.70	

Cut/Fill Volumes per Phase: N/A

Demonstration of how spoils will be handled during construction:

Spoils will be stored in a designated temporary spoils area within the site. Silt fences will be installed down-gradient from the spoils area. Spoils will be hauled to a COA-approved landfill for permanent disposal.

2.3 Phasing and Construction Sequence Plan

No Phasing

2.4 Potential Sources of Pollution

Potential sources of sediment to stormwater runoff:
Potential sources of pollution which may affect the quality of storm water discharges from the construction site include silt and sediments from excavation and temporary spoils piles, oil leaking from construction equipment and litter from materials packaging opened on-site. To prevent pollution of the storm water discharges from the construction site, erosion/sedimentation controls have been specified in compliance with the City of Austin's Environmental Criteria Manual. Stabilized construction entrances will be installed to prevent trucks from tracking dirt onto the city streets. Inlet sediment traps will be installed as shown on the plans to capture sediment before it reaches the city storm sewer system. Silt fences will be installed down gradient of all surface construction areas to filter sheet flow runoff. Contractor will promptly remove any sediment that collects in the project area and repair any erosion controls that get damaged. Oil leaks will be immediately contained with absorbent materials. All disturbed areas will be revegetated upon completion of the pipe installation.

Potential pollutants and sources, other than sediment, to stormwater runoff: N/A

Trade Name Material	Stormwater Pollutants	Location

SECTION 3: GRADING AND EROSION/SEDIMENT CONTROL BMPs

3.1 Minimize Disturbed Area and Protect Natural Features and Soil

To prevent pollution of the storm water discharges from the construction site, erosion/sedimentation controls have been specified in compliance with the City of Austin's Environmental Criteria Manual. Stabilized construction entrances will be installed to prevent trucks from tracking dirt onto the city streets. Inlet sediment traps will be installed as shown on the plans to capture sediment before it reaches the city storm sewer system. Silt fences will be installed down gradient of all surface construction areas to filter sheet flow runoff. Contractor will promptly remove any sediment that collects in the project area and repair any erosion controls that get damaged.

All disturbed areas will be revegetated upon completion of the project improvements. Contractor shall water all seeded or sodded areas twice per week a minimum of 5 gallons of water per square yard to insure growth of vegetation. Watering shall continue until grass has reached a height of 1 ½" with 95% coverage and no bare patches greater than 16 s.f.

3.2 Control Stormwater Flowing onto and through the Project

Silt fence will be installed near the perimeter of all disturbed areas to intercept sediment and will remain in place until the disturbed are is permanently stabilized.

BMP Description:	***Silt Fence***
Installation Schedule:	***Prior to any site disturbance***
Maintenance and Inspection:	***Contractor***
Responsible Staff:	***Contractor***

3.3 Stabilize Soils: N/A

3.4 Protect Slopes: N/A

3.5 Protect Storm Drain Inlets:

Inlet filter dikes will be installed prior to any site disturbance to protect inlets from receiving stormwater from the sites.

BMP Description:	***Inlet Filter Dikes***
Installation Schedule:	***Prior to any site disturbance***
Maintenance and Inspection:	***Contractor***
Responsible Staff:	***Contractor***

3.6 Establish Perimeter Controls and Sediment Barriers

Silt fence will be installed near the perimeter of all disturbed areas to intercept sediment and will remain in place until the disturbed area is permanently stabilized.

BMP Description:	***Silt Fence***
Installation Schedule:	***Prior to any site disturbance***
Maintenance and Inspection:	***Contractor***
Responsible Staff:	***Contractor***

3.7 Retain Sediment On-Site: N/A

3.8 Establish Stabilized Construction Exits

A stabilized pad of crushed stone will be installed at all points of construction ingress and egress.

BMP Description:	***15'x50' Stabilized Construction Exits***
Installation Schedule:	***Prior to any site disturbance***
Maintenance and Inspection:	***Contractor***
Responsible Staff:	***Contractor***

3.9 Additional BMPs: N/A

SECTION 4: GOOD HOUSEKEEPING BMPs

An effort will be made to store only enough products required to do the job. All materials stored on-site will be stored in a neat, orderly manner in their appropriate containers and, if possible, in an enclosure. Products will be kept in their original containers with the original manufacturer's labels. Substances will not be mixed with one another unless recommended by the manufacturer. Whenever possible, all the product will be used before disposing of the container. Manufacturers' recommendations for proper use and disposal will be followed. The contractor will inspect daily to assure proper use and disposal of materials on-site. Contractor shall advise Owner immediately, verbally and in writing, of any fuel or toxic material spill and the actions taken to remedy the problem. Contractor is responsible for disposing fuels, materials and contaminated excavated materials in a legally approved manner. Contractor is responsible for complying with all applicable environmental laws. All waste materials will be collected and stored in a securely lidded metal dumpster. The dumpster will meet all local and state solid waste management regulations. All trash and construction debris from the site will be deposited in the dumpster and hauled to an approved landfill. No construction waste material will be buried on-site. All personnel will be instructed regarding the correct procedure for waste disposal. The contractor who manages the day-to-day site operations will be responsible for seeing that these procedures are followed. No hazardous waste is expected to be generated or encountered in this project. In the event that hazardous waste is encountered, the contractor will advise the Owner immediately. All hazardous waste materials will be disposed of in a manner specified by local or state regulation or by the manufacturer. The contractor who manages day-to-day site operations will be responsible for assuring that these practices are followed for any hazardous waste that is generated. Contractor will not aggravate any hazardous waste that is encountered. All sanitary waste will be regularly collected from the portable units by a licensed sanitary waste management contractor. The stabilized construction entrances are to be used by vehicles leaving the site to capture mud before it is tracked onto the existing streets. The paved streets adjacent to the site entrances will be cleaned (not flushed) as needed to remove any excess mud, dirt or rock tracked from the site. It shall be the contractor's continuous responsibility at all times, including nights, holidays and weekends until acceptance of the project by the City, to maintain the specified areas relatively free of dust by sprinkling in a manner what will cause the least inconvenience to the public.

4.1 Material Handling and Waste Management

Waste Materials - All trash and debris will be collected and stored in securely lidded dumpsters meeting all local and state solid waste management regulations prior to removal from site. The trash and debris will be hauled to an approved landfill site and no construction debris will be buried on site.

Sanitary Waste - Contractor is responsible for providing adequately maintained sanitary facilities.

Description

Building materials and other construction site wastes must be properly managed and disposed of to reduce the risk of pollution from materials such as surplus or refuse building materials or hazardous wastes. Practices such as trash disposal, recycling, proper material handling, and spill prevention and cleanup measures can reduce the potential for stormwater runoff to mobilize construction site wastes and contaminate surface or ground water.

Applicability

The proper management and disposal of wastes should be practiced at every construction site to reduce stormwater runoff. Use waste management practices to properly locate refuse piles, to cover materials that might be displaced by rainfall or stormwater runoff, and to prevent spills and leaks from hazardous materials that were improperly stored.

Siting and Design Considerations

Solid Wastes:

- Designate a waste collection area on the site that does not receive a substantial amount of runoff from upland areas and does not drain directly to a water body.
- Ensure that containers have lids so they can be covered before periods of rain, and keep containers in a covered area whenever possible.
- Schedule waste collection to prevent the containers from overfilling.
- Clean up spills immediately. For hazardous materials, follow cleanup instructions on the package. Use an absorbent material such as sawdust or kitty litter to contain the spill.
- During the demolition phase of construction, provide extra containers and schedule more frequent pickups.
- Collect, remove, and dispose of all construction site wastes at authorized disposal areas. Contact a local environmental agency to identify these disposal sites.

Hazardous Materials and Wastes:

- Consult with local waste management authorities about the requirements for disposing of hazardous materials.
- To prevent leaks, empty and clean hazardous waste containers before disposing of them.
- Never remove the original product label from the container because it contains important safety information. Follow the manufacturer's recommended method of disposal, which should be printed on the label.
- Never mix excess products when disposing of them, unless specifically recommended by the manufacturer.

To ensure the proper disposal of contaminated soils that have been exposed to and still contain hazardous substances, consult with state or local solid waste regulatory agencies or private firms. Some landfills might accept contaminated soils, but they require laboratory tests first.

Paint and dirt are often removed from surfaces by sandblasting. Sandblasting grits are the byproducts of this procedure and consist of the sand used and the paint and dirt particles that are removed from the surface. These materials are considered hazardous if they are removed from older structures because they are more likely to contain lead-, cadmium-, or chrome-based paints. To ensure proper disposal of sandblasting grits, contract with a licensed waste management or transport and disposal firm.

Pesticides and fertilizers:

- Follow all federal, state, and local regulations that apply to the use, handling, or disposal of pesticides and fertilizers.
- Do not handle the materials any more than necessary.

- Store pesticides and fertilizers in a dry, covered area.
- Construct berms or dikes to contain stored pesticides and fertilizers in case of spillage.
- Follow the recommended application rates and methods.
- Have equipment and absorbent materials available in storage and application areas to contain and clean up any spills that occur.

Petroleum Products:

- Store new and used petroleum products for vehicles in covered areas with berms or dikes in place to contain any spills.
- Immediately contain and clean up any spills with absorbent materials.
- Have equipment available in fuel storage areas and in vehicles to contain and clean up any spills that occur.

Detergents:

Phosphorous- and nitrogen-containing detergents are used in wash water for cleaning vehicles. Excesses of these nutrients can be a major source of water pollution. Use detergents only as recommended, and limit their use on the site. Do not dump wash water containing detergents into the storm drain system; direct it to a sanitary sewer or contain it so that it can be treated at a wastewater treatment plant.

Limitations

An effective waste management system requires training and signage to promote awareness of the hazards of improper storage, handling, and disposal of wastes. The only way to be sure that waste management practices are being followed is to be aware of worker habits and to inspect storage areas regularly. Extra management time may be required to ensure that all workers are following the proper procedures.

Maintenance Considerations

Inspect storage and use areas and identify containers or equipment that could malfunction and cause leaks or spills. Check equipment and containers for leaks, corrosion, support or foundation failure, or other signs of deterioration, and test them for soundness. Immediately repair or replace any that are found to be defective.

Effectiveness

Waste management practices are effective only when they are regularly practiced at a construction site. In storage and use areas, post the guidelines for proper handling, storage, and disposal of construction site wastes; train workers in these practices to ensure that everyone is knowledgeable enough to participate.

Cost Considerations

The costs associated with construction site waste management are mainly attributed to purchasing and posting signs, increased management time for oversight, additional labor required for special handling of wastes, transportation costs for waste hauling, and fees charged by disposal facilities to take the wastes.

4.2 Establish Proper Building Material Staging Areas

The following materials are expected to be stored on-site: Pipe, bedding material, grout, steel rebar, concrete forms, lumber, metal castings, and equipment to be installed in the building.

4.3 Designate Washout Areas: N/A

4.4 Establish Proper Equipment/Vehicle Fueling and Maintenance Practices:

Fuel will not be stored on-site. Fuel will be delivered to the site as needed for the purpose of refueling.

4.5 Control Equipment/Vehicle Washing

Description

Ideally, vehicle maintenance and washing occurs in garages and wash facilities, not on active construction sites. However, if these activities must occur onsite, operators should follow appropriate BMPs to prevent untreated nutrient-enriched wastewater or hazardous wastes from being discharged to surface or ground waters.

Applicability

Vehicle maintenance and washing BMPs prevent construction site spills of wash water, fuel, or coolant from contaminating surface or ground water. They apply to all construction sites. Appropriate BMPs include the following:

- Using a covered, paved area dedicated to vehicle maintenance and washing
- Ensuring that the areas are properly connected to a storm drain system
- Developing a spill prevention and cleanup plan
- Preventing hazardous chemical leaks by properly maintaining vehicles and equipment
- Properly covering and providing secondary containment for fuel drums and toxic materials
- Properly handling and disposing of vehicle wastes and wash water

Implementation

Inspect construction vehicles daily, and repair any leaks immediately. Dispose of all used oil, antifreeze, solvents and other automotive-related chemicals according to manufacturer instructions. These wastes require special handling and disposal. Used oil, antifreeze, and some solvents can be recycled at designated facilities, but other chemicals must be disposed of at a hazardous waste disposal site. Local government agencies can help identify such facilities.

Designate special paved areas for vehicle repair. To direct wash water to sanitary sewer systems or other treatment facilities, ensure that vehicle-washing areas are impervious and are bermed. Use blowers or vacuums instead of water to remove dry materials from vehicles if possible. Because water alone can remove most dirt adequately, use high-pressure water spray without detergents at vehicle washing areas. If you must use detergents, avoid phosphate- or organic-based cleansers to reduce nutrient enrichment and biological oxygen demand in wastewater. Use only biodegradable products that are free of halogenated solvents. Clearly mark all washing areas, and inform workers that all washing must occur in this area. Do not perform other activities, such as vehicle repairs, in the wash area.

Limitations

Vehicle maintenance area limitations include connection costs to sanitary sewers; disposal costs for wash water (fees charged by hazardous waste disposal facilities); construction costs for an enclosed maintenance area; and labor costs for hazardous waste storage, handling, and disposal. Depending on the volume of wastewater created and the type of detergents used, vehicle wash areas may also require permits.

Maintenance Considerations

Vehicle maintenance operations produce substantial amounts of hazardous and other wastes that require regular disposal. Clean up spills and dispose of cleanup materials immediately. Inspect equipment and storage containers regularly to identify leaks or signs of deterioration. Maintenance of vehicle wash areas is minimal, usually involving repairs to berms and drainage to the sanitary sewer system.

Effectiveness

These techniques effectively reduce discharges of untreated automotive wastes and wash water to receiving waters. Their effectiveness highly depends on personnel's training and level of commitment to follow procedures.

Cost Considerations

Costs associated with vehicle maintenance and wash areas include building enclosed structures, establishing connections to the sanitary sewer system, grading wash areas to

drain only to sanitary sewers, and increased labor associated with special handling of hazardous wastes.

4.6 Spill Prevention and Control Plan

The following good housekeeping practices will be followed onsite during the construction project.

1. An effort will be made to store only enough products required to do the job.
2. All materials stored onsite will be stored in a neat, orderly manner in their appropriate containers and, if possible, under a roof or other enclosure.
3. Product will be kept in their original containers with the original manufacturer's label.
4. Substances will not be mixed with one another unless recommended by the manufacturer.
5. Whenever possible, all of a product will be used up before disposing of the container.
6. Manufacturers' recommendations for proper use and disposal will be followed.
7. The site superintendent will inspect daily to ensure proper use and disposal of materials onsite.

Hazardous Products Practices

These practices will be used to reduce the risks associated with hazardous materials, if hazardous materials are used.

1. Products will be kept in original containers unless they are not resealable.
2. Original labels and material safety data will be retained.
3. If surplus product must be disposed of, manufacturers' or local and state recommended methods for proper disposal will be followed.

Product Specific Practices

The product specific practices to be followed are listed in Table 1.

TABLE 1
Product Specific Practices
The following product specific practices will be followed onsite: <u>Petroleum Products:</u> All onsite vehicles will be monitored for leaks and receive regular preventive maintenance to reduce the chance of leakage. Petroleum products will be stored in tightly sealed containers, which are clearly labeled. Any asphalt substances used onsite will be applied according to the manufacturer's recommendations.
<u>Fertilizers:</u> Fertilizers used will be applied only in the minimum amounts recommended by the manufacturer. Once applied, fertilizer will be worked in the soil to limit exposure to storm water. Storage will be in a covered shed. The contents of any partially used bags of fertilizer will be transferred to a sealable plastic bin to avoid spills.
<u>Paints:</u> All containers will be tightly sealed and stored when not required for use. Excess paint will not be discharged to the storm water system but will be properly disposed of according to manufacturers' instructions or State and local regulations.
<u>Concrete Trucks:</u> Concrete trucks will not be allowed to wash out or discharge surplus concrete or drum wash water on the site.

Spill Prevention Practices

The spill prevention practices to be followed are listed in Table 2.

TABLE 2
Spill Prevention Practices
In addition to the good housekeeping and material management practices discussed in the previous sections of this plan, the following practices will be followed for spill prevention and cleanup: • Manufacturers' recommended methods for spill cleanup will be clearly posted and site personnel will be made aware of the procedures and the location of the information and cleanup supplies. • Materials and equipment necessary for spill cleanup will be kept in the material storage area onsite. Equipment and materials will include but not be limited to brooms, dustpans, mops, rags, gloves, goggles, kitty litter, sand, sawdust, and plastic and metal trash containers specifically for this purpose. • All spills will be cleaned up immediately after discovery. • The spill area will be kept well ventilated and personnel will wear appropriate protective clothing to prevent injury from contact with a hazardous substance. • Spills of toxic or hazardous material will be reported to the appropriate State or local government agency, regardless of the size. • The spill prevention plan will be adjusted to include measures to prevent this type of spill from reoccurring and how to clean up the spill if there is another one. A description of the spill, what caused it, and the cleanup measures will also be included. • The site superintendent responsible for the day-to-day site operations will be the spill prevention and cleanup coordinator. He will designate at least three other site personnel who will receive spill prevention and cleanup training. These individuals will each become responsible for a particular phase of prevention and cleanup. The names of responsible spill will be posted in the material storage area and in the office trailer onsite.

4.7 Any Additional BMPs: N/A

4.8 Allowable Non-Stormwater Discharge Management

1. Water used to wash vehicles where detergents are not used
2. Water used to control dust
3. Potable water sources including line flushing
4. Uncontaminated ground or spring water

SECTION 5: SELECTING POST-CONSTRUCTION BMPs

N/A

SECTION 6: INSPECTIONS

6.1 Inspections

1. Inspection Personnel: The Contractor shall provide qualified personnel to inspect disturbed areas of the construction site that have not been finally stabilized, areas used for storage of materials that are exposed to precipitation, structural control measures, and locations where vehicles enter and exit the site.

2. Inspection Schedule and Procedures:

The contractor shall inspect the disturbed areas at least once every fourteen (14) calendar days and within 24 hours of the end of a storm event of 0.5 inches or greater, or the contractor may establish a specific day each week for inspections to occur. Erosion and sedimentation control measures identified in the SWP3 shall be observed to ensure that they are operating correctly. Based on the results of the inspection, the SWP3 shall be modified as necessary (e.g. show additional controls on the erosion/sedimentation controls plan sheet and revise description of controls) to include additional or modified controls, or best management practices (BMPs), designed to correct problems identified. Revisions to the SWP3 shall be completed within 7 calendar days following the inspection. If existing controls need to be modified or if additional controls are necessary, implementation shall be completed before the next anticipated storm event, or as soon as practicable.

Contractor shall attach a copy of the inspection report to be used for the site.

6.2 Delegation of Authority

Contractor shall identify the individual(s) who have authority to sign inspection reports, certification and other information.

6.3 Corrective Action Log

Corrective Action Log:
Contractor shall maintain a log of corrective actions.

SECTION 7: RECORDKEEPING AND TRAINING

7.1 Recordkeeping

Records will be retained for a minimum period of at least 3 years after the permit is terminated.

Contractor shall maintain a log of date(s) when major grading activities occur.

Contractor shall maintain a log of date(s) when construction activities temporarily or permanently cease on a portion of the site.

Contractor shall maintain a log of date(s) when an area is either temporarily or permanently stabilized.

7.2 Log of Changes to the SWPPP

SWP3 LOG OF CHANGES AND UPDATES

DATE	CHANGE/UPDATE

7.3 Training

Individual(s) Responsible for Training:

Name: _____ Title:_____

Name: _____ Title:_____

Describe Training Conducted:
• General stormwater and BMP awareness training for staff and subcontractors:

• Detailed training for staff and subcontractors with specific stormwater responsibilities:

SECTION 8: PERMANENT STABILIZATION

All disturbed areas will be revegetated as shown on the construction plans. Seed mix is shown in the Project Manual in Standard Specification 604S pages 3 and 4. Topsoil requirements are shown in the Project Manual in Standard Specification 601S page 1.

SECTION 9: CERTIFICATION AND NOTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Name: _____ Title:_____

Signature:_____Date:_____

Repeat as needed for multiple construction operators at the site

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

Documents related to this section will include the construction drawings and general provisions of the Contract, including the General Conditions, Section 00700, Supplemental General Conditions, Section 00810, and other Division 1 requirements.

1.2 SUMMARY

A. This section describes the preconstruction conference and other Project related meetings which may be held on a routine schedule throughout the duration of the Project.

B. The CONTRACTOR, or his authorized representative(s), shall attend all Project related meetings as indicated herein. The CONTRACTOR's representatives, as a minimum, shall include his Project Manager and Superintendent. Other CONTRACTOR's representatives may attend Project related meetings; however, there shall be a maximum of four (4) CONTRACTOR's representatives at any one meeting unless the ENGINEER/ARCHITECT approves a larger number.

C. The CONTRACTOR shall provide all pertinent reports, copies of reports, etc., for each meeting as may be required by this or other sections of the Contract.

1.3 PARTNERING WORKSHOP

A. To complete this work most beneficially for all parties, the Owner desires to form a Partnering Team among the Owner, Engineer/Architect, Contractor, and Subcontractor(s). This relationship will draw on the strength of all parties to identify and achieve mutual goals. The objectives are effective and efficient contract performance, intended to achieve completion within budget, on schedule, and in accordance with the drawings and specifications.

B. The Owner will schedule a Partnering Workshop independent of or in conjunction with the Preconstruction Conference, to facilitate the project objectives. The partnering relationship will be multilateral in makeup and participation will be totally voluntary.

1.4 PRECONSTRUCTION CONFERENCE

A. Attendees

A preconstruction conference shall be held as soon after the award and execution of the Contract as possible and before any Work at the site is started. The conference will be held at a location selected by the Owner's Project Manager. The Owner's Project Manager shall prepare and distribute the meeting agenda, preside over the conference, and may distribute meeting minutes. The conference shall be attended by:

1. CONTRACTOR's Project Manager.
2. CONTRACTOR's Superintendent.
3. Any Subcontractors' and/or Suppliers' representatives whom the CONTRACTOR may desire to invite or whom the ENGINEER/ARCHITECT or OWNER may request to attend.
4. ENGINEER/ARCHITECT's representative.
5. OWNER's Project Manager.
6. OWNER's REPRESENTATIVE
7. OWNER's Sponsor Department Representative.

8. Representative from the City of Austin, Transportation Department if a traffic management plan is required.
9. Representative from the City of Austin, Watershed Protection and Development Review Department, Environmental Inspection Division, if site erosion / sedimentation controls are required.
10. Representative from the City of Austin, Transportation Department if utility coordination has occurred through the Austin Utility Location and Coordination Committee.
11. Representative from the City of Austin, Contract Management Department, Contract Administration Division, to discuss wage.
12. Representative from the City of Austin, Small and Minority Business Resources Department to discuss M/WBE compliance.

B. Meeting topics

The topics to be discussed may include, but will not be limited to, the following items:

1. Introduction of persons attending the meeting.
2. General project description, including length of contract and liquidated damages.
3. Key personnel associated with the construction (may include, but is not limited to the following):
   - CONTRACTOR's Project Manager
   - CONTRACTOR's Superintendent
   - OWNER's Project Manager
   - ENGINEER/ARCHITECT's representative
   - OWNER's Sponsor Department Representative.
   - Representatives of the various utilities.
4. Lines of communication and chains of command.
5. Wage and personnel records and reporting requirements.
6. Subcontractors and suppliers.
7. Submittal review and approval procedure. Submittals may include, but are not limited to the following:
   - Letter stating the name and qualifications of the CONTRACTOR's Superintendent
   - Letter(s) from the Subcontractor(s) listing their salaried specialists
   - If applicable, a letter designating the Registered Professional Land Surveyor
   - If applicable, a letter designating the Safety Representative (for general project safety) and the "Competent Person" for excavation safety
   - Excavation Safety Systems Plan
   - Schedule of Values
   - Schedule for submittals
   - Shop drawings
   - Construction schedule (The schedule shall indicate the phases of work in which subcontractors will be participating. Subcontractors shall be indicated by name.)
   - Payroll reports
   - Substitution of subcontractors
   - Non-use of asbestos materials affidavit
   - Appropriate safety training certificates for workers that will initially be on site

- Documentation for all workers initially on site who are governed by a prevailing wage classification as described in Section 00830.
- Construction Equipment Emissions Reduction Plan

8. Job and traffic safety.
9. Permits.
10. Utility coordination report.
11. Notification of property owners and other affected by the project
12. Job meetings.
13. Use of the site for construction, storage, staging, etc., and interrelationship with other contracts.
14. Equal opportunity requirements.
15. Laboratory testing of material requirements.
16. Inventory of materials stored on site provisions.
17. Progress estimate and payment procedure.
18. Posting of signs.
19. Project safety.
20. Prompt payment procedure.
21. Review of contract - addenda, supplementary general conditions, special provisions, special specifications, and other unique project items.
22. Other

1.5 JOB MEETINGS

A. General

Job meetings shall be held as deemed necessary by the ENGINEER/ARCHITECT or OWNER or as requested by the CONTRACTOR throughout the duration of the Project. The meetings shall be held at a location selected by or approved by the Owner's Representative. The OWNER's REPRESENTATIVE or CONTRACTOR, as agreed to, shall preside over the meeting and issue meeting minutes.

B. Attendees

Job meetings will be attended by the following:

1. CONTRACTOR's Project Manager, when requested to attend.
2. CONTRACTOR's Construction Superintendent.
3. Any subcontractors' and/or suppliers' representatives whom the CONTRACTOR may desire to invite or whom the ENGINEER/ARCHITECT or OWNER requests to attend.
4. OWNER's REPRESENTATIVE
5. ENGINEER/ARCHITECT's representative(s), if needed or required.
6. OWNER's PROJECT MANAGER, if needed or required
7. OWNER's Sponsor Department representative(s), if needed or required.

C. Meeting topics

The topics will include, but not necessarily be limited to, the following subjects:

1. Review of previous meetings' notes and update of pertinent information and Project status.
2. Identification and discussion of new job related construction problems. Such discussion will be toward resolving identified problems.
3. Review work accomplished to date and establish proposed construction activities for the upcoming week(s).
4. Discuss the status of or need for change orders.
5. Check of required bonds and insurance certificates (including Workers' Compensation Insurance verification for CONTRACTOR's, Subcontractor's, and Sub-Subcontractor's employees as stated in Section 00700, General Conditions, 5.2 Workers' Compensation).
6. Status of pay requests.
7. Work in progress.
8. Review and update construction schedule.
9. Review of submittals schedule and status of submittals.
10. Status of SMBR Compliance Plan.
11. Status of Safety Training certificates for all new workers on project.
12. Other.

1.6 OTHER MEETINGS

Other meetings shall be held from time to time as may be requested by the CONTRACTOR, the ENGINEER/ARCHITECT, or the OWNER. The time and place of the meetings shall be as mutually agreed upon. The attendance at the meetings shall be as requested by the party requesting the meeting.

END

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

The Contractor prepares submittals. Drawings and general provisions of Contract, including Section 00700, "General Conditions"; Section 00810, "Supplemental General Conditions"; Division 1 requirements and City of Austin Technical Specifications and Special Provisions thereto, should be used as the related documents for this requirement.

1.2 SUMMARY

A. This Section includes administrative and procedural requirements for submittals required for performance of the Work, including the following:

1. Security plan.
2. Contractor's construction schedule.
3. Submittal schedule.
4. Shop drawings.
5. Product data.
6. Samples.
7. Quality assurance and quality control submittals, including calculations, mix designs and substantiating test results.

B. Administrative Submittals: Refer to other Division 1 Sections and other Contract Documents for requirements for administrative submittals. Such submittals include, but are not limited to, the following:

1. Permits.
2. Applications for Payment.
3. Performance and Payment bonds.
4. Insurance certificates.
5. Monthly Subcontractors expense report.
6. Non-use of asbestos affidavits

C. Related Sections: The following Sections contain requirements that relate to this Section:

1. Section 00700, "General Conditions"; Section 00810, "Supplemental General Conditions"; and/or Division 1, Section 01025, "Measurement and Payment" specifies requirements for submittal of the Schedule of Values.

2. Division 1, Section 01200, "Project Meetings" specifies requirements for submittal and distribution of meeting and conference minutes.

3. Section 00700, "General Conditions"; Section 00810, "Supplemental General Conditions"; and/or Division 1, Section 01700, "Contract Close-out" specifies requirements for submittal of Project Record Documents and warranties at project close-out.

4. Section 00700, "General Conditions" Article 6.2.4 specifies requirements for Substitutes and "Approved Equal" Items.

D. Technical Submittals: Technical information required to be submitted by the Standard Specifications, Special Provisions or Special Specifications.

PART 2 - PRODUCTS - not used

PART 3 - EXECUTION

3.1 SUBMITTAL PROCEDURES

Contractor shall be responsible for the following:

A. Coordination: Coordinate preparation and processing of submittals with performance of construction activities. Transmit each submittal sufficiently in advance of performance of related construction activities to avoid delay.

1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.

2. Coordinate transmittal of different types of submittals for related elements of the Work so processing will not be delayed by the need to review submittals or resubmittals concurrently.

a. The E/A reserves the right to withhold action on a submittal requiring coordination with other submittals until all related submittals are received.

3. Processing: To avoid the need to delay installation as a result of the time required to process submittals, allow sufficient time for submittal review, including time for resubmittals.

a. Allow fourteen (14) calendar days for initial review. Allow additional time if the Engineer must delay processing to permit coordination with subsequent submittals.

b. If an intermediate submittal is necessary, process the same as the initial submittal.

c. Allow fourteen (14) calendar days for processing each resubmittal.

d. No extension of Contract Time will be authorized because of failure to transmit submittals to the E/A sufficiently in advance of the Work to permit processing.

B. Submittal Preparation: Place a permanent label or title block on each submittal for identification. Indicate the name of the entity that prepared each submittal on the label or title block.

1. Provide a space approximately 4 inches by 5 inches (100 by 125 mm) on the label or beside the title block on Shop Drawings to record the Contractor's review and approval markings and the action taken.

2. Include the following information on the label for processing and recording action taken.

a. Project name.
b. Date.
c. Name and address of the Contractor’s Engineer.
d. Name and address of the Contractor.
e. Name and address of the subcontractor.
f. Name and address of the supplier.
g. Name of the manufacturer.
h. Number and title of appropriate Specification Section.
i. Drawing number and detail references, as appropriate.

C. Number of Copies:

1. Two (2) copies of the proposed Construction schedule and subsequent revision are required.

2. Two (2) copies of the proposed Submittal schedule and subsequent revision are required.

3. Nine (9) copies of Shop Drawings, Product, Product Samples, Quality Assurance and Quality Control submittals are required.

D. Submittal Transmittal: Package each submittal appropriately for transmittal and handling. Transmit each submittal from the Contractor to the E/A through the Owner's Representative using a transmittal form (An example Transmittal Form is provided at the end of this section). The E/A will not accept submittals received from sources other than the Contractor.

1. On the transmittal, record relevant information and requests for data. On the form, or separate sheet, record deviations from Contract Document requirements, including variations and limitations. Include Contractor's certification that information complies with Contract Document requirements.

2. Number transmittals in sequence for each Series of the Specifications thus: x-xxx. The number after the dash indicates the Section of the Specifications, and the number before the dash is the sequence number of the transmittal. For example, the first item submitted related to Specification Item No. 506, "Manholes" would be labeled **1-506**, the second item submitted would be labeled **2-506**, etc. If the submittal item relates to a Special Provision or Special Specification, use **SP506** or **SS5061**, for example, to indicate the applicable Specification Section. Identify resubmittals with a letter of the alphabet following the original sequence number, using "A" for the first resubmittal, "B" for the second resubmittal, etc. For example, the first resubmittal of the second item submitted for Specification SP506 would be labeled **2A-SP506**.

3.2 CONTRACTOR'S CONSTRUCTION SCHEDULE

A. Construction Schedule: As described in Section 2.4.2 of Section 00700 "General Conditions", prepare a fully developed Contractor's construction schedule ("Baseline Schedule") using Microsoft Project© software unless otherwise approved by Owner's Representative. Submit Baseline Schedule prior to or at the preconstruction conference, and submit updated schedules as specified by the E/A, usually at each regularly scheduled Project Meeting and with each pay application.

1. Detail each significant construction activity and use a weekly timeframe for the schedule. Use the same breakdown of units of the Work as indicated in the "Schedule of Values."

2. With each update, revise task completion percentage and mark completed tasks.

3. Prepare the schedule on a sheet, or series of sheets, of stable transparency, or other reproducible media, of sufficient width to show data for the entire construction period.

4. Secure time commitments for performing critical elements of the Work from parties involved. Coordinate each element on the schedule with other construction activities; include minor elements involved in the sequence of the Work. Show each activity in proper sequence. Indicate graphically the critical path items and the sequences necessary for completion of related portions of the Work.

5. Indicate the phases of work in which subcontractors will be participating. Subcontractors shall be indicated by name.

6. Coordinate the Contractor's Construction Schedule with the Schedule of Values, list of subcontracts, Submittal Schedule, progress reports, payment requests, and other schedules.

7. Indicate substantial completion in advance of the date established for Final Completion to allow time for the E/A's procedures necessary for certification of Substantial and Final Completion.

B. Work Stages: Indicate important stages of construction for each major portion of the Work, including submittal review, testing, and installation.

C. Cost Correlation: Within the Baseline Schedule, provide cost information indicating planned and actual costs. On the appropriate task line(s), show dollar volume of Work performed as of the dates used for preparation of applications for payment. Refer to Section 00700, "General Conditions", Article 14 Payment to Contractor and Completion for cost reporting and payment procedures.

D. Distribution: Following response to the Baseline Schedule submittal, distribute electronic copies to the E/A, subcontractors, suppliers, and other parties required to comply with scheduled dates. Keep a copy at the Project Site at all times.

1. When revisions are made, distribute to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in construction activities.

E. Schedule Updating: Revise the schedule after each meeting, event, or activity where revisions have been recognized or made and as requested by the E/A. Issue the updated schedule concurrently with the report of each meeting, or as requested by the E/A.

3.3 SUBMITTAL SCHEDULE

A. Concurrently with the development of the Contractor's Construction Schedule, prepare a complete schedule of submittals. Submit the initial Submittal Schedule along with the Construction Schedule, at, or prior to, the Pre-construction Conference.

1. Coordinate Submittal Schedule with the list of subcontractors, Schedule of Values, and the list of products as well as the Contractor's Construction Schedule.

2. Prepare the schedule in chronological order. Provide the following information:

a. Scheduled date for the first submittal.
b. Related Section number or Specification number.
c. Submittal category (Shop Drawings, Product Data, Calculations, Test Results, or Samples).
d. Name of the subcontractor.
e. Description of the part of the Work covered.
f. Scheduled date for resubmittal.
g. Scheduled date for completion of the E/A's review.

B. Contractor's schedule of submittals will be reviewed to verify that the list of submittals provided is all inclusive and the schedule is reasonable and realistic for delivery of the project. Owner will provide a response to the Contractor based on the assessment of the schedule of submittals.

C. Distribution: Upon Owner's agreement with the schedule of submittals, print and distribute copies to the Owner's Representative, E/A, Owner, subcontractors, suppliers, and other parties required to comply with submittal dates indicated. Keep copies at the Project Site at all times.

1. When revisions are made, distribute to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in construction activities.

D. Schedule Updating: Revise the schedule after each meeting or activity where revisions have been recognized or made. Issue the updated schedule concurrently with the report of each meeting, or as requested by the E/A.

3.4 CONSTRUCTION SEQUENCE PLANS

The Contractor is required to submit construction sequence plans to the City at, or prior to, the pre-construction conference for approval. The Project shall be divided into phases according to the sequence of construction given in the Drawings and traffic control plans. The Contractor shall arrange his/her work schedule to complete all Work on each phase, including street repair, any valve casting or manhole adjustments, and street overlay before moving on to the next work area.

3.5 SHOP DRAWINGS

A. Submit newly prepared information drawn accurately to scale. Highlight, circle, or otherwise indicate deviations from the Contract Documents. Do not reproduce Contract Documents or copy standard information as the basis of Shop Drawings. Standard information prepared without specific reference to the Project is not a Shop Drawing.

B. Shop Drawings include fabrication and installation Drawings, setting diagrams, schedules, patterns, templates and similar Drawings. Include the following information:

1. Dimensions;
2. Identification of products and materials included by sheet and detail number;
3. Compliance with specified standards;
4. Notation of coordination requirements; and
5. Notation of dimensions established by field measurement.
6. Sheet Size: Except for templates, patterns and similar full-size Drawings, submit Shop Drawings on sheets at least 8-1/2 inches by 11 inches but no larger than 24 inches by 36 inches.
7. Do not use Shop Drawings without an appropriate stamp indicating action taken.

3.6 PRODUCT DATA

A. Collect Product Data into a single submittal for each element of construction or system. Product Data includes printed information, such as manufacturer's installation instructions, catalog cuts, standard color charts, roughing-in diagrams and templates, standard wiring diagrams, applicable certifications and performance curves.

1. Mark each copy to show applicable choices and options. Where printed Product Data includes information on several products that are not required, mark copies to indicate the applicable information. Include the following information:

   a. Manufacturer's printed recommendations;
   b. Compliance with trade association standards;
   c. Compliance with recognized testing agency standards;
   d. Application of testing agency labels and seals;
   e. Notation of dimensions verified by field measurement; and
   f. Notation of coordination requirements.

2. Do not submit Product Data until compliance with requirements of the Contract Documents has been confirmed.

3. Distribution: Furnish copies of final submittal to installers, subcontractors, suppliers, manufacturers, fabricators, and others required for performance of construction activities. Show distribution on transmittal forms.

   a. Do not proceed with installation until a copy of the final submission of Product Data is in the Installer's possession.

   b. Do not permit use of unmarked copies of Product Data in connection with construction.

4. Potable Water, Reclaimed Water, and Wastewater Items or Projects: The Contractor shall submit descriptive information and evidence that the materials and equipment

the Contractor proposes for incorporation into the Work is of the kind and quality that satisfies the specified functions and quality. **Austin Water Utility Standard Products Lists (SPL)** are a part of the Specifications. Contractors shall use products specified in the Contract Documents, listed on the SPLs, or approved by AWU through the process in Section 2.4.0 of the Utilities Criteria Manual. Products contained in the SPL cannot be substituted for items shown on the Drawings, or called for in the specifications, unless approved by the E/A in conjunction with the Austin Water Utility Standards Committee. **Unless otherwise specified,** products current at the time of solicitation shall be installed except where an updated List has been issued to remove a product because of quality or performance issues.

3.7 SAMPLES

A. Submit full-size, fully fabricated Samples cured and finished when specified and physically identical with the material or product proposed. Samples include partial sections of manufactured or fabricated components, cuts or containers of materials, color range sets, and swatches showing color, texture, and pattern.

1. Mount or display Samples in the manner to facilitate review of qualities indicated. Include the following:

    a. Specification Section number and reference;
    b. Generic description of the Sample;
    c. Sample source;
    d. Product name or name of the manufacturer;
    e. Compliance with recognized standards; and
    f. Availability and delivery time.

2. Submit Samples for review of size, kind, color, pattern, and texture. Submit Samples for a final check of these characteristics with other elements and a comparison of these characteristics between the final submittal and the actual component as delivered and installed.

    a. Where variation in color, pattern, texture, or other characteristic is inherent in the material or product represented, submit at least 3 multiple units that show approximate limits of the variations.

    b. Refer to other Specification Sections for requirements of Samples that illustrate workmanship, fabrication techniques, details of assembly, connections, operation, and similar construction characteristics.

    c. Refer to other Sections for Samples to be returned to the Contractor for incorporation in the Work. Such Samples must be undamaged at time of use. On the transmittal, indicate special requests regarding disposition of Sample submittals.

    d. Samples not incorporated into the Work, or otherwise designated as the Owner's property, are the property of the Contractor and shall be removed from the site prior to Substantial Completion.

3. Maintain sets of Samples, as returned, at the Project Site, for quality comparisons throughout the course of construction.

    a. Unless noncompliance with Contract Document provisions is observed, the submittal may serve as the final submittal.

    b. Sample sets may be used by Owner for final acceptance of the construction associated with each set.

B. Distribution of Samples: Prepare and distribute additional sets to subcontractors, manufacturers, fabricators, suppliers, installers, and others as required for performance of the Work. Show distribution on transmittal forms.

3.8 QUALITY ASSURANCE AND QUALITY CONTROL SUBMITTALS

A. Submit quality assurance and quality control submittals, including design data, certifications, manufacturer's instructions, manufacturer's field reports, materials test results, field testing and inspection reports, and other quality-control submittals as required under other Sections of the Specifications.

B. Certifications: Where other Sections of the Specifications require certification that a product, material, or installation complies with specified requirements, submit a certification from the manufacturer or responsible Engineer certifying compliance with specified requirements.

   1. Signature: Certification shall be signed by an officer of the corporation or other individual authorized to sign documents on behalf of the company.

C. Calculations: When required in the technical specification, calculations shall be prepared and stamped by a Professional Engineer registered in the State of Texas.

D. Concrete, Controlled Low Strength Material, Asphalt Stabilized Base and Hot Mix Asphaltic Concrete Mix Designs and Substantiating Test Data: Requirements for submittal of mix designs and substantiating test data are specified in the applicable Technical Specification Section. Each separate batch plant supplying ASB, HMAC and/or concrete shall submit mix designs to the Owner's Representative for review.

3.9 ENGINEER/ARCHITECT'S ACTION

A. Except for submittals, for the record, or for information where action and return is not required, the E/A will review each submittal, mark to indicate action taken, and return within the time frame specified in Paragraph 3.1.A.3.

   1. Compliance with specified characteristics is the Contractor's responsibility.

B. Action Stamp: The E/A will stamp each submittal with a uniform, action stamp. The E/A will mark the stamp appropriately to indicate the action taken, as follows:

   1. "Reviewed": the Work covered by the submittal may proceed provided it complies with requirements of the Contract Documents. Final payment depends on that compliance.

   2. "Reviewed with Comments": the Work covered by the submittal may proceed provided it complies with notations or corrections on the submittal and requirements of the Contract Documents. Final payment depends on that compliance.

   3. "Revise and Resubmit" or "Rejected": do not proceed with Work covered by the submittal, including purchasing, fabrication, delivery, or other activity. Revise or prepare a new submittal according to the notations and resubmit without delay. Repeat if necessary to obtain different action mark.

      a. Do not use, or allow others to use, submittals marked "Revise and Resubmit" or "Rejected" at the Project Site or elsewhere where Work is in progress.

   4. Other Action: Where a submittal is for information, or for record purposes, or for special processing, or for other activity, the E/A will return the submittal marked "Record Copy", "Action Not Required" or "No Action Taken."

C. Unsolicited Submittals: The E/A will return unsolicited submittals to the sender without action.

3.10 PREPARATION AND SUBMITTAL OF CONSTRUCTION RECORD DRAWINGS

The Owner's Representative and the Contractor's Superintendent will each maintain a set of bluelines noting any changes in ink during construction of the Project. The Owner's Representative and the Contractor's Superintendent will compare bluelines at least weekly (at a time mutually acceptable to both) to exchange information and compare notes to ensure all items installed and changes are documented. The following is a recommended minimum of items to be noted:

GENERAL

1. Notes should be sufficiently clear to allow a draftsperson to easily make the necessary changes without the need for field checks and interpretation.
2. One complete set of Construction Record bluelines will be submitted prior to the final pay request and forwarded to the Owner.

STREET RECONSTRUCTION AND OVERLAY PROJECTS

1. Location, type, and quantity of all work added or deleted from the Project including repair areas, milled areas, sidewalk, ramps, curb and gutter, etc.
2. Deviations in street, sidewalk, curb and gutter location and grades from Drawings.

WATER/WASTEWATER PROJECTS

1. Type, name and model numbers of all valves (with # of turns to open/close), air release valves, drain and fire hydrants noted at locations installed.
2. Installed locations of all assignments, appurtenances and elevations which differ from those indicated on the Drawings.
3. Pipe manufacturer type and classification noted in sufficient detail to determine location and extent of each type or classification installed.
4. Modification to any standard or special details noted.
5. Location and description of pipe closures.
6. Thrust blocking locations and restrained pipe lengths, approximate dimensions and quantities noted.
7. Location, type and quantity of all addition and deletions.
8. Changes in grade.

The above list is not intended to be complete. Any information noted which could be used for future maintenance, location and construction projects is encouraged to be noted on the bluelines.

3.11 CONSTRUCTION DIARIES

The Contractor shall prepare a daily construction diary recording as a minimum the following information concerning events at the site and submit duplicate copies to the Owner's Representative at weekly intervals. The copies are to be signed by the project Superintendent as defined in Section 00700, Article 6.1.2.

1. Work performed;
2. Approximate count of Contractor's personnel, by classification, on the site;
3. List by classification, of all Subcontractors, personnel and any professionals on the site that day;
4. List of all equipment on the site by make and model;
5. High and low temperatures together with general weather conditions;
6. Start time and finish time of day's work;
7. Accidents and / or unusual events;
8. Meetings and significant decisions made;
9. Stoppages, delays, shortages and / or losses;
10. Meter readings and / or similar recordings;
11. Emergencies procedures that may have been needed;
12. Orders and requests of governing authorities;
13. Change Orders received and implemented;
14. Services connected and / or disconnected;
15. Installed equipment and / or system tests and / or startups and results;

16. Partial completions and / or occupancies; and
17. Date of substantial completion certified.

Shop Drawing Transmittal

Month XX, 2008

Transmittal No. _____
Previous Transmittal No. _____
Previous Submittal Date _____

City of Austin
Construction Inspection Division
Public Works Department
P.O. Box 1088
Austin, Texas 78767

Project Name: Austin Lakeside Drive

Attention: Owner's Representative

Enclosed are nine (9) copies of the following items for your review:

Item No.	Description	Submittal Type	Specification Section	Subcontractor/Supplier
1.	6" DI Pipe	Produce Data	510	ABC Company
2.	8" Resilient Seat Gate Valve	Product Data	511	DEF Company

Example

NOTE: Item 1 above contains a deviation from the Specifications as indicated on the item

Submitted by: _____

XYZ Company
101 Ranch Road 2974
Austin, Texas 78759

END

Division 1 General Requirements

SUSTAINABLE CONSTRUCTION REQUIREMENTS

Section 01352

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section. The requirements may or may not include reference to sustainability.

Related Sections include the following Division 1 Sections:

1. The contents of this Section are related to all Sections of these Specifications.
2. Section 01300 Submittals.
3. Section 01505 Construction and Demolition Waste Management and Disposal.

1.2 SUMMARY

A. This Section includes requirements and procedures for compliance with certain Sustainable Construction requirements.

1. Some Sustainability requirements are dependent on material selections and may not be specifically identified as sustainability requirements. Compliance with requirements may be used as one criterion to evaluate substitution requests.
2. Additional Sustainability Construction requirements are dependent on design and other aspects of the Project that are not part of the Work of the Contract.

1.3 DEFINITIONS

A. Regionally Manufactured Materials: Materials that are manufactured within a radius of 500 miles (800 km) from the Project location. Manufacturing refers to the final assembly of components into the product that is installed at the Project site.

B. Regionally Extracted, Harvested, or Recovered Materials: Materials that are extracted, harvested or recovered and manufactured within a radius of 500 miles (800 km) from the Project site.

C. Recycled Content: The percentage by weight of constituents that have been recovered or otherwise diverted from the solid waste stream, either during the manufacturing process (pre-consumer), or after consumer use (post-consumer).

D. Post-consumer recycled content: The percentage (by weight) of a reclaimed waste material contained in a product. A reclaimed waste material (e.g., newspaper, magazines, beverage containers, etc.) has already served a purpose to a consumer and has been diverted or separated from waste stream for recycling.

E. Pre-Consumer Recycled Content: (or Post-industrial recycled content). The percentage (by weight) of a waste material obtained from industrial processes that is contained in a product. Discarded materials from one manufacturing process that are used in another manufacturing process are pre-consumer recycled materials. Wastes from the original manufacturing process used in the same product after minimal reprocessing are <u>not</u> recycled material.

F. Recycled material: A material that would otherwise be destined for landfill disposal but is diverted or separated from the waste stream, reintroduced as material feedstock, and processed into marketed end products.

G. Reused Material: Any item that is salvaged or reused without significant reprocessing as in a recycling process.

H. Source reduction: Minimization of waste at the start of a process or activity so that there is a reduced amount of waste to recycle or dispose. Also called precycling.

I. Xeriscape: Quality landscaping that conserves water and protects the environment through its employment of seven principles: planning and design; soil analysis; appropriate plant selection; practical turf areas; efficient irrigation; use of mulches; and appropriate maintenance.

1.4 SUSTAINABILITY OBJECTIVES/GOALS

The City of Austin is committed to sustainability and expects the Project to reflect this commitment. The specific Sustainable (Design & Construction) goals for this project include:

1. Protection of the environment.
2. Limiting construction site area and disturbance of natural habitat and protection of trees and vegetation.
3. Reduction of waste created by construction activity through Source Reduction.
4. Increasing the use of materials and products with recycled content.
5. Chemically safe construction materials and pest management.
6. Construction materials that use less energy and create less pollution in manufacture, delivery, installation, renovation, and demolition.

1.5 SUBMITTALS

A. *Sustainability submittals* If required submitted item is identical to that submitted for another requirement, submit duplicate copies for each separate submittal.

B. *Sustainable Construction Action Plans*: Provide preliminary submittals within 14 calendar days of date established for the Notice to Proceed indicating how the following requirements will be met.

1. Construction & Demolition Waste Management Plan complying with Division 1 Section 01505 "Construction Waste Management."
2. List of proposed materials with recycled content, indicating cost, post consumer recycled content, and pre-consumer recycled content for each product having recycled content.
3. List of proposed regionally manufactured materials and regionally extracted, harvested, or recovered materials, identifying each regionally manufactured material and its source.

C. *Sustainability Contract Closeout Documentation*:

1. Comply with Division 1 Section 01505 "Construction Waste Management."
2. Provide manufacturer's product Data indicating percentages by weight of post-consumer and pre-consumer recycled content for products having recycled content. Include statement indicating costs for each product having recycled content.
3. Provide manufacturer's and or supplier's product Data indicating location of material manufacturer for regionally manufactured, harvested, recovered and extracted materials.

1.6 QUALITY ASSURANCE

A. Sustainability Coordinator: Engage a responsible person on the construction team who is familiar with Sustainable practices and procedures. The Coordinator may also serve as the Waste Management coordinator.

PART 2 – PRODUCTS

Provide and maximize to the greatest extent economically feasible, a combination of salvaged, refurbished, recycled, regional materials within the scope of the project.

PART 3 – EXECUTION

A. SITE DISTURBANCE - Special Site Practices:

1. Construction Activity Pollution Prevention: Comply with City of Austin standard requirements.

2. Protect and restore natural vegetation per division 1 Sections and plans.

3. Replace any removed or destroyed vegetation with equivalent species that are within City guidelines for native and adaptive plants.

4. Restrict construction activity only to defined site limits per plans and avoid activity and practices that would adversely affect environment, property, soils, vegetation and water courses.

END SECTION 01352

CONSTRUCTION EQUIPMENT EMISSIONS REDUCTION PLAN
Section 01353

1. GENERAL

1.1. RELATED DOCUMENTS

A. This Section applies to Drawings and all provisions of Contract.

1.2. SUMMARY – CONSTRUCTION EQUIPMENT EMISSIONS PLAN

A. The OWNER, as part of the Council Resolution No. 20100211-019, has decided to take steps to reduce emissions associated with construction process including Nitrogen Oxides (NOx), particulate matter and greenhouse gas. Construction activity is a source of large quantities of particulate matter and ozone forming Nitrogen Oxides that adversely affect the health of our community and the natural environment.

B. The CONTRACTOR shall employ practices and take actions that reduce emissions from NOx, particulate matter (black soot) and greenhouse gases resulting from activities associated with new construction and demolition Projects.

C. The CONTRACTOR shall maximize the use of equipment and vehicles with advanced emission controls in support of the City's goals, utilizing equipment that meets defined EPA emissions standards.

1.3. DEFINITIONS

A. "Construction Equipment" means equipment powered by an internal combustion engine and used for performing or otherwise advancing the Work on the Project, other than motor vehicles intended for use on public highways and registered pursuant to Section 502.002 of the Texas Transportation Code.

B. The list of applicable Construction Equipment includes, but is not limited to excavators, backhoes, loaders, bulldozers, graders, rock saws, generators, and other similar equipment.

C. "EPA" means the United States Environmental Protection Agency.

D. "Low-Use Equipment" means any piece of construction equipment which is used for less than ten (10) hours per week on site for a single construction contract.

E. "Greenhouse Gases" are emissions that absorb and emit radiation within the atmosphere. Greenhouse Gases can be one or a combination of, these gases: carbon dioxide, methane, nitrous oxide and three groups of fluorinated gases (sulfur hexafluoride, hydro fluorocarbons, and perfluorocarbons)

1.4. REQUIREMENTS – Not Used

1.5. SUBMITTALS

A. CONSTRUCTION EQUIPMENT EMISSIONS REDUCTION PLAN:

1. The CONTRACTOR agrees to prepare a draft Emissions Reduction Plan (referred to as PLAN) prior to start of construction. This PLAN shall include an inventory report

containing identifying data for each piece of equipment to be used on the worksite and shall include the following:

- Vehicle/Equipment: Make & Model Year
- Vehicle/Equipment: Engine Make & Model Year
- Vehicle/Equipment: Fuel Type
- Vehicle/Equipment: Expected gallons or hours used for project duration

a) The OWNER will provide Emissions Reduction Toolkit to help the CONTRACTOR in preparation of the PLAN and inventory.

2. The CONTRACTOR shall develop a list of strategies to be used in this Project in order to reduce emissions from NOx, particulate matter and greenhouse gas (CO_2 equivalent). Once prepared, the agreed upon strategies shall be incorporated into the PLAN. The PLAN will then be signed by the CONTRACTOR and made ready for implementation. Implementation progress will be reviewed once a month in regularly scheduled project progress meetings. The PLAN may be modified during construction if changes are made to the Project, but adjustments shall be approved by the OWNER prior to implementation.

3. This PLAN may be used by the Owner's Representative or Inspector to conduct site inspections and/or verify compliance with specification elements.

4. If additional equipment is brought on-site after construction begins, the Contractor shall provide this same inventory information to the Owner's Representative for the new equipment on or before the day it begins work on-site. All additional equipment shall conform to the PLAN.

5. Reports shall be provided for all equipment used on-site.

B. EQUIPMENT EMISSIONS CLOSEOUT DOCUMENTATION:

1. Submit the following prior to final payment:

a) Record of changes made to the original PLAN and reasons.

b) Provide a summary and documentation of strategies used and estimated reductions in fuel & emissions.

c) Provide documentation of amount and % of alternative fuel used.

2. PRODUCTS

Not used

3. EXECUTION

3.1. GENERAL

A. Implement the submitted PLAN. Provide personnel, documentation, equipment, signage, transportation, and other items as required to implement the PLAN during the entire duration of the Contract.

3.2. EQUIPMENT EMISSIONS PLAN IMPLEMENTATION

A. Plan Coordinator (Could be same as superintendent): Designate an on-site person responsible for instructing workers on the Owner's intent to reduce emissions, overseeing implementation and documenting results of the PLAN for the Project.

B. Plan Review: Review the PLAN in monthly progress meeting and include comments in the meeting notes.

C. Instruction: Provide on-site instructions to all subcontractors of emissions reduction methods to be used by all parties for the appropriate activities of the Project.

D. Discuss Owner's goals and requirements at the following meetings:

1. Pre-bid conference.

2. Pre-construction conference.

3. Progress meetings (monthly).

3.3 EQUIPMENT EMISSIONS REDUCTION TOOLKIT

A. Equipment Emissions Reduction Toolkit available at:

1. Website: (http://austintexas.gov/department/capital-improvement-program)

2. City of Austin Public Works Department, Project Management Division, One Texas Center, Suite 900

3. Construction Job Site Office (after contract award)

B. Equipment Emissions Reduction Toolkit consists of:

1. A list of Construction Equipment Emissions Reduction Strategies

2. EPA fuel savings calculator by idling reductions

3. Posting of Anti-idling signs

4. Memorandum of Agreement by Local Area Governments

5. Equipment Inventory Form

3.4 A LIST OF EQUIPMENT EMISSIONS REDUCTION STRATEGIES

The following are suggested emissions reduction strategies and references. As per the specification section 01353, 1.5 Submittals, the CONTRACTOR shall develop a list of strategies to be used in this Project at the start of construction.

C-1 Anti-Idling Strategies:

1. Implement and enforce anti-idling practices for all equipment and vehicles on and adjacent to the site and associated with the project. City will provide a construction site sign and stickers for vehicles and equipment. (http://www.engineoff.org/)

2. Limit all idling of project associated vehicles and equipment operations to five (5) minutes unless the idling is applicable to one or more of the following exceptions:

a) Idling is being used for emergency response purposes;

b) Idling is necessary for component of mechanical operation, maintenance, or diagnostic purposes; or

c) Idling is for the health or safety of the equipment operator.

3. Provide education to all staff, vendors and subcontractors about emissions hazards and anti-idling practices and encourage use of EPA calculator for fuel savings.

4. To the extent possible, do not stop or idle haulage trucks directly under tree limbs and foliage overhanging the street along the haul route. Further avoid such damage from truck exhaust by means of exhaust diversion devices to redirect or diffuse exhaust from being directed in a concentrated manner to tree limbs and foliage.

5. Avoid vehicle loitering or queuing outside or inside the gates of the work area to minimize degradation of localized air quality.

   (http://data.capcog.org/air-quality/engineoff/AntiIdlingBrochure(2).pdf)

   (http://data.capcog.org/air-quality/engineoff/template-1/HowtoOrderSign.html)

   (http://data.capcog.org/air-quality/engineoff/smartwaycalculator.xls)

   (http://austintexas.gov/airquality/)

C-2 Alternative Fuels:

6. Utilize **alternative fuels** including, Texas LED Compliant B20 (or higher) biodiesel, Compressed Natural Gas (CNG), propane and electric. (Refer to EPA Energy Policy Act for full list).

7. Avoid unnecessary fuel use by providing on-site fuelling for alternate fuels.

   (http://www.tceq.texas.gov/airquality/mobilesource/txled/cleandiesel.html)

   (http://www.eere.energy.gov/cleancities)

   (http://lonestarcfa.org)

C-3 Vehicle/Equipment Improvements:

8. Eliminate use of vehicles in tier 0 and 1 categories per EPA and rent or purchase tier 2 and 3 or (4) compliant vehicles.

9. It is recommended that CONTRACTOR takes advantage of the **Texas Emission Reduction Plan (TERP)** grant incentives to upgrade (replace or repower) vehicles with retrofitted emission reduction technologies. (http://www.tceq.texas.gov/airquality/terp/index.html) or (www.terpgrants.com)

10. Utilize **battery powered and/or solar powered equipment** where available. This strategy can be combined with anti-idling strategies by using this technology for sign boards. (evtransportal.org/dieselengineidlereduction.pdf)

C-4 Maintenance Program:

11. Establish a preventative **maintenance program** addressing issues including but not limited to, fuel use, air emissions, tire pressure, smoke from exhaust and noise.

12. Make all efforts to **prevent oil/fuel spillage** on to site surfaces.

C-5 Resource Management:

13. Utilize equipment companies that are located closest to the construction site.

14. Store equipment on site during construction use or arrange for closest overnight storage including **temporary use of the Right of Way** if possible.

15. To the extent possible, CONTRACTOR shall maximize use of **local and regional materials** to reduce transportation emissions.

16. CONTRACTOR shall maximize **salvage and reuse** of appropriate on-site materials. (http://www.usgbc.org/ShowFile.aspx?DocumentID=1095)

17. To the greatest extent possible, stage equipment and vehicles away from, and minimize operation near, sensitive receptors including, but not limited to, operable windows, fresh air intakes, hospitals, schools, licensed day care facilities, residences and areas where people congregate.

END

CONSTRUCTION PHOTOGRAPHY & VIDEOS
Section 01380

1. GENERAL

CONTRACTOR shall be responsible for the production of pre-construction, construction progress and post-construction photographs as provided herein. Owner's Representative may also designate additional subjects for photographs in addition to the general guidelines identified below.

2. QUALITY

All photographs must be produced by a competent photographer and shall be digital (6 Mega-Pixel) date-stamped color photography of commercial quality. All CONTRACTOR-generated photographs must be stored in a .jpeg file format Each photograph shall be submitted in duplicate as two 3x5 prints with no more than 3 photos per page of professional quality enclosed in clear plastic sleeve within 3 tab folders. The prints shall be accompanied by digital date-stamped photographs in CD format or other format acceptable to the City. Each print shall be marked with the name and CIP ID number for the Contract, name of CONTRACTOR, description and location of view and identity of photographer.

Each photograph submittal must include a Photo Log that includes the name and CIP ID number of Contract, name of CONTRACTOR, the name of the photographer and company, photograph number, the date of the photograph and the filename that the camera assigns to the photo (e.g. MVC-001.jpg). In addition, appropriate descriptive information to properly identify the location of view must be entered into the Photo Log that includes a project drawing or sketch to assist in maintaining a concise project record (e.g. location of MH 5 - Line A or Sta. 2+00 - Line A or location of Sedimentation Basin 5, sludge pump A).

3. VIEWS AND QUANTITIES

3.1. PRE-CONSTRUCTION VIDEO
STREET, RIGHTS-OF-WAY OR WATER/WASTEWATER/STORMWATER PROJECTS

CONTRACTOR shall document by video, within the limits of construction, all pre-existing site conditions/elements as listed for the Pre-construction Photographs below. The video documentation shall provide a clear and continuous view of the project alignment showing all visible utilities and features within the limits of construction. The pre-construction video shall be in a format acceptable to the City and shall be shot prior to the occurrence of any site disturbance after Notice to Proceed. The pre-construction video shall be submitted within ten (10) calendar days of the Notice to Proceed.

3.2. PRE-CONSTRUCTION PHOTOGRAPHS

STREET, RIGHTS-OF-WAY OR WATER/WASTEWATER/STORMWATER PROJECTS

All pre-construction photographs must be submitted within ten (10) calendar days of the Notice to Proceed. Pre-construction photographs must be taken at sufficient intervals to be able to carefully document the pre-construction conditions of the Work, but in no case less than 100 foot intervals along the street, right-of-way, drainage easement or water/wastewater line route before commencement of Work. Each photograph location shall be taken from a minimum of two (2) views (one forward station view and one backward station view along the street, drainage, easement or pipeline route) within the limits of construction. Particular attention must be devoted to pre-existing damage to structures; landscape features, streets, curbs, sidewalks, driveways, signs, mailboxes, retaining walls, MSE walls, etc. shall be documented. An identifier such as houses or businesses address/ signs, property numbers, mail boxes, landscaping, etc. shall be included in each view for ease of later identification. At a minimum, Pre-construction photographs must be taken of the following views:

- The entire street ROW
- The entire easement width and length (both permanent and temporary)
- All curb lines (both sides of street) – all pre-existing curb damage not called for replacement within the Work and shall include major cracks
- All driveways, steps, and curbs and curb ramps (both sides of street)
- Fence and gate conditions
- Trees, ornamental shrubs, plantings/planter boxes and evidence of irrigation features
- Other privately or publically owned features or facilities that might be disturbed by the construction
- Prominent utility features, such as: guy wires, poles, signs, valves, fire hydrants, meters, pull boxes, etc.
- Streams and stream banks within the limits of construction
- Other significant or prominent features in order to protect the OWNER and CONTRACTOR following construction (e.g. close up photographs of pre-existing broken curbs, cracked/failed pavement, damaged adjacent retaining walls, etc.)
- Views of structures, both inside and adjacent to the ROW/easement in areas where CONTRACTOR will be working within five (5) feet of said structure
- Other views as requested by the OWNER

3.2 CONSTRUCTION PROGRESS PHOTOGRAPHS

STREET, RIGHTS-OF-WAY OR WATER/WASTEWATER/STORMWATER PROJECTS

Construction Progress photos must be taken at least monthly showing the progress of the work for the month. Construction photographs of the same views taken during pre-construction photography must be taken during the progress of the Work and shall be submitted monthly with the Contractor's monthly progress payment application.

3.4 POST CONSTRUCTION PHOTOGRAPHS

Post-construction photographs must be taken of the same views taken during pre-construction photography to fully document the completed project. Post-construction photographs must be taken after cleanup and site restoration, and must be submitted with the final payment.

End

PART 1 - GENERAL

1.1 Related Documents:

Drawings and general provisions of Contract, including General Conditions, Section 00700,and Supplemental General Conditions, Section 00810, and Division 1 requirements.

PART 2 - PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 Office at the Work Site (Job Shack)

NOT USED.

3.2 Water for Construction

All water required for and in connection with the Work to be performed shall be furnished by and at the expense of the CONTRACTOR through meters installed on hydrants, except for water used in the "disinfection of potable water lines" process per Specification 510.3(29). All water used in the disinfection process shall not be metered, but rather shall be measured by calculation. Such water use does not require a meter, but a double-check valve assembly is required when connecting to a fire hydrant or a City main. CONTRACTOR shall submit a written plan for the disinfection process for review and approval by OWNER prior to commencing Work. The written plan shall include the CONTRACTOR's plan for final flushing and discharge of chlorinated water, and shall specify the quantities of potable water that will be required for the procedure and dosage plan proposed by the CONTRACTOR. Water used in the disinfection process shall be supplied by the OWNER through hydrants or connection through a City main at no charge to the CONTRACTOR for the initial disinfection procedure up to the quantities agreed to in the written plan for the disinfection process. Should the initial disinfection procedure fail to produce acceptable bacteriological sample test results, the cost of water at standard rates used for subsequent disinfection procedures shall be the responsibility of the CONTRACTOR with quantities determined through calculations.

For all water required for and in connection with the Work to be performed other than for the disinfection process, water and meters will be available from OWNER at standard rates. All costs for obtaining a water meter shall be the responsibility of the CONTRACTOR. The CONTRACTOR shall contact the Austin Water Utility and arrange to pick up the meter. CONTRACTOR shall install a double-check valve assembly on the fire hydrant between the hydrant and the meter, to prevent backflow in the event of pressure failure. CONTRACTOR shall supply all necessary tools, hose and pipe, and shall make necessary arrangements for securing and transporting such water and shall take water in such a manner, and at such times, that will not produce a harmful drain or decrease of pressure in the OWNER's water system. It shall be the CONTRACTOR's responsibility to make arrangements with the Austin Water Utility for the metering and reporting of the amount of water used. Water shall not be used in a wasteful manner. Standard hydrant wrenches shall be used for opening and closing of fire hydrants. In no case shall pipe wrenches be used for this purpose. Temporary lines shall be removed when no longer required.

"If applicable, after the installation of the City of Austin's water meter(s) for the Project, the CONTRACTOR has the option to utilize the water available from this service at the CONTRACTOR's expense. An adjustment to the Contract amount will be made by Change Order at the end of the Project for the costs incurred by the City of Austin for the water."

3.3 Telephone Service

NOT USED.

3.4 Sanitary Facilities

CONTRACTOR shall furnish temporary sanitary facilities at the site, as provided herein, for the needs of all construction workers and others performing Work or furnishing services on the Project.

Sanitary facilities shall be of reasonable capacity, properly maintained throughout the construction period, and obscured from public view to the greatest practical extent. If toilets of the chemically treated type are used, at least one toilet shall be furnished for each 20 employees. CONTRACTOR shall enforce the use of such sanitary facilities by all personnel at the site.

3.5 Protection of Public and Private Property

CONTRACTOR shall protect, shore, brace, support and maintain all underground pipes, conduits, drains, and other underground construction uncovered or otherwise affected by the CONTRACTOR's operations. All pavement, surfacing, driveways, curbs, walks, buildings, utility poles, guy wires, fences, and other surface structures affected by construction operations, together with all sod and shrubs in yards, parkways, and medians, shall be restored to their original condition, whether within or outside the easement/right-of-way. All replacements shall be made with new materials.

CONTRACTOR shall be responsible for all damage to streets, roads, curbs, sidewalks, highways, shoulders, ditches, embankments, culverts, bridges, or other public or private property, which may be caused by transporting equipment, materials, or men to or from the Work, whether by him or his Subcontractors. CONTRACTOR shall make satisfactory and acceptable arrangements with the owner of, or the agency having jurisdiction over, the damaged property concerning its repair or replacement or payment of costs incurred in connection with the damage.

All fire hydrants and water control valves shall be kept free from obstruction and available for use at all times.

3.6 Tree and Plant Protection

All trees and other vegetation which must be removed to perform the Work shall be removed and disposed of by the CONTRACTOR; however, no trees or cultured plants shall be unnecessarily removed unless their removal is indicated on the Drawings. All trees and plants not removed shall be protected against injury from construction operations.

No tree shall be removed outside of permanent easement(s), except where authorized by the E/A. Whenever practicable, CONTRACTOR shall tunnel beneath trees in yards and parking lots when on or near the line of trenching operations. Hand excavations shall be employed as necessary to prevent injury to trees. Care shall be taken with exposed roots, unearthed during construction, so that roots do not dehydrate causing tree damage.

Trees considered by the E/A to have any significant effect on construction operations are indicated on the Drawings and those which are to be preserved are so indicated.

CONTRACTOR shall take extra measures to protect trees designated to be preserved, using methods shown on the Drawings and as specified in Standard Specification Item No. 610S "Preservation of Trees and other Vegetation".

3.7 Security

CONTRACTOR shall be responsible for protection of the site, and all Work, materials, equipment, and existing facilities hereon, against vandals and other unauthorized persons.

No claim shall be made against OWNER by reason of any act of an employee or trespasser, and CONTRACTOR shall make good all damage to the OWNER's property resulting from CONTRACTOR's failure to provide security measures as specified.

Security measures shall be at least equal to those usually provided by OWNER to protect existing facilities during normal operations, and shall also include such additional security fencing, barricades, lighting, and other measures as required to protect the site. When required, the CONTRACTOR shall provide a security plan to the OWNER for review as to appropriateness of the security measures proposed.

3.8 Access Roads

CONTRACTOR shall establish and maintain temporary access roads to various parts of the site as required to complete the Project. Such roads shall be available for the use of all others performing Work or furnishing services in connection with the Project.

3.9 Parking

CONTRACTOR shall provide and maintain suitable parking areas for the use of all construction workers and others performing Work or furnishing services in connection with the Project, as required, to avoid any need for parking personal vehicles where they may interfere with public traffic, the OWNER's operations, or construction activities.

3.10 Dust Control

Dust Control during construction of this Project shall conform to Standard Specifications Item No. 220S, "Sprinkling for Dust Control". No direct payment will be made for dust control. Dust Control shall be considered subsidiary work relating to various Bid items of the Contract.

3.11 Temporary Drainage Provisions

CONTRACTOR shall be responsible for providing for the drainage of stormwater and such water as may be applied or discharged on the site in performance of the Work. CONTRACTOR shall obtain E/A approval for temporary drainage facilities which will handle, carry through, or divert around his Work all drainage flow, including storm flow and flows created by construction activity, to prevent silting of waterways or flooding damage to the property and adjacent property.

3.12 Erosion Control

CONTRACTOR shall prevent erosion of soil on the site and adjacent property resulting from his construction activities. Effective measures shall be initiated prior to the commencement of clearing, grading, excavation, or other operations which will disturb the natural protection.

CONTRACTOR shall use controls found in "Environmental Criteria Manual" or developed from successful techniques elsewhere as approved by E/A.

3.13 Pollution Control

CONTRACTOR shall prevent the pollution of drains and watercourses by sanitary wastes, sediment, debris and the substances resulting from construction activities. No sanitary wastes will be permitted to enter any drain or watercourse. No sediment, debris or other substance will be permitted to enter sanitary sewers and reasonable measures shall be taken by CONTRACTOR to prevent such materials from entering any drain or watercourse.

CONTRACTOR shall observe the rules and regulations of the State of Texas and agencies of the U.S. Government prohibiting the pollution of any lake, stream, river, or wetland by the dumping of any refuse, rubbish, dredge material, or debris therein.

CONTRACTOR is specifically cautioned that disposal of materials into any water of the State must conform to the requirements of the Texas Commission on Environmental Quality (TCEQ), and any applicable permit from the U.S. Army Corps of Engineers.

3.14 Noise Control

CONTRACTOR shall comply with the City of Austin's Noise Ordinance. CONTRACTOR shall take reasonable measures to avoid unnecessary noise. Such measures shall be appropriate for the normal ambient sound level in the area during working hours. All construction machinery and vehicles shall be equipped with practical sound-muffling devices, and operated in a manner to cause the least noise consistent with efficient performance of the Work.

3.15 CIP Sign

CONTRACTOR shall erect install and maintain CIP signs as specified. Signs shall be constructed in accordance with City Standard Specification Item No. 802S "Project Signs," as indicated on the Drawings.

3.16 Fences

All existing fences affected by the Work shall be maintained by the CONTRACTOR until completion of the Work. Fences which interfere with construction operations shall not be relocated or dismantled until written permission is obtained from the owner of the fence, and the period the fence may be left relocated or dismantled has been agreed upon. Where fences must be maintained across any construction easement, adequate gates shall be installed. Gates shall be kept closed and locked at all times when not in use.

Upon completion of the Work across any tract of land, CONTRACTOR shall restore all fences to preconstruction, or to a better, condition and to their preconstruction location.

3.17 Mail Boxes

CONTRACTOR shall remove, reset temporarily, and relocate permanently all mail boxes that are within construction site limits conforming to requirements of United States Postal Service. Mailboxes shall not be laid on the ground, but shall be temporarily reset the same day as removed. Payment for removing and resetting of mail boxes will not be paid for directly, but will be considered subsidiary to the various Bid items. Any damage to mail boxes or posts shall be the responsibility of the CONTRACTOR.

3.18 Emergency Facilities

Free access shall be maintained at all times to fire lanes and emergency and utility control facilities such as fire hydrants, fire alarm boxes, police call boxes, and utility valves, manholes, junction boxes, etc. In the event that it is necessary to make one of these facilities temporarily inaccessible, CONTRACTOR shall obtain approval of such action and schedule of Work from the OWNER. CONTRACTOR shall also provide at least 24 hours prior notice to the Fire Department, Police Department, and City Department governing the affected utility. The same Department(s) shall be promptly notified by the CONTRACTOR when such facilities are placed back in unobstructed service.

3.19 Notification of Owners

Unless otherwise indicated, the OWNER will notify property owners abutting the right-of-way of impending construction. The CONTRACTOR shall exercise diplomacy and tact with individual property owners.

3.20 Maintenance of Traffic

CONTRACTOR shall conduct his Work to interfere as little as possible with public travel, whether vehicular or pedestrian. Whenever it is necessary to cross, obstruct, or close roads, driveways, and walks whether public or private, the CONTRACTOR shall provide and

maintain suitable safe bridges, detours or other temporary measures to accommodate public and private travel, and shall provide reasonable notice to owners of private drives before interfering with them. Such maintenance of traffic will not be required when CONTRACTOR has obtained written permission from the owner and the tenant of the private property, or from the authority having jurisdiction over public property involved, to obstruct traffic at the designated point. A copy of the initial written permission shall be provided to the Owner's Representative.

Safety and conveyance of traffic shall be regarded as prime importance. Unless otherwise directed, all portions of streets associated with this Project shall be kept open and provided a dust free, smooth and comfortable ride to traffic. It shall be the responsibility of the CONTRACTOR to ensure that two-way traffic may safely bypass the construction site and that access is provided to abutting private property. In making open cut street crossings, the CONTRACTOR shall not block more than one-half of the street at one time without approval of the OWNER. Whenever possible, CONTRACTOR shall widen the shoulder on the opposite side to facilitate traffic control. Temporary surfacing shall be provided as necessary on shoulders.

Prior to beginning Work, CONTRACTOR shall designate, in writing, a competent person who will be responsible and available on the Project site, or in the immediate area, to ensure compliance with the traffic control plan. CONTRACTOR shall provide documentation to demonstrate the sufficient training in Traffic Control for his competent person. Owner will designate a qualified person to observe implementation and who will have authority to assure compliance with the traffic control plan.

The CONTRACTOR shall perform the necessary cleanup and finishing immediately after all or a portion of the Work is completed. When the Work includes paving operations, the entire site shall be kept clean to facilitate placement of required traffic control devices. Temporary and permanent striping lay-out shall be approved by the Transportation Department prior to placement, when included in the Work.

1. Detours

Where indicated on the traffic control plan CONTRACTOR shall erect and maintain detours around construction activities. Should CONTRACTOR desire to propose a detour, not already included in the traffic control plan, it shall be his responsibility to prepare a revised traffic control plan showing the detour, and obtain approval of the revised traffic control plan from the Transportation Department, prior to implementation of the detour. The Transportation Department has final authority as to the acceptability of any proposed revisions to the traffic control plan. The CONTRACTOR shall bear all costs for revising the traffic control plan and for maintaining the proposed detour.

2. Barricades and lights

CONTRACTOR shall place and maintain in good condition, standard barricades at each end of the Project and at other locations where traffic is rerouted or blocked from using regular traffic lanes. Barricades and warning signs shall be in accordance with the Texas Manual on Uniform Traffic Control Devices (MUTCD) and City of Austin Standard Specification Item No. 803S, "Barricades, Signs and Traffic Handling". Signs, barricades, and warning devices informing the public of construction features will be placed and maintained by the CONTRACTOR, who shall be solely responsible for their maintenance. The decision to use a particular device at a particular location as indicated in the traffic control plan or as determined by the CONTRACTOR, shall be the sole responsibility of the CONTRACTOR.

All open trenches and other excavations shall have suitable barricades, signs, and lights to provide adequate protection to the public. Obstructions, such as material piles and equipment shall be provided with similar warning signs and lights.

All barricades and obstructions shall be illuminated with warning lights from sunset to sunrise. Material storage and conduct of the Work on, or along side, public streets and highways shall cause a minimum obstruction and inconvenience of the traveling public.

3.21 Required Job Site Postings and Notices

CONTRACTOR shall post the following postings and notices in English and Spanish at one or more conspicuous locations on the job site. In the case of Projects with multiple sites, the notices and postings must be displayed at each site. In the case of Projects that do not have a job shack or other temporary facility on the site, CONTRACTOR shall post all notices on a temporary bulletin board. Other special conditions are noted below.

Required for all Projects	
Poster	Available at:
Baseline Schedule for Project identifying when all subcontractors will be used	N/A (as required under Section 00700, paragraph 2.4.2.1.)
Wage Rates as required under Section 00830.	Section 00830BC and/or Section 008300HH
City of Austin Wage Contact posters	Provided at Pre-Construction meeting (English and Spanish)
City of Austin Equal Employment Opportunity posters	http://austintexas.gov/department/wage-compliance (English and Spanish)
Texas Commission on Environmental Quality "Construction Site Notice" form, if applicable, as required <u>or</u> the required TPDES information	http://www.tceq.state.tx.us/assets/public/permitting/waterquality/attachments/stormwater/txr152d2.pdf (Option 1 – as required under Section 00810, 6.7.4.2 N/A (Option 2 – as required under Section 00810, 2.6.7.4.3)
OSHA poster "Job Safety and Health: It's the Law"	http://www.osha.gov/Publications/osha3165.pdf (English) http://www.osha.gov/Publications/osha3167.pdf (Spanish)
City of Austin Rest Break Ordinance Signs	http://austintexas.gov/department/wage-compliance (English and Spanish) As required to be posted in English and Spanish under Ordinance No. 20100729-047
Texas Payday Law Poster	http://www.twc.state.tx.us/ui/lablaw/ll10.pdf (English) http://www.twc.state.tx.us/ui/lablaw/ll10s.pdf (Spanish)
Texas Workers Compensation notice that the employer does or does not carry Workers Compensation insurance	Does <u>not</u> carry Workers Compensation Insurance: http://www.tdi.state.tx.us/forms/dwc/notice5.pdf (English) http://www.tdi.state.tx.us/forms/dwc/notice5s.pdf (Spanish) Does carry Workers Compensation Insurance: http://www.tdi.state.tx.us/forms/dwc/notice6.pdf (English) http://www.tdi.state.tx.us/forms/dwc/notice6s.pdf (Spanish)
TWC Employer's Notification of the Ombudsman Program to Employees	http://www.oiec.state.tx.us/documents/Employer_Notice_of_O.pdf (both versions)
DOL – The Uniformed Services Employment and Reemployment Rights Act	http://www.dol.gov/vets/programs/userra/USERRA_Private.pdf

(USERRA)	
EEOC Equal Employment Act and the Americans with Disabilities Act (ADA)	http://www.dol.gov/ofccp/regs/compliance/posters/pdf/eeopost.pdf (English) http://www.dol.gov/ofccp/regs/compliance/posters/pdf/eeosp.pdf (Spanish)
Fair Labor Standards Act (FLSA) Minimum Wage Poster	http://www.dol.gov/whd/regs/compliance/posters/flsa.htm (English) http://www.dol.gov/whd/regs/compliance/posters/flsaspan.htm (Spanish)
If applicable: Employee Rights for Workers with Disabilities/Special Minimum Wage Poster – Employment Standards	http://www.dol.gov/whd/regs/compliance/posters/disabc.pdf http://www.dol.gov/whd/regs/compliance/posters/disabspanc3p.pdf
"Your Rights Under the Family and Medical Leave Act (FLMA)"	http://www.dol.gov/whd/regs/compliance/posters/fmlaen.pdf (English) http://www.dol.gov/whd/regs/compliance/posters/fmlasp.pdf (Spanish)
Title VI Rights Poster	http://austintexas.gov/department/wage-compliance
Additional Postings Required for Federally Funded Projects	
"Employee Rights Under the Davis-Bacon Act"	http://www.dol.gov/whd/regs/compliance/posters/fedprojc.pdf (English) http://www.dol.gov/whd/regs/compliance/posters/davispan.pdf (Spanish)
Applies to USDOT/FHWA funded projects: "Notice of False Statements Concerning Highway Projects"	http://www.mdt.mt.gov/publications/docs/forms/dbe/eeo_board/false_statements.pdf (as required in Section 00810A Standard Federal-Aid Assurances)
Applies to USDOT/FHWA funded projects; "Contractors EEO Policy"	N/A (as required in Section 00810A Standard Federal-Aid Assurances)

END

SECTION 01505.3

Non-Building Projects – Water/Wastewater and Street Reconstruction

PART 1 – GENERAL

1.1 RELATED DOCUMENTS

1. Division 01 Section 01200 "Project Meetings"
2. Division 01 Section 01500 "Temporary Facilities"
3. Division 00 Section "Hazardous Waste Management"
4. Division 01 Section 01700 "Contract Closeout"
5. Division 02 Section "Demolition" & "Clearing and Grubbing".
6. Division 01 Section 01352 "Sustainable Construction Requirements".

1.2 SUMMARY

A. The Owner has established that the Project shall minimize the creation of construction and demolition waste on the Project site and shall recycle and/or salvage non-hazardous construction, demolition, and land clearing debris to divert waste from Landfills. See 1.5 Waste Management Goals.

1. All profits resulting from salvaging and recycling shall go to the Contractor.
2. Where there is little cost difference between recycling/salvaging and land-filling of items, the Contractor is directed to recycle/salvage.

B. Hazardous materials are an exception to this Section. Comply with applicable requirements of Local, State and Federal regulations.

C. This Section includes administrative and procedural requirements for recycling, salvaging and disposing of non-hazardous demolition and construction waste

1.3 REFERENCES

A. The standards listed below form a part of this Section to extent referenced. Standards are referred to in the text by basic reference only.

1. Sustainable Building Sourcebook – Austin Energy Green Building:www.austinenergy.com/Energy%20Efficiency/Programs/Green%20Building/Sourcebook/constructionWasteManagement.htm

2. Resource Exchange Network for Eliminating Waste (RENEW), TCEQ (MC-112), Biannual catalog lists materials available and wanted; serves Texas and surrounding states; lists are posted on the Internet: http://www.tceq.state.tx.us/assistance/P2Recycle/renew/renew.html

3. Recycle Texas Online, A service of the Texas Commission on Environmental Quality. Contains information on about 1000 businesses and local governments handling materials from Texas. Organizations' information is self-reported and listings are free of charge. www.tceq.state.tx.us/assistance/P2Recycle/rtol/rtol.html

1.4 DEFINITIONS

A. Chemical Waste: Includes petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.

B. Clean: Untreated, unpainted, not contaminated with oils, solvents, caulk, or other materials.

C. Disposal: Acceptance of solid wastes at legally permitted and operating facility for the purposes of land-filling.

D. Diversion: Avoidance of demolition and construction waste sent for disposal to landfill or incineration. Diversion does not include using materials for landfill, alternate daily cover on landfills, or materials used as fuel in waste-to-energy processes.

E. Hazardous Waste: Byproducts of society that can pose a substantial or potential hazard to human health or the environment when improperly managed, and possessing at least 1 of 4 of the following characteristics, or appearing on a special Environmental Protection Agency (EPA) list.

1. Ignitability.

2. Corrosivity.

3. Reactivity.

4. Toxicity.

F. Landfill: Authorized land waste disposal site that is located to minimize waste pollution from runoff and leaching.

G. Recycling: The process of sorting, cleansing, treating, and reconstituting solid waste and other discarded materials for the purpose of using the altered form. Recycling does not include burning, incinerating, or thermally destroying waste.

H. Return: To give back reusable items or unused products to vendors for credit.

I. Reuse: A strategy to return materials to active use in the same or a related capacity.

J. Salvage: To remove a waste material from the Project site to another site for resale or reuse by others.

K. Source Separation: The act of keeping different types of waste materials separate beginning from the first time they become a waste.

L. Toxic: Poisonous to living beings either immediately or after a long period of exposure.

M. Trash: Any product or material unable to be reused, returned, recycled, or salvaged.

N. Waste: Extra material or material that has reached the end of its useful life in its intended use. Waste includes all materials removed from the Project site to be land-filled, recycled, or salvaged for reuse. Pallets, containers, packaging and packing materials in which construction products are delivered to the Project site are considered waste materials.

1.5 WASTE MANAGEMENT GOALS

A. The Owner has established that as much as is economically feasible of the "waste" materials produced as a result of the Work, shall be employed, salvaged, reused, or recycled in order to minimize the impact of construction and demolition waste on landfills and reducing disposal costs.

B. Contractor shall employ and encourage practices that ensure the generation of as little waste as possible due to error, poor planning, breakage, mishandling, contamination, or other factors.

C. Contractor is responsible for knowing and complying with regulatory requirements, including but not limited to Federal, State and local, pertaining to legal disposal of all construction waste materials.

D. Contractor shall recycle and divert materials for secondary uses whenever economically feasible.

E. Acceptable methods of diversion include:
Recycling, reuse and salvage
Donation to nonprofit organizations
Removal from jobsite by staff or subcontractors for use (not disposal)
Return to supplier
Sale to organizations or individuals

F. The Contractor shall develop a Construction and Demolition Waste Management Plan of non-hazardous construction and demolition waste. The plan shall identify the materials to be diverted from disposal and define the materials to be separated on-site or off-site. Calculations can be done by weight or volume, but must be consistent throughout.

1.6 SUBMITTALS

A. ***Waste Management Plan:*** A Project-specific plan for the collection, transportation, and disposal of the waste generated at the construction site, shall be submitted for approval within 14 calendar days after notice to proceed, or prior to any waste removal, whichever occurs first. The approved Plan shall be distributed to all subcontractors and the owner and will not relieve the Contractor's responsibility for compliance with applicable environmental regulations.

An example template is included as "Appendix A" to this section.

1. The Waste Management Plan shall include the following:

a. Identify each type of waste material produced as a result of the Work on the Project Site.

b. Identify each type and quantity of demolished and waste material intended to be recycled, salvaged or reused.

c. Identify material separation requirements.

e. Identify location of temporary on-Site storage for recycled and reused materials.

f. Identify final destination means of transportation for each recycled and reused material.

h. Identify the name/phone number of the Contractor's on-site coordinator of the Waste Management Plan.

i. Indicate permit or license and the location of the municipal solid waste landfills and other disposal area(s) to be used.

j. List of materials that cannot be recycled or reused.

B. ***Construction Waste Management Closeout Documentation:*** Submit the following upon the completion of The Work and prior to final payment:

a. A Summary of Solid Waste Disposal and Diversion (refer example template "Appendix B") prepared and maintained through Project duration, demonstrating that 100% of all non-hazardous construction wastes were recycled, salvaged or disposed of properly and includes as a minimum the following information:

1. Dates
2. Materials Description and Quantity
3. Indicate whether recycled, salvaged, reused of sent to landfill for disposal.
4. Destination or Name and location of accepting facility.

b. Copies of all receipts, manifests, weight tickets, and other documentation that identify all materials recycled, salvaged, land-filled or incinerated.

PART 2 - PRODUCTS

Not used

PART 3 – EXECUTION

3.1 GENERAL

A. Implement the Waste Management Plan as approved by the City of Austin Project Manager. Provide handling, containers, storage, signage, transportation, and other items as required to implement Waste Management Plan during the entire duration of the Contract.

B. Satisfy the requirements outlined in Subsection 1.5, Waste Management Goals.

3.2 WASTE MANAGEMENT PLAN IMPLEMENTATION

A. Plan Coordinator: Designate an on-site party (or parties) responsible for instructing workers, overseeing implementation and documenting results of the Waste Management Plan for the Project.

B. Plan Distribution: Provide copies of the Waste Management Plan to the Contractor's superintendent, each Subcontractor, the Owner, and the Engineer.

C. Meetings: Include Construction Waste Management in progress meetings to maintain the Plan for achieving the owners waste management goals:

D. Carefully order materials to avoid over supply.

E. Protect materials from contamination during handling, storage and transport to meet the requirements of the accepting facilities.

F. Assign and label a specific area to facilitate separation of materials for potential recycling, salvage, reuse, return and disposal. This area shall be kept neat and clean and clearly marked in order to avoid contamination of materials.

3.3 RECYCLING REQUIREMENTS

A. Materials: In general the contractor is encouraged to recycle the following types of construction waste materials generated during the course of this project, that are not salvaged or reused:

a. Asphalt concrete pavement.

b. Concrete materials.

c. Metals, including the following.

i. Banding straps.
ii. Reinforcing steel.
iii. Iron.
iv. Steel pipe.
v. Galvanized steel pipe.

d. Clean dimensional lumber.

e. Wood crates and pallets.

f. Glass and glass containers.

g. Plastics.

h. Electrical wiring.

i. Cardboard, paper, and packaging.

j. Beverage containers.

B. Methods: The following recycling methods, or a combination of, may be used.

1. On-site separation: Each material to be recycled shall be separated at the Project site and delivered to the recycling markets or directly from the Project site.

   a. If on-site separation method is used, designate a specific area or areas to facilitate separation of materials for potential reuse, salvage, recycling, and return.

   b. Maintain recycling and waste bin areas neat and clean and clearly marked, both in Spanish and in English, in order to avoid co-mingling of materials.

   c. Protect materials from contamination.

2. Off-site separation: Materials to be recycled are delivered unsorted from the Project site to a materials recovery facility or transfer station where recyclable materials are separated from other waste.

   a. Contractor shall verify that the entity responsible for the off-site separation has a market for all materials required to be recycled from the Project site.

   b. The same Submittals procedures shall apply.

   c. Protect materials from contamination.

3.4 REUSE

A. Contractor is encouraged to reuse as many demolished and waste materials as possible.

B. Reuse of waste materials includes the following:

a. Salvaging materials scheduled for disposal.

b. Off-Site storage of waste materials for future reuse by Contractor on other projects.

c. Returning unused and reusable materials, packaging and pallets, to vendor.

e. Assemble designated reuse items in a single location safe from damage, for review and approval by the owner's representative.

3.5 SALVAGE

A. Salvage Guidelines:

1. The contractor is encouraged to salvage as many items as deemed economically possible, considering reduction of land filling fees and possible use by others.

2. Assemble potentially salvageable items in one area and donate or sell to the public after review by the City of Austin Project Manager.

3. All proceeds from the sale of salvaged items shall go to the contractor.

Appendix A. Sample Construction Waste Management Plan

Construction Waste Management Plan

Project:
Contractor:
Date:
Contact:
Phone:
Prepared by:

Diversion Goal: Recycle, reuse and/or salvage as much land-clearing and construction waste as is economically feasible.

I. Coordination and Training

a. Name of Contractor's representative responsible for CWM implementation & coordination.

b. Describe method(s) of waste recycling management – on-site and/or off-site.

c. Describe how Contractor's staff and subcontractors will be informed regarding proper recycling and separation procedures

d. Describe and/or show on an attached site map where the temporary waste material storage area(s) will be located, and how will contamination of separated waste materials will be prevented?

II. Waste Minimization

a. What waste minimization techniques will be employed during the construction phase?

_____
_____
_____
_____

b. Which employees and / or subcontractors will be involved with each technique?

_____
_____
_____
_____

III. Construction Waste Analysis (including site / land-clearing materials, as applicable)

a. ***Diverted Materials***: For each material anticipated to be reused or recycled (diverted from the landfill), provide information to complete the table below. (Note: Whenever possible, attempt to use or donate construction waste materials rather than recycling.)

Material or Item	Storage Method (roll-off, bin, area, on pallet, etc.)	Quantity estimate (no., linear ft., square ft., etc.)	Proposed Recipient

Add rows (or paper pages) as required

b. ***Landfill***: For construction phase trash and materials / items that will not be diverted, complete the following table:

Quantity estimate (weight or volume)	Number and size of roll offs anticipated	Proposed landfill site

Appendix B. Summary of Solid Waste Disposal and Diversion

Project name _____ Project Number _____
Contractor Name _____ License Number_____
Contractor Address_____

Solid Waste Material	**Recycled, Reused, salvaged or disposed**	**Date Material Disposed** or diverted	**Amount Disposed/ Diverted** (Ton or cubic yd.)	**Municipal Solid Waste Facility** (Name, address, Phone)	**Recycling/Reuse Facility** Name Address Phone	**Comment** (If disposed state why not diverted)
Vegetation						
Soil						
Trench spoils						
Rock						
Asphalt						
Concrete						
Metal						
Wood						
Debris						
Glass						
Trash						
Other						

Signature _____ Date _____

Page / of / total pages

END SECTION 01505.3

PART 1 - GENERAL

1.1 Related Documents:

Drawings and general provisions of Contract, including General Conditions, Section 00700, and Supplemental General Conditions, Section 00810, and Division 1 requirements.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 General

CONTRACTOR shall maintain reasonable local vehicular and pedestrian dust free traffic, including use of driveways, to proceed safely with minimum inconvenience, except during actual construction operations. CONTRACTOR provided flaggers shall assist traffic when a street is operating under a single lane. Two-way traffic shall be maintained at all other times unless otherwise authorized by Owner.

CONTRACTOR shall provide, at the work zone location during temporary traffic control installation, a designated Competent Traffic Control Person to ensure compliance with the traffic control plans and the provisions of the Contract. Training Certificates for the designated Competent Person shall be provided with submittals at the Precon. Training certificates for competent persons shall be good for four (4) years from the date of training. After such time the competent person must show that additional training or re-certification has been completed to maintain competent person status.

CONTRACTOR shall maintain a smooth and safe ride for traffic by placing steel plates with Asphaltic concrete berms, temporary fill or bridging and temporary surfacing with cold or hot-mix Asphaltic concrete paving in accordance with applicable City Standards.

Sidewalks shall not be obstructed, except by special permission of Owner or E/A. Access to private dwelling and to commercial establishments shall be provided at all times.

CONTRACTOR shall plan and execute his operations in a manner that will cause a minimum interference with traffic. The CONTRACTOR shall place and maintain in good condition, standard barricades at each end of the Project and at other locations where traffic is rerouted or blocked from using regular traffic lanes. Barricades and warning signs shall be in accordance with Texas Manual on Uniform Traffic Control Devices (MUTCD) and the City of Austin Transportation Criteria Manual.

Signs, barricades and warning devices informing public of construction features shall be placed and maintained by the CONTRACTOR who shall be solely responsible for their maintenance.

Unless otherwise specified elsewhere in Division 1, neither explosives nor blasting shall be permitted on this Project.

3.2 Traffic Control

3.2.1 It shall be the sole responsibility of the CONTRACTOR to furnish, install, maintain and remove barricades, detour signs, warning signs, lights and all regulatory traffic control devices of the size and type specified, at locations indicated, or as directed or approved by the OWNER in accordance with the Texas Manual on Uniform Traffic Control Devices, (MUTCD), Part VI, Traffic Control for Street and Highway Construction and Maintenance Operations and the City of Austin Transportation Criteria Manual. Upon phase completion, the Contractor shall immediately revise the

temporary traffic devices to reflect the next phase or if the project is complete remove them from the public right of way.

3.2.2 Throughout the life of the Contract, all existing roads and Traffic Control devices included in the Work shall be maintained by the CONTRACTOR to a condition, in the opinion of the OWNER, which is equal to or better than that which existed when Work commenced. Maintenance of existing roads and devices shall take priority over all other Work items and shall be subject to a seven-day-a-week, 24-hours-per-day time frame. The CONTRACTOR shall provide a smooth and safe riding surface for all vehicles along the route of this Project. This could include, but not be limited to, small cars, motorcycles, mopeds and bicycles. If the condition of the street surface deteriorates, for any reason, CONTRACTOR shall take necessary steps to insure immediate restoration.

3.2.3 During construction of streets, drainage, and utility projects, if conditions of existing street surface require maintenance to upgrade from their state when the Work began, a separate pay item may be included in Bid. Otherwise, maintenance work will not be paid for directly but will be considered subsidiary to various Bid items of this Contract.

3.2.4 In the event that CONTRACTOR fails, in opinion of OWNER, to maintain a smooth surface for public comfort, fails to provide ingress and egress to private property, and/or does not provide and maintain proper traffic control devices, OWNER may provide these services and deduct any cost thereof, including overtime and administrative expenses, from all estimates thereafter due the CONTRACTOR. Such action by the OWNER shall not relieve the CONTRACTOR of his liability to protect the public at construction site. Owner may also assess an investigation fee, as established by separate Fee Ordinance, for violations resulting in more than one deficiency report issued to Contractor.

3.2.5 A permit must be obtained from Texas Department of Transportation (TxDOT), prior to Work being performed on state highway routes passing through the City.

3.2.6 CONTRACTOR shall notify the Owner's Representative, Police Department, Fire Department, EMS, and Right of Way Management Division at least seven Calendar Days in advance of beginning proposed Work, with intention to close or partially block any street or any part thereof, or of any construction affecting free flow of traffic. The CONTRACTOR shall plan and adequately provide barricades and warning devices. The same parties shall be notified when normal traffic flow is restored.

3.2.7 Should the CONTRACTOR, in his operations, reduce an existing two-way roadway to less than 20 feet in width, CONTRACTOR shall provide a route through or around the narrowed area as approved by Owner or E/A.

3.2.8 The CONTRACTOR's Flaggers shall be required any time it is necessary for the CONTRACTOR's equipment to move into or across an open traffic lane, or at other such times as directed by the Owner's Representative. A flagger shall be utilized to aid exit of hauling equipment from open traffic lanes to the Work area, and entry of hauling equipment from Work area to open traffic lanes. Flaggers shall be dressed and conduct operations in accordance with Texas Manual on Uniform Traffic Control Devices and the Transportation Criteria Manual. Flagging operations shall be the sole responsibility of the CONTRACTOR.

3.2.9 The CONTRACTOR and Subcontractors shall confine their activities to the immediate area of the construction site and provide the following:

a. Appropriate temporary fences, barricades, and/or Metal Beam Guard Fence if required, for site work involving excavation, utility extensions, remote construction work or other circumstances involving safety of public or protection of the work in progress.

b. Warning lights at open trenches, excavations, etc., during hours from dusk to dawn each day. Protection of structures, utilities, sidewalks, pavements, and other facilities immediately adjacent to excavations, from damages caused by settlement, lateral movement, undermining, washout and other hazards.

3.3 Spoil Disposal

CONTRACTOR may make other arrangements for spoil disposal subject to E/A evaluation of the CONTRACTOR-supplied proof that the Owner(s) of the proposed site(s) has a valid fill permit issued by the appropriate governmental agency. Finally, the CONTRACTOR shall submit a haul route plan including a map of the proposed route(s) for the E/A and Owner's approval.

3.4 Restoration

WATER AND WASTEWATER CONSTRUCTION REQUIREMENTS

3.4.1 In order to minimize environmental and potential flood impacts, the sum of the amount of trench opened in advance of the completed line and the amount of trench left unfilled at any time shall be restricted to one (1) full block or 300 linear feet, whichever is less.

3.4.2 Restoration shall be an on-going process during construction operations and shall immediately precede completion of construction of each successive section of the line, which shall not exceed 1,200 linear feet without approval of the E/A.

3.5 Street Markers and Traffic Control Signs

It shall be responsibility of the CONTRACTOR to remove, preserve and reset, as required, Street Marker and Traffic Control Signs that are within construction limits to the line and heights as described in Texas Manual on Uniform Traffic Control Devices before any sidewalks or street excavation is begun. Signs shall not be laid on the ground. No payment will be made for this work but shall be considered subsidiary to the various Bid items. Traffic Sign Activity Section of the Transportation Department (457-4850) shall be notified a minimum of five Working Days prior to completion of the Project so that signs may be checked for damage. Any damage to signs or posts shall be paid for by the CONTRACTOR.

3.6 Burning Permit

Open burning within City limits will not be allowed. Trench burning shall require a permit from the Fire Marshal. Burning permits outside City limits shall be obtained from the appropriate authority.

The CONTRACTOR shall secure and pay for all burning permits.

3.7 Driveways

Unless otherwise indicated, the approach grade of existing driveways shall be modified as indicated and as directed by the Owner's Representative. The OWNER will contact property owners whose driveways require grade modification beyond street right-of-way and the OWNER will obtain their concurrence for approach grade modification. Within the right-of-way, all driveways shall be replaced with concrete driveways. Outside the right-of-way, when approach grade modifications are required, flexible base shall be placed by the CONTRACTOR to resurface existing dirt or gravel driveways; asphalt and concrete drives shall be replaced in kind by the CONTRACTOR. Excavation, Flexible Base, Portland Cement Concrete and Asphaltic Concrete, used for driveways as prescribed above shall not be measured for payment but shall be considered subsidiary to various Bid items in the Contract unless payment is included as a separate Contract pay item.

3.8 Removal or Relocation of Fences and Sprinkler Systems

Removal or relocation of privately owned fences and sprinkler systems not specified in Bid, and within public right-of-way is the primary responsibility of the property owner. OWNER

will cause property owners to be aware of any known conflicts and encourage them to make desired adjustments in advance of construction. In the event the property owner does not, or will not, make adjustments necessary for construction of improvements to be made under this Contract, CONTRACTOR, after receiving written approval from the OWNER, shall remove those portions that interfere with the Work, as follows:

3.8.1 Fences shall be disassembled, by hand, into hand manageable sizes and placed on the private property.

3.8.2 For sprinkler systems, the CONTRACTOR, after assuring that electrical and/or mechanical controls are disconnected, shall remove sprinkler heads, valves, controls, and any other miscellaneous items, including distribution pipe, or wire, saw cut from the system. The CONTRACTOR shall present these materials to the property owner. Where piping is cut, the pipe shall be permanently capped or plugged, unless otherwise directed by the OWNER.

Work for removal or relocation of fences and sprinkler systems shall not be paid for directly but shall be subsidiary to the various Bid items.

End

ARTICLE 1 - GENERAL

1.1 RELATED DOCUMENTS

The following documents are a part of this section:

All documents in Bidding Requirements, Contract Forms and Conditions of the Contract.

Other sections of Division 1 - General Requirements apply to this section.

1.2 DESCRIPTION AND INTENT OF THE WORK

No asbestos containing material (ACM) shall be brought onto the Project site, and/or incorporated into the Project construction without the written consent of the OWNER. Any asbestos containing material found at any time including after contract completion, to have been brought onto the site or incorporated into the Project construction by the CONTRACTOR, or any Subcontractors, Sub-Subcontractors or Suppliers, shall be removed and disposed of in accordance with the then current governmental regulatory standards.

All costs associated with the inspection, sampling, testing, removal and disposal of ACM as described above shall be paid by the CONTRACTOR.

1.3 DEFINITIONS

ASBESTOS: The asbestiform varieties of serpentine (chrysotile), riebeckite (crocidolite) cummingtonite-grunerite (amosite), anthophyllite, actinolite and tremolite.

ASBESTOS CONTAINING MATERIAL (ACM): Any material containing more than one percent (1%) by weight of asbestos of any type or mixture of types.

ASBESTOS CONTAINING BUILDING MATERIAL (ACBM): Any material used in the construction of, or incorporated into the construction of, any building that contains more than one percent (1%) by weight of asbestos of any type or mixture of types.

MSDS: A material safety data sheet (MSDS) is a form containing data regarding the properties of component substances that comprise a manufactured product. They are a basic hazard communication tool that gives details on chemical and physical dangers, safety procedures, and emergency responses for chemicals.

1.4 QUALITY ASSURANCE

PROHIBITION OF ASBESTOS CONTAINING MATERIALS

The E/A has been instructed to not permit any asbestos containing materials to be specified, requested or approved for use in conjunction with this Project.

The E/A has signed the following:

A. 01900A Statement of Non-Inclusion of Asbestos Containing Material (E/A, Prior to Design): stating that the Engineer/Architect shall not specify, request or approve any ACM in this Project without prior written approval of OWNER.

B. 01900B Statement of Non-Inclusion of Asbestos Containing Material (E/A, After Design): stating that the Engineer/Architect has not specified, requested or approved any ACM in this Project without the prior written approval of the OWNER, and that any ACM allowed in this Project is identified in the Statements.

These Statements are included in the Construction Documents.

ASBESTOS CONTAINING MATERIALS PROHIBITED FROM SITE

No asbestos containing materials will be permitted as part of the Project construction. The following list is intended to be used as a general guide to show which types of materials are suspected to contain asbestos:

- Cement Pipes
- Cement Wallboard
- Cement Siding
- Asphalt Floor Tile
- Vinyl Floor Tile
- Vinyl Sheet Flooring/vinyl wall coverings
- Flooring Backing
- Construction Mastics (floor tile, carpet, ceiling tile, etc.)
- Acoustical Plaster
- Decorative Plaster / stucco
- Textured Paintings/Coatings
- Ceiling Tiles and Lay-in Panels
- Spray-Applied Insulation
- Blown-in Insulation
- Fireproofing Materials
- Taping Compounds (thermal)
- Packing Materials (for wall/floor penetrations)
- High Temperature Gaskets
- Laboratory Gloves
- Fire Blankets
- Fire Curtains
- Elevator Equipment Panels
- Elevator Brake Shoes
- HVAC Duct Insulation
- Boiler Insulation
- Breeching Insulation
- Ductwork Flexible Fabric Connections
- Cooling Towers
- Pipe Insulation (corrugated air-cell, block, etc.)
- Heating and Electrical Ducts
- Electrical Panel Partitions
- Electric Cloth
- Electric Wiring Insulation
- Chalkboards
- Roofing Shingles / tiles / membranes
- Roofing Felt
- Roof Coatings
- Base Flashing
- Thermal Paper Products
- Fire Doors
- Caulking/Putties
- Adhesives / mastics
- Wallboard
- Joint Compounds
- Spackling Compounds
- Laboratory hoods/tabletops
- CMU block fill materials

If any of these suspect materials are specified for use on the Project, and if they do not have specific labelling identifying them as asbestos free, then the CONTRACTOR shall notify the OWNER immediately. Laboratory analysis of the material by an OWNER-approved laboratory shall be performed at CONTRACTOR's expense in order to warrant that the material does not contain asbestos. A copy of the package labelling or results of laboratory testing must be provided to the OWNER prior to inclusion of the specified material during construction. Contractor's construction submittals must include MSDSs for all new materials used in construction of buildings, facilties and infrastructure.

1.5 SUBMITTALS

NON-USE OF ASBESTOS AFFIDAVITS

At the time that the CONTRACTOR signs the Agreement, they shall sign a Non-Use of Asbestos Affidavit (Contractor Prior to Construction), Contract Document 00680. This Affidavit certifies that the CONTRACTOR agrees that they will not allow any asbestos containing materials to be incorporated into the construction of the Project or allow any asbestos containing building materials on the site for which the OWNER has not given prior written approval.

Prior to final payment, the CONTRACTOR will provide to the OWNER a Non-Use of Asbestos Affidavit (Contractor After Construction), Contract Document 00681. This Affidavit certifies that the CONTRACTOR did not allow asbestos containing materials to be incorporated into the construction or allowed any asbestos containing building materials on the site for which the OWNER of the Project did not give prior written approval.

ASBESTOS CONTAINING MATERIALS: When any asbestos containing materials are used on the Project, provide the following information:

A detailed description of the material containing the asbestos.

The type and percent of asbestos contained in the material.

The quantity of the materials used, including the square footage, or in the case of pipe insulation, the size and linear footage.

A drawing showing the exact location of any asbestos containing materials.

Final payment shall be withheld until the above described Affidavits, submittals and/or information are received and approved.

END

CITY OF AUSTIN

STATEMENT OF NON-INCLUSION OF ASBESTOS CONTAINING MATERIAL

STATE OF TEXAS
COUNTY OF TRAVIS

ENGINEER/ARCHITECT PRIOR TO DESIGN

"My name is CHIEN LEE, hereinafter known as Authorized Representative.

"I am over the age of 18 years and I have never been convicted of a crime. I am the PRINCIPAL of HEJL, LEE & ASSOCIATES, INC. hereinafter known as ENGINEER/ARCHITECT.

"I am fully competent to make this statement. I have personal knowledge of the facts set forth below and they are all true and correct.

"WHEREAS ENGINEER/ARCHITECT has been selected to provide designs, to prepare the bid and construction documents, and to assist the City of Austin, Texas, hereinafter known as OWNER, during the construction of HARMON AVENUE AREA W& WW RENEWAL, located at 53rd ON THE NORTH, HARMON AVE. ON THE EAST, E.48th ST. ON THE SOUTH, & AIRPORT BLVD. ON THE WEST, Austin, Texas, hereinafter known as Project, and

"WHEREAS asbestos in a dust form is a recognized health hazard, and
"WHEREAS the OWNER desires not to have any asbestos containing materials used or incorporated into the construction of the Project;
"THEREFORE the ENGINEER/ARCHITECT affirms that to the best of its knowledge and belief:

1. The ENGINEER/ARCHITECT, any person, firm or organization representing or represented by the ENGINEER/ARCHITECT, shall not knowingly specify, request, or approve for use in conjunction with the Project, any asbestos containing materials or any other materials defined as containing asbestos by any laws, rules or regulations promulgated by the United States Government, the State of Texas or any governmental organization or agency operating under the authority of either of those entities.
2. Realizing that there might be materials required in which a satisfactory non-asbestos containing material cannot be obtained, the ENGINEER/ARCHITECT will do the following before specifying any asbestos containing material:
   A. Inform the OWNER's Project Manager for this Project, in writing, of any intent to specify asbestos containing materials.
   B. Receive written approval from the City of Austin Project Manager for the specifying of any asbestos containing materials.
   C. At the completion of the design phase, and before the OWNER receives any bids for this Project, provide to the Project Manager, in writing, the proposed location of any asbestos containing materials, the type of asbestos they contain, and the percent of asbestos by types.
3. The ENGINEER/ARCHITECT states its understanding that if any asbestos containing materials not approved by the OWNER for inclusion into the Project, are determined, as a result of any inspection and sample analysis performed by an individual(s) and/or firm(s) certified and/or licensed to perform such inspection by the United States Government and/or the State of Texas, to have been knowingly specified, requested and/or approved by the ENGINEER/ARCHITECT for inclusion in the Project, the OWNER shall look to the ENGINEER/ARCHITECT for reimbursement of any and all costs incurred in the removal and/or other abatement of said asbestos containing materials.
4. ENGINEER/ARCHITECT further understands that OWNER shall also look to the ENGINEER/ARCHITECT for any and all damages to OWNER which result from the inability of the OWNER to use any portion or all of the Project due to the incorporation of asbestos containing materials that have been knowingly specified, requested and/or approved by the ENGINEER/ARCHITECT.
5. ENGINEER/ARCHITECT further understands that OWNER will pursue reimbursement of any said cost and compensation for any said damages from the ENGINEER/ARCHITECT by any and every means within OWNER's right and power.

Signature of Authorized Representative: Chien Lee

STATE OF TEXAS
COUNTY OF TRAVIS

ON April 25, 2019, personally appeared Chien Lee and been duly sworn by me, subscribed to the foregoing statement and has stated that the facts stated therein are true and correct.

LINDA K. HEJL
My Notary ID # 4498350
Expires August 16, 2021

Notary Public, State of Texas Linda K. Hejl

Printed Name of Notary Linda Hejl

My Commission Expires: August 16, 2021

01605A.00/110392

CITY OF AUSTIN

STATEMENT OF NON-INCLUSION OF ASBESTOS CONTAINING MATERIAL

ENGINEER/ARCHITECT AFTER DESIGN

STATE OF TEXAS
COUNTY OF TRAVIS

"My name is CHIEN LEE, hereinafter known as Authorized Representative.

"I am over the age of 18 years and I have never been convicted of a crime. I am the PRINCIPAL of HEJL, LEE & ASSOCIATES, INC. hereinafter known as ENGINEER/ARCHITECT.

"I am fully competent to make this statement. I have personal knowledge of the facts set forth below and they are all true and correct.

"WHEREAS ENGINEER/ARCHITECT has been selected to provide designs, to prepare the bid and construction documents, and to assist the City of Austin, Texas, hereinafter known as OWNER, during the construction of HARMON AVENUE AREA W & WW RENEWAL, located at 53rd ST. ON THE NORTH, HARMON AVE. ON THE EAST, E. 48th ST. ON THE SOUTH, & AIRPORT BLVD. ON THE WEST Austin, Texas, hereinafter known as Project, and

"WHEREAS asbestos in a dust form is a recognized health hazard, and
"WHEREAS the OWNER desires not to have any asbestos containing materials used or incorporated into the construction of the Project;
"THEREFORE the ENGINEER/ARCHITECT affirms that to the best of its knowledge and belief:

1. The ENGINEER/ARCHITECT, any person, firm or organization representing or represented by the ENGINEER/ARCHITECT, shall not knowingly specify, request, or approve for use in conjunction with the Project, any asbestos containing materials or any other materials defined as containing asbestos by any laws, rules or regulations promulgated by the United States Government, the State of Texas or any governmental organization or agency operating under the authority of either of those entities.
2. The only exceptions to the above statement are the following materials that are required because a satisfactory non-asbestos containing material cannot be obtained. The inclusion of these materials has been approved by the OWNER's Project Manager for this Project.

   N/A

3. The ENGINEER/ARCHITECT states its understanding that if any asbestos containing materials not approved by the OWNER for inclusion into the Project, are determined, as a result of any inspection and sample analysis performed by an individual(s) and/or firm(s) certified and/or licensed to perform such inspection by the United States Government and/or the State of Texas, to have been knowingly specified, requested and/or approved by the ENGINEER/ARCHITECT for inclusion in the Project, the OWNER shall look to the ENGINEER/ARCHITECT for reimbursement of any and all costs incurred in the removal and/or other abatement of said asbestos containing materials.
4. ENGINEER/ARCHITECT further understands that OWNER shall also look to the ENGINEER/ARCHITECT for any and all damages to OWNER which result from the inability of the OWNER to use any portion or all of the Project due to the incorporation of asbestos containing materials that have been knowingly specified, requested and/or approved by the ENGINEER/ARCHITECT.
5. ENGINEER/ARCHITECT further understands that OWNER will pursue reimbursement of any said cost and compensation for any said damages from the ENGINEER/ARCHITECT by any and every means within OWNER's right and power.

Signature of Authorized Representative: Chien Lee

STATE OF TEXAS
COUNTY OF TRAVIS

ON April 25, 2019, personally appeared Chien Lee and been duly sworn by me, subscribed to the foregoing statement and has stated that the facts stated therein are true and correct.

LINDA K. HEJL
My Notary ID # 4498350
Expires August 16, 2021

Notary Public, State of Texas Linda K. Hejl

Printed Name of Notary Linda Hejl

My Commission Expires: August 16, 2021

01605B/110392

Item No. 110S
Street Excavation

110S.1 Description

This item shall govern: (1) the excavation and proper utilization or otherwise satisfactory disposal of all excavated material, of whatever character, within the right of way or other limits of the work indicated and (2) the construction, compaction, shaping and finishing of all earthwork on the entire project in accordance with the specification requirements herein outlined, in conformity with the required lines, grades and typical cross sections indicated on the Drawings or as directed by the Engineer or designated representative. When not otherwise included in the Contract Documents, this item shall include the Work described in specification Item Nos. 101S, "Preparing Right of Way", 102S, "Clearing and Grubbing", 104S, "Removing Portland Cement Concrete", 132S, "Embankment", 201S, "Subgrade Preparation" and 236S, “Proof Rolling”.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text inch-pound units are given preference followed by SI units shown within parentheses.

110S.2 Submittals

The submittal requirements of this specification item may include:

A. A permit when utility adjustments are made in the right-of-way,

B. A plan for removal and deposition of all 'Waste' materials, and

C. A Blasting Permit if blasting is required and allowed on the project.

110S.3 Classification

All excavation shall be unclassified and shall include all materials encountered regardless of their nature or the manner in which they are removed.

110S.4 Construction Methods

Prior to commencement of this work, all required erosion control and tree protection measures shall be in place. The existing utilities shall be located and protected as specified in the Standard Contract Documents, Section 00700, "General Conditions" and/or indicated on the Drawings. A permit shall be required when utility adjustments are to be made in preparation for construction in the right-of-way, as specified in Section 5.2.0 of the City of Austin Utilities Criteria Manual.

Construction equipment shall not be operated nor construction materials stockpiled under the canopies of trees, unless otherwise indicated on the Drawings. Excavation or embankment materials shall not be placed within the drip line of trees until tree wells are constructed, that conform to Item No. 610S, " Preservation of Trees and Other Vegetation ".

All street excavation shall be performed as specified herein and shall conform to the established alignment, grades and cross sections. The Contractor will be required to set blue-tops for the subgrade along centerlines, at quarter points and curb lines or edge of

pavement at intervals not exceeding 50 feet (15 meters). Suitable excavated materials shall be utilized, insofar as practicable, in constructing any required embankments. The construction of all embankments shall conform to Item No. 132S, "Embankment".

All earth cuts for base and/or pavement structure construction shall be scarified to a uniform depth of at least 6 inches (150 millimeters) below the required finished subgrade elevation for the entire roadbed width. The material shall be mixed, reshaped by blading, sprinkled and then rolled in accordance with Section 2 of the City of Austin Specification Item 132S, "Embankment".

High PI materials (i.e. PI $\geq$ 20 %) which exhibit a Plasticity Index (PI) greater by 5 % than the surrounding materials or any materials with a moisture content greater than 2 percent (%) in excess of optimum moisture shall be classified as unsuitable and must be removed or manipulated to meet the above criteria before use.

Unsuitable excavated materials or excavation in excess of that needed for construction shall be known as "Waste" and shall become the property of the Contractor. Unsuitable material encountered below the subgrade elevation in roadway cuts, when declared “Waste” by the Engineer, shall be replaced with material from the roadway excavation or with other suitable material as approved by the Engineer or designated representative. It shall become the Contractor’s responsibility to dispose of this material off the limits of the right of way in an environmentally sound manner at a permitted disposal site.

All blasting shall conform to the General Notes on the Drawings and to the Standard Contract Document Section 01550, "Public Safety and Convenience". In all cases where blasting is permitted, a Blasting Permit must be obtained in advance from the City of Austin Department of Public Works and Transportation.

110S.5 Measurement

All accepted street excavation will be measured by either Method A or B as follows:

A. Method A

Measurement of the volume of excavation in cubic yards (cubic meters: 1 cubic meter is equal to 1.308 cubic yards) by the average end areas. Cross sectional areas shall be computed from the existing ground surface to the established line of the subgrade over the limits of the right of way or other work limits shown on the Drawings, including parkway slopes and sidewalk areas.

B. Method B

Measurement of the volume of excavation in cubic yards (cubic meters: 1 cubic meter is equal to 1.308 cubic yards), based upon the average end areas taken from pre-construction cross sections and planned grades. The planned quantities for street excavation will be used as the measurement for payment of this item.

110S.6 Payment

This item will be paid for at the contract unit bid price for "Street Excavation", as provided under measurement Method A or B as included in the bid. The bid price shall include full compensation for all work herein specified, including subgrade preparation, unless specified otherwise, and the furnishing of all materials, equipment, tools, labor and incidentals necessary to complete the work.

Payment will be made under one of the following:

Pay Item No. 110S-A:	Street Excavation	Per Cubic yard.
Pay Item No. 110S-B:	Street Excavation, Plan Quantity	Per Cubic yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 110S, "STREET EXCAVATION"

City of Austin Standard Contract Documents

Designation	Description
00700	General Conditions
01550	Public Safety and Convenience

City of Austin Utilities Criteria Manual

Designation	Description
Section 5.2.0	Permit for Excavation in the Public Right-of-Way

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 104S	Removing Portland Cement Concrete
Item No. 132S	Embankment
Item No. 201S	Subgrade Preparation
Item No. 236S	Proof Rolling
Item No. 610S	Preservation of Trees and Other Vegetation

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Contract Documents

Designation	Description
01500	Temporary Facilities

The Code of the City of Austin, Code of Ordinances, Volume 1

Designation	Description
Article 14-11-181	Permit Required
Article 14-11-189	Conditions for Permit Issuance
Article 14-11-190	Excavation Sequence and Permit Term

City of Austin Standard Specifications

Designation	Description
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 203S	Lime Treatment for Materials In Place
Item No. 204S	Portland Cement Treatment for Materials In Place
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 234S	Rolling (Tamping)
Item No. 602S	Sodding for Erosion Control
Item No. 604S	Seeding for Erosion Control
Item No. 610S	Preservation of Trees and Other Vegetation
Item No. 622S	Diversion Dike
Item No. 628S	Sediment Containment Dikes
Item No. 642S	Silt Fence

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item 110S, "STREET EXCAVATION"

City of Austin Standard Details

Designation	Description
610S-1	Tree Protection Fence Locations
610S-2	Tree Protection Fence, Type B Chainlink
610S-3	Tree Protection Fence, Type B Wood
610S-4	Tree Protection Fence, Modified Type A
610S-5	Tree Protection Fence, Modified Type B
610S-6	Tree Protection, Tree Wells
621S-1	Diversion
622S-1	Diversion Dike
624S-1	Earth Outlet Sediment Trap
625S-1	Grade Stabilization Structure
627S-1	Grass Lined Swale
627S-2	Grass Lined Swale With Stone Center
628S	Triangular Sediment Filter Dike
628S-1	Hay Bale Dike
629S-1	Brush Berm
630S-1	Interceptor Dike
631S-1	Interceptor Swale
632S-1	Storm Inlet Sediment Trap
633S-1	Landgrading
634S-1	Level Spreader
635S-1	Perimeter Dike
636S-1	Perimeter Swale
637S-1	Pipe Slope Drain (Flexible)
637S-2	Pipe Slope Drain (Rigid)
638S-1	Pipe Outlet Sediment Trap
639S-1	Rock Berm
641S-1	Stabilized Construction Entrance
642S-1	Silt Fence
643S-1	Stone Outlet Structure
644S-1	Stone Outlet Sediment Trap

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 112	Subgrade Widening
Item No. 132	Embankment
Item No. 150	Blading
Item No. 158	Specialized Excavation Work
Item No. 160	Furnishing and Placing Topsoil
Item No. 164	Seeding for Erosion Control
Item No. 204	Sprinkling
Item No. 210	Rolling (Flat Wheel)
Item No. 211	Rolling (Tamping)
Item No. 213	Rolling (Pneumatic Tire)
Item No. 260	Lime Treatment for Materials Used as Subgrade (Road Mixed)
Item No. 265	Lime-Fly Ash (LFA) Treatment for Materials Used as Subgrade

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item 110S, "STREET EXCAVATION"

Texas Department of Transportation:
Manual of Testing Procedures

Designation	Description
Tex-103-E	Determination of Moisture Content of Soil Materials
Tex-104-E	Determination of Liquid Limit of Soils
Tex-105-E	Determination of Plastic Limit of Soils
Tex-106-E	Method of Calculating the Plasticity Index of Soils
Tex-114-E	Laboratory Compaction Characteristics and Moisture-Density Relationship of Subgrade & Embankment Soil
Tex-115-E	Field Method for Determination of In-Place Density of Soils and Base Materials

Item No. 234S
Rolling (Tamping)

234S.1 Description

This item shall govern compaction of embankment, lime-treated subgrade or other courses by the operation of approved tamping rollers as herein specified and as directed by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

234S.2 Submittals

The submittal requirements of this specification item may include:

A. A plan describing the condition of each roller proposed for the work, as well as the type of traction (self propelled or drawn), Type of roller, size, weight, and configuration of each individual tamping roller, and

B. The operating speed proposed for each individual tamping roller.

234S.3 Equipment

The tamping rollers shall consist of 2 metal rollers, drums or shells of 40 inches (1 meter) minimum diameter; each not less than 42 inches (1.067 meters) in length. The drums shall be unit mounted in a rigid frame in such a manner that each roller may oscillate independently of the other.

Each roller, drum or shell shall be surmounted by metal studs with tamping feet projecting not less than 7 inches (180 millimeters) from the surface and spaced not less than 6 inches (150 millimeters) nor more than 10 inches (254 millimeters), measured diagonally center to center and the cross-sectional area of each tamping foot, measured perpendicularly to the axis of the stud, shall not be less than 5 nor more than 8 square inches (less than 3200 nor more than 5200 square millimeters). The roller shall be supplemented with cleaning teeth to provide self-cleaning.

The roller shall be so designed that, by ballast loading, the load on each tamping foot may be varied uniformly from 125 to 550 psi (860 to 3800 kiloPascals) of cross sectional area. The load per tamping foot will be determined by dividing the total weight (mass) of the roller by the number of tamping feet in 1 row parallel to or approximately parallel to the axis of the roller. The compression to be provided at any time shall be as directed by the Engineer or designated representative.

The tamping roller shall be drawn by suitable power equipment of adequate tractive effort. Two tamping rollers, consisting of 4 cylinders, conforming to the above prescribed requirements, drawn by approved power equipment, shall be considered a roller unit.

Where turning is impractical or detrimental to the work and when specifically directed by the Engineer or designated representative, the roller shall be capable of being operated in a forward and backward direction. When operations are confined to narrow widths and when specifically directed in writing by the Engineer or designated representative, 1

tamping roller consisting of 2 cylinders, fastened to the front end of approved power equipment shall be considered a roller unit.

In lieu of the rolling equipment specified, the Contractor may, upon written permission from the Engineer or designated representative, operate other compacting equipment that will produce equivalent relative compaction in the same period of time as the specified equipment. If the substituted compaction equipment fails to produce the desired compaction within the same period of time as would be expected of the specified equipment, as determined by the Engineer or designated representative, its use shall be discontinued and the Contractor will be required to furnish the specified equipment.

Rollers shall be maintained in good repair and operating condition and shall be approved by the Engineer or designated representative.

234S.4 Construction Methods

The embankment layer, subbase or the base course shall be sprinkled in accordance with Standard Specification Item Nos. 201S, "Subgrade Preparation" and 203S, "Lime Treatment for Materials In Place". Rolling with a tamping roller unit shall start longitudinally at the sides of the designated area and proceed toward the center, overlapping on successive trips by at least 1/2 of the width of the tamping roller unit. On superelevated curves, rolling shall begin at the low sides and progress toward the high sides. Alternate trips of the unit shall be slightly different in length. The tamping roller unit, unless otherwise directed by the Engineer or designated representative, shall be operated at a speed between 2 and 3 miles per hour (3 and 5 kilometers per hour).

Sufficient rollers shall be provided to compact the material in a satisfactory manner. When operations are so isolated from one another that one roller cannot perform the required compaction satisfactorily, additional rollers shall be provided and operated as directed by the Engineer.

234S.5 Measurement and Payment

No additional payment will be made for the materials, equipment or labor required by this item, but shall be included in the unit price bid for the item of construction in which this item is used.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 234S, "Rolling (Tamping)"

City of Austin Standard Specifications

Designation	Description
Item No. 201S	Subgrade Preparation
Item No. 203S	Lime Treatment for Materials in Place

RELATED CROSS REFERENCE MATERIALS
Specification 234S, "Rolling (Tamping)"

City of Austin Contract Documents

Designation	Description
Section 00700	General Conditions

RELATED CROSS REFERENCE MATERIALS – Continued
Specification 234S, "Rolling (Tamping)"

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 132	Embankment
Item No. 204	Sprinkling
Item No. 210	Rolling (Flat Wheel)
Item No. 211	Rolling (Tamping)
Item No. 213	Rolling (Pneumatic Tire)

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 130S	Borrow
Item No. 132S	Embankment
Item No. 202S	Hydrated Lime and Lime Slurry
Item No. 210S	Flexible Base
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 236S	Proof Rolling
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 306S	Prime Coat
Item No. 307S	Tack Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 320S	Two Course Surface Treatment
Item No. 340S	Hot Mix Asphaltic Concrete Pavement
Item No. 402S	Controlled Low Strength Material
Item No. 403S	Concrete for Structures

City of Austin Standard Details

Designation	Description
No. 1000S-10	Local Street Sections
No. 1000S-11(1)	Residential and City of Austin Neighborhood Collector Street Sections
No. 1000S-11(2)	Industrial and Commercial Collector Street Sections
No. 1000S-12(1)	Primary Collector Street Sections
No. 1000S-12(2)	Primary Arterial Street Sections
No. 1000S-13(1)	Minor Arterial Street Sections (4 Lanes)
No. 1000S-13(2)	Minor Arterial Street Sections- (4 Lanes divided)
No. 1000S-14	Major Arterial Street Sections

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 112	Subgrade Widening
Item No. 132	Embankment
Item No. 150	Blading
Item No. 158	Specialized Excavation Work
Item No. 264	Lime and Lime Slurry

RELATED CROSS REFERENCE MATERIALS-Continued

Specification 234S, "Rolling (Tamping)"

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 300	Asphalts, Oils and Emulsions
Item No. 301	Asphalt Anti-stripping Agents
Item No. 310	Prime Coat (Cutback Asphaltic Materials)
Item No. 314	Emulsified Asphalt Treatment
Item No. 316	Surface Treatments
Item No. 345	Asphalt Stabilized Base (Plant Mixed)

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-101-E	Surveying and Sampling Soils for Highways
Tex-103-E	Determination of Moisture Content of Soil Materials
Tex-104-E	Determination of Liquid Limit of Soils
Tex-105-E	Determination of Plastic limit of Soils
Tex-106-E	Method of Calculating the Plasticity Index of Soils
Tex-114-E	Laboratory Compaction Characteristics & Moisture Density Relationship of Subgrade & Embankment Soil
Tex-115-E	Field Method for Determination of In-Place Density of Soils & Base Materials
Tex-117-E	Triaxial Compression Tests for Disturbed Soils and Base Materials
Tex-120-E	Soil Cement Testing
Tex-121-E	Soil Lime Testing
Tex-126-E	Molding, Testing and Evaluation of Bituminous Black Base Materials
Tex-207-F	Determination of Density of Compacted Bituminous Mixtures
Tex-210-F	Determination of Asphalt Content of Bituminous Mixtures
Tex-600-J	Sampling and Testing of Hydrated Lime, Quicklime & Commercial Lime Slurry

Item No. 301S
Asphalts, Oils and Emulsions

301S.1 Description

This item includes the requirements for cutback asphalts, emulsified asphalts, polymer modified asphalt cements, performance graded asphalt binders and other miscellaneous asphaltic materials and latex additives.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text the inch-pound units are given preference followed by SI units shown within parentheses.

301S.2 Submittals

Submittals shall include test results for each the materials described herein when specifically identified on the Drawings and/or referenced in associated standard specification items and standard details.

Submittals may include samples of the base asphalt cement and polymer additives.

301S.3 Materials

When tested in accordance with designated TxDoT, AASHTO and/or ASTM Test Methods, the various materials shall meet the applicable requirements of this specification.

A. Acronyms

The acronyms used in this specification are defined in the following table.

Table 1: Acronyms

Acronym	Definition	Acronym	Definition
Test Method Prefix Tex T D	 TxDOT AASHTO ASTM	Polymer Modifier SBR or L SBS TR P	 Styrene-Butadiene Rubber (Latex) Styrene-Butadiene-Styrene Block Copolymer Tire Rubber, from ambient temperature grinding of truck and passenger tires Polymer Modified
AC	Asphalt Cement	SS	Slow Setting
RC	Rapid Curing	H-suffix	Harder Residue (Lower Penetration)
MC	Medium Curing	AE	Asphalt Emulsion
SCM	Special Cutback Material	S-suffix	Stockpile Usage
HF	High Float	AE-P	Asphalt Emulsion Prime
C	Cationic	EAP&T	Emulsified Asphalt Prime and Tack
RS	Rapid Setting	PCE	Prime, Cure, and Erosion Control
MS	Medium Setting	PG	Performance Grade

B. Asphalt Cement

The material shall be homogeneous, free from water, shall not foam when heated to 350°F (177°C) and shall meet the requirements in Table 2.

Table 2: Asphalt Cement Requirements

Viscosity Grade		AC-10		AC-20		AC-30	
Property	Test Method	Min	Max	Min	Max	Min	Max
Viscosity: 140°F, poises (60°C, pascals)	T202	800 (80)	1200 (120)	1600 (160)	2400 (240)	2400 (240)	3600 (360)
Viscosity: 275°F, stokes (135°C, pascals)	T202	1.9 (.19)	-	2.5 (.25)	-	3.0 (.30)	-
Penetration: 77°F (25°C), 100g, 5s	T49	85	-	55	-	45	-
Flash Point, C.O.C. °F (°C)	T48	450 (232)	-	450 (232)	-	450 (232)	-
% Solubility trichloroethylene	T44	99.0	-	99.0	-	99.0	-
Spot test	Tex 509-C						
Viscosity: 140°F stokes (60°C pascals)	T202	-	3000 (300)	-	6000 (600)	-	9000 (900)
Ductility 77°F (25°C), 5 cm/min, cm	T202	100	-	70	-	50	-

C. Polymer Modified Asphalt Cement.

Polymer modified asphalt cement must be smooth, homogeneous, and shall comply with the requirements listed in Table 3.

Table 3: Polymer Modified Asphalt Cement Requirements

Polymer Modified Viscosity Grade		AC-5		AC-10		AC-15P		AC-45P*	
Polymer Type		SBR		SBR		SBS		SBS	
Property	Test Method	Min	Max	Min	Max	Min	Max	Min	Max
Polymer in % (solids basis)	Tex-533-C	2.0	-	2.0	-	3.0	-	3.0	-
Viscosity									
140ºF, poise (60°C, pascals)	T 202	700 (70)	- -	1300 (130)	- -	1500 (150)	- -	4500 (450)	- -
275ºF, poise (135°C, pascals)	T 202	- -	7.0 (0.7)	- -	8.0 (0.8)	- -	8.0 (0.8)	14.0 (1.4)	
Penetration, 77ºF (25°C), 100 g, 5 s.	T 49	120	-	80	-	100	150	50	74
Ductility, 5cm/min., 39.2ºF, cm	T 51	70	-	60	-	-	-	15	-
Elastic Recovery, 50ºF (10°C), %	Tex-539-C	-	-	-	-	55	-		-
Polymer Separation, 48 hrs**.	Tex-540-C	None		None		None		None	
Flash Point, C.O.C., ºF (°C),	T 48	425 (218)	- -	425 (218)	- -	425 (218)	- -	425 (218)	- -
Tests on Residue from Thin Film Oven Test: (T179)									
Retained Penetration Ratio, 77ºF (25°C), % original	T 49	-	-	-	-	0.60	1.00	0.60	0.90

* The SBS block copolymer may be pre-blended with a polymer processing oil (up to a 1:1 ratio of polymer to oil) to aid the solution of the polymer in the asphalt.

** A 350-gram (0.77 pound) sample of the asphalt-SBS blend is stored for 48 hours at 325°F (163°C). Upon completion of the storage time, the sample is visually examined for separation of the SBS from the asphalt (smoothness and homogeneity). If a question still exists about the separation of the SBS, samples shall be taken from the top and bottom of the sample for Infrared Spectroscopy analysis. A difference of 0.4% or more in the concentration of the SBS between the top and bottom samples shall constitute separation.

D. Cutback Asphalt

Cutback Asphalt shall meet the requirements presented in tables 4, and 5 for the specified type and grade.

Table 4: RAPID CURING TYPE CUTBACK ASPHALT Requirements

Type-Grade		RC-250		RC-800		RC-3000	
Properties	Test Method	Min	Max	Min	Max	Min	Max
Water, percent	T55	-	0.2	-	0.2	-	0.2
Flash Point, T.O.C.,°F [°C]	T79	80 (27)	-	80 (27)	-	80 (27)	-
Kinematic viscosity @ 140°F, cst [60°C, mm²/s]	T201	250	400	800	1600	3000	6000
Distillation Test:	T78						
Distillate, % by volume of total distillate to 680°F [360°C]:							
to 437°F [225°C]:		40	75	35	70	20	55
to 500°F [260°C]:		65	90	55	85	45	75
to 600°F [316°C]:		85	-	80	-	70	-
Residue from Distillation, Volume %		70	-	75	-	82	-
Tests of Distillation Residue:							
Penetration, 100g, 5 sec., 77°F [25°C], cm	T49	80	120	80	120	80	120
Ductility, 5 cm/min., 77°F, 5 cm/min., cm	T51	100	-	100	-	100	-
[25°C, 50 mm/min., mm]		1000	-	1000	-	1000	-
Solubility in trichloroethylene, % T44		99.0	-	99.0	-	99.0	-
Spot Test	Tex 509-C	ALL NEGATIVE					

Table 5: MEDIUM CURING TYPE CUTBACK ASPHALT Requirements

Type		MC-30		MC-70		MC-250		MC-800		MC-3000	
Properties	Test Method	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Water, %	T55	-	0.2	-	0.2	-	0.2	-	0.2	-	0.2
Flash Point, T.O.C.,°F [°C]	T79	100 [38]	-	100 [38]	-	150 [65]	-	150 [65]	-	150 [65]	-
Kinematic viscosity. @ 140°F. cst [60°C, mm²/s]	T201	30	60	70	140	250	500	800	1600	3000	6000
Distillation Test:	T78										
Distillate, as % by volume to total distillate to 680°F[360°C]:, shall be as follows:											
to 437°F [225°C]:		-	25	-	20	-	10	-	-	-	-
to 500°F [260°C]:		40	70	20	60	15	55	-	35	-	15
to 600°F [316°C]:		75	93	65	90	60	87	45	80	15	75
Residue from 80°F [225°C] distillation											
Volume Percent		50	-	55	-	67	-	75	-	80	-
Tests on Distillation Residue:											
Penetration @ 77°F [25°C], 100g, s, 01mm:	T49	120	250	120	250	120	250	120	250	120	250
Ductility @ 77°F, 5 cm/min, cms	T51	100*	-	100*	-	100*	-	100*	-	100*	-
[25°C, 50 mm/min., mm]		1000*	-	1000*	-	1000*	-	1000*	-	1000*	-
% Solubility in trichloroethylene	T44	99.0	-	99.0	-	99.0	-	99.0	-	99.0	-
Spot Test	Tex 509-C	ALL NEGATIVE									

* If penetration of residue is more than 200 and the ductility at 77°F [25°C] is less than 100 cm [1000 mm], the material will be acceptable if its ductility at 60°F [16°C] is more than 100cm [1000 mm].

E. Emulsified Asphalt

The material shall be homogenous. It shall show no separation of asphalt after thorough mixing and shall meet the requirements for the specified type and grade presented in Tables 6, 7 and 8.

Table 6: ANIONIC EMULSION Requirements

	Type	Medium Setting		Slow Setting			
	Grade	MS-2		SS-1		SS-1h	
Property	Test Method	Min	Max	Min	Max	Min	Max
Furol Viscosity @ 77°F [25°C], sec.	T72	-	-	20	100	30	100
@ 122°F[50°C], sec		100	300	-	-	-	-
Sieve Test, %.	T59	-	0.1	-	0.1	-	0.1
Miscibility (Standard Test)	T59	-	-	Passing		Passing	
Cement Mixing, %	T59	-	-	-	2.0	-	2.0
% Demulsibility: 35 cc 0.02N $CaCl_2$	T59	-	30	-	-	-	-
Storage Stability 1 day, %	T59	-	1	-	1	-	1
Freezing Test, 3 Cycles*	T59	Passing		Passing		Passing	
Distillation Test	T59						
Distillation Residue, %		65	-	60	-	60	-
Distillate Oil Portion, %		-	½	-	½	-	½
Tests of Residue from Distillation:							
Penetration @ 77°F [25°C], 100g, 5s	T49	120	160	120	160	70	100
Solubility in Trichloroethylene, %	T44	97.5	-	97.5	-	97.5	-
Ductility @ 77F, 5 cm/min., cm	T51	100	-	100	-	80	-
[@ 25°C, 50 mm/min., mm]		1000	-	1000	-	800	-

* Applies only when Engineer or designated representative specifies the material for winter use.

Table 7: HIGH FLOAT ANIONIC EMULSION Requirements

	Type	Rapid Setting		Medium Setting	
	Grade	HFRS-2		AES-300	
Property	Test Method	Min	Max	Min	Max
Viscosity, Saybolt Furol	T72				
@ 77°F [25°C], sec.		-	-	75	400
@ 122°F [50°C], sec.		150	400	-	-
Oil Portion of Distillate, %	T59	-	2	-	7
Sieve Test, %	T59	-	0.1	-	0.1
Particle Charge	T59	positive		positive	
Coating Ability and Water Resistance:	T59				
Coating, dry aggregate		-	-	good	
Coating, after spraying		-	-	fair	
Coating, wet aggregate				fair	
Coating, after spraying				fair	
% Demulsibility: 35 ml 0.02 N $CaCl_2$	T59	50	-	-	-
Storage Stability Test, 1 day, %	T59	-	1	-	1
Distillation Test	T59				
Residue by Distillation, % by weight		65	-	65	-
Oil Distillate, by volume of emulsion, %		-	1/2	-	5
Tests on Residue from Distillation:					
Penetration at 77°F [25°C], 100 g, 5s	T49	100	140	300	-
Solubility in Trichloroethylene, %	T44	97.5	-	97.5	-
Ductility @ 77°F., 5 cm/min, cms	T51	100	-	-	-
[25°C., 50 mm/min, mm]		[1000}			

Float Test at 140°F [60°C], sec.	Tex 509-C	1200	-	1200	-

Table 8: CATIONIC EMULSION Requirements

Type		Rapid Setting				Medium Setting				Slow Setting			
Grade		CRS-2		CRS-2h		CMS-2		CMS-2s		CSS-1		CSS-1h	
Property	Test Method	Min	Max	Min	Max	Min.	Max	Min	Max	Min	Max	Min	Max
Viscosity, Saybolt Furol	T72												
@ 77°F [25°C], sec.		-	-	-	-	-	-	-	-	20	100	20	100
@ 122°F [50°C],sec.		150	400	150	400	100	300	100	300	-	-	-	-
Storage stability test, 1 day %	T59	-	1	-	1	-	1	-	1	-	1	-	1
% Demulsibility: *,**	T59	40	-	40	-	-	-	-	-	-	-	-	-
Coating, ability & water resistance	T59												
Coating, dry aggregate		-	-	-	-	good		good		-	-	-	-
Coating, after spraying		-	-	-	-	fair		fair		-	-	-	-
Coating, wet aggregate		-	-	-	-	fair		fair		-	-	-	-
Coating, after spraying		-	-	-	-	fair		fair		-	-	-	-
Particle charge test	T59	Positive		Positive		Positive		Positive		Positive		Positive	
Sieve test, %	T59	-	0.10	-	0.10	-	0.10	-	0.10	-	0.10	-	0.10
Cement Mixing test, %	T59	-	-	-	-	-	-	-	-	-	2.0	-	2.0
Distillation Test:	T59												
% Oil distillate, vol. of emulsion		-	1/2	-	1/2	-	7	-	5	-	1/2	-	1/2
Residue by Distillation,% by wgt		65	-	65	-	65	-	65	-	60	-	60	-
Tests on Residue from Distillation:													
Penetration,77°F [25°C], 100g, 5s.	T49	120	160	80	110	120	200	300	-	120	160	80	110
Ductility,	T51												
77°F, 5 cm/min, cm		100	-	80	-	100	-	-	-	100	-	80	-
[25°C, 50 mm/min, mm]		1000	-	800	-	1000	-	-	-	1000	-	800	-
% Solubility in trichloroethylene	T44	97.5	-	97.5	-	97.5	-	97.5	-	97.5	-	97.5	-

* At a level of 35 ml 0.8% sodium dioctyl sulfosuccinate.

** The demulsibility test shall be made within 30 days from date of shipment.

F. Polymer Modified Emulsions

The material shall be homogenous. It shall show no separation of asphalt after thorough mixing and shall meet the requirements for the specified type and grade presented in Tables 9 and 10.

G. Specialty Emulsions.

Specialty emulsions may be either asphaltic-based or resin-based and must meet the requirements included in Table 11.

H. Recycling Agent.

Recycling agent and emulsified recycling agent must meet the requirements of table 12. Additionally, recycling agent and residue from emulsified recycling agent, when added in the specified proportions to the recycled asphalt, must meet the properties specified on the drawings.

Table 9: Polymer Modified Emulsified Asphalt Requirements

Type-Grade		Rapid Setting				Medium Setting						Slow Setting	
		RS-1P		HFRS-2P		AES-150P		AES-300P		AES-300S		SS-1P	
Property	Test Method	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Viscosity, Saybolt Furol	T 72												
77ºF, sec.		-	-	-	-	75	400	75	400	75	400	30	100
122ºF, sec.		50	200	150	400	-	-	-	-	-	-	-	-
Sieve Test, %	T 59	-	0.1	-	0.1	-	0.1	-	0.1	-	0.1	-	0.1
Miscibility	T 59	-		-		-		-		-		pass	
Coating Ability and Water Resistance:	T59												
dry aggregate/after spray		-		-		good/fair		good/fair		good/fair		-	
wet aggregate/after spray		-		-		fair/fair		fair/fair		fair/fair		-	
Demulsibility, 35 ml of 0.02 N $CaCl_2$, %	T 59	60	-	50	-	-	-	-	-	-	-	-	-
Storage Stability, 1 day, %	T 59	-	1	-	1	-	1	-	1	-	1	-	1
Breaking Index, g	Tex-542-C	-	80	-	-	-	-	-	-	-	-	-	-
Distillation Test:[1]	T 59												
Residue by Distillation, % by wt.		65	-	65	-	65	-	65	-	65	-	60	-
Oil Distillate, % by vol of emulsion		-	3	-	0.5	-	3	-	5	-	7	-	0.5
Tests: Residue from Distillation:													
Polymer Content, wt. % (solids basis)	Tex-533-C	-	-	3.0	-	-	-	-	-	-	-	3.0	-
Penetration, 77ºF, (25ºC) 100 g, 5 sec.	T 49	225	300	90	140	150	300	300	-	300	-	100	140
Solubility in Trichloroethylene, %	T 44	97.0	-	97.0	-	97.0	-	97.0	-	97.0	-	97.0	-
Viscosity, 140ºF, poise 60ºC, Pa-s	T 202	-	-	1500	-	-	-	-	-	-	-	1300	-
Float Test, 140ºF, sec.	T 50	-	-	1200	-	1200	-	1200	-	1200	-	-	-
Ductility[2], 39.2ºF, 5 cm/min., cm (4ºC, 5 cm/min., mm)	T 51	-	-	50 500	-	-	-	-	-	-	-	50 500	-
Elastic Recovery[2], 50ºF,(10ºC), %	Tex-539-C	55	-	55	-	-	-	-	-	-	-	-	-
Tests on RTFO Curing of Distillation Residue:	Tex-541-C												
Elastic Recovery, 50ºF,(10ºF) %	Tex-539-C	-	-	-	-	50	-	50	-	30	-	-	-

[1] Exception to AASHTO T 59: Bring the temperature on the lower thermometer slowly to 350ºF +/- 10ºF. Maintain at this temperature for 20 min. Complete total distillation in 60 +/- 5 min. from the first application of heat.

[2] HFRS-2P must meet one of either the Ductility or Elastic Recovery.

Table 10: Polymer Modified Cationic Emulsified Asphalt Requirements

Type-Grade		Rapid Setting				Slow Setting	
		CRS-1P		CRS-2P		CSS-1P	
Property	Test Method	Min	Max	Min	Max	Min	Max
Viscosity, Saybolt Furol	T 72						
77ºF (25ºC), sec.		-	-	-	-	20	100
122ºF (50ºC), sec.		50	150	150	400	-	-
Sieve Test, %	T 59	-	0.1	-	0.1	-	0.1
Demulsibility, 35 ml of 0.8% sodium dioctyl sulfosuccinate, %	T 59	60	-	70	-	-	-
Storage Stability, 1 day, %	T 59	-	1	-	1	-	1
Breaking Index, g	Tex-542-C	-	80	-	-	-	-
Particle Charge	T 59	positive		positive		positive	
Distillation Test:[1]	T 59						
Residue by Distillation, % by wt.		65	-	65	-	62	-
Oil Distillate, % by volume of emulsion		-	3	-	0.5	-	0.5
Tests on Residue from Distillation:							
Polymer Content, wt. % (solids basis)	Tex-533-C	-	-	3.0	-	3.0	-
Penetration, 77ºF (25ºC), 100 g, 5 sec.	T 49	225	300	90	150	55	90
Viscosity, 140ºF, poise (60ºC, Pa-s)	T 202	-	-	1300	-	-	-
Solubility in Trichloroethylene, %	T 44	97.0	-	97.0	-	97.0	-
Softening Point, ºF	T 53	-	-	-	-	135	-
Ductility, 77ºF, 5 cm/min., cm (25ºC, 5 cm/min., mm)	T 51	-	-	-	-	70 700	-
Ductility[2], 39.2ºF, 5 cm/min., cm (4ºC, 5 cm/min., mm)	T 51	-	-	50	-	-	-
Elastic Recovery[2], 50ºF (10ºC), %	Tex-539-C	45	-	55	-	-	-

[1] Exception to AASHTO T 59: Bring the temperature on the lower thermometer slowly to 350ºF +/- 10ºF. Maintain at this temperature for 20 min. Complete total distillation in 60 +/- 5 min. from the first application of heat.

[2] CRS-2P must meet one of either the Ductility or Elastic Recovery.

Table 11: Specialty Emulsion Requirements

Type-Grade		Medium Setting				Slow Setting	
		AE-P		EAP&T		PCE[1]	
Property	Test Method	Min	Max	Min	Max	Min	Max
Viscosity, Saybolt Furol	T 72						
77ºF (25ºC), sec.		-	-	-	-	10	100
122ºF (50ºC), sec.		15	150	-	-	-	-
Sieve Test, %	T 59	-	0.1	-	0.1	-	0.1
Miscibility[2]	T 59	-		pass		pass	
Demulsibility, 35 ml of 0.10 N $CaCl_2$, %	T 59	-	70	-	-	-	-
Storage Stability, 1 day, %	T 59	-	1	-	1	-	-
Particle Size[3], % by volume < 2.5 □m	Tex-238-F	-	-	90	-	-	-
Asphalt Emulsion Distillation to 500ºF (260ºC) followed by Cutback Asphalt Distillation of Residue to 680ºF (360ºC):	T 59 & T 78						
Residue after both Distillations, % by wt.		40	-	-	-	-	-
Total Oil Distillate from both distillations, % by volume of emulsion		25	40	-	-	-	-
Distillation:	T 59						
Residue by Distillation, % by wt.		-	-	60	-	-	-
Evaporation:[4]	T 59						
Residue by Evaporation, % by wt.		-	-	-	-	60	-
Tests on Residue after all Distillation(s):							
Viscosity, 140ºF, poise (60ºC, Pa-s)	T 202	-	-	800	-	-	-
Kinematic Viscosity, 140ºF, cSt [60°C, mm^2/s]	T 201	-	-	-	-	100	350
Flash Point, C.O.C., ºF [°C]	T 48	-	-	-	-	400 204	-
Solubility in Trichloroethylene, %	T 44	97.5	-	-	-	-	-
Float Test, 122ºF (50ºC), sec.	T 50	50	200	-	-	-	-

[1] Supply with each shipment of PCE:

a) a copy of a lab report from an approved analytical lab, signed by a lab official, indicating the PCE formulation does not meet any characteristics of a Resource Conservation Recovery Act (RCRA) hazardous waste;

b) a certification from the producer that the formulation supplied does not differ from the one tested and that no listed RCRA hazardous wastes or PCB's have been mixed with the product; and

c) a Materials Safety Data Sheet.

[2] Exception to AASHTO T 59: In dilution, use 350 ml of distilled or deionized water and a 1000-ml beaker.

[3] Tex-238-F, beginning at "Particle Size Analysis by Laser Diffraction," "Procedure" (using - medium: distilled or deionized water and dispersant: none), or other approved method.

[4] Exception to AASHTO T 59: Leave sample in the oven until foaming ceases, then cool and weigh.

Table 12: Recycling Agent and Emulsified Recycling Agent Requirements

Property	Test Method	Recycling Agent		Emulsified Recycling Agent	
		Min	Max	Min	Max
Viscosity, Saybolt Furol, 77ºF, sec.	T 72	-	-	15	100
Sieve Test, %	T 59	-	-	-	0.1
Miscibility[1]	T 59	-		No Coagulation	
Evaporation Test:[2]	T 59				
Residue by Evaporation, % by wt.		-	-	60	-
Tests on Recycling Agent or Residue from Evaporation:					
Flash Point, C.O.C., ºF	T 48	400	-	400	-
Kinematic Viscosity,	T 201				
140ºF, cSt		75	200	75	200
275ºF, cSt		-	10.0	-	10.0

[1]Exception to AASHTO T 59: Use 0.02 N $CaCl_2$ solution in place of water.

[2]Exception to AASHTO T 59: Maintain sample at 300ºF until foaming ceases, then cool and weigh.

I. Crack Sealer

This section sets forth the requirements for a polymer modified emulsion suitable for sealing fine cracks, and a rubber asphalt compound suitable for sealing cracks of 1/8 inch [3 mm] or greater width.

1. Polymer Modified Asphalt Emulsion Crack Sealer

For cracks on the order of 1/8 inch [3 mm] width, HFRS-2P polymer modified emulsion as described in the table included in Section F, Polymer Modified Emulsions of this item may be used. Requirements for the polymer modified emulsion and rubber-asphalt crack-sealing compound are presented in Table 13.

Table 13: Polymer Modified Asphalt Emulsion Crack Sealer Requirements

Property	Test Methods	Min	Max
Rotational Viscosity, 77ºF, cP	ASTM D 2196, Method A	10,000	25,000
Sieve Test, %	T 59	-	0.1
Storage Stability, 1 day, %	T 59	-	1
Evaporation	Tex-543-C		
Residue by Evaporation, % by wt.		65	-
Tests on Residue from Evaporation:			
Penetration, 77ºF, 100 g, 5 sec.	T 49	35	75
Softening Point, ºF	T 53	140	-
Ductility, 39.2ºF, 5 cm/min., cm	T 51	100	-

2. Rubber-Asphalt Crack Sealing Compound

This specification item may be a proprietary product. The compound shall be capable of being melted and applied at a temperature of 400°F [200°C] or less by a suitable oil jacketed kettle equipped with a pressure pump, a hose and a nozzle. It shall contain no water or highly-volatile matter. It shall not be tracked by vehicular traffic once it cools to road pavement temperature.

The rubber-asphalt crack sealing compound shall meet requirements in Table 14.

Table 14: Rubber-Asphalt Crack Sealer Requirements

Property	Test Methods	Class A		Class B	
		Min	Max	Min	Max
CRM Content, Grade A or B, % by wt.	Tex-544-C	22	26	-	-
CRM Content, Grade B, % by wt.	Tex-544-C	-	-	13	17
Virgin Rubber Content[1], % by wt.		-	-	2	-
Flash Point[2], COC, ºF	T 48	400	-	400	-
Penetration[3], 77ºF, 150g, 5 sec.	T 49	30	50	30	50
Penetration[3], 32ºF, 200g, 60 sec.	T 49	12	-	12	-
Softening Point, ºF	T 53	-	-	170	-
Bond[4], 3 cycles, 20ºF	Tex-525-C	-		Pass	

1 Provide certification that the min. % virgin-rubber was added.

2 Before passing the test flame over the cup, agitate the sealing compound with a 3/8 to 1/2 in. (9.5 to 12.7 mm) wide, square-end metal spatula in a manner so as to bring the material on the bottom of the cup to the surface, i.e., turn the material over. Start at one side of the thermometer, move around to the other, and then return to the starting point using 8 to 10 rapid circular strokes. Accomplish agitation in 3 to 4 sec. Pass the test flame over the cup immediately after stirring is completed.

3 Exception to AASHTO T 49: Substitute the cone specified in ASTM D 217 for the penetration needle.

4 No crack in the crack sealing materials or break in the bond between the sealer and the mortar blocks over 1/4 in. deep for any specimen after completion of the test.

a. Properties of Rubber Used in Sealer. The rubber shall be one of the following types;

1) Type I - Ground tire rubber.

2) Type II - A mixture of ground tire rubber and high natural reclaimed scrap rubber. The natural rubber content, determined by ASTM D 297, shall be a minimum of 25 percent.

b. Ground Rubber. The ground rubber shall comply with the following gradation requirements when tested by TxDoT Test Method Tex-200-F, Part I.

Table 15: Ground Rubber Gradation Requirements

Sieve Size		Percent Retained	
U.S.	SI	Type I	Type II
No. 8	2.36 mm	0	-
No. 10	2.00 mm	0-5	0
No. 30	600µm	90-100	50-70
No. 50	300µm	95-100	70-95
No. 100	150µm	-	95-100

The ground rubber shall be free from fabric, wire, cord or other contaminating materials.

c. Packaging. The rubber-asphalt crack sealing compound shall be packaged in boxes, which contain two (2) 30-35 pound [14-16 kilogram] blocks that are individually packaged in a liner made of polyethylene, or other packaging approved by the Engineer or designated representative.

J. Performance Graded Binders.

Performance graded binders must be smooth, homogeneous, show no separation when tested in accordance with Test Method Tex-540-C, and must meet the requirements in the following table.

Separation testing is not required if:

- a modifier is introduced separately at the mix plant either by injection in the asphalt line or mixer, or
- the binder is blended on site in continuously agitated tanks, or
- binder acceptance is based on field samples taken from an in-line sampling port at the hot mix plant after the addition of modifiers.

Table 16 Performance Graded Binder Requirements

Performance Grade	PG 58			PG 64				PG 70				PG 76				PG 82		
	-22	-28	-34	-16	-22	-28	-34	-16	-22	-28	-34	-16	-22	-28	-34	-16	-22	-28
Average 7-day Max Pavement Design Temperature, ºC[1]	58			64				70				76				82		
Min Pavement Design Temperature, ºC[1]	>-22	>-28	>-34	>-16	>-22	>-28	>-34	>-16	>-22	>-28	>-34	>-16	>-22	>-28	>-34	>-16	>-22	>-28
ORIGINAL BINDER																		
Flash Point, AASHTO T 48: Min,	230ºC																	
Viscosity, AASHTO TP 48:[2, 3] Max, 3.0 Pas, Test Temperature,	135ºC																	
Dynamic Shear, AASHTO TP 5:[4] G*/sin (δ), Min, 1.00 kPa Test Temperature @ 10 rad/sec.,	58ºC			64ºC				70ºC				76ºC				82ºC		
Elastic Recovery, ASTM D 6084, 50ºF, % Min	-	-	30	-	-	30	50	-	30	50	60	30	50	60	70	50	60	70
ROLLING THIN FILM OVEN (Tex-541-C)																		
Mass Loss, Max, %	1.0																	
Dynamic Shear, AASHTO TP 5: G*/sin (δ), Min, 2.20 kPa Test Temperature @10 red/sec.,	58ºC			64ºC				70ºC				76ºC				82ºC		
PRESSURE AGING VESSEL (PAV) RESIDUE (AASHTO PP 1)																		
PAV Aging Temperature	100ºC																	
Dynamic Shear, AASHTO TP 5: G*/sin (δ), Max, 5000 kPa Test Temperature10 rad/sec., ºC	25	22	19	28	25	22	19	28	25	22	19	28	25	22	19	28	25	22
Creep Stiffness, AASHTO TP 1:[5, 6] S, Max, 300 mPa, M - value, Min, 0.300 Test Temperature @ 60 sec., ºC	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18
Direct Tension, AASHTO TP 3:[6] Failure Strain, Min, 1.0% Test Temperature @1.0 mm/min., ºC	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18	-24	-6	-12	-18

[1] Pavement temperatures are estimated from air temperatures using an algorithm contained in the PGEXCEL3.xls software program, may be provided by the Department or by following the procedures as outlined in AASHTO MP 2 and PP 28.

[2] This requirement may be waived at the Department's discretion if the supplier warrants that the asphalt binder can be adequately pumped, mixed and compacted at temperatures that meet all applicable safety, environmental, and constructability requirements. At test temperatures where the binder is a Newtonian fluid, any suitable standard means of viscosity measurement may be used, including capillary (AASTHO T 201 or T 202) or rotational viscometry (AASHTO TP 48).

[3] Viscosity at 135ºC is an indicator of mixing and compaction temperatures that can be expected in the lab and field. High values may indicate high mixing and compaction temperatures. Additionally, significant variation can occur from batch to batch. Contractors should be aware that variation could significantly impact their mixing and compaction operations. Contractors are therefore responsible for addressing any constructability issues that may arise.

[4] For quality control of unmodified asphalt binder production, measurement of the viscosity of the original asphalt binder may be substituted for dynamic shear measurements of G*/sin (□) at test temperatures where the asphalt is a Newtonian fluid. Any suitable standard means of viscosity measurement may be used, including capillary (AASHTO T 201 or T 202) or rotational viscometry (AASHTO TP 48).

[5] Silicone beam molds, as described in AASHTO TP 1-93, are acceptable for use.

[6] If creep stiffness is below 300 mPa, direct tension test is not required. If creep stiffness is between 300 and 600 mPa, the direct tension failure strain requirement can be used instead of the creep stiffness requirement. The m-value requirement must be satisfied in both cases.

301S.4 Equipment.

All equipment necessary to transport, store, sample, heat, apply, and incorporate asphalts, oils, and emulsions shall be provided.

301S.5 Construction

Typical materials used for specific applications are identified in table 17. These are typical uses only and circumstances may require use of other material.

Table 17: Typical Material Use

Material Application	Typically Used Materials
Hot-Mixed, Hot-Laid Asphalt Mixtures	PG Binders, Modified PG Binders
Surface Treatment	AC-5, AC-10, AC-5 w/2% SBR, AC-10 w/2% SBR, AC-15P, AC-15-5TR, HFRS-2, MS-2, CRS-2, CRS-2H, HFRS-2P, CRS-2P,
Surface Treatment (Cool Weather)	RS-1P, CRS-1P, RC-250, RC-800, RC-3000, MC-250, MC-800, MC-3000, MC-2400L
Precoating	AC-5, AC-10, PG 64-22, SS-1, SS-1H, CSS-1, CSS-1H
Tack Coat	RC-250, SS-1, SS-1H, CSS-1, CSS-1H, EAP&T
Fog Seal	SS-1, SS-1H, CSS-1, CSS-1H
Hot-Mixed, Cold-Laid Asphalt Mixtures	AC-0.6, AC-1.5, AC-3, AES-300, AES-300P, CMS-2, CMS-2S
Patching Mix	MC-800, SCM I, SCM II, AES-300S
Recycling	AC-3, AES-150P, AES-300P, Recycling Agent, Emulsified Recycling Agent
Crack Sealing	SS-1P, Polymer Mod AE Crack Sealant, Rubber Asphalt Crack Sealers (Class A, Class B)
Prime	MC-30, AE-P, EAP&T, PCE
Curing Membrane	SS-1, SS-1H, CSS-1, CSS-1H, PCE
Erosion Control	SS-1, SS-1H, CSS-1, CSS-1H, PCE

301S.6 Storage, Heating and Application Temperatures

Asphaltic materials should be applied at the temperature, which provides proper and uniform distribution. Within practical limits higher temperatures than necessary to produce the desired results shall be avoided. Satisfactory application usually should be obtained within the recommended ranges shown below.

No material shall be heated above the following maximum temperatures:

Table:18 Recommended Temperature Ranges

	Recommended Range; °F [°C]	Maximum Temperature; °F [°C] for	
Type-Grade	Application/Mixing	Allowable Application	Storage
AC-5, 10,20,30	275-350 [135-177]	375 [191]	400 [204]
AC-5 or AC-10 + 2% SBR	300-375 [142-191]	390* [199]	375 [191]
AC-10 + 3% SBR, AC-45P	300-350 [142-191]	350 [177]	360 [182]
RC-250	125-180 [52-82]	200 [93]	200 [93]
RC-800	170-230 [77-110]	260 [127]	260 [127]
RC-3000	215-275 [102-135]	285 [141]	285 [141]
MC-30, AEP	70-150 [21-66]	175 [79]	175 [79]
MC-70	125-175 [52-79]	200 [93]	200 [93]
MC-250	125-210 [52-99]	240 [116]	240 [116]
MC-800, SCM I, SCM II	175-260 [79-127]	275 [135]	275 [135]
MC-3000 & MC-2400 Latex	225-275 [107-135]	290 [143]	290 [143]
HFRS-2, MS-2, CRS-2, CRS-2H, HFRS-2P, CRS-2P, CMS-2, CMS-2S, AES-300, AES-300S, AES-150P, AES-300P	120 - 160	180	180
SS-1, SS-1h, SS-1P, CSS-1, CSS-1h, PCE, EAP & T, SS-1P, RS-1P, CRS-1P, CSS-1P, recycling agent, emulsified recycling agent, polymer modified AE crack sealant.	50-130 [10-54]	140 [60]	140 [60]
RS-2, RS-2h, MS-2, CRS-2, CRS-2h, CRS-2p, CMS-2, CMS-2S, HFRS-2, HFRS-2p, AES-300	110-160 [43-71]	170 [77]	170 [77]
Special Precoat Material	125-250 [52-121]	275 [135]	275 [135]
PG Binders, Modified PG Binders	275 - 350	350	350
Rubber Asphalt Crack Sealers (Class A, Class B)	350 - 375	400	-
Rubber-Asphalt Crack Sealer	350-375 [177-191]	400 [204]	-

* AC-5 + 2% SBR and AC-10 + 2% SBR, which is designated for surface treatment work, may be heated to a maximum temperature of 390°F [200°C] by the supplier loading through an in-line heater, or with the permission of the Engineer or designated representative, these materials may be heated to maximum of 390°F [200°C] by the Contractor just prior to application. When any of the SBR-modified asphalt cements are used in asphaltic concrete, the storage temperature at the mix plant should not exceed 350°F [177°C].

Attention is called to the fact that asphaltic materials (except emulsions) are very flammable and constitute fire hazards. Proper precautions should be used in all cases, especially with RC cutbacks.

Utmost care shall be taken to prevent open flames from coming in contact with the asphaltic material or the gases of it. The Contractor shall be responsible for any fires or accidents, which may result from heating the asphaltic materials.

301S.7 Measurement and Payment

All asphaltic materials included in this specification will not be paid for directly but shall be included in the unit price bid for the item of construction in which this item is used.

End

Specific CROSS REFERENCE MATERIALS
Specification Item 301S "Asphalts, Oils and Emulsions"

American Association of State Highway and Transportation Officials (AASHTO)

Designation	Description
AASHTO T-44	Solubility Of Bituminous Materials in Organic Solvents
AASHTO T-48	Flash and Fire Points By Cleveland Open Cup
AASHTO T-49	Penetration of Bituminous Materials
AASHTO T-50	Float Test for Bituminous Materials
AASHTO T-51	Ductility of Bituminous Materials
AASHTO T-53	Distillation of Road Tar
AASHTO T-55	Water in Petroleum Products and Bituminous Materials by Distillation
AASHTO T-59	Testing Emulsified Asphalt
AASHTO T-72	Saybolt Viscosity
AASHTO T-78	Distillation of Cut-Back Asphaltic (Bituminous) Products
AASHTO T-79	Flash Point With Tag Open-Cup Apparatus
AASHTO T-201	Kinematic Viscosity of Asphalts
AASHTO T-202	Viscosity of Asphalts by Vacuum Capillary Viscometer
AASHTO TP-1	Creep Stiffness
AASHTO TP-3	Direct Tension
AASHTO TP-5	Dynamic Shear
AASHTO TP-48	Rotational Viscometry

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-200-F	Sieve Analysis of Fine and Coarse Aggregates
Tex-238-F	Laser Diffraction Particle Size Distribution Analyzer
Tex-509-C	Spot Test of Asphaltic Materials
Tex-525-C	Tests for Asphalt and Concrete Joint Sealers
Tex-533-C	Determination of Polymer Additive Percentages in Polymer Modified Asphalt Cements
Tex-539-C	
Tex-540-C	
Tex-541-C	
Tex-542-C	
Tex-543-C	
Tex-544-C	

American Society for Testing and Materials (ASTM)

Designation	Description
D 217	Test Methods for Cone Penetration of Lubricating Grease
D 297	Test Methods for Rubber Products-Chemical Analysis
D 2186 Method A	Test Methods for Deposit-Forming Impurities in Steam
D 6084	Test Method for Elastic Recovery of Bituminous Materials by Ductilometer

RELATED CROSS REFERENCE MATERIALS
Specification Item 301S "Asphalts, Oils and Emulsions"

City of Austin Standard Specifications

Designation	Description
Item No. 206S	Asphalt Stabilized Base

Item No. 210S	Flexible Base
Item No. 302S	Aggregates for Surface Treatments
Item No. 306S	Prime Coat
Item No. 307S	Tack Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item 301S "Asphalts, Oils and Emulsions"

City of Austin Standard Specifications

Designation	Description
Item No. 312S	Seal Coat
Item No. 313S	Rubber Asphalt Joint and Crack Sealant
Item No. 315S	Milling Asphaltic Concrete Paving
Item No. 320S	Two Course Surface Treatment
Item No. 340S	Hot Mix Asphaltic Concrete Pavement
Item No. 341S	Paving Fabric
Item No. 350S	Heating, Scarifying and Repaving
Item No. 351S	Recycling Agent

City of Austin Standard Details

Designation	Description
1000S-10	Local Street Sections
1000S-11(1)	Residential and Neighborhood collector Street Sections
1000S-11(2)	Industrial and Collector Street Sections
1000S-12(1)	Primary Collector Street Sections
1000S-12(2)	Primary Arterial Street Sections
1000S-13(1)	Minor Arterial Street Sections (4 Lanes)
1000S-13(2)	Minor Arterial Street Sections- (4 Lanes divided)
1000S-14	Major Arterial Street

Texas Department of Transportation: Standard Specifications for Construction And Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 300	Asphalts, Oils and Emulsions
Item 301	Asphalt Antistripping Agents
Item 310	Prime Coat (Cutback Asphaltic Materials)
Item 314	Emulsified Asphalt Treatment
Item 316	Surface Treatments
Item 345	Asphalt Stabilized Base (Plant Mixed)
Item 354	Planing and/or Texturing Pavement
Item 520	Weighing and Measuring Equipment

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-126-E	Molding, Testing and Evaluation of Bituminous Black Base Materials
Tex-207-F	Determination of Density of Compacted Bituminous Mixtures
Tex-211-F	Recovery of Asphalt From Bituminous Mixtures By Abson
Tex-215-	Determination of Asphalt Content of Rock Asphalt Process by Hot Solvent Method
Tex-217-F	Determination of Deleterious Material and Decantation Test For Coarse Aggregates
Tex-224-F	Determination of Flakiness
Tex-400-A	Method of Sampling Stone, Gravel, Sand and Mineral Aggregates
Tex-410-A	Abrasion of Coarse Aggregate Using the Los Angeles Machine
Tex-411-A	Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
Tex-438-A	Accelerated Polish Test for Aggregate
Tex-460-A	Determination of Crushed Face Particle

Tex-501-C	Test for Water in Petroleum Products and Other Bituminous Materials
Tex-502-C	Test for Penetration of Bituminous Material
Tex-503-C	Test for Ductility of Bituminous Materials
Tex-504-C	Test for Flash and Fire Points of Petroleum Materials by Cleveland Open Cup

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item 301S "Asphalts, Oils and Emulsions"

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-505-C	Test for Softening Point of Bituminous Materials by Ring-and-Ball Method
Tex-506-C	Test for Loss on Heating of Oils and Asphaltic Compounds
Tex-507-C	Proportion of Bitumen Soluble in Trichloroethylene
Tex-510-C	Determining the Effect of Heat and Air on Asphaltic Materials when Exposed in Thin Films
Tex-512-C	Test for Flash Points of Volative Flammable Materials By Tag Open-Cup Apparatus
Tex-513-C	Test for Saybolt Viscosity
Tex-515-C	Distillation of Cut-Back Asphalt Products
Tex-519-C	Float Test for Bituminous Materials
Tex-520-C	Test for Residue of Specified Penetration
Tex-521-C	Testing Emulsified Asphalts
Tex-528-C	Test for Absolute Viscosity of Asphalt Cements
Tex-529-C	Test for Kinematic Viscosity of Asphalts

Item No. 306S
Prime Coat

306S.1 Description

This item shall govern the application of asphaltic material on the completed base course and/or other approved areas in accordance with the Drawings, these specifications or as directed by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

306S.2 Submittals

The submittal requirements of this specification item include:

A. List of recommended materials (i.e. prime material, dispersal agent, etc.).

B. Temperature Viscosity data and proposed temperature of application.

C. Characteristics (i.e. manufacturer, rate of application, speed, etc.) of the proposed pressure distributor including calibration documentation.

D. List of facilities and equipment proposed for temperature measurements.

E. List of facilities and equipment proposed for storage and handling of asphaltic materials.

306S.3 Materials

A. Asphalt Materials

The asphalt material for Prime Coat shall meet the requirements of Cutback Asphalt, MC-30, Emulsion, SS-1, Emulsion CSS-1 or AE-P, Standard Specification Item No. 301S, "Asphalts, Oils and Emulsions".

B. Water

Water shall be furnished by the Contractor and shall be clean and free from industrial wastes and other objectionable matter.

C. Dispersal Agent

Agent shall be added to water and sprayed on surfaces to be primed in accordance with asphalt manufacturer's recommendations.

306S.4 Construction Methods

When, in the opinion of the Engineer or designated representative, the base course or other surface is satisfactory to receive the prime coat, the surface shall be prepared by sweeping or other approved methods as directed by the Engineer or designated representative. The surface shall be lightly sprinkled with water just prior to application of the asphaltic material unless this

requirement is waived by the Engineer or designated representative. The Contractor shall submit a list of prime material(s) recommended for application on the work to the Engineer or designated representative for approval. When emulsions are approved, a dispersal agent shall be added to the water before sprinkling.

The asphaltic material shall be applied on the clean surface by an approved type of self-propelled pressure distributor operated so as to distribute the prime coat at a rate ranging from 0.1 to 0.3 gallons per square yard (0.45 to 1.36 liters per square meter) of surface area. The material shall be evenly and smoothly distributed under pressure sufficient to assure proper distribution. During the application of prime coat, care shall be taken to prevent splattering of adjacent pavement, curb and gutters or structures. The Contractor shall be responsible for cleaning all splattered areas.

Prime Coat may be applied when the temperature of the surface on which the prime coat is to be placed is 60°F (16°C) or above and the air temperature is above 50^{0}F (10^{0}C) and rising; the air temperature being taken in the shade and away from artificial heat. Asphaltic material shall not be placed when general weather conditions, in the opinion of the Engineer or designated representative, are not suitable.

The Contractor shall provide all necessary facilities and equipment for determining the temperature of the asphaltic material in all of the heating equipment and in the distributor, for determining the rate at which it is applied, and for securing uniformity at the junction of two (2) distributor loads.

The distributor shall have been calibrated within three (3) years from the date it is first used on this project. The Engineer or designated representative shall be furnished an accurate and satisfactory record of such calibration. After beginning the work, if the yield on the asphaltic material applied appears in error, the distributor shall be calibrated in a manner satisfactory to the Engineer or designated representative before proceeding with the work.

The Contractor shall be responsible for the maintenance of the surface until the work is accepted by the Engineer or designated representative. No traffic, hauling or placement of any subsequent courses shall be permitted over the freshly applied prime coat for a minimum of 48 hours or until the prime coat is accepted as dry and cured completely by the Engineer or designated representative.

All storage tanks, piping, retorts, booster tanks and distributors used in storing or handling asphaltic material shall be kept clean and in good operating condition at all times and they shall be operated in such a manner that there will be no contamination of the asphaltic material with foreign material. It shall be the responsibility of the Contractor to provide and maintain in good working order a recording thermometer at the storage heating unit at all times.

The Engineer or designated representative will approve the temperature of application based on the temperature-viscosity relationship that will permit application of the asphalt within the limits recommended in Standard Specification Item No. 301S, "Asphalts, Oils and Emulsions". The Contractor

shall apply the asphalt at a temperature within 15^0F (8^0C) of the temperature specified in Standard Specification Item No. 301S, "Asphalt, Oils and Emulsions".

306S.5 Measurement

The prime coat will be included in the unit price bid for Standard Specification Item No. 340, "Hot Mix Asphaltic Concrete Pavement" unless included as a separate pay item in the contract. When included for payment, it shall be measured at point of delivery on the project in gallons (liters: 1 liter equals 0.264 gallons) at the applied temperature. The quantity to be paid for shall be the number of gallons used in the accepted prime coat.

306S.6 Payment

The work performed and materials furnished as prescribed by this item, when included as a contract pay item, will be paid for at the unit bid price per gallon for "Prime Coat". The price shall include full compensation for cleaning the base course or other surface, for furnishing, heating, hauling and distributing the prime coat specified; for all freight involved and for all manipulations, labor, tools, equipment and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 306S: Prime Coat Per Gallon.

End

SPECIFIC *CROSS REFERENCE MATERIALS*
Specification Item 306S "Prime Coat"

City of Austin Standard Specifications

Designation	**Description**
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 340S	*Hot Mix Asphaltic Concrete Pavement*

RELATED *CROSS REFERENCE MATERIALS*

City of Austin Standard Specifications

Designation	**Description**
Item No. 206S	Asphalt Stabilized Base
Item No. 210S	Flexible Base
Item No. 307S	Tack Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving
Item No. 320S	Two Course Surface Treatment

City of Austin Standard Details

Designation	Description
1000S-10	Local Street Sections
1000S-11 (1)	Residential and Neighborhood collector Street Sections
1000S-11 (2)	Industrial and Collector Street Sections
1000S-12 (1)	Primary Collector Street Sections
1000S-12 (2)	Primary Arterial Street Sections
1000S-13 (1)	Minor Arterial Street Sections (4 Lanes)
1000S-13 (2)	Minor Arterial Street Sections- (4 Lanes divided)
1000S-14	Major Arterial Street

RELATED *CROSS REFERENCE MATERIALS - Continued*
Specification Item 306S "Prime Coat"

Texas Department of Transportation: Standard Specifications for Construction

and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 300	Asphalts, Oils and Emulsions
Item 301	Asphalt Antistripping Agents
Item 310	Prime Coat (Cutback Asphaltic Materials)
Item 314	Emulsified Asphalt Treatment
Item 345	Asphalt Stabilized Base (Plant Mixed)
Item 520	Weighing and Measuring Equipment

Item No. 315S
Milling Asphaltic Concrete Pavement and Non-Portland Cement Concrete Bases

315S.1 Description

This item shall govern for the planing or the planing and texturing of existing asphaltic concrete pavement, asphalt stabilized and other non Portland cement Concrete base to depths indicated at the locations shown on the Drawings or as directed by the Engineer or designated representative. The item shall also include removal, and disposal or salvage/stockpiling the milled materials at the locations designated by the Engineer or designated representative.

When shown on the Drawings, the salvaged asphaltic concrete pavement and/or stabilized base, including any accompanying surface treatment, plant mix seal and micro-surfacing, may be allowed or required for use in other construction items of this project

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

315S.2 Submittals

The submittal requirements of this specification item include:

A. Characteristics (i.e. manufacturer, power, stability, speed, etc.) and capabilities (depth of cut, dust control, etc.) of the proposed milling equipment.

B. Proposed plan for grade reference, control point spacing and support system.

C. Proposed dust control plans including proposed equipment (type street sweeper, loader, water trucks, sprayers, etc.).

315S.3 Equipment

The equipment for removing the pavement surface shall be a power operated planing machine or grinder with a minimum 2 feet (1.8 meter) cutting width. For detail work and cutting widths less than 2 feet (1.8 meter), equipment with less than 2 feet (1.8 meter) cutting width shall be allowed. The equipment shall be self-propelled with sufficient power, traction and stability to maintain accurate depth of cut and slope. The equipment shall be capable of removing in one pass, asphaltic concrete pavement of a thickness of 1 inch and any required thickness less than 1 inch (25 millimeters) in a minimum 3 foot (0.9 meters) width. Machines capable of removing, in one pass, a depth greater than 1 inch (25 millimeters) will be permitted.

The grade reference used by the Contractor may be of any type approved by the Engineer or designated representative. Control points, if required by the Drawings, shall be set at intervals not to exceed 50 feet (15 meters). The Contractor shall set the grade reference from the control points. The grade reference shall have sufficient support so that the maximum deflection shall not exceed two millimeters (1/16 inch) between supports.

The machine shall have a manual system providing for uniformly varying the depth of cut while the machine is in motion, thereby making it possible to cut flush to all inlets, manholes, or other obstructions within the paved area. The speed of the machine shall be variable in order to leave the desired grid pattern as specified in sections 315S.4 and 315S.5.

The machine shall be equipped with an integral loading and reclaiming means to immediately remove material being cut from the surface of the roadway and discharge the cuttings into a truck, all in one operation. The machine shall be equipped with means to control dust created by the cutting action. Adequate backup equipment (mechanical street sweepers, loaders, water truck, sprayers, brooms etc.) and personnel will also be provided to keep flying dust to a minimum and to insure that all cuttings are removed from the street surface daily. Stockpiling of planed material will not be permitted on the project site.

Various machines may be permitted to make trial runs to demonstrate the capabilities of that machine and to determine the acceptability of that machine to the Engineer or designated representative. Any machine that is incapable, in the opinion of the Engineer or designated representative, of meeting these requirements will not be permitted.

315S.4 Construction Methods

A. General.

The pavement surface shall be removed for the length, depth and width and to the typical section shown on the Drawings, and to the lines and grades established by the Engineer or designated representative. The planed surface shall provide a satisfactory riding surface free from gouges, continuous longitudinal grooves, ridges, oil film and other imperfections and shall have a uniform textured appearance.

When an existing asphaltic concrete pavement overlay is to be removed from an underlying Portland cement concrete pavement, all of the asphaltic concrete pavement shall be removed, leaving a uniform surface of Portland cement concrete, unless otherwise directed by the Engineer or designated representative.

B. Surface Milling.

Surface milling shall be taken to a minimum depth of 2 inches (50 mm) or deeper as may be dictated by delamination of asphalt layers during the milling operation, to a depth of 1 inch (25 millimeters) below the lip gutter transitioning to the existing surface in 3 feet (0.9 meter) or as indicated on the Drawings for resurfacing operations. The pavement surface shall be removed to the appropriate milling depths around all castings within the area to be milled. When milling is used for leveling without the addition of asphalt, the milled surface shall be free of ridges deeper than 3/16 inch (5 millimeters).

Pavement, which is adjacent to steep curbs, inlets, manholes or other obstructions and that is not removed by the planing machine, shall be removed by other methods, acceptable to the Engineer or designated representative.

The pavement and curb surfaces shall be swept with a street sweeper or other sweeping equipment approved by the Engineer or designated representative to remove all debris leaving a clean and presentable condition.

C. Edge Milling.

Edge milling at the gutter lip shall be taken to a minimum depth of 1/4 inch (6 mm) less than the overlay thickness and shall transition to the existing surface in a minimum of 6 feet (1.8 meters).

D. Spot Milling.

Milling for spot repairs shall be completed in successive passes to the depth specified. Ramping for spot repairs shall be minimized. "Transition milling required at the beginning and ending of the overlay shall be taken to a minimum depth of the overlay thickness and transition to the existing surface for the length specified in the plans.

E. Miscellaneous.

Unless otherwise specified, the milling material shall remain the property of the Contractor. Temporary stockpiling shall not be permitted on site. Temporary pavement markings shall conform to Item No. 864S, "Abbreviated Pavement Markings".

315S.5 Surface Texture (Temporary Traffic Only)

In those areas where traffic will temporarily be permitted, the texture produced shall be a grid pattern or any other pattern with discontinuous longitudinal striations that will provide, in the opinion of the Engineer, a satisfactory riding surface.

When the planed pavement will not be overlaid, the minimum texture depth resulting from the number of measurements directed by the Engineer shall not be less than 3/64 inch (1.25 millimeters), unless specified otherwise on the Drawings. When these texture requirements are not met, the Contractor shall cease operations until the Engineer is satisfied that changes in the texturing procedures will produce an acceptable texture.

The Contractor shall take care to prevent damage to armor joints, sealed expansion joints and/or other appurtenances.

The surface of the pavement, after planing, shall have a smooth riding quality and shall be true to the established line, grade and cross section.

315S.6 Measurement

Work prescribed by this item will be measured by the square yard (square meter: 1 square meter equals 1.196 square yards) of surface area for actual quantities based on the neat dimensions indicated for surface and transition milling, spot repairs and edge milling to the specified width. Ramping for spot repairs shall not be measured for payment. Surface milling for spot repairs shall be included in the unit price bid for the spot milling area measured.

Measurement will be made only one time regardless of the number of passes required by the machine to secure the depth desired.

315S.7 Payment

The work performed in accordance with this item and measured as provided under "Measurement", will be paid for at the unit bid price per square yard for "Milling Asphaltic Concrete Paving and Non-Portland Cement Bases". The price shall include full compensation for removal of all materials to the depth shown; minimizing the dust escaping to the atmosphere; loading, hauling, unloading and satisfactorily storing or disposing of the material; and for all labor, tools, equipment, manipulation, temporary pavement markings and incidentals to complete the work, including mobilization of the milling machine.

No payment will be made for work done by any machine on a trial run to demonstrate its ability to meet this specification unless the work performed is acceptable under this specification.

Payment will be made under the following:

Pay Item No. 315S-A:	Surface Milling	Per Square Yard.
Pay Item No. 315S-B:	Profile Milling	Per Square Yard.
Pay Item No. 315S-C:	Transition Milling	Per Square Yard.
Pay Item No. 315S-D:	Edge Milling	Per Square Yard.
Pay Item No. 315S-E:	Spot Milling	Per Square Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 315S "Milling Asphaltic Concrete"

City of Austin Standard Specifications

Designation	Description
Item No. 642S	Silt Fence (SF)
Item No. 864S	Abbreviated Pavement Markings

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Specifications

Designation	Description
Item No. 206S	Asphalt Stabilized Base
Item No. 210S	Flexible Base
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 306S	Prime Coat
Item No. 307S	Tack Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving
Item No. 312S	Seal Coat
Item No. 320S	Two Course Surface Treatment
Item No. 340S	Hot Mix Asphaltic Concrete Pavement
Item No. 341S	Paving Fabric
Item No. 350S	Heating, Scarifying and Repaving

Item No. 351S Recycling Agent

RELATED CROSS REFERENCE MATERIALS (Continued)
Specification Item 315S "Milling Asphaltic Concrete"

City of Austin Standard Details

Designation	Description
1000S-10	Local Street Sections
1000S-11(1)	Residential and Neighborhood collector Street Sections
1000S-11(2)	Industrial and Collector Street Sections
1000S-12(1)	Primary Collector Street Sections
1000S-12(2)	Primary Arterial Street Sections
1000S-13(1)	Minor Arterial Street Sections (4 Lanes)
1000S-13(2)	Minor Arterial Street Sections- (4 Lanes divided)
1000S-14	Major Arterial Street

Texas Department of Transportation: Standard Specifications for Construction And Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 300	Asphalts, Oils and Emulsions
Item 301	Asphalt Antistripping Agents
Item 310	Prime Coat (Cutback Asphaltic Materials)
Item 314	Emulsified Asphalt Treatment
Item 345	Asphalt Stabilized Base (Plant Mixed)
Item 354	Planing and/or Texturing Pavement

Item No. 340S
Hot Mix Asphaltic Concrete Pavement

340S.1 Description

This item shall govern base, level up, and pavement surface courses composed of a compacted mixture of aggregate and asphaltic cement mixed hot in a mixing plant. The hot mix asphaltic (HMA) concrete pavement shall be constructed on a previously completed and approved subgrade, subbase material, base material, concrete slab or existing pavement.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

340S.2 Submittals

The submittal requirements of this specification item may include:

A. A mix design submittal including the plant corrected Job Mix Formula (JMF) for the hot mix asphaltic concrete,
B. Certification that the aggregate materials meet appropriate quality requirements.
C. Particle-size gradation and specific gravity tests on all aggregate materials.
D. Certification that the asphalt cement for paving materials meet appropriate quality requirements.

340S.3 Materials

The Contractor shall furnish materials to meet the requirements specified herein and shall be solely responsible for the quality and consistency of the product delivered to the Project.

A. Aggregate: The aggregate shall be composed of coarse aggregate, a fine aggregate and, if required or allowed, mineral filler and reclaimed asphalt pavement (RAP). RAP use will be allowed in all base course mixtures except as specifically excluded herein, in the Contract Documents or on the Drawings, provided no more than 20% RAP is used.

   RAP use will not be permitted in pavement surface courses.

   Aggregates shall meet the quality requirements of Table 1 and other requirements as specified herein. The aggregate contained in RAP will not be required to meet Table 1 requirements unless indicated otherwise on the Drawings.

   1. Coarse Aggregate: Coarse aggregate is defined as that part of the aggregate retained on the No. 10 (2.00 mm) sieve and shall consist of clean, tough, durable fragments of crushed stone or crushed gravel of uniform quality throughout.

      Gravel from each source shall be crushed to the extent that it has a minimum of 85% of the particles retained on the No. 4 (4.75 mm) sieve with two or more mechanically induced crushed faces as determined by TxDOT Test Method TEX-460-A (Part I). The material passing the No. 4 (4.75 mm) sieve and retained on the No. 10 (2.00 mm) sieve must be the produced from crushing aggregate that was originally retained on the No. 4 (4.75 mm) sieve.

   2. Reclaimed Asphalt Pavement (RAP): RAP is defined as a salvaged, milled, pulverized, broken or crushed asphaltic pavement. The RAP to be used in the mix shall be crushed or broken to the extent that 100 percent will pass the 2-inch (50 mm) sieve.

The RAP shall be stockpiled in such a manner that assures that it will not become contaminated by dirt or other objectionable materials. Unless indicated otherwise on the Drawings, stockpiled, crushed RAP must not exhibit a decantation more than 5 percent or a plasticity index more than 8, when tested in accordance with TxDOT Test Method Tex-406-A, Part I, or Test Method Tex-106-E, respectively.

3. Fine Aggregate: Fine aggregate is defined as that part of the aggregate passing the No. 10 (2.00 mm) sieve and shall be of uniform quality throughout. A maximum of 15 percent of the total aggregate may be field sand or other uncrushed fine aggregate.

   Screenings shall be supplied from sources whose coarse aggregate meets the abrasion and magnesium sulfate soundness loss requirements shown in Table 1.

   a) Unless indicated otherwise on the Drawings, stone screenings, which are the product of a rock crushing operation, are required and shall meet the following gradation requirements when tested in accordance with TxDOT Test Method Tex-200-F, Part I.

Material	Percent by Weight (Mass)
Passing 3/8 inch (9.50 mm) sieve	100
Passing No. 10 (2.00 mm) sieve	70-100
Passing No. 200 (75 µm) sieve	0-15

   b) Crushed gravel screenings may be used with, or in lieu of, stone screenings only when indicated on the Drawings. Crushed gravel screenings must be the product of crushing aggregate that was originally retained on the No. 4 (4.75 mm) sieve and must meet the gradation for stone screenings shown above.

4) Mineral Filler: Mineral filler shall consist of thoroughly dried stone dust, Portland cement, fly ash, lime or other mineral dust approved by the Engineer or designated representative. The mineral filler shall be free from foreign matter.

   Portland cement manufactured in a cement kiln fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Natural Resource Conservation Commission (TNRCC) and the U. S. Environmental Protection Agency (EPA). Supplier shall provide current TNRCC and EPA authorizations to operate the facility.

   Fly ash obtained from a source using a process fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Natural Resource Conservation Commission (TNRCC) and the U. S. Environmental Protection Agency (EPA). Supplier shall provide current TNRCC and EPA authorizations to operate the facility.

   The addition of baghouse fines or other collected fines will be permitted if the mixture quality is not adversely affected in the opinion of the Engineer or designated representative. In no case shall the amount of material passing the No. 200 (75 µm) sieve exceed the tolerances of the job-mix formula or the master gradation limits.

   When tested by TEX-200-F (Part I or Part III, as applicable), the mineral filler shall meet the following gradation requirements. Baghouse fines are not required to meet the gradation requirements.

Material	Percent by Weight (mass)
Passing No. 30 (600 µm) Sieve	95 - 100
Passing No. 80 (187.5 µm) Sieve, not less than	75
Passing No. 200 (75 µm) Sieve, not less than	55

TABLE 1: AGGREGATE QUALITY REQUIREMENTS *

Requirement	Test Method	Amount
COARSE AGGREGATE		
Deleterious Material, percent, maximum	Tex-217-F, I	1.5
Decantation, percent, maximum	Tex-217-F, II	1.5
Los Angeles Abrasion, percent, maximum	Tex-410-A	40
Magnesium Sulfate Soundness Loss 5 cycle, percent, maximum	Tex-410-A	30
FINE AGGREGATE		
Linear Shrinkage, maximum	Tex-107-E, II	3
COMBINED AGGREGATES		
Sand Equivalent Value, minimum	Tex-203-F	45

***** - Aggregates, without added mineral filler or additives, combined as used in the job-mix formula (Plant Corrected).

B. Asphaltic Material

1. Paving Mixture. Asphalt cement for the paving mixture shall conform to the requirements of Standard Specification Item No. 301S, "Asphalts, Oils and Emulsions", for AC-20 or PG64-22, Styrene (SBS) Modified Asphalt Cement, AC-SBS Blend AC-45P or PG76-22S, unless otherwise indicated in the Project Documents.

2. Tack Coat: Tack Coat shall conform to Standard Specification Item No. 307S, "Tack Coat".

C. Additives: Additives to facilitate mixing and/or improve the quality of the asphaltic mixture or tack coat may be used with the authorization of the Engineer or designated representative. The Contractor may choose to use either lime or a liquid anti-stripping agent to reduce moisture susceptibility of the aggregate.

340S.4 Paving Mixtures

An asphalt mixture design is developed by a laboratory process, which includes the determination of the quality and quantity of the asphalt cement and the individual aggregates, and the testing of the combined mixture (Laboratory Design). The Laboratory Design is subsequently revised to produce an appropriate job mix formula.

The job mix formula (JMF) lists the quantity of each component to be used in the mix after the laboratory design has been adjusted by running it through a particular plant (i.e. the mix design is Plant Corrected). The JMF will be the standard to which the Acceptance Plan will be applied. The JMF of one drum or batching unit shall not be used for another unit.

The Contractor shall submit to the Engineer on forms provided by the Engineer or designated representative, an asphalt mixture design reviewed, signed and sealed by a Registered Professional Engineer licensed in the State of Texas or certified by a TxDOT Level II Certified

Asphalt Technician. An asphalt mixture design shall be submitted for a comprehensive review every two (2) years. Mix designs older than one year will not be accepted without a review of current test data of the proposed materials and current mix design to ensure that the materials meet specification requirements.

The JMF (Plant Corrected) shall be submitted to the Engineer or designated representative on a form provided by the Engineer through the Construction Inspector or Project Manager of the Project for review, for each individual Project, a minimum of three (3) working days before the mixture is to be placed. Under no circumstances will a mixture be placed before its use is reviewed and approved by the Engineer or designated representative.

Performance of the mix design shall remain the responsibility of the Contractor.

A. Mixture Design: The mix shall be designed in accordance with TxDOT Construction Bulletin C-14 and Test Method Tex-204-F to conform with the requirements herein. The master grading limits of the appropriate type and the JMF will be plotted on a graduated chart with sieve sizes raised to the 0.45 power and will be submitted to the Engineer or designated representative with the asphalt mixture design.

   The Bulk Specific Gravity of aggregates in RAP will be determined on extracted aggregates.

B. Types: The blend of coarse aggregate, fine aggregate, and mineral filler, if allowed, that is established by TxDOT Test Method Tex-200-F, Dry Sieve Analysis, shall conform to the master gradation shown in Table 2 for the type of specified mixture. The voids in the mineral aggregate (VMA) will be determined as a mixture design requirement only, in accordance with TxDOT Test Method Tex-207-F, and shall not be less than the value indicated in Table 2.

TABLE 2: Master Grading - Percent Passing by Weight (Mass) or Volume

Sieve Size US (SI)	Type A Coarse Base	Type B Fine Base	Type C Coarse Surface	Type D Fine Surface	Type F Fine Mixture
1-1/2" (37.5 mm)	100				
1-1/4" " (31 mm)	95-100				
1" (25 mm)		100			
7/8" (22 mm)	70-90	95-100	100		
5/8 (15.5 mm)"		75-95	95-100		
1/2" (12.5 mm)	50-70			100	
3/8" (9.5 mm)		60-80	70-85	85-100	100
1/4" (6.25 mm)					95-100
No. 4 (4.75 mm)	30-50	40-60	43-63	50-70	
No. 10 (2.00 mm)	20-34	27-40	30-40	32-42	32-42
No. 40 (425 µm)	5-20	10-25	10-25	11-26	9-24
No. 80 (187.5 µm)	2-12	3-13	3-13	4-14	3-13
No. 200 (75 µm)	1-6*	1-6*	1-6*	1-6*	1-6*
VMA % minimum	11	12	13	14	15
Rec. Min. Lift	3" (75 mm)	2" (50 mm)	1-3/4" (45 mm)	1" (25 mm)	3/4" (20 mm)

C. Tolerances: Fluctuations in the aggregate gradation and asphalt content of the Job Mix Formula (JMF) shall not vary by more than the following criteria but the aggregate gradation shall be limited to the range of the master gradation as established by TEX-210-F.

SIEVES	Percent By Weight (Mass)
2" " (50 mm) Sieve through No. 10 " (2.00 mm) Sieve	±5.0
No. 40 (425 µm) through No. 200 (75 µm) Sieve	± 3.0
Asphalt Content	±0.5

D. Stability and Density: The mixture shall be designed at or near optimum density, as indicated on the Drawings, to conform to the following percent of Maximum Theoretical Density as measured by TxDOT Test Method TEX-227-F and Stability conforming to TxDOT Test Method TEX-208-F. The laboratory mixture shall be molded in accordance with TxDOT Test Method TEX-206-F and the Bulk Specific Gravity determined in accordance with TxDOT Test Method TEX-207-F.

	Optimum Laboratory Density (%)	Laboratory Density (%) Min.	Laboratory Density (%) Max.	Stability
Local Streets Surface Courses	96	94.5	97.5	35 Min.
Collectors & Arterials Surface Courses	96	94.5	97.5	40-60
All Base Courses	96	94.5	97.5	35 Min.

E. Job Mix Formula Field Adjustments: The Contractor shall produce a mixture of uniform composition closely conforming to the reviewed JMF, that falls within the limits of the tolerances given above and the Acceptance Plan.

If it is determined by the City of Austin that adjustments to the JMF are necessary to achieve the specified requirements, the Engineer or designated representative may allow adjustments of the JMF within the following limits without a laboratory redesign of the mixture. The adjusted JMF shall not exceed the master grading criteria for the type of mixture specified. The proposed JMF adjustments shall not exceed 5 percent on any one sieve, ½-inch (12.5 mm) size and larger, or 3 percent on the sieve size below the 1/2-inch (12.5 mm) sieve of the JMF (Plant Corrected) reviewed for the Project.

When the proposed adjustments exceed either the 5 or 3 percent limits, and the Engineer or designated representative determines that the impact of these changes may adversely affect pavement performance, a new laboratory mixture design will be required.

The asphalt content may be adjusted with the concurrence of the Engineer or designated representative to maintain desirable laboratory density near the optimum value while achieving other mix requirements. However, increasing the asphalt content of the mixture in order to reduce pavement air voids will not be allowed. Also, if the percent air voids is determined to be less than 4 percent, adjustments shall be made to the plant production by the Contractor, within the tolerances as outlined above, so that an adequate air void level is attained.

340S.5 Equipment

The trucks that deliver the hot mix asphalt concrete material to the project shall be of sufficient number to insure a continuous paving operation. All equipment used for the production, placement and compaction of the mixture shall be maintained in good repair and operating

conditions to the satisfaction of the Engineer or designated representative. All equipment shall be made available for inspection. If the Engineer or designated representative expresses concern about the condition of any equipment, it shall not be used until it is repaired to the satisfaction of the Engineer or designated representative.

A. Mixing Plants: Plants may be of the weigh-batch type, the modified weigh-batch type or drum-mix type equipped with suitable material conveyers, power units, mixing equipment, aggregate proportioning devices, dryers, bins, dust collectors and sensing and recording devices as appropriate for the mixing plant type. The mixing plants shall meet the requirements specified in Section 340.4, 'Equipment' of TxDOT Specification Item No. 340, "Hot Mix Asphaltic Concrete Pavement".

B. Spreading and Finishing Paving Machine: The paving machine shall be self-propelled and equipped with a heated compacting screed capable of producing a finish surface meeting the requirements of the street cross-section indicated on the Drawings and all surface criteria. Extensions to the screed shall have the same heating and compacting capabilities as the primary unit, except for use on variable depth tapered areas and/or as approved by the Engineer or designated representative.

   The paving machine shall be equipped with an approved automatic dual longitudinal screed control system and an automatic transverse screed control system. The longitudinal controls shall be capable of operating from any longitudinal grade reference including a string line, ski, mobile string line or matching shoe. Unless indicated otherwise on the Drawings, the Contractor may use any one of these grade references. The selected grade reference equipment shall be maintained in good operating condition by personnel trained in the use of the specific type of equipment.

   The Contractor shall furnish all labor and equipment required for establishing and maintaining appropriate grade reference.

C. Rollers: The Contractor shall select rollers conforming to Item 230S, "Rolling (Flat Wheel)" and Item 232S, "Rolling (Pneumatic Tire)". Rollers that do not conform to these requirements shall be immediately removed from the Project.

D. Motor Grader: A self-propelled power motor grader may only be used, when its use is approved by the Engineer or designated representative. It shall have a blade of not less than 12 feet (3.66 meters) and a wheelbase of not less than 16 feet (4.88 meters). Smaller graders may be used for small irregular areas when approved by the Engineer or designated representative.

E. Material Transfer Equipment: Equipment for transferring the HMA mixture from the hauling units or the roadbed to the spreading and finishing machine will be allowed unless indicated otherwise on the Drawings.

   Windrow pick-up equipment, if permitted by the Engineer or designated representative, shall be constructed in such a manner that substantially all of the HMA mixture deposited on the roadbed is picked up and loaded into the spreading and finishing machine. The HMA mixture shall not be contaminated with foreign material. The loading equipment shall be designed so that it does not interfere with the spreading and finishing machine in obtaining the required line, grade and surface without resorting to hand finishing.

F. Straightedges and Templates: The Contractor shall provide a ten-foot (3.05 meter) straightedge acceptable to the Engineer or designated representative for surface testing. Satisfactory templates shall be provided as required by the Engineer or designated representative.

340S.6 Stockpiling Aggregates

Aggregates shall be stockpiled to facilitate blending. When the aggregate is not stockpiled on a hard, non-contaminant base, the bottom six-inch (150 mm) depth of the stockpiles shall not be used in asphaltic mixtures. Where space is limited at the plant site, the aggregate stockpiles shall be separated by walls or other appropriate barriers.

Aggregates shall be stockpiled and handled in a manner that will insure minimization of segregation and contamination. Aggregate and RAP stockpiles shall only contain material from a single source.

340S.7 Mixture Temperature

The Contractor shall select a target temperature for discharge of the HMA mixture from the mixer between 250°F (120°C) and 350°F (176°C) that is suitable to weather and Project conditions. The target temperature shall be reported to the Engineer or designated representative daily and recorded in the Daily Progress Report. The HMA mixture temperature shall not vary by more than 25°F (14°C) from the target temperature for discharge from the mixer. HMA mixtures that are discharged from the mixer at a temperature exceeding 360°F (182°C) or a temperature more than 50°F (28°C) below the target temperature shall not be accepted and shall not be placed on the Project.

340S.8 Mixture Storage

A surge-storage system may be used to minimize production interruptions during a normal day of operation. When approved by the Engineer or designated representative, overnight storage of HMA mixture in insulated storage bins may be used provided that material temperature and physical properties of the HMA mixture are not adversely affected. HMA mixtures that include hardened lumps shall not be used. Stored HMA mixtures shall not be exempt from any requirements provided in this specification.

When a surge-storage system is used, it shall be equipped with a device such as a gob hopper or other device approved by the Engineer or designated representative to prevent segregation in the surge-storage bin.

340S.9 Mixture Moisture Content

Hot mix asphalt (HMA) mixtures produced from any plant shall not have a moisture content in excess of 1 percent by weight (mass) when discharged from the mixer. The moisture content shall be determined in accordance with TxDOT Test Method Tex-212-F, Part II, except that the sample shall be left in the oven a total of not less than four (4) hours.

340S10 Construction Methods

A General: The Contractor shall be responsible for the production, transportation, placement and compaction of the specified HMA paving mixture to the requirements of this specification. The Contractor shall also be responsible for providing a safe environment for inspection personnel to inspect the equipment and to acquire samples.

All hot mix asphalt concrete pavement surface courses shall be placed with a spreading and finishing (lay-down) machine only. All hot mix asphalt concrete pavement base layers with the possible exception of the first lift of the base layer shall also be placed with a

spreading and finishing (lay-down) machine. Longitudinal pavement joints shall be located under the proposed lane lines. Density tests shall be taken prior to opening to traffic.

The first lift of a base layer may be placed with a motor grader if approved in advance by the Engineer or designated representative. The loose measure thickness of this first lift shall not exceed 6 inches (150 mm). If placed with a motor grader, the first lift shall achieve a minimum in-place relative density of 89% as determined by TxDOT test procedures TEX-207-F and TEX-227-F. All subsequent lifts should be placed with a spreading and finishing (lay-down) machine and shall be subject to the requirements of Section 340S.12, "Acceptance Plan". Density tests will be taken randomly to confirm compliance with the specification requirements.

For hot mix asphalt overlays, an automatic screed shall be used with outriggers.

Any material delivered to the Project that by visual inspection can reasonably be expected not to meet specification requirements (i.e. segregated or burned material, deficient or excess asphalt, low mixing temperature, visible contaminants, etc.), as determined by the Engineer or designated representative, shall not be used or left in place.

Equipment shall be inspected prior to use and, if found to be defective or in an operating condition that could potentially affect the quality of the finished pavement, as determined by the Engineer or designated representative, its use shall not be allowed. Leakage of fuels, oils, grease, hydraulic or brake fluids or other contaminants onto the prepared surface or newly-laid HMA layer will not be allowed and may require replacement of the affected pavement area.

The HMA paving mixture, when placed with a spreading and finishing machine, shall not be placed when the air temperature is below 50°F (10°C) and is falling, but it may be placed when the air temperature is above 40°F (4°C) and is rising.

The paving mixture, when used as a level-up course or when spread with a motor grader, shall not be placed when the air temperature is below 60°F (15°C) and is falling, but it may be placed when the air temperature is 50°F (10°C) and is rising. An HMA layer with a thickness of 1-1/2 inches (37.5 mm) and less shall not be placed when the temperature of the surface on which the layer is to be placed is below 50°F (10°C). The temperature shall be taken in a shaded area away from artificial heat.

Additional surface temperature requirements may be included in the Contract Documents or indicated on the Drawings.

Surfaces to be paved shall be finished, primed, cured, broomed and tacked, as appropriate, to the satisfaction of the Engineer or designated representative. If the surface on which the first course of the paving mixture is to be placed is a flexible base course, and a cut-back asphalt is to be used as a prime coat, the flexible base shall have been primed and cured a minimum of 24 hours before the paving mixture may be placed. The 24-hour restriction will not apply to a flexible base that has been primed with material other than a cutback. However, the surface on which the tack coat and/or paving mixture are to be placed shall be in a dry condition.

Pavement shall be opened to traffic as soon as possible after temporary pavement markings or permanent markings are in place as indicated on the Drawings) or as directed by the Engineer or designated representative. Construction traffic allowed on pavements open to the public will be subject to all laws governing traffic on streets and highways.

B. Tack Coat: The surface upon which the tack is to be placed shall be cleaned thoroughly to the satisfaction of the Engineer or designated representative. The surface shall be given a

uniform application of tack coat as governed by Standard Specification Item No. 307S, "Tack Coat". The tack coat shall be applied, as directed by the Engineer or designated representative, with an approved sprayer at a rate not to exceed 0.05 gallons per square yard. (0.225 liters per square meter) of surface area. Where the paving mixture will adhere to the surface on which it is to be placed without the use of a tack coat, the tack coat may be eliminated when approved by the Engineer or designated representative. All contact surfaces of curbs, castings and all structures and all joints shall be painted with a thin uniform application of tack coat.

During the application of tack coat, care shall be taken to prevent splattering of adjacent pavement, curb and gutter and structures. Before the Work can be accepted, all splatter shall be removed by the Contractor at the Contractor's expense.

C. Transporting Hot Mix Asphaltic (HMA) Concrete: The HMA mixture shall be hauled to the Work site in tight vehicles that were previously cleaned of all foreign material. Dispatching of the vehicles shall normally be arranged so that all material delivered is placed and all rolling completed during daylight hours. Nighttime paving may be allowed, when approved in advance by the Engineer or designated representative.

In cool weather or for long hauls, truck bodies containing the HMA mixture shall be covered.

If necessary, to prevent the HMA mixture from adhering to the truck body, the inside of the truck may be given a light coating of a release agent satisfactory to the Engineer or designated representative.

D. HMA Placement: The HMA mixture shall be dumped and spread on the approved prepared surface with the spreading and finishing machine. When properly compacted, the finished pavement shall be smooth, of uniform texture and density and shall meet the requirements of the typical cross sections and the surface tests. In addition the placement of the HMA mixture shall be done without tearing, shoving, gouging or segregating the mixture and without producing streaks in the HMA layer.

Discharge of the HMA mixture into the finishing machine shall be controlled so that the spreading and finishing machine is not bounced or jarred and the required lines and grades shall be obtained without resorting to hand finishing except as permitted below in this Section.

Unless indicated otherwise on the Drawings, dumping of the HMA material in a windrow and then placing the HMA mixture in the finishing machine with windrow pick-up equipment will be permitted provided the temperature of the HMA mixture does not drop more than 50°F (28°C) below the target temperature before being placed by the finishing machine.

Under no circumstances will the HMA material be permitted to be dumped on or near the job site and then reloaded for hauling to the site of placement. Exceptions may be allowed if approved by the Engineer or designated representative.

The windrow pick-up equipment shall be operated in such a manner that substantially all the mixture deposited on the roadbed or prepared surface is picked up and loaded into the finishing machine without contamination by foreign material. The windrow pick-up equipment will also be so operated that the finishing machine will obtain the required line, grade and surface without resorting to hand finishing. Any operation of the windrow pick-up equipment resulting in accumulation and subsequent shedding of accumulated material into the HMA mixture will not be permitted.

When approved by the Engineer or designated representative, level-up courses may be spread with a motor grader that meets the requirements of this specification item.

The spreading and finishing machine shall be operated at a uniform forward speed consistent with the plant production rate, hauling capability and roller train capacity to result in a continuous operation. Stopping of the spreading and finishing machine between trucks is to be held to a minimum. If, in the opinion of the Engineer or designated representative, delivery of material is adversely affecting the condition of the HMA layer (excessive stopping of the spreading and finishing machine, loss of mixture temperature, etc.), the Engineer or designated representative may require paving operations to cease until acceptable methods are provided to minimize starting and stopping of the spreading and finishing machine.

The hopper gates of the spreading and finishing machine shall be adjusted to provide an adequate and consistent flow of material. This shall result in enough material being delivered to the augers so that they are operating approximately 85 percent of the time or more. The augers shall provide means to supply adequate flow of material to the center of the paver. Augers shall supply an adequate flow of material for the full width of the mat being placed, as approved by the Engineer or designated representative. Augers should be kept approximately one-half to three-quarters full of HMA mixture at all times during the paving operation.

When the HMA mixture is placed in a narrow strip along the edge of an existing pavement, or is used to level up small areas of an existing pavement or is placed in small irregular areas where the use of a finishing machine is not practical, the finishing machine may be eliminated when permitted by the Engineer or designated representative.

The paving material adjacent to castings and flush curb and gutter and structures shall be finished uniformly high so that when compacted, it will be slightly above but not more than 1/8 inch (3 mm) above the edge of the casting or gutter lip.

Construction joints of successive courses of HMA material shall be offset at least 6 inches (150 mm). Longitudinal joints in the layer shall be placed to coincide with lane lines as directed the Engineer or designated representative. Transverse joints shall be offset a minimum of 5 feet (1.5 meters).

E. Compaction: The pavement layers/lifts shall be compacted thoroughly and uniformly to obtain the compaction and cross section meeting the requirements indicated on the Drawings and this specification item.

Regardless of the method used for compaction, all rolling to achieve specified density shall cease before the temperature of the HMA mixture drops below 175°F (80°C).

Rolling with a pneumatic tire roller shall be used to seal the surface. Rolling with a tandem or other steel-wheel roller shall be provided if required to iron out any roller marks. Surface sealing and removal of roller marks may be accomplished at HMA temperatures below 175°F (80°C).

Vibratory rollers shall not be allowed in the vibrating mode on layers with a plan thickness less than 1-1/2 inches (37.5 mm).

The motion of the rollers shall be slow enough to avoid other than usual initial displacement. If any displacement occurs, it shall be corrected to the satisfaction of the Engineer or designated representative.

The roller shall not be allowed to stand on pavement, which has not been compacted to minimum density requirements. In order to prevent adhesion of the surface mixture to the steel-wheel rollers, the wheels shall be thoroughly moistened with water; however an excess

of water will not be allowed. Necessary precautions shall be taken to prevent the dropping of diesel, gasoline, oil, grease or other foreign matter on the pavement, either when the rollers are in operation or when standing.

The edges of the pavement along curbs, headers and similar structures, and all places not accessible to the roller, or in such positions as will not allow thorough compaction with the rollers, shall be thoroughly compacted with lightly oiled tamps.

Rolling with a trench roller will be required on widened areas, in trenches and other limited areas where satisfactory density cannot be obtained with the approved rollers.

340S.11 Sampling and Testing

The HMA mixture shall be tested daily at the Project site for conformance to specification requirements. The Engineer or designated representative shall utilize a random selection method to determine sample locations based on the Contractor's anticipated production. Each day's anticipated production shall be divided into three (3) essentially equal single-pass, sub-area lots. Each day's sample locations shall be equally distributed over the three (3) sub-areas. If, due to the weather or plant malfunctions, the Contractor’s daily-anticipated production is not attained, the random locations will not be recalculated. Also, no more than one location of the three (3) sub-areas shall be located in an irregular shaped area such as a cul-de-sac.

Unless directed otherwise by the Engineer or designated representative, a minimum of three bag samples and three correlating 6-inch (150-mm) cores will be obtained from each day's production.

Bag samples shall be taken during lay-down operations. The primary sampling point for the bag samples shall be from the windrow if a windrow elevator is used. If a windrow elevator is not used, the sample shall be taken from the middle of the paving machine hopper. This sampling location will require a stoppage in the paving operation in order for the Inspector to safely secure a sample from the hopper.

One core shall be taken for every 2,000 single-pass square yards (1 675 single-pass square meters) with a minimum of three (3) cores for all projects. One core shall be taken at the same station and pass sampled for each of the bag samples. Cores shall be taken by the City’s laboratory within 48 hours of pavement laydown unless otherwise directed by the Engineer or designated representative.

For total areas of less than 500 square yards (420 square meters), a total of only two bag samples and two correlating cores will be obtained. If the Contractor desires additional testing, it shall be at its own entire expense.

The Engineer or designated representative may alter, increase or waive the testing schedule to ensure that the Work performed and the material used meet specification requirements. Acceptability of the completed pavement shall be based on the average of test results for the Project as defined in Section 340S.12, "Acceptance Plan" of this item.

Gradation, asphalt content and stability value of the HMA mixture shall be reported for each of the bag samples. The stability value reported for each of the bag samples shall be the average of three (3) tests per bag.

Pavement thickness and density shall be determined from 6-inch (150 mm) field cores. For each day's placement, density of cores for which no corresponding bag samples were taken shall be determined by using the average Maximum Theoretical Density of the day's three (3) bag samples or as may otherwise be determined by the Engineer or designated representative.

When, in the opinion of the Engineer or designated representative, test results appear unrepresentative, additional testing may be authorized. The retesting will be at the expense of the Contractor and the results of the retesting shall be averaged with the results of the original testing. If the results of retesting indicate that the original test results were erroneous, the original test results will be discarded. In the instance of erroneous original test results the subsequent first set of retests will be at the expense of the City of Austin.

Pavements with low-density results may be recored; but the pavement shall not receive any additional compactive effort.

Pavements that will not or cannot be cored within 48 hours shall be closed to both public and construction traffic.

340S.12 Acceptance Plan

For the purpose of the Acceptance Plan only, the "Paving Project" of each of the specified mixture types shall be defined by the Engineer or designated representative before the paving operation begins

Considerations for defining the Paving Project shall include paving operations staged due to traffic considerations, pavement structural section (i.e. with varying layer thicknesses), time required for paving, changes to the Job Mix Formula, phasing of large projects, or other factors affecting the consistency in the production, lay-down/compaction, use of completed portions, and/or aging of in-place material.

Acceptability of the completed pavement structure for a Paving Project shall be based on all daily averages of three test results and when approved by the Engineer or designated representative the overall average of all test results for each of the mixture/layer types specified on the Drawings.

Pay adjustments for two or more acceptance factors shall be accumulative. Pay adjustments of 100% unit price reduction shall require removal and replacement of the Work. Replacement materials shall be subject to all requirements of this specification. Alternatively, the Engineer or designated representative may allow the Work to remain in place without payment provided that the Work is warranted for an extended period under conditions as determined by the Engineer or designated representative. The decision of the Engineer or designated representative related to the removal and replacement of the Work shall be the final authority.

A. Non-Pay-Adjustment Acceptance Factors:

1 Surface Characteristics: Unless otherwise directed by the Engineer or designated representative, all pavements shall be tested for smoothness. Surfaces shall be tested with a 10-foot (3.05 meter) straightedge parallel to the roadway centerline and perpendicular to the centerline on flat, cross-slope sections. Maximum allowable deviation in 10 feet shall be 1/8 inch (1-mm per meter) parallel to the centerline and 1/4 inch (2-mm per meter) perpendicular to the centerline. Sections exceeding these maximums shall be corrected to the satisfaction of the Engineer or designated representative. The completed surface must meet the approval of the Engineer or designated representative for surface smoothness, finish and appearance.

If the surface ravels, ruts or deteriorates in any manner prior to the end of the warranty period, it will be the Contractor's responsibility to correct this condition at its own entire expense to the satisfaction of the Engineer or designated representative in conformance with the requirements of this specification.

For HMAC rehabilitation and overlay projects, if cracks develop in the pavement surface within the one-year warranty period, the Contractor shall seal the cracks in accordance with Standard Specification Item No. 313S, "Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete). Payment for this work will be measured and paid for as Mobilization (LS) and Crack Sealing (LF).

For new HMAC roadways constructed in accordance with the Drawings and specifications, if cracks less than 1/4 inch (6 mm) in width develop in the pavement surface within the one year warranty period the Contractor shall seal the cracks in accordance with Standard Specification Item No. 313S, "Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete). Payment for this Work will be measured and paid for as Mobilization (LS) and Crack Sealing (LF).

If cracks equal to or greater than 1/4 inch (6 mm) in width develop in the pavement surface within the one-year warranty period, the cracking shall be reviewed and evaluated by the Engineer or designated representative before corrective action is taken.

2. Stability: Stability test results shall be used as indicators of potential problems. Where stability test results fall below the range specified in this specification, additional tests shall be taken as directed by the Engineer or designated representative for further evaluation and monitoring of the paving mixture. This additional stability testing will be at the expense of the Contractor. When, in the opinion of the Engineer or designated representative, the stability is deemed unacceptable for the intended use of the pavement, the paving mixture shall be removed and replaced to the limits indicated by test results or may be left in place on conditions acceptable to the Engineer or designated representative. When the paving mixture is removed and replaced, it shall be at the sole expense of the Contractor.

3. Laboratory Density: Laboratory density results as determined by TxDOT Test Method Tex-207-F shall be used as indicators of potential problems. Where laboratory density test results are less than 94.5% or more than 97.5% of mix design maximum density, additional tests shall be taken as directed by the Engineer or designated representative for further evaluation and monitoring of the paving mixture. This additional laboratory density testing will be at the expense of the Contractor. When, in the opinion of the Engineer or designated representative, the laboratory density is deemed unacceptable for the intended use of the pavement, the paving mixture shall be removed and replaced to the limits indicated by test results.

   The removal and replacement of the paving mixture shall be at the sole expense of the Contractor.

4. Limited Areas: Irrespective of an acceptable overall Paving Project average for any or all of the Pay-Adjustment Acceptance Factors, limited substandard portions of the Work, as determined by the Engineer or designated representative, shall be remedied or removed and replaced to the satisfaction of the Engineer or designated representative at the sole expense of the Contractor.

B. Pay-Adjustment Acceptance Factors: Contract unit prices shall be adjusted for paving mixtures that fail to meet acceptance criteria for gradation, asphalt content, density and mat thickness in accordance with the following:

Gradation Acceptance Schedule (TEX-210-F)

Sieve	Deviation From Job Mix Formula		Percent Contract Unit Price Reduction
	Daily Average	Overall Average	
Total retained on No. 10 (2.00 mm)	± 6.5 6.6±	± 5.0 5.1±	0 10
Passing No. 200 (75 µm)	± 3.9 4.0±	± 3.0 3.1±	0 5

Asphalt Content Acceptance Schedule (TEX-210-F, PartII)

Deviation from the Job Mix Formula		Percent Contract Unit Price Reduction	
Daily Average	Overall Average	Local Streets*	All Others
± 0.5	± 0.4	0	0
±0.51 to ±0.60	±0. 41 to ±0.50	15	25
+0.61 to +0.70	+0.51 to +0.60	25**	100; Remove and Replace
-0.61 to -0.70	-0.51 to -0.60	100: Remove and Replace	100; Remove and Replace
Over ±0.70	Over ±0.60	100: Remove and Replace	100; Remove and Replace

*A local or residential street that serves as access to residence or other abutting property.

**If the street has an ADT of 500, or less, with 1%, or less, of truck traffic, plus a 2 year warranty; otherwise, Remove and Replace

Density Acceptance Schedule (TEX-207-F/TEX-227-F)

*Percent Density		Percent Contract Unit Price Reduction	
Daily Average	Overall Average	1-1/2" (38 mm) Thickness or Greater	Less than 1-1/2" (38 mm) Thickness
Above 96.5	Above 96	100; Remove and Replace	100; Remove and Replace
90.5 to 96.5	91 to 96	0	0
90.5 to 87.6	90.9 to 88.1	0.625 per 0.10% deficiency in density	0.50 per 0.10% deficiency in density
Less than 87.6	Less than 88.1	100: Remove and Replace	100; Remove and Replace

*Core bulk density divided by max. theoretical density

Thickness Acceptance Schedule

Variance Percent of Thickness		Percent Contract Unit Price Reduction
Daily Average	Overall Average	
0 – 15.0	0 - 10	0
15.1 – 20.0	10.1 - 16	20
20.1 – 30.0	16.1 - 25	50
Over 30.0	Over 25	100; Remove and Replace or mill/overlay 1" (25 mm) minimum

The Density Acceptance Schedule For Irregularly Shaped Areas; Hike And Bike Trails And Utility Trenches (see following table) will apply to utility trenches of widths less than 4 feet

(1.2 meter) and to irregular shaped areas and hike and bike trails in which an appropriate rolling pattern cannot be established making it difficult to achieve compaction.

Density Acceptance Schedule For Irregularly Shaped Areas; Hike And Bike Trails and Utility Trenches (TEX-207-F/TEX-227-F)

*Percent Density	Percent Contract Unit Price Reduction	
Daily Average	1-1/2" (38 mm) Thickness or Greater	Less than 1-1/2" (38 mm) Thickness
Above 96.5	100; Remove and Replace	100; Remove and Replace
96.5 to 89.0	0	0
89.0 to 86.1	0.625 per 0.10% deficiency in density	0.50 per 0.10% deficiency in density
Less than 86.1	100: Remove and Replace	100; Remove and Replace
*Core bulk density divided by maximum theoretical density		

The Density Acceptance Schedule will apply to utility trenches 4 feet (1.2 meter) or wider.

Core thicknesses greater than Drawing requirements shall be factored into the average thickness calculation as the Drawing required thickness. If total thickness of lift(s) proves to be less than required, the Contractor may remove and replace the overlay deficient areas as agreed to by the Engineer or designated representative. Overlays to correct thickness deficiencies shall be not less than one (1) inch (25-mm) thick. Overlays shall require milling of the asphalt in order to prevent a “featheredge” of the overlaying pavement.

The extent of the area to be overlaid or removed and replaced shall be determined by additional cores with thicknesses greater than or equal to the required thickness. All additional coring that is necessary to determine the area shall be paid for by the Contractor.

340S.13 Measurement

Work performed and material placed shall be measured under one of the following methods. When Drawing quantity measurement is specified, adjustment of quantity may be made as follows. If the quantity measured as outlined vary from those shown on the Drawings by more than 5%, either party to the Contract may request in writing and adjustment of the quantity by each separate bid item. The party to the Contract which requests the adjustment shall present to the other party one copy of measurements and calculations showing the revised quantity in question. This revised quantity, when approved by the Engineer or designated representative, shall constitute the final quantity for which payment will be made. However, no adjustment will be made for any quantity, which exceeds the Drawing required thickness.

A. Method A: Asphaltic concrete pavement shall be measured by the ton (2,000 pounds) of the type actually used in completed and accepted Work in accordance with the Drawings and specifications.

   The measurement shall be made on approved truck scales that meet the requirements of the National Institute of Standards and Technology Handbooks 44 and 112 except that the required accuracy shall be 0.4 percent of the load being weighed. The Contractor shall furnish a report of calibration from a scale mechanic licensed by the Texas Department of Agriculture certifying that the scales meet this requirement.

B. Method B: Asphaltic concrete pavement shall be measured by the square yard of specified total thickness of the type of paving mixture actually used in completed and accepted Work in

accordance with Drawings and specifications. Multiple lifts of the same type shall be considered as one for square yard measurement purposes.

C. Method C: Asphaltic concrete pavement shall be measured by the lineal foot of specified total thickness of the type of paving mixture actually used in completed and accepted Work in accordance with Drawings and specifications. Multiple lifts of the same type shall be considered as one for linear foot measurement purposes.

340S.14 Payment

Work performed and materials furnished as prescribed by this item and measured as provided under "Measurement" will be paid for at the unit bid prices or pay adjusted unit price for Hot Mix Asphaltic Concrete Pavement, of the types and thicknesses specified. The unit bid prices shall include full compensation for furnishing all labor, equipment, time, materials and incidentals necessary to complete the Work.

Removal of existing hot mix asphalt concrete transition areas prior to overlay, tack coat, saw cutting and temporary pavement markings will not be measured or paid for directly but shall be included in the unit price bid for Standard Specification Item No. 340S, "Hot Mix Asphaltic Concrete Pavement".

Payment for Work meeting these specifications will be made under one of the following:

Pay Item No. 340S-A:	Hot Mix Asphaltic Concrete Pavement, Type ____,	Per Ton.
Pay Item No. 340S-B:	Hot Mix Asphaltic Concrete Pavement, ___Inches, Type ____,	Per Square Yard.
Pay Item No. 340S-C:	Hot Mix Asphaltic Concrete Pavement, ___Inches, Type ____,	Per Lineal Foot.
Pay Item No. 340S-PQ:	Hot Mix Asphaltic Concrete Pavement, ___Inches, Type ____, Plan Quantity,	Per Ton
Pay Item No. 340S-L:	Hot Mix Asphaltic Concrete Pavement, ___In., Type ____, Level-up Course,	Lump Sum.
Pay Item No. 340S-M:	Crack Sealing Mobilization,	Lump Sum.
Pay Item No. 340S-S:	Crack Sealing,	Per Lineal Foot.

End

SPECIFIC CROSS REFERENCE MATERIALS
Special Specification Item 340S "Hot Mix Asphaltic Concrete Pavement"

City of Austin Standard Specifications

Designation	Description
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 307S	Tack Coat
Item No. 313S	Cleaning and/or Sealing Joints and Cracks (Asphaltic Concrete)

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-106E	Method of Calculating the Plasticity Index of Soils
Tex-107E	Determination of Bar Linear Shrinkage of Soils
Tex-200-F	Sieve Analysis of Fine and Coarse Aggregates
Tex-203-F	Sand Equivalent Test
Tex-204-F	Design of Bituminous Mixtures
Tex-207-F	Determination of Density of Compacted Bituminous Mixtures
Tex-208-F	Test for Stabilometer Value of Bituminous Mixtures
Tex-210-F	Determination of Asphalt Content of Bituminous Mixtures by Extraction
Tex-212-F, Part II	Determination of Moisture Content of Bituminous Mixtures (by oven drying)
Tex-217-F	Determination of Deleterious Material and Decantation Test For Coarse Aggregates
Tex-227-F	Theoretical Maximum Specific Gravity of Bituminous Mixtures
Tex-410-A	Abrasion of Coarse Aggregate Using the Los Angeles Machine
Tex-460-A	Determination of Crushed Face Particle

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 340	Hot Mix Asphalt Concrete Pavement

RELATED CROSS REFERENCE MATERIALS
Special Specification Item 340S "Hot Mix Asphaltic Concrete Pavement"

City of Austin Standard Specifications

Designation	Description
Item No. 206S	Asphalt Stabilized Base
Item No. 210S	Flexible Base
Item No. 306S	Prime Coat
Item No. 310S	Emulsified Asphalt Treatment
Item No. 311S	Emulsified Asphalt Repaving
Item No. 320S	Two Course Surface Treatment

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-215-F	Determination of Asphalt Content of Rock Asphalt By Hot Solvent Method
Tex-224-F	Determination of Flakiness
Tex-400-A	Method of Sampling Stone, Gravel, Sand and Mineral Aggregates

Tex-411-A	Soundness of Aggregate by Use of Sodium Sulfate or magnesium Sulfate
Tex-438-A	Accelerated Polish Test for Aggregate

Item No. 402S
Controlled Low Strength Material

402S.1 Description

This item governs Controlled Low Strength Material (CLSM) used for trench backfill and for filling abandoned culverts, pipes, other enclosures, and for other uses as indicated on the drawings, Standard Details or as approved by the Engineer or designated representative. CLSM is a low strength, self-compacting, flowable, cementitious material used in lieu of soil backfill. It is intentionally prepared at low strength to allow for future removal using conventional excavation equipment.

The CLSM shall be composed of Portland cement or fly ash, or both, filler aggregate and water. The CLSM, specified for use in filling abandoned culverts, pipes, or other enclosures, shall contain a settlement compensator, in addition to the other ingredients, to minimize settlement of the CLSM within the enclosure.

Normal Set CLSM shall be specified whenever the material will remain uncovered or will not be subjected to traffic or other loads within 24 hours after placement. Fast Set CLSM shall be specified whenever the material will be covered, subjected to traffic or other loads within 24 hours, or needed to expedite construction.

CLSM can be used for permanent subgrade repairs below the base layer, but shall not be used for permanent pavement repairs. For temporary traffic applications, a minimum 2 inch (50 mm) cap composed of Hot Mix-Cold Laid Asphaltic Concrete (TxDoT Standard Specification Item 334) shall be placed on the CLSM.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

402S.2 Submittals

The submittal requirements of this specification item include:

A. A mix design submittal including the results of unconfined compressive strength tests, air entrainment (if applicable), flow consistency, hardened unit weight, and timed Ball Drop and corresponding Penetrometer tests.

B. Certifications and test results for the cement fly ash, and admixtures.

C. Particle-size gradation and specific gravity tests on the filler aggregate.

402S.3 Materials

A. Cement.

Portland cement shall conform to ASTM C 150, Type I (General Purpose).

Portland cement manufactured in a cement kiln fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Natural Resource Conservation Commission

(TNRCC) and the U. S. Environmental Protection Agency (EPA). Supplier shall provide current TNRCC and EPA authorizations to operate the facility.

B. Fly Ash

Fly ash shall conform to the requirements of Standard Specification Item No. 405, "Concrete Admixtures" and TxDOT Specification Item 437.

C. Filler Aggregate.

Filler aggregate shall consist of sand, stone screenings, pavement milling cuttings or other granular material that is compatible with the other mixture components. The filler aggregate shall be fine enough to stay in suspension to the extent required for proper flow without segregation, and, in the case of filling of enclosures, for minimal settlement. Filler aggregate shall have a Plasticity Index (TxDOT Test Method Tex-106-E) less than 15 and shall conform to the following gradation:

Sieve Designation US	(SI)	Percent Passing
No. 200	(75μm)	0 - 10

D. Mixing Water.

Mixing water shall conform to the requirements of Standard Specification Item No. 403, "Concrete for Structures".

E. Settlement Compensator

An air entraining admixture with a higher than usual dosage, which meets the requirements of Standard Specification Item No. 405, "Concrete Admixtures", shall be used as a settlement compensator. The settlement compensator may be introduced to the CLSM at the job site by placement of prepackaged admixture in capsules or bags in the mixing drum in accordance with the admixture manufacturer's recommendations.

402S.4 Mix Design

The proportioning of CLSM shall be the responsibility of the Contractor. The Contractor shall furnish a mix design conforming to the requirements herein, for review and approval by the Engineer or designated representative. The mix design shall be prepared by a qualified commercial laboratory and then reviewed and signed by a registered Professional Engineer licensed in the State of Texas.

The Mix Design submittal must include:

A. Test results for unconfined compressive strength, air entrainment (if applicable), flow consistency, hardened unit weight, and timed Ball Drop (ASTM C-360) and corresponding Penetrometer tests (with a concrete pocket penetrometer),

B. Certifications and test results for the cement, fly ash, and admixtures, and

C. Results of particle-size gradation and specific gravity tests on the filler aggregate. The submittal shall include Penetrometer tests performed every thirty minutes

until the Ball Drop test shows a 2-inch (50 mm) indentation, as well as the predicted Penetrometer reading that corresponds to a 3-inch (75 mm) Ball Drop indentation. Particle-size gradation shall be determined using a series of sieves that gives no fewer than five uniformly spaced points for graphing the entire range of particle sizes larger than a No. 200 sieve (75-µm).

The Contractor shall perform the work required to substantiate the design at no cost to the City, including all testing. Approved mix designs shall be valid for one year, provided there are no changes in the type, source, or characteristics of the materials during that year.

At the end of one year, the mix design may be submitted for renewal, provided that:

A. field tests of the CLSM during the year have been satisfactory,
B. there have been no changes in type or source of the materials of the mix, and
C. the characteristics of the materials have not changed significantly since the original submittal.

The Contractor shall also submit certifications and test results for the cement, fly ash and admixtures, and particle-size gradation and specific gravity test results for the filler aggregate. The Contractor shall compare results of tests made on the filler aggregate at the end of the year to the results of tests reported in the original submittal. Gradation changes less than ten percent in percent passing any sieve and specific gravity changes less than five percent shall not be considered significant.

402S.5 Strength

The CLSM mix designs shall meet the unconfined compressive strength requirements outlined in the table below. The compression tests shall be conducted in accordance with TxDOT Method Tex-418-A, using approved unbonded caps on specimens with four-inch (100 mm) diameter and eight-inch (200 mm) height [or three-inch (75 mm) diameter by six-inch (150 mm) high specimens if a smaller capacity loading device gives more accurate results].

Unconfined Compressive Strength, psi (mPa)		
Age	Normal Set CLSM	Fast Set CLSM
3 hours	—	35 (0.24) minimum
24 hours	35 (0.24) minimum	—
28 days	300 (2.1) maximum	300 (2.1) maximum

402S.6 Flow Consistency

Flow consistency shall be established in tests involving the use of a six-inch (150 mm) length by three-inch (75 mm) diameter open-ended straight tubing made of steel, plastic or other non-absorbent material that is non-reactive with cement or fly ash. The tube shall be placed with one end on a horizontal flat surface and held in a vertical position. The tube shall then be filled to the top with CLSM. The top surface shall be struck off with a suitable straight edge and any spillage shall be removed from the base of the tube. Within five seconds thereafter the tube shall be raised carefully, using a steady

upward lift with no lateral or torsional motion. The entire test, from the start of filling until removal of the tube, shall be completed within 1½ minutes without interruption.

After removal of the tube, the spread of the CLSM shall be measured immediately along two diameters that are perpendicular to one another. The average of those two measurements is defined as the flow consistency of the mix. The flow consistency of the CLSM shall be considered satisfactory if a circular-type spread of the mix occurs without segregation and a flow consistency (average diameter of spread) of 8 inches (200 mm) or more is achieved.

402S.7 Air Entrainment

Air entraining admixture shall be added as a settlement compensator, whenever the CLSM will be used to fill an enclosure (Section 402S-1). The dosage shall be sufficient to result in an air content of 15 to 25 percent (as determined by TxDOT Method Tex-416-A) at the time of placement of the CLSM.

402S.8 Field Strength Tests

Ball Drop or Penetrometer tests shall be used to determine, when the CLSM has developed sufficient strength to be covered or subjected to traffic or other loads as approved by the Engineer or designated representative.

The Ball Drop test shall be performed according to the latest version of ASTM C-360. An indentation diameter of three inches (75 mm) or less, and the absence of a sheen or any visible surface water in the indentation area shall indicate that the CLSM has achieved the desired strength. Because trench width and depth may affect the test results, the Contractor may perform this test on a control sample of CLSM in a two-foot (600 mm) square by six-inch (150 mm) deep container.

Penetrometer tests using a hand-held, spring reaction-type device commonly called a concrete pocket penetrometer, shall be performed on the surface of the CLMS. A Penetrometer reading, equal to or greater than the value established in the mix design (Section 402S.4) for a Ball Drop test indentation of 3-inches (75 mm), shall indicate that the CLSM has achieved the desired strength.

402S.9 Construction Methods

A. General

The height of free fall placement of the CLSM shall not exceed four feet (1.2 meters). Since CLSM is considered to be self-compacting, a vibrator shall not be allowed. The CLSM shall not be covered with any overlying materials or subjected to traffic or other loads until the Ball Drop test or the Penetrometer test shows acceptable results (Section 402S.8) or until the CLSM has been in place a minimum of 24 hours for Normal Set CLSM and a minimum of 3 hours for Fast Set CLSM. Curing of the CLSM will not be required.

B. Utility Line Backfill

After the utility pipe has been placed and the proper bedding material placed in accordance with the details on the drawings, the trench may be immediately backfilled with the CLSM to the subgrade level shown on the drawings, Standard Details 1100S-6A, B, C & D, 430S-4, 511S-13A and 511S-13B or as directed by the Engineer or designated representative.

C. Culvert Backfill

Care shall be taken to prevent movement of the structure. If the pipe or structure moves either horizontally or vertically, the CLSM and the structure shall be immediately removed and the pipe or structure re-laid to proper line and grade.

D. Other Backfill

CLSM may be used for backfill material in lieu of soil as shown on the drawings, Standard Details or as approved by the Engineer or designated representative.

E. Filling Abandoned Culverts, Pipe, or other Enclosures

The CLSM shall be placed in a manner that allows all air or water, or both, to be displaced readily as the CLSM fills the enclosure.

402S.10 Acceptance Testing During Construction

The Engineer or designated representative may perform flow consistency, air entrainment, and unconfined compressive strength tests to determine if the CLSM meets the specification requirements. The number and frequency of acceptance tests will be determined by the Engineer or designated representative.

402S.11 Measurement and Payment

The work and materials presented herein will generally not be paid for directly, but shall be included in the unit price bid for the item of construction in which this item is used.

When specified in the contract bid form as a separate pay item, the item will be paid for at the contract unit bid price(s) for "Controlled Low Strength Material". The bid prices shall include full compensation for all Work herein specified, including the furnishing of all materials, equipment, tools, labor and incidentals necessary to complete the Work.

Payment will be made under the following:

Pay Item No. 402S-A: Controlled Low Strength Material Per Cubic Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Standard Specification Item 402S, “Controlled Low Strength Material”

City of Austin Standard Details

Designation	Description
430S-4	Concrete Backfill Under Curb & Gutter
506S-14	Control or Mini Manhole
511S-13A	Water Valve Box Adjustment to Grade W/ Full Depth Concrete
511S-13B	Water Valve Box Adjustment to Grade W/ Concrete and H.M.A.C.

1100S-6A	Narrow Excavation Next to C&G - Trench Width 0.3 M (12") & Less
1100S-6B	Narrow Excavations - Trench Width 0.3 M (12") & Less
1100S-6C	Excavation Next to C&G - Trench Width Greater than 0.3 M (12")
1100S-6D	Excavations - Trench Width Greater than 0.3 M (12")

City of Austin Standard Specification Items

Designation	Description
Item No 403S	Concrete for Structures
Item No 405S	Concrete Admixtures

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 334	Hot Mix-Cold Laid Asphaltic Concrete Pavement
Item No. 420	Concrete Structures
Item No. 421	Portland Cement Concrete
Item No. 437	Concrete Admixtures

RELATED CROSS REFERENCE MATERIALS
Standard Specification Item 402S, “Controlled Low Strength Material”

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-106-E	Method Of Calculating the Plasticity Index of Soils
Tex-416-A	Air Content of Freshly Mixed Concrete By The Pressure Method
Tex-418-A	Compressive Strength of Cylindrical Concrete

American Society for Testing and Materials (ASTM)

Designation	Description
ASTM C 150	Portland Cement
ASTM C 360	Ball Penetration in Fresh Portland Cement Concrete
ASTM C 403	Time of Setting of Concrete Mixtures by Penetration Resistance

City of Austin Standard Specification Items

Designation	Description
Item No. 504S	Adjusting Structures
Item No. 506S	Manholes
Item No. 508S	Miscellaneous Structures and Appurtenances
Item No. 510	Pipe

Item No. 405S
Concrete Admixtures

405S.1 Description

This item shall govern material requirements of admixtures for Portland cement concrete.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

405S.2 Submittals

The submittal requirements of this specification item include:

A. Type and manufacturer of any proposed admixture.

B. Certification that proposed admixture meet the requirements of this specification, ASTM C260 and ASTM C494.

C. For a specific mix design, a statement of compatibility of products shall be submitted when admixtures from multiple manufacturers are proposed.

405S.3 Materials

All admixture submittals must be approved by the Engineer or designated representative. No admixture shall be chloride-based or have chloride(s) added in the manufacturing process. Admixtures must be pretested by the Texas Department of Transportation (TXDOT) Materials and Tests Engineer and be included in the State's current approved admixture list. All admixtures must retain an approved status through the duration of a mix design's one-year approval period.

(1) Air Entraining Admixture:

An "Air Entraining Admixture" is defined as a material which, when added to a concrete mixture in the proper quantity, will entrain uniformly dispersed microscopic air bubbles in the concrete mix. The admixture shall meet the requirements of ASTM Designation: C 260 modified as follows:

(a) The cement used in any series of test shall be either the cement proposed for the specific work or a "reference" Type I cement from one mill.

(b) The air entraining admixture used in the reference concrete shall be Neutralized Vinsol Resin.

(2) Water-reducing Admixture:

A "Water-reducing Admixture" is defined as a material which, when added to a concrete mixture in the correct quantity, will reduce the quantity of mixing water required to produce concrete of a given consistency and required strength. This admixture shall conform to ASTM C 494, Type A.

(3) Accelerating Admixture:

An "Accelerating Admixture" is defined as an admixture that accelerates the setting time and the early strength development of concrete. This admixture shall conform to ASTM C 494, Type C. The accelerating admixture will contain no chlorides.

(4) Water-reducing, Retarding Admixture:

A "Water-reducing, Retarding Admixture" is defined as a material which, when added to a concrete mixture in the correct quantity, will reduce the quantity of mixing water required to produce concrete of a given consistency and retard the initial set of the concrete. This admixture shall conform to ASTM C 494, Type D.

(5) High-range Water Reducing Admixtures:

A "High-range Water Reducing Admixture", referred to as a superplasticizer, is defined as a synthetic polymer material which, when added to a low slump concrete mixture increases the slump without adversely affecting segregation, impermeability or durability of the mix. This admixture shall conform to ASTM C 494, Type F or G.

(6) Fly Ash:

Fly ash used in Portland cement concrete as a substitute for Portland cement or as a mineral filler shall comply with TXDOT Materials Specification D-9-8900 and be listed on TXDOT's current list of approved fly ash sources. Fly ash obtained from a source using a process fueled by hazardous waste (30 Texas Administrative Code, Section 335.1) shall be prohibited. This applies to any other specification concerning the use of fly ash. Contractor shall maintain a record of source for each batch. Supplier shall certify that no hazardous waste is used in the fuel mix or raw materials.

405S.4 Certification and Product Information

The Contractor shall submit the name of the admixture proposed and manufacturer's certification that the selected admixtures meet the requirements of this item and of ASTM C 260 and C 494 as applicable. Admixtures for a mix design shall be of the same brand. If more than one admixture is proposed in the concrete mix, a statement of compatibility of components shall accompany certification. Manufacturer's product literature shall specify when in the batching/mixing operation the admixture must be added.

The Engineer or designated representative may request additional information such as infrared spectrophotometry scan, solids content, pH value, etc., for further consideration. Any unreported changes in formulation discovered by any of the tests prescribed herein may be cause to permanently bar the manufacturer from furnishing admixtures for Owner's work.

405S.5 Construction Use of Admixtures

All admixtures used shall be liquid except high-range water reducers which may be a powder. Liquid admixtures shall be agitated as needed to prevent separation or sedimentation of solids; however, air agitation of Neutralized Vinsol Resin will not be allowed.

No admixture shall be dispensed on dry aggregates. Admixtures shall be dispensed at the batching site separately, but at the same time as the mixing water. Only high range water reducers may be introduced into the mix at the job site.

When other admixtures are used with fly ash, the amount of the other admixture to be used shall be based on the amount of Portland cement only and not the amount of Portland cement and fly ash.

When high-range water reducers are to be added at the job site, transit mixers shall be used. Admixture manufacturer literature shall indicate recommended mixing methods and time for the specific equipment and mix design used. The transit mix equipment shall not be loaded in excess of 63 percent of its rated capacity to ensure proper mixing of the admixture at the site. If during discharging of concrete a change in slump in excess of 30% is noted, the remaining concrete shall be rejected unless prior approval was given by the Engineer or designated representative to retemper a load with a second charge of admixture. Retempering with water shall not be allowed.

Accelerating admixtures will not be permitted in combination with Type II cement.

All mixes with air entrainment shall have a minimum relative durability factor of 80 in accordance with ASTM C 260. Dosage of air entrainment admixtures may be adjusted by the Contractor to stay within the specified tolerances for air entrainment of Standard Specification Item No. 403S, "Concrete for Structures".

405S.6 Measurement and Payment

The requirements of this specifications shall not be measured and paid for directly, but shall be included in the unit price bid for the item of construction in which this item is used.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 405S, "Concrete Admixtures"

City of Austin Standard Specifications

Designation	*Description*
Item No. 403S	*Concrete for Structures*

American Society for Testing and Materials, ASTM

Designation	*Description*
ASTM C260	*Air-Entraining Admixtures for Concrete*
ASTM C495	*Chemical Admixtures for Concrete*

Texas Department of Transportation: Department Material Specification

Designation	*Description*
DMS-8900	*Fly Ash*

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 405S, "Concrete Admixtures"

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 360	Concrete Pavement
Item 420	Concrete Structures
Item 421	Portland Cement Concrete
Item 427	Surface Finishes for Concrete
Item 431	Pneumatically Placed Concrete
Item 437	Concrete Admixtures
Item 520	Weighing and Measuring Equipment
Item 522	Portland Cement Concrete Plants
Item 524	Hydraulic Cement

Item No. 406S
Reinforcing Steel

406S.1 Description

This item shall govern furnishing and placement of reinforcing steel, deformed and smooth, of the size and quantity indicated on the drawings and in accordance with these specifications.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

406S.2 Submittals

The submittal requirements of this specification item may include:

A. Evidence that the steel reinforcement producer is included on the TxDoT list of approved producing mills

B. Listing of the size, grade, type and quantity of reinforcing steel proposed for the project.

C. If welding of reinforcing steel is proposed, evidence that carbon equivalent (C.E.) of the proposed steel is at least 0.55% with a report of chemical analysis showing the percentages of elements necessary to establish C.E.

D. If epoxy coated steel is proposed, evidence that the steel reinforcement producer is included on the TxDoT list of approved epoxy coating applicators

E. If epoxy coated steel is proposed, written certification that the epoxy-coated reinforcing steel meets the requirements of this Item with a copy of the manufacturer's control tests.

F. When mechanical splices are proposed, the types of couplers proposed for use.

406S.3 Materials

A. Approved Mills

Prior to furnishing reinforcing steel, the producing mills must be included on the list of approved producing mills that is maintained by the Construction Division of the State of Texas Department of Transportation

B. Deformed Bars and Wire Reinforcement

Unless indicated otherwise on the drawings, Bar reinforcement shall be Grade 60 and deformed. Reinforcing steel must conform to one of the following:

ASTM A615/ 615M, Grades 40 or 60 (300 or 420)

ASTM A996/ 996M, Type A, Grades 40 or 60 (300 or 420)

ASTM A996/996M, Type R, Grade 60 (420), permitted in concrete pavement only (furnished as straight bars only without bends. Bend tests are not required)

ASTM A706/706M

In cases where the provisions of this item are in conflict with the provisions of the ASTM Designation to which reference is made, the provisions of this item shall govern.

The nominal size, area and weight (mass) of reinforcing steel bars covered by these specifications are as follows:

Bar Size Number 1/8th ins (mm)	Nominal Diameter, inches (mm)	Nominal Area, Sq. ins. (mm2)	Weight/Linear Foot Lbs. (kg)
2 (6)	0.250 (6.6)	0.05 (32)	0.167 (.075)
3 (10)	0.375 (9.5)	0.11 (71)	0.376 (.171)
4 (13)	0.500 (12.5)	0.20 (127)	0.668 (.303)
5 (16)	0.625 (15.5)	0.31 (198)	1.043 (.473)
6 (19)	0.750 (19.0)	0.44 (285)	1.502 (.681)
7 (22)	0.875 (22.0)	0.60 (388)	2.044 (.927)
8 (25)	1.000 (25.5)	0.79 (507)	2.670 (2.211)
9 (29)	1.128 (28.5)	1.00 (641)	3.400 (1.542)
10 (32)	1.270 (32.0)	1.27 (792)	4.303 (1.952)
11 (36)	1.410 (36.0)	1.56 (958)	5.313 (2.410)
14 (43)	1.693 (43.0)	2.25 (1552)	7.65 (3.470)

18 (57)	2.257 (57.5)	4.00 (2565)	13.60 (6.169)

Smooth, round bars shall be designated by size number through a No. 4. Smooth bars above No. 4 shall be designated by diameter in inches.

C. Smooth Bar and Spiral Reinforcement

Smooth bars and dowels for concrete pavement must have a minimum yield strength of 60 ksi (414 MPa) and meet ASTM A615/615M. Smooth bars that are greater in diameter than a No. 3 (10 mm) designation shall conform to ASTM A615 or meet the physical requirements of ASTM A36.

Spiral reinforcement shall be either smooth or deformed bars or wire of the minimum size or gauge indicated on the drawings. Bars for spiral reinforcement shall comply with ASTM A615 Grade 40(300), ASTM A996, Type A, Grade 40 (300); or ASTM A675, Grade 80(550), meeting dimensional requirements of ASTM A615. Smooth wire shall comply with ASTM A82, and deformed wire shall comply with ASTM A496.

D. Weldable Reinforcing Steel

Reinforcing steel to be welded must comply with ASTM A706 or have a carbon equivalent (C.E.) of at most 0.55%. A report of chemical analysis showing the percentages of elements necessary to establish C.E. is required for reinforcing steel that does not meet ASTM A706 to be structurally welded. No tack welding will be allowed. All welding shall conform to the requirements of AWS D1.1/D1.1M.

The requirements above do not apply to the following miscellaneous welding applications:

Splicing reinforcing steel to extend bars in the bottom of a drilled shaft;

Attaching chairs to the reinforcing steel cage of a drilled shaft;

Armor joints and their supports;

Screed rail and form hanger supports where permitted on steel units;

Reinforcing steel to R-bars for lateral stability between prestressed beams, spirals, or bands of reinforcing bars in drilled shaft cages;

Permanent bridge deck forms;

Steel added in railing when slip-form construction is used; and

Other similar miscellaneous members that have no load carrying capacity in the completed structure.

E. Welded Wire Fabric

Wire shall conform to the requirements of the Standard Specifications for Cold-Drawn Steel Wire for Concrete Reinforcement, ASTM A 82 or A 496. Wire fabric, when used as reinforcement, shall conform to ASTM A 185 or A 497.

When wire is ordered by size numbers, the following relation between size number, diameter in inches and area shall apply unless otherwise indicated on the drawings:

Size, W Number 1/100 in^2 (mm2)	Nominal Diameter inch (mm)	Nominal Area, sq. inches (mm^2)
31 (200)	0.628 (16.0)	0.310 (200)
30 (194)	0.618 (15.7)	0.300 (194)
28 (181)	0.597 (15.2)	0.280 (181)
26 (168)	0.575 (14.6)	0.260 (168)
24 (155)	0.553 (14.0)	0.240 (155)
22 (142)	0.529 (13.4)	0.220 (142)
20 (129)	0.505 (12.8)	0.200 (129)
18 (116)	0.479 (12.2)	0.180 (116)
16 (103)	0.451 (11.5)	0.160 (103)
14 (90)	0.422 (10.7)	0.140 (90)
12 (77)	0.391 (9.9)	0.120 (77)
10 (65)	0.357 (9.1)	0.100 (65)
8 (52)	0.319 (8.1)	0.080 (52)
7 (45)	0.299 (7.6)	0.070 (45)
6 (39)	0.276 (7.0)	0.060 (39)
5.5 (35)	0.265 (6.7)	0.055 (35)
5 (32)	0.252 (6.4)	0.050 (32)
4.5 (29)	0.239 (6.1)	0.045 (29)

4 (26)	0.226 (5.7)	0.040 (26)
3.5 (23)	0.211 (5.4)	0.035 (23)
3 (19)	0.195 (5.0)	0.030 (19)
2.5 (16)	0.178 (4.5)	0.025 (16)
2 (13)	0.160 (4.1)	0.020 (13)
1.5 (9)	0.138 (3.5)	0.015 (9.7)
1.2 (8)	0.124 (3.1)	0.012 (7.7)
1 (6)	0.113 (2.9)	0.010 (6.5)
0.5 (3)	0.080 (2.0)	0.005 (3.2)

Where deformed wire is required, the size number shall be preceded by D and for smooth wire the prefix W shall be shown.

Welded wire fabric shall be designated as follows: 6 x 12 – W16 x W8, which indicates a 6 in. (150 mm) longitudinal wire spacing and 12-in (300 mm) transverse wire spacing with smooth No. 16 (103) wire longitudinally and smooth no. 8 (52) wire transversely.

F. Epoxy Coating

Epoxy coating shall be required as indicated on the drawings. Prior to furnishing epoxy-coated reinforcing steel, the epoxy applicator must be included on the list of approved applicators that is maintained by the Construction Division of the State of Texas Department of Transportation.

The reinforcing steel shall be epoxy coated in accordance with the following.

Epoxy Coating Requirements for Reinforcing Steel

Material	Specification
Bar	ASTM A775 or A934
Wire or Fabric	ASTM A884 Class A or B
Mechanical Coupler	As indicated on the drawings

Hardware	As indicated on the drawings

The epoxy coating material and coating repair material shall comply with TxDoT's DMS-8130, "Epoxy Powder Coating for Reinforcing Steel". The applicator shall not patch more than ¼ inch total length in any foot (20 mm total length in any meter) at the applicator's plant.

The epoxy-coated reinforcing steel shall be sampled and tested in accordance with TxDoT Test Method Tex-739-I, "Sampling and Testing Epoxy Coated Reinforcing Steel".

The identification of all reinforcing steel shall be maintained throughout the epoxy coating and fabrication and until delivery to the project site.

Written certification that the epoxy-coated reinforcing steel meets the requirements of this Item shall be provided along with a copy of the manufacturer's control tests.

G. Mechanical Couplers

When mechanical splices in reinforcing steel bars are indicated on the drawings, the following types of couplers may be used:

Sleeve-filler

Sleeve-threaded

Sleeve-swaged, or

Sleeve-wedge.

H. Chairs and Supports

Chairs and Supports shall be steel, precast mortar or concrete blocks cast in molds meeting the approval of the Engineer or designated representative of sufficient strength to position the reinforcement as indicated on the drawings when supporting the dead load of the reinforcement, the weight of the workers placing concrete and the weight of the concrete bearing on the steel. Chairs shall be plastic coated when indicated on the drawings.

Chair Types and Applicable Uses	
Structural or Architectural Elements (columns, beams, walls, slabs) exposed to weather, not subjected to sand blasting, water blasting or grinding.	Galvanized steel or steel chairs with plastic coated feet.

Structural or Architectural Elements exposed to weather and subject to sand blasting, water blasting or grinding.	Stainless steel chairs.
Structural or Architectural Elements not exposed to weather or corrosive conditions.	Uncoated steel chairs
Slabs and grade beams cast on grade.	Steel chairs with a base with 9 inch² (58 cm^2) minimum area or sufficient area to prevent the chair from sinking into fill or subgrade. Precast mortar or concrete blocks meeting the requirements of this item may be used.

406S.4 Bending

The reinforcement shall be bent cold, true to the shapes indicated on the drawings. Bending shall preferably be done in the shop. Irregularities in bending shall be cause for rejection. Improperly fabricated, damaged or broken bars shall be replaced at no additional expense to the City. Damaged or broken bars embedded in a previous concrete placement shall be repaired using a method approved by the Engineer or designated representative.

Unless otherwise indicated on the drawings, the inside diameter of bar bends, in terms of the nominal bar diameter (d), shall be as follows:

Bends of 90 degrees and greater in stirrups, ties and other secondary bars that enclose another bar in the bend.

Bar Number in 1/8th inches (mm)	Diameter
3, 4, 5 (10, 13, 16)	4d
6, 7, 8	6d

All bends in main bars and in secondary bars not covered above.

Bar Number in 1/8th inches (mm)	Diameter
3 thru 8 (10 thru 25)	6d
9, 10, 11 (29, 32, 36)	8d
14, 18 (43, 57)	10d

406S.5 Tolerances

Fabricating tolerances for bars shall not be greater than shown on Standard (Detail) 406S-1.

406S.6 Storing

Steel reinforcement shall be stored above the surface of the ground upon platforms, skids or other supports and shall be protected as far as practicable from mechanical injury and surface deterioration caused by exposure to conditions producing rust. When placed in the work, reinforcement shall be free from dirt, paint, grease, oil or other foreign materials. Reinforcement shall be free from injurious defects such as cracks and laminations. Rust, surface seams, surface irregularities or mill scale will not be cause for rejection, provided the minimum dimensions, cross sectional area and tensile properties of a hand wire brushed specimen meets the physical requirements for the size and grade of steel indicated on the drawings.

406S.7 Splices

Splicing of bars, except when indicated on the drawings or specified herein, will not be permitted without written approval of the Engineer or designated representative. No substitution of bars will be allowed without the approval of the Engineer or designated representative. Any splicing of substituted bars shall conform to the requirements in the Table below.

Splices not indicated on the drawings will be permitted in slabs not more than 15 inches (380 mm) in thickness, columns, walls and parapets.

Splices will not be permitted in bars 30 feet (9.1 meters) or less in plan length unless otherwise approved. For bars exceeding 30 feet (9.1 meters) in plan length, the distance center to center of splices shall not be less than 30 feet (9.1 meters) minus 1 splice length, with no more than 1 individual bar length less than 10 feet (3 meters). Splices not indicated on the drawings, but permitted hereby, shall conform to the Table

below. The specified concrete cover shall be maintained at such splices and the bars placed in contact and securely tied together.

Minimum Lap Requirements		
Bar Number in 1/8th inches (mm)	Uncoated Lap Length	Coated Lap Length
3 (10)	1 foot 4 inches (0.4 meters)	2 foot 0 inches (0.610 meters)
4 (13)	1 foot 9 inches (0.533 meters)	2 foot 8 inches (0.813 meters)
5 (16)	2 foot 2 inches (0.660 meters)	3 feet 3 inches (0.991meters)
6 (19)	2 foot 7 inches (0.787 meters)	3 feet 11 inches (1.194 meters)
7 (22)	3 feet 5 inches (1.041 meters)	5 feet 2 inches (1.575 meters)
No. 8 (25)	4 feet 6 inches (1.372 meters)	6 feet 9 inches (2.057 meters)
No. 9 (29)	5 feet 8 inches (1.727 meters)	8 feet 6 inches (2.591 meters)
No. 10 (32)	7 feet 3 inches (2.210 meters)	10 feet 11 inches (3.327 meters)
No. 11 (36)	8 feet 11 inches (2.718 meters)	13 feet 5 inches (4.089 meters)

Spiral steel shall be lapped a minimum of 1 turn. Bar No. 14 and No. 18 may not be lapped.

Welded wire fabric shall be spliced using a lap length that includes an overlap of at least 2 cross wires plus 2 inches (50 mm) on each sheet or roll.

Splices using bars that develop equivalent strength and are lapped in accordance with the table above are permitted.

Welding of reinforcing bars may be used only where indicated on the drawings or as permitted herein. All welding operations, processes, equipment, materials, quality of work and inspection shall conform to the requirements indicated on the drawings. All

splices shall be of such dimension and character as to develop the full strength of the bar being spliced.

End preparation for butt-welding reinforcing bars shall be done in the field, except Bar No. 6 and larger shall be done in the shop. Delivered bars shall be of sufficient length to permit this practice.

For box culvert extensions with less than 1 foot (0.3 meters) of fill, the existing longitudinal bars shall have a lap with the new bars as shown in the table above. For box culvert extensions with more than 1 foot (0.3 meters) of fill, a minimum lap of 12 inches (300 mm) will be required.

Unless otherwise indicated on the drawings, dowel bars transferring tensile stresses shall have a minimum embedment equal to the minimum lap requirements shown in the table above. Shear transfer dowels shall have a minimum embedment of 12 inches (300 mm).

406S.8 Placement

Reinforcement shall be placed as near as possible in the position indicated on the drawings. Unless otherwise indicated on the drawings, dimensions shown for reinforcement are to the centers of the bars. In the plane of the steel parallel to the nearest surface of concrete, bars shall not vary from plan placement by more than 1/12 of the spacing between bars. In the plane of the steel perpendicular to the nearest surface of concrete, bars shall not vary from plan placement by more than 1/4 inch (6 mm). Cover of concrete to the nearest surface of steel shall be as follows:

	Minimum Cover, Inches (mm)
(a) Concrete cast against and permanently exposed to earth	3 (76 mm)
(b) Concrete exposed to earth or weather:	
Bar No. 6 (19) through No. 18 bars (57)	2 (51 mm)
Bar No. 5 (16), W31 (W200) or D31 (D200) wire and smaller	1 ½ (38 mm)
(c) Concrete not exposed to weather or in contact with ground:	

Slabs, walls, joists:	
Bar No. 14 (43) and 18 (57)	1 ½ (38mm)
Bar No. 11 (36) and smaller	1 (25 mm)
Beams, columns:	
Primary reinforcement, ties, stirrups, spirals	1 ½ (38 mm)
Shells, folded plate members:	
Bar No. 6 (19) and larger	1 (25 mm)
Bar No. 5 (16), W31 (W200) or D31 (D200) wire, and smaller	1 (25 mm)

Vertical stirrups shall always pass around the main tension members and be attached securely thereto.

The reinforcing steel shall be located accurately in the forms and held firmly in place before and during concrete placement by means of bar supports that are adequate in strength and number to prevent displacement and to keep the steel at the required distance from the form surface. Bars shall be supported by means of approved galvanized metal spacers, metal spacers with plastic coated tips, stainless steel spacers, plastic spacers or approved precast mortar or concrete blocks when supports are in contact with removable or stay-in-place forms. Bright basic bar supports shall be used to support reinforcing steel placed in slab overlays on concrete panels or on existing concrete slabs. Bar supports in contact with soil or subgrade shall be approved.

For bar supports with plastic tips, the plastic protection must be at least 3/32 in. (2.4 mm) thick and extend upward on the wire to a point at least ½ in. (12.5 mm) above the formwork.

For approval of plastic spacers on a project, representative samples of the plastic shall show no visible indications of deterioration after immersion in a 5 percent solution of sodium hydroxide for 120 hours.

All accessories such as tie wires, bar chairs, supports, or clips used with epoxy-coated reinforcement shall be of steel, fully coated with epoxy or plastic. When approved by the Engineer or designated representative, plastic supports may also be used with epoxy-coated reinforcement.

All reinforcing steel shall be tied at all intersections, except that where spacing is less than 1 foot (300 mm) in each direction, alternate intersections only need be tied. For reinforcing steel cages for other structural members, the steel shall be tied at enough intersections to provide a rigid cage of steel. Mats of wire fabric shall overlap each other 1 full space as a minimum to maintain a uniform strength and shall be tied at the ends and edges.

Where prefabricated deformed wire mats are specified or if the Contractor requests, welded wire fabric may be substituted for a comparable area of steel reinforcing bar plan, subject to the approval of the Engineer or designated representative.

Mortar or concrete blocks shall be cast to uniform dimensions with adequate bearing area. A suitable tie wire shall be provided in each block, to be used for anchoring to the steel. Except in unusual cases and when specifically authorized by the Engineer, the size of the surface to be placed adjacent to the forms shall not exceed 2 1/2 inches (63.5 mm) square or the equivalent thereof in cases where circular or rectangular areas are provided. Blocks shall be cast accurately to the thickness required and the surface to be placed adjacent to the forms shall be a true plane, free of surface imperfections. The blocks shall be cured by covering them with wet burlap or mats for a period of 72 hours. Mortar for blocks should contain approximately 1 part hydraulic cement to three parts sand. Concrete for blocks should contain 850 pounds of hydraulic cement per cubic yard (500 kilograms per cubic meter) of concrete

Individual bar supports shall be placed in rows at 4-ft (1.22 meters) maximum spacing in each direction. Continuous type bar supports shall be placed at 4-ft (1.22 meters) maximum spacing. Continuous bar supports shall be used with permanent metal deck forms.

The exposure of the ends of longitudinals, stirrups and spacers used to position the reinforcement in concrete pipe and in precast box culverts or storm drains is not a cause for rejection.

Reinforcing steel for bridge slabs, top slabs of direct traffic culverts, and top slabs of prestressed box beams at all intersections, except tie only alternate intersections where spacing is less than 1 ft. (300 mm) in each direction.

For steel reinforcing cages for other structural members, reinforcement shall be supported and tied in such a manner that a sufficiently rigid cage of steel is provided. Fasten mats of wire fabric securely at the ends and edges. If the cage is not adequately supported to resist settlement or floating upward of the steel, overturning of truss bars or movement in any direction during concrete placement, permission to continue concrete placement will be withheld until corrective measures are taken. Sufficient measurements shall be made during concrete placement to insure compliance with the above.

No concrete shall be deposited until the Engineer or designated representative has reviewed the placement of the reinforcing steel and all mortar, mud, dirt, etc, shall be cleaned from the reinforcement, forms, workers' boots and tools. Do not place concrete until authorized by the Engineer or designated representative

406S.9 Handling, Placement and Repair of Epoxy-coated Reinforcement Steel

A. Handling

Systems for handling coated-reinforcement with padded contact areas shall be provided. Handling bands shall be padded to prevent damage to the coating. Bundles of coated reinforcement shall be lifted with a strongback, spreader bar, multiple supports or a platform bridge. The bundled reinforcement shall be carefully transported and stored on protective cribbing. The coated reinforcement should not be dropped or drug during handling.

B. Construction Methods

Coated reinforcement shall not be flame-cut but shall be sawn or shear-cut only when approved. Cut ends shall be coated as specified in Section C, “Repair of Coating”.

Coated reinforcement steel shall not be welded or mechanically coupled except where specifically indicated on the drawings. When welding or coupling is indicated on the drawing, the epoxy coating shall be removed at least 6 in. (150 mm) beyond the weld limits before welding and 2 in. (50 mm) beyond the limits of the mechanical coupler before assembly. After the welding or coupling operation is completed the steel shall be cleaned of oil, grease, moisture, dirt, welding contamination (slag or acid residue) and rust to a near-white finish. The existing epoxy coating shall be examined for damage and any damaged or loose epoxy shall be removed to expose sound epoxy coating.

After cleaning the coated-steel, the splice area shall be coated with epoxy repair material to a thickness of 7 to 17 mils (0.18 to 0.43 mm) after curing. A second application of the repair material shall be applied to the bar and coupler interface to ensure complete sealing of the joint.

C. Repair of Coating

The material used for coating repair shall comply with the requirements of this Item and ASTM D3963/D3963M, “Specification for Fabrication and Jobsite Handling of Epoxy-coated Reinforcing Steel Bars”. Repairs shall be made in accordance with procedures recommended by the manufacturer of the epoxy coating powder. For areas to be patched, a minimum coating thickness as required for the original coating shall be applied. All visible damage to the coating shall be repaired.

Sawed and sheared ends, cuts, breaks and other damage shall be promptly repaired before additional oxidation occurs. The areas to be repaired shall be cleaned to ensure that they free from surface contaminants. Repairs shall be made in the shop or in the field as required.

406S.10 Measurement

The measurement of quantities of reinforcement furnished and placed will be based on the calculated weight of the steel actually placed as indicated on the drawings, with no allowance made for added bar lengths for splices requested by the Contractor nor for

extra steel used when bars larger than those indicated on the drawings are used or for a higher grade of steel that is substituted with the permission of the Engineer or designated representative. Tie wires and supporting devices will not be included in the calculated weights. The calculated weight of bar reinforcement will be determined using the theoretical bar weight set forth in this item.

Measurement required by a change in design will be computed as described above for the actual steel required to complete the work.

406S.11 Payment

Reinforcing steel will generally not be paid for directly, but shall be included in the unit price bid for the items of construction in which the reinforcing steel is used.

When specified in the contract bid form as a separate pay item, this item shall be paid for at the contract unit price bid per pound of "Reinforcing Steel". The unit bid price shall include full compensation for all work specified herein including furnishing, bending, fabricating, welding and placing reinforcement, for all clips, blocks, metal spacers, ties, chairs, wire or other materials used for fastening reinforcement in place and for all tools, labor, equipment and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 406S-RC:	Reinforcing Steel -	Per Pound.
Pay Item No. 406S-ERC:	Epoxy-Coated Reinforcing Steel -	Per Pound.

END

SPECIFIC CROSS REFERENCE MATERIALS
Standard Specification Item 406S, "Reinforcing Steel"

American Society for Testing and Materials, ASTM

Designation	Description
ASTM A 36/A 36M	Carbon Structural Steel
ASTM A 82	Steel Wire, Plain, for Concrete Reinforcement
ASTM A 185	Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
ASTM A 496	Steel Wire, Deformed, for Concrete Reinforcement
ASTM A 497	Steel Welded Wire Fabric, Deformed, for Concrete Reinforcement
ASTM A 615/A 615M	Deformed and Plain Billet-steel Bars for Concrete Reinforcement
ASTM A 675/A 675M	Steel Bars, Carbon, Hot-Wrought, Special Quality, Mechanical Properties
ASTM A 706/A 706M	Low- Alloy Steel Deformed and Plain Bars for Concrete Reinforcement
ASTM A 775/A 775M	Epoxy-Coated Reinforcing Steel Bars
ASTM A 884/A 884M	Epoxy-Coated Steel Wire and Welded Wire Fabric For Reinforcement
ASTM A 934/A 934M	Epoxy-Coated Prefabricated Reinforcing Steel Bars
ASTM A 996/A 996M	Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement
ASTM D3963/D3963M	Fabrication and Jobsite Handling of Epoxy-coated Reinforcing Steel Bars

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-739-I	Sampling and Testing Epoxy Coated Reinforcing Steel

City of Austin Standard (Details)

Designation	Description
Standard 406S-1	Reinforced Steel Tolerances

Texas Department of Transportation: Departmental Material Specifications

Designation	Description
DMS 8130	Epoxy Powder Coating for Reinforcing Steel

American Welding Society

Designation	Description
AWS D1.1/D1.1M	Structural Welding Code

RELATED CROSS REFERENCE MATERIALS
Standard Specification Item 406S, "Reinforcing Steel"

City of Austin Standard Specification Items

Designation	Description
Item No. 360	Concrete Pavement
Item No. 403S	Concrete for Structures
Item No. 410S	Concrete Structures
Item No. 414S	Concrete Retaining Walls

Item No. 420S	Drilled Shaft Foundations
Item No. 830S	Traffic Signal Controller Foundation
Item No. 831S	Traffic Signal Drilled Shaft Foundation

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 360	Concrete Pavement
Item No. 420	Concrete Structures
Item No. 421	Hydraulic Cement Concrete
Item No. 422	Reinforced Concrete Slab
Item No. 423	Retaining Walls
Item No. 440	Reinforcing Steel

Item No. 408S
Concrete Joint Materials

408S.1 Description

This item shall govern the furnishing and placing of all longitudinal, transverse contraction and expansion joint material in concrete work as herein specified in the various items of these specifications as indicated or as directed by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

408S.2 Submittals

The submittal requirements of this specification item include:

A. Type and manufacturer of all joint materials proposed for use.

B. Technical data indicating that proposed products meet the requirements specified herein.

408S.3 Materials

(1) Preformed Asphalt Board

Preformed asphalt board formed from cane or other suitable fibers of a cellular nature securely bound together and uniformly impregnated with a suitable asphaltic binder and meeting the requirements of the Standard Specifications for Preformed Expansion Joint Filler for Concrete (Bituminous Type), ASTM D 994.

(2) Preformed Nonbituminous Fiber Material

Preformed nonbituminous fiber material shall meet the requirements of the Standard Specifications for the Preformed Expansion Joint Filler for Concrete Paving and Structural Construction, ASTM D 1751, except that the requirements pertaining to bitumen content, density and water absorption shall be voided.

(3) Boards

Boards obtained from Redwood timber, of sound heartwood, free from sapwood, knots, clustered birdseye, checks and splits. Occasional sound or hollow birdseye, when not in clusters, will be permitted provided the board is free from any other defects that will impair its usefulness as a joint filler.

(4) Joint Sealer (Concrete Pavement)

This material shall be a one part low modulus silicone especially designed to cure at ambient temperatures by reacting with moisture in the air and shall have the following properties:

As Supplied	
Color	Gray
Flow, MIL-2-8802D Sec. 4.8.4	0.2 maximum

Working Time, minutes	10
Tack-Free Time at 77°F ± 2F (25°C ± -1.66°C) Min. MIL-2-8802D Sec.4.8.7	60
Cure time, at 77°F (25°C), days	7-14
Full Adhesion, days	14-21
As Cured---after 7 days at 77°F (25°C) and 40% RH	
Elongation, percent minimum	1200
Durometer Hardness, Shore A, points ASTM 2240	15
Joint Movement Capability, percent	+100/-50
Tensile Strength, maximum elongation,psi (kPa)	100 (689)
Peel Strength, psi (kPa)	25 (172)

The joint sealer shall adhere to the sides of the concrete joint or crack and shall be an effective seal against infiltration of water and incompressibles. The material shall not crack or break when exposed to low temperature.

(5) Backer Rod

Backer Rod shall be expanded closed cell polyethylene foam compatible with sealant. No bond or reaction shall occur between rod and sealant. Backer Rod shall be of sufficient width to be in compression after placement and shall be used with joint sealer.

(6) Joint Sealing Material

Joint Sealing Material for other than pavement use may be a two-component, synthetic polymer or cold-pourable, self leveling type meeting the following requirements:

The material shall adhere to the sides of the concrete joint or crack and shall form an effective seal against infiltration of water and incompressibles. The material shall not crack or break when exposed to low temperatures. Curing is to be by polymerization and not by evaporation of solvent or fluxing of harder particles. It shall cure sufficiently at an average temperature of 77°F± 3°F (25°C ± -1.66°C) so as not to pick up under wheels of traffic in a maximum of 3 hours.

Performance Requirements:

When tested in accordance with Test Method Tex-525-C, the joint sealing material shall meet the above curing times and the requirements as follows:

It shall be of such consistency that it can be mixed and poured or mixed and extruded into joints at temperatures above 60°F (1.66°C).

Penetration 77°F (25°C), 150 gm. Cone, 5 sec., max.-cm	0.90
Bond and Extension 75%, 0F, 5 cycles:	
Dry Concrete Blocks	Pass
Wet Concrete Blocks	Pass
Steel Blocks (Primed if specified by manufacturer)	Pass
Flow at 200 °F (93°C)	None
Water content % by weight, max.	5.0

Resilience:	
Original sample min. % (cured)	50
Oven-aged at 158°F (70°C) min. %	50
For Class 1-a material only, Cold Flow (10 minute)	None

(7) Rebonded Recycled Tire Rubber

This material consists of granular particles of rubber, made by grinding automobile and truck tires, securely bound together by a synthetic resin or plastic binder. The filler must be molded into sheets of the required dimensions, which meet the testing requirements of both ASTM D 1751 and ASTM D 1752, except that the requirements for asphalt content and expansion are waived. The density of the material must be at least 30 lb/ft ^{3} (440kg/m^3).

408S.4 Construction Methods

The Contractor shall install "Concrete Joint Materials" which will function as a compatible system. Joint sealer shall not be placed where a bond braker is present.

Asphalt, Redwood board or other materials used shall extend the full depth of the concrete and shall be perpendicular to the exposed face. All joints shall be shaped to conform to the contour of the finished section in which they are installed. All material shall be a minimum of 1/2 inch (12.5 mm) thick or as indicated. Wood materials shall be anchored to the adjacent concrete to permanently hold them in place. Joint sealer shall be installed in accordance with the manufacturer's recommendations.

The material used for side walk expansion joints shall conform to No. 3 above, unless otherwise indicated.

The material used for curb and gutter expansion joints filler shall conform to any of the above, except when placed adjacent to concrete pavement, the joint material shall match the pavement joint material.

408S.5 Measurement and Payment

No additional compensation will be made for materials, equipment or labor required by this item, but shall be included in the unit price bid for the item of construction in which this item is used.

End

SPECIFIC Cross Reference Materials
Standard Specification Item No. 408S, " Concrete Joint Materials”

American Society for Testing and Materials (ASTM)

Designation	Description
D 994	Specification for Preformed Expansion Joint Filler for Concrete

	(Bituminous Type)
D 1751	Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
D 1752	Specification for Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction
D 2240	Standard Test Method for Rubber Property-Durameter Hardness

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex-525-C	Tests for Asphalt and Concrete Joint Sealers

Item No. 411S
Surface Finishes for Concrete

411S.1 Description

This item shall govern the furnishing of all materials and the application by the methods of construction indicated on the Drawings for the application of a surface finish to concrete.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

411S.2 Submittals

The submittal requirements of this specification item include:

A. Type and manufacturer of cement(s).

B. Type and manufacturer of membrane curing compound.

C. Type and manufacturer of adhesive grout.

D. Type and manufacturer of resin paint.

E. Samples as requested.

F. Locations of proposed grade/class of finishes.

411S.3 Materials

(1) Masonry Sand

Masonry sand shall conform to ASTM C 144.

(2) White Cement

White cement shall conform to ASTM C 150.

(3) Portland Cement

All cement unless otherwise indicated shall be Portland cement conforming to ASTM C 150.

Portland cement manufactured in a cement kiln fueled by hazardous waste shall be considered as an approved product if the production facility is authorized to operate under regulation of the Texas Natural Resource Conservation Commission (TNRCC) and the U. S. Environmental Protection Agency (EPA). Supplier shall provide current TNRCC and EPA authorizations to operate the facility.

(4) Membrane Curing

Membrane curing shall conform to Item No. 409S, "Membrane Curing".

(5) Adhesive Grout

This subsection sets forth the requirements for three epoxy adhesives with different viscosities designed to bond fresh Portland Cement concrete to existing Portland Cement concrete, hardened concrete to hardened concrete and steel to fresh or hardened concrete. These adhesives are as follows:

Type V: Standard (medium viscosity) for applying to horizontal and vertical surfaces. This material is suitable for surface sealing of fine cracks in concrete.

Type VI: Low viscosity for application with spray equipment to horizontal surfaces.

Type VII: Paste consistency for overhead application and where a high buildup is required. This material is suitable for surface sealing of cracks in concrete, which are veed out prior to sealing, and for grouting of dowel bars where clearance is 1/16 inch (1.6 mm) or less.

(a) Mixing Ratio: The ratio of resin and hardener components to be mixed together to form the finished adhesive shall be either 1 to 1 or 2 to 1 by volume.

Any specific coloring of resin and/or hardener components desired will be stated by the Engineer or designated representative.

Fillers, pigments and thixotropic agents. All fillers, pigments and/or thixotropic agents in either the epoxy resin or hardener component must be of sufficiently fine particle size and dispersed so that no appreciable separation or settling will occur during storage.

Any fillers present in the low viscosity version must be of such a nature that they will not interfere with application by spray equipment or abrade or damage such equipment.

The concrete adhesive shall contain no volatile solvents.

(b) Consistency: The adhesives shall comply with the following:

	Type V	Type VI	Type VII
Viscosity of mixed adhesive 77° ± 1°F, (25° ± -17°C) Poises	400 Maximum	150 Maximum	must be sufficiently fluid to apply by trowel or spatula without difficulty
Pot Life at 77°F (25°C), minutes minimum - 30			
Set Time at 77°F (25°C) (Time required to attain 180 psi (1.3 mPa), hours maximum - 12			

Thixotropy test shall be performed at both 77° and 120° F (25° and 49° C). Average thickness of cured adhesive remaining on test panel, mils minimum.

Type V	Type VII
30	45

Samples of the individual components in sealed containers shall be maintained at 115° + 3° F (46° + -16° C) for 2 weeks. The mixed adhesive prepared from these samples must still comply with the minimum thixotropy requirements.

The viscosity of the Type V and Type VI versions must not show an increase of more than 20 percent compared with the viscosity prior to the stability test. The

Type VII adhesive must still be sufficiently fluid to apply by trowel or spatula without difficulty.

(c) Physical Properties of the Cured Adhesive

Property	**Requirements**
Adhesive Shear Strength, psi, (mPa), minimum	2200 (15)
Water Gain, percent by weight, maximum	0.20
Ability to bond fresh Portland cement concrete to cured Portland cement concrete psi, (mPa), minimum (7 days cure time)	400 (2.8)

(6) Synthetic Resin Paint

Type X Epoxy: This is a high solids epoxy coating designed for application by brush or roller. The materials can also be applied by airless spray by addition of a maximum of 5 percent toluene solvent at the direction of the Engineer or designated representative.

Raw Materials: The basic raw materials to be incorporated into this coating are listed below, along with the specific requirements for each material. The final decision as to the quality of materials shall be made by the Engineer or designated representative. After the Engineer or designated representative has approved the brand names of raw materials proposed by the Contractor, no substitution will be allowed during the manufacture without prior approval of the Engineer or designated representative.

Epoxy Resin: The basic epoxy resin used in the formulation shall be an unmodified liquid resin conforming to the following chemical and physical requirements:

Viscosity at 25.0 + 0.1 C, cps	7,000 to 10,000
Weight per epoxy equivalent, gms per gm - mole	175 to 195
Color (Gardner Number), maximum	5
Hydrolyzable chlorine, maximum % by weight	0.2
Specific gravity, 25/25 degrees	1.14. to 1.18

Test methods to be used in determining these qualities are listed below:

(a) Viscosity - Test for Kinematic Viscosity (ASTM Designation: D 445).

(b) Weight per Epoxy Equivalent - Test for Epoxy Content of Epoxy Resins (ASTM Designation: D 1652).

(c) Color - Test for Color of Transparent Liquids (Gardner Color Scale) (ASTM Designation: D 1544).

(d) Hydrolyzable Chlorine - Test for Hydrolyzable Chlorine Content of Liquid Epoxy Resins (ASTM Designation D: 1726).

(e) Specific Gravity - Method of Test for Density of Paint, Varnish, Lacquer and Related Products (ASTM Designation: D 1475).

Pigment

Titanium Dioxide: The titanium dioxide used in this formulation shall be equivalent to DuPont R-900. This shall be a pure, chalk-resistant, rutile titanium dioxide meeting the requirements of ASTM D 476, Type III.

Extender: The extender used in this formulation shall be Nyad 400, manufactured by Interpace Pigments. Specific requirements are as follows:

Particle size distribution	Minimum	Maximum
Minus 20 microns, percent by weight	95	
Minus 10 microns, percent by weight	70	80
Minus 5 microns, percent by weight	40	50
Minus 3 microns, percent by weight	30	40
Minus 1 micron, percent by weight	14	20
Oil Absorption (rub out, lbs/100 lbs)		25 maximum
Brightness (G.E.)	92.5 minimum	

411S.4 Grade of Finish

(1) General

The grade and/or class of finish shall be as described herein and as indicated.

"Grade" of finish designates the areas to which a higher finish is to be applied beyond the requirements of an Ordinary Surface Finish. Four grades of finish are included herein.

"Class" of finish designates the materials or the process to be used in providing the grade of finish. Three classes of finish are included herein.

For structures and surfaces not described herein under grade of finish, a class of finish only may be indicated. Where neither a grade nor class is specified, an Ordinary Surface Finish only will be required as specified in Item No. 410S, "Concrete Structures".

Where the plans specify a grade and class of finish, i.e., Grade II, Class C, only that type of finish shall be furnished.

Where the plans specify a grade of finish only, i.e., Grade I Finish, any of the classes of finish may be furnished. Only one class of finish shall be furnished on any individual structure, twin structures or on structures in close proximity to each other, except as specified for prestressed concrete members below.

(2) Grade I

The following areas shall receive a Class A, B or C (two rub) Finish, except that prestressed members shall receive either a Class A or B Finish only.

All concrete surfaces of railing, including the parapet types; exterior vertical faces of slabs, slab spans, arches and box girders; the outside and bottom surfaces of fascia beams or girders (including prestressed members); the underside of overhanging slabs to the point of juncture of the supporting beam; all exposed vertical surfaces of

bents and piers and bottom surfaces of bent caps; all exposed surfaces of tie beams, abutments, bridge wingwalls, culvert headwalls and wingwalls and retaining walls exposed to view after all backfill and is placed.

Unless otherwise indicated, the underside of the slab of slab spans shall be finished its entire width.

Unless otherwise indicated, exposed surfaces of pump houses and other miscellaneous concrete surfaces shall receive a Class A, B or C (one rub) Finish.

(3) Grade II

All concrete surfaces of railing, including the parapet types, all exposed surfaces of bridge wingwalls and the exterior vertical faces of slabs and slab spans shall receive a Class A, B or C (two rub) Finish. All other surfaces described under Grade I Finish shall receive a Class A or B finish only. The underside of slab spans shall receive an Ordinary Surface Finish only.

(4) Grade III

All concrete surfaces of railing, including the parapet types, all exposed surfaces of bridge wingwalls and the exterior vertical faces of slabs shall receive a Class A, B or C (two rub) Finish. All other surfaces described under Grade I Finish shall receive an Ordinary Surface Finish.

(5) Grade IV

The top and roadway faces only of all concrete railing, including the parapet types and bridge wingwalls shall receive a Class A, B or C (one rub) Finish. All other surfaces described under Grade I shall receive an Ordinary Surface Finish.

411S.5 Class of Finish

The Class of Finish designates either an adhesive grout material, a paint-type material or a rubbing process applied to surfaces specified in "Grade of Finish", as required above and/or as indicated.

Unless otherwise indicated the color shall be concrete gray.

(1) Class A

This finish shall consist of an adhesive grout textured coating with a minimum 1/16 inch thickness, composed of 1 part white cement, 1 part natural (gray) cement, 2 parts masonry sand, 1 part (latex) emulsion and enough water to form a viscous slurry of a consistency that may be applied by spray gun, brush or roller without appreciable running or sagging. The proportions of white and gray cement may be varied slightly to obtain the desired color.

Gradation of the masonry sand shall be as required to produce a texture satisfactory to the Engineer or designated representative.

Prepackaged materials meeting these requirements and acceptable to the Engineer or designated representative as to color, texture and appearance will be permitted.

(2) Class B

The finish shall be a paint-type material, consisting of a synthetic resin, containing fibrous as well as texturing pigments, which when applied by a 1 coat spray application at the rate of 45 + 5 square feet per gallon (15.9 + 1.9 square meters per liter) will yield an acceptable textured coating. Certification by the manufacturer of the above materials will be required.

(3) Class C

This finish shall consist of a one rub or two rub system, as the case may be, meeting the requirements set forth below under "Construction Methods".

411S.6 Approval of Surface Finishing Materials

The material to be furnished shall meet the requirements of TxDoT Specification DMS-8110, Structural Coatings, latest revision.

In addition to the above, the manufacturer shall furnish the following:

(1) At the time of original request for approval of the surface furnishing material, the manufacturer shall supply a 1-gallon (3.8 L) sample of the material to the Engineer or designated representative, if requested.

(2) Each 6 months after approval of the material, the manufacturer shall furnish a notarized certification indicating that the material originally approved has not been changed or altered in any way. Any change in formulation of a surface finish shall require retesting prior to use.

The Engineer or designated representative may request additional information to be submitted such as infrared spectophotometry scan, solids content, etc., for further identification. A change in formula discovered by any of the tests prescribed herein or by other means and not reported and retested, may be cause to permanently bar the manufacturer from furnishing surface finish materials for City work.

The City reserves the right to perform any or all of the tests required by this specification as a check on the tests reported by the manufacturer. In case of any variance the City tests will govern.

411S.7 Construction Methods

Prior to application of any of the finishes required herein, concrete surfaces shall be given an Ordinary Surface Finish. For Class A and B materials, concrete surfaces shall be clean and free of dirt, grease, curing compound or any other bond breaking substance. Class A shall be applied on moistened surfaces but Class B requires a dry surface. The temperature of the atmosphere, concrete and compound shall be above 50°F (10°C) for Classes A and B at the time of application. The finished surfaces shall be protected against rain or freezing for a period of 24 hours after application.

Class A materials shall be applied by spraying, by roller or by brush. Class B materials shall be applied by spraying only. All applications shall provide an acceptable texture of the proper coverage.

The Class A and B material shall be applied after all preparation work required by Ordinary Surface Finish has been completed.

The Class C Finish shall be performed with a carborundum stone as follows, after all preparatory work required by Ordinary Surface Finish has been completed:

For a two-rub system, the first rubbing shall bring the wetted concrete face to a paste and produce a smooth dense surface without pits, form marks or other irregularities. The use of cement or grout to form the paste will not be permitted. Striping with a brush and washing after the first rubbing will not be required. Chamfer lines shall be finished during the second rubbing.

The first rubbing shall be done soon after form removal. Membrane curing, if used, shall be applied after the first rub is complete. Prior to the second rubbing, any remaining curing membrane shall be removed from the surface by brushing, buffing or other satisfactory methods.

The second rubbing shall be performed when conditioning the structure for final acceptance. The specified surfaces shall be cleaned of drip marks and discolorations and given a final rubbing. The surface shall be striped neatly with a brush and the paste allowed to take a reset, after which the surfaces shall be washed with clean water leaving them with a neat and uniform appearance and texture.

For a one rub system, the rubbing requirements shall be the same as for the first rub above, except chamfer lines shall be finished and the paste spread uniformly, striped with a brush and allowed to take a reset after which the surfaces shall be washed with clean water leaving them with a neat and uniform appearance and texture.

411S.8 Special Surfaces Finishes

(1) General

When special surface finishes are required for retaining walls, panels, copings or similar construction, the Contractor shall prepare sample panels for approval of the finish and the method of application. Unless otherwise indicated, panel or pattern arrangement and dimensions may be varied to achieve a more pleasing appearance or to utilize forming material more efficiently when approved by the Engineer or designated representative. Aggregates, materials, variation of panel or pattern arrangement, dimensions and other features affecting the work shall be approved prior to start of the work.

(2) Striated Finish

The striated (grooved) pattern shall be as indicated or as approved by the Engineer or designated representative.

The finish shall be made by lining the forms with striated sheets of plywood, plastic, fiberglass, metal or other material acceptable to the Engineer or designated representative. The striations on the panels shall be of a smooth, wide pattern, not sharp or angular.

A chamfer groove shall be used along all edges of each panel. All ties, bolts or other forming accessories shall be located along the chamfer grooves or panel edges.

(3) Exposed Aggregate Finish

(a) Structural Concrete

Exposed aggregate panels may be either raised, recessed or as indicated with the sides of each panel chamfered as directed by the Engineer or designated representative.

The aggregate used for this finish shall be approved by the Engineer or designated representative. Unless otherwise indicated, aggregate shall conform to the grading requirements of Grade 2 aggregate except that a minimum of 50 percent shall be retained on the ¾-inch (19 mm) sieve. Gravel of predominately rounded particles shall be used, except that when indicated or approved by the Engineer or designated representative in writing, crushed stone may be used. The aggregate shall be large enough to remain firmly anchored in the face of the final product. The depth shall be 1/4-inch (6.4 mm) minimum to 1/2-inch (12.7 mm), unless otherwise indicated or directed by the Engineer or designated representative.

A surface retarder that penetrates the concrete approximately 1/4 inch (6.4 mm) shall be applied to the forms or concrete surface as an aid in achieving the desired finish. Wood forms may require 2 or 3 coatings to compensate for absorption. Form joints shall be taped or caulked to prevent escape of the retarder during placing operations.

Treated form surfaces shall be protected from sun and rain while exposed to the atmosphere. In case of high humidity or if rain has dampened the forms prior to placing concrete, a reapplication of the surface retarder may be required to provide uniform coverage of the retarder on the forms.

Adjacent areas of fresh concrete not requiring exposed aggregate finish shall be protected when the retarder is applied.

The finish shall be obtained by sandblasting, bush hammering, water blasting or other methods, as approved by the Engineer or designated representative. Horizontal surfaces may be finished by a combination of brushing and washing, but only after the concrete has set sufficiently to prevent loosening of the aggregate.

Unless otherwise directed by the Engineer or designated representative, forms for surface requiring exposed aggregate finish shall be removed 12 to 15 hours after concrete placement. The exposed aggregate operation shall be accomplished immediately after form removal. Except for the time required for obtaining the exposed aggregate finish, curing of all surfaces shall be maintained for the minimum 4 day curing time. All surfaces shall be either water cured or may be cured with an approved clean membrane compound. If water curing is used, it shall be followed by a clear membrane curing compound conforming to Item No. 409S, "Membrane Curing".

Care shall be taken to ensure proper vibration at all points of concrete placement to prevent honeycomb or segregation of the materials. Vibration shall be done in such a manner as to provide adequate penetration of previously placed concrete lifts. Care shall be taken to prevent contact of the vibrator with the face form.

(b) Sidewalks

When exposed aggregate surfaces are required for sidewalks, driveways and/or medians, the coarse aggregate shall consist of particles with at least 40 percent crushed faces. Uncrushed gravel, polished aggregates and clear resilient

coatings are not acceptable. Grade 5 coarse aggregates shall be used for exposed aggregate finishes for sidewalks, driveways and/or medians.

411S.9 Measurement and Payment

No direct measurement or payment will be made for the work to be done, the equipment or materials to be furnished under this item, but shall be included in the unit price bid for the item of construction in which this item is used.

End

SPECIFIC Cross Reference Materials
Standard Specification Item No. 411S, " Surface Finishes for Concrete"

City of Austin Standard Specification Items

Designation	Description
Item No. 410S	Concrete Structures

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
DMS-8110	Coatings for Concrete

American Society for Testing and Materials (ASTM)

Designation	Description
C 144	Aggregate for Masonry Mortar
C 150	Portland Cement
D 445	Kinematic Viscosity of Transparent and Opaque Liquids
D 476	Standard Classification for Dry Pigmentary Titanium Dioxide Products
D 1475	Standard Test Method for Density of Liquid Coatings, Inks and Related Products
D 1544	Standard Test Method for Color of Transparent Liquids (Gardner Color Scale)
D 1652	Standard Test Method for Epoxy Content of Epoxy Resins
D 1726	Standard Test Method for Hydrolyzable Chloride Content of Liquid Epoxy Resins

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 411S, " Surface Finishes for Concrete"

City of Austin Standard Specification Items

Designation	Description
Item No. 403S	Concrete for Structures
Item No. 410S	Concrete Structures
Item No. 411S	Surface Finished for Concrete

430S.1 Description

This item shall govern Portland Cement (p.c.) concrete curb, p.c. concrete curb and gutter with reinforcing steel or p.c. concrete laydown curb as required, that is constructed in accordance with this specification on an approved subgrade and base in conformity with Standard Detail Series 430S and the lines, grades, section indicated on the Drawings or as established by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

430S.2 Submittals

The submittal requirements of this specification item include:

A. Class A p.c. concrete mix design,

B. Type of Installation (i.e. P.C. Concrete Curb and Gutter or P.C. Concrete Curb or P.C. Concrete Laydown Curb) and construction details (i.e. base, reinforcing steel, joints, curing membrane),

C. Identification of the type, source, mixture, Pure Live Seed (PLS) and rate of application of the seeding.

430S.3 Materials

A. Concrete

The Portland cement (p.c.) concrete shall conform to Class A Concrete, Section 403S.7 (Table 4) of Standard Specification Item No. 403S, "Concrete for Structures" or Sections 360S.4 and 360S.6 of Standard Specification Item No. 360S, "Concrete Pavement" when curb and gutter is to be constructed integral with the pavement.

B. Reinforcing Steel

Reinforcing steel shall conform to Standard Specification Item No. 406S, "Reinforcing Steel".

C. Expansion Joint Materials

Expansion joint materials shall conform to Standard Specification Item No. 408S, "Expansion Joint Materials".

D. Membrane Curing Compound

Membrane curing compound shall conform to Standard Specification Item No. 409S, "Membrane Curing".

E. Flexible Base

Aggregate shall conform to Standard Specification Item No. 210S, "Flexible Base".

430S.4 Construction Methods

A. Subgrade and Base Preparation

Subgrade for curb and gutter shall be excavated and prepared to depth and width requirements indicated on the Drawings, including a minimum of 12 inches (300 mm) behind the curb, unless a greater width is indicated on the Drawings. The subgrade shall be shaped to the line, grades, cross section and dimensions indicated on the Drawings. A minimum of 4 inches (100 mm) of flexible base shall be spread, wetted and thoroughly compacted under curb and gutter as specified in Standard Specification Item No. 210S, "Flexible Base". If dry, the base shall be sprinkled lightly with water before p.c. concrete is deposited thereon.

B. C & G Forms

Forms shall be of metal, well-seasoned wood or other approved material. The length of the forms shall be a minimum of 10 feet (3 meters). Flexible or curved forms shall be used for curves of 100-foot (30 meter) radius or less. Wood forms for straight sections shall be not less than 2 inches (50 mm) in thickness. Forms shall be a section, that is satisfactory to the Engineer or designated representative, of the depth required and clean, straight, free from warp and, if required, oiled with a light form oil. All forms shall be securely staked to line and grade and maintained in a true position during the placement of p.c. concrete.

C. Reinforcing Steel

The reinforcing steel, if required, shall be placed as shown on the typical section of the Drawings. Care shall be exercised to keep all steel in its proper location during p.c. concrete placement.

D. Joints

Joints shall be of the type and spacing shown on the Drawings. Expansion joint material, 3/4 inch (19 mm) in thickness, shall be provided at intervals not to exceed 40 feet (12 meters) and shall extend the full width and depth of the p.c. concrete. Weakened plane joints shall be made 3/4 inch (19 mm) deep at 10-foot (3 meters) intervals. All joint headers shall be braced perpendicular and at right angles to the curb.

Two round smooth dowel bars, 1/2 inch (12.5 mm) in diameter and 24 inches (600 mm) in length, shall be installed at each expansion joint. Sixteen inches (400 mm) of one end of each dowel shall be thoroughly coated with hot oil, asphalt or red lead, so that it will not bond to the concrete. The dowels shall be installed with a dowel sleeve on the coated end as indicated on the Drawings or equivalent method as directed by the Engineer or designated representative.

E. P.C. Concrete Placement and Form Removal

Concrete shall be placed in the forms and properly consolidated. Within 1 hour after p.c. concrete placement, a thin coating, that is no more than 1/2 inch (12.5 mm) nor less than 1/4 inch (6.25 mm) thick of finish mortar, composed of 1 part Portland Cement to 2 parts fine aggregate, shall be worked into the exposed faces of the curb and gutter by means of a "mule". After the p.c. concrete has become sufficiently set, the exposed edges shall be rounded by the use of an edging tool to the radii indicated on Standard Detail 430S-1. The entire exposed surface of the curb and gutter shall be floated to a uniform smooth surface, and then finished with

a camel hairbrush to a gritty texture. The forms shall remain in place a minimum of 24 hours unless approved otherwise by the Engineer or designated representative.

After removal of the forms, any minor honeycombed surfaces shall be plastered with a mortar mix as described above. Excessively honeycombed curb and gutter, as determined by the Engineer or designated representative, shall be completely removed and replaced when directed.

F. Curing

Immediately after finishing the curb, concrete shall be protected by a membrane curing conforming to Standard Specification Item No. 409S, "Membrane Curing".

After a minimum of 3 days curing and before placement of the final lift of the base course, the curb shall be backfilled to the full height of the p.c. concrete, tamped and sloped as directed by the Engineer or designated representative. The upper 4 inches (100-mm) of backfill shall be of clean topsoil that conforms to Standard Specification Item No. 130S, "Borrow" and is free of stones and debris.

G. Seeding in Turf Areas

When turf is to be established, preparation of the seedbed shall conform to Item No. 604S, "Seeding for Erosion Control".

430S.5 Measurement

Accepted work as prescribed by this item will be measured by the lineal foot (lineal meter: 1 lineal meter equals 3.281 lineal feet) of p.c. concrete curb and gutter, p.c. concrete curb and/or p.c. concrete laydown curb, complete in place.

430S.6 Payment

The work performed as prescribed by this item will be paid for at the unit bid price per lineal foot for "P.C. Concrete Curb and Gutter" or P.C. Concrete Curb. The price shall include full compensation for all work as set forth and described under payment Method A and/or B.

A. Method A (Pay Item No. 430S-A)

This payment method shall include all the work performed for "P.C. Concrete Curb and Gutter" complete, at the unit bid price. The unit bid price shall include full compensation for excavation, preparation of the subgrade, furnishing and placing all concrete and base material, reinforcing steel, dowels, expansion joint material, curing material, backfill and for all other materials, manipulations, labor, tools, equipment and incidentals necessary to complete the work.

B. Method B (Pay Item No. 430S-B)

This payment method includes all the work performed for "P.C. Concrete Curb and Gutter", complete, at the unit bid price. The unit bid price shall include full compensation for fine grading, furnishing and placing concrete and reinforcing steel, dowels, expansion joint material, curing material, backfill and for all other materials, manipulations, labor, tools, equipment and incidentals necessary to complete the work.

C. Method C (Pay Item No. 430S-C)

This payment method includes all the work performed for " P.C. Concrete Curb" complete, at the unit bid price. The unit bid price shall include full compensation for excavation, furnishing and placing all concrete and base material, reinforcing steel, dowels, expansion joint material, curing material, backfill and for all other materials, manipulations, labor, tools, equipment and incidentals necessary to complete the work.

D. Method D (Pay Item No. 430S-D)

This payment method includes all the work performed for "P.C. Concrete Curb" complete, at the unit bid price. The unit bid price shall include full compensation for fine grading, furnishing and placing concrete and reinforcing steel, dowels, expansion joint material, curing material, backfill and for other materials, manipulations, labor, tools, equipment and incidentals necessary to complete the work.

E. Method E (Pay Item No. 430S-E)

This payment method shall include all the work performed for "P.C. Concrete Laydown Curb" complete, at the unit bid price. The unit bid price shall include full compensation for excavation, preparation of the subgrade, furnishing and placing all concrete and base material, reinforcing steel, dowels, expansion joint material, curing material, backfill and for all other materials, manipulations, labor, tools, equipment and incidentals necessary to complete the work

F. Method F (Pay Item No. 430S-F)

This payment method includes all the work performed for "P.C. Concrete Laydown Curb" complete, at the unit bid price. The unit bid price shall include full compensation for fine grading, furnishing and placing concrete and reinforcing steel, dowels, expansion joint material, curing material, backfill and for other materials, manipulations, labor, tools, equipment and incidentals necessary to complete the work.

Payment will be made under one of the following:

Pay Item No. 430S-A:	P.C. Concrete Curb and Gutter (Excavation)	Per Lineal Foot.
Pay Item No. 430S-B:	P.C. Concrete Curb and Gutter (Fine Grading)	Per Lineal Foot.
Pay Item No. 430S-C:	P.C. Concrete Curb (Excavation)	Per Lineal Foot.
Pay Item No. 430S-D:	P.C. Concrete Curb (Fine Grading)	Per Lineal Foot.
Pay Item No. 430S-E:	P.C. Concrete Laydown Curb (Excavation)	Per Lineal Foot.
Pay Item No. 430S-F:	P.C. Concrete Laydown Curb (Fine Grading)	Per Lineal Foot.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 430S, “P.C. Concrete Curb and Gutter”

City of Austin Standard Specifications

Designation	*Description*

Item No 130S	Borrow
Item No 210S	Flexible Base
Item No. 360S	Concrete Pavement
Section 360S.4 of Item 360S	Proportioning of Concrete
Section 360S.6 of Item 360S	Concrete Mixing and Placing
Item No. 403S	Concrete for Structures
Section 403S.7 of Item No. 403S	(Table 4)
Item No. 406S	Reinforcing Steel
Item No. 408S	Expansion Joint Materials
Item No. 409S	Membrane Curing
Item No. 604S	Seeding for Erosion Control

City of Austin Standard Details

Designation	*Description*
430S-1	Curb and Gutter Section
430S-3	Curb Expansion Joint Dowel Detail
430S-4	Concrete Backfill Under Curb & Gutter
430S-5	Reinforcing Bar Detail at Existing Curb and Gutter

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 430S, “P.C. Concrete Curb and Gutter”

City of Austin Standard Specifications

Designation	*Description*
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 302S	Aggregates for Surface Treatments
Item No. 340S	Hot Mix Asphaltic Concrete Pavement
Item No. 431S	Machine Laid PCC Curb and Gutters
Item No. 433S	P.C. Concrete Driveways
Item No. 434S	P.C. Concrete Medians and Islands
Item No. 436S	P.C. Concrete Valley Gutters
Item No. 606S	Fertilizer

Item No. 432S
Portland Cement Concrete Sidewalks

432S.1 Description

This item shall govern the construction of Portland cement concrete sidewalks (Standard Detail No. 432S-1), as herein specified, on an approved subgrade and in conformance with the lines, grades and details indicated on the Drawings or as established by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text inch-pound units are given preference followed by SI units shown within parentheses.

432S.2 Submittals

The submittal requirements of this specification item include:

A. Class A portland cement (p.c). concrete mix design,

B. Type of Installation (i.e. Type I, Type II, etc.) and construction details (i.e. cushion layer, base, reinforcing steel, joints, curing membrane),

C. Identification of the type, source, mixture, Pure Live Seed (PLS) and rate of application of the seeding.

D. Number, manufacturer, model, construction, finish and installation details of streetscape appurtenances of bicycle racks, benches, chairs, trash receptacles, streetlights, tree wells and above grade tree planters [for sidewalks, 12 feet (3.66 meters) or wider].

432S.3 Materials

A. Portland Cement Concrete

Portland cement concrete shall be Class A conforming to Specification Item No. 403S, "Concrete for Structures" or Specification Item No. 407S, "Fibrous Concrete".

B. Reinforcement

Reinforcement shall conform to Specification Item No. 406S, "Reinforcing Steel" or Specification Item No. 407S, "Fibrous Concrete".

C. Expansion Joint Materials

Expansion joint materials shall conform to Specification Item No. 408S, "Expansion Joint Materials".

D. Membrane Curing Compound

Membrane curing compound shall conform to Specification Item No. 409S, "Membrane Curing".

432S.4 Construction Methods

The subgrade shall be excavated in accordance with Specification Item No. 111S, “Excavation”, prepared in accordance with Specification Item No. 201S, “Subgrade Preparation”, shaped to the lines, grades and cross section as indicated on the Drawings or as directed by the Engineer or designated representative and thoroughly compacted in accordance with Specification Item No. 201S. A granular cushion of a minimum thickness of 2 inches (50 mm) but maximum thickness of 5 inches (125 mm), composed of crusher screenings, gravel and sand, crushed rock or coarse sand,

shall be spread, wetted thoroughly, tamped and leveled. The granular cushion shall be moist at the time the Portland cement concrete is placed.

If the subgrade is undercut by more than 4 inches (100 mm) or the elevation of the natural ground is more than 4 inches (100 mm) below "top of subgrade", then a necessary backfill/embankment layer of an approved material shall be placed and compacted with a mechanical tamper. Hand tamping will not be permitted.

Where the subgrade is rock or gravel, 70 percent of which is rock; the 2-inch (50 mm) cushion need not be used. The Engineer or designated representative will determine if the subgrade meets the above requirements.

Sidewalk forms shall be constructed of metal or well-seasoned wood not less than 2 inches (50 mm) in thickness, with a section satisfactory to the Engineer or designated representative. The forms shall be clean, straight, and free from warp with a depth equal to the thickness of the finished work. All forms shall be securely staked to line and grade and maintained in a true position during the deposition of Portland cement concrete. Before p.c. concrete is placed, the forms shall be thoroughly oiled with a light form oil.

Expansion joint material 3/4 inch (19 mm) thick, shall be provided where the new construction abuts an existing structure, sidewalk or driveway. Similar expansion material shall be placed around all obstructions protruding through the sidewalk. The expansion joint material shall be placed vertically and shall extend the full depth of the p.c. concrete. Maximum spacing of expansion joints shall be 40 feet (12 meters) as indicated on the Drawings or as directed by the Engineer or designated representative. Weakened plane joints shall be spaced at 5 feet (1.5 meters) on center. Normal dimensions of the weakened plane joints shall be 1/4 inch wide and 3/4 inch deep (6 mm wide and 19 mm deep). All joints shall be constructed perpendicular (90 degrees) to the centerline of walk and shall match any previously placed concrete joints. For sidewalks with widths exceeding 6 feet (1.83 meters) longitudinal weakened-plane tooled joints shall be provided as indicated on the Drawings or as directed by the Engineer or designated representative.

Reinforcement for sidewalks shall consist either of polypropylene fibrillated fibers or 6” x 6” x W1.4 x W1.4 (150mm x 150mm x MW9 x MW9) welded wire fabric or one layer #3 (10M) reinforcing bars, placed no more than 18 inches (450 mm) on center both directions. All reinforcement shall be accurately placed at slab mid-depth, equidistant from the top and bottom of the p.c. concrete and held firmly in place by means of bar supports of adequate strength and number that will prevent displacement and keep the steel at its proper position during the placement of the p.c concrete. In no instance shall the steel be placed directly on the subgrade or sand cushion layer.

Prior to placement of the concrete, the reinforcement installation shall be inspected by the Engineer or designated representative to insure conformance with the drawings, specifications and this item. In addition care shall be exercised to keep all steel in its proper position during placement of the p.c. concrete. If during placement of the concrete, the reinforcement is observed to loose bar support, float upward or move in any direction, the placement shall be stopped until corrective action is taken.

Splices in wire fabric shall overlap sufficiently to allow two pairs of transverse wires to be tied together and no splice of less than 6 inches (150 mm) will be permitted. Splices in the #3 (10M) bars shall have a minimum lap of 12 inches (300 mm).

Where driveways cross sidewalks, additional reinforcing shall be placed in the sidewalk as indicated on the Drawings.

Portland cement concrete shall be placed in the forms and spaded, tamped and thoroughly consolidated until it covers the entire surface with a monolithic finish. The top surface shall be floated and troweled to a uniform smooth surface; then finished with a broom or wood float to a gritty texture unless indicated otherwise on the Drawings or as directed by the Engineer or designated representative. The outer edges and joints shall be rounded with approved tools to a

1/4-inch (6 mm) radius. Care will be exercised to prevent loss of dummy joints or rounded edges when applying the brush finish.

Portland cement concrete sidewalk ramps shall be formed to produce a finished surface with detectable warnings (Standard Detail 432S-2A) in accordance with the requirements of the American Disabilities Act and Texas Accessibility Standards (TAS), including Sections 4.29.2 and A4.29.2. The p.c. concrete sidewalk ramps shall be constructed in accordance with appropriate City of Austin Standard Details (Standard Details 432S-3, 432S-3A through 432S-3H, 432S-5, 432S-5A, 432S-5B, etc.).

Detectable warning for the ramps shall consist of raised truncated domes with a diameter of nominal 0.9 inch (23 mm), a height of nominal 0.2 inch (5 mm) and center-to-center spacing of nominal 2.35 inches (60 mm) and shall contrast visually with adjoining surfaces, either light on dark or dark-on-light. The material used to provide contrast shall be an integral part of the walking surface.

When indicated on the Drawings or as directed by the Engineer or designated representative, the construction of the sidewalk ramp shall include the installation of interlocking concrete paving units (Standard Specification Item No. 480S, "Concrete Paving Units"). The concrete paving units shall be constructed in accordance in accordance with Standard Specification Item No. 485S, "Concrete Paving Units for Sidewalk Ramps) and appropriate City of Austin Standard Details (Standard Details 432S-2A, 432S-3, 432S-3A through 432S-3H, 432S-5, 432S-5A and 432S-5B).

At the proper time after finishing, the surface shall be protected by a membrane, compound curing agent or by wetted cotton or burlap mats, conforming to Item No.409S, "Membrane Curing". The sides of the p.c. concrete shall be cured in the forms. If the forms are removed during the curing process, the curing shall be continued by the placement of fill against the exposed concrete edges or by other procedures conforming to Item No. 410S, "Concrete Structures". The top 4 inches (100 mm) of fill shall be clean topsoil conforming to Item No. 604S, "Seeding for Erosion Control".

Existing sidewalk that is scheduled for removal and replacement shall be removed and the underlying material shaped to the lines, grades and cross section as indicated in the drawings or as directed by the Engineer or designated representative. The removal and/or relocation of obstructions, including but not limited to signs, trash cans and benches on concrete pads, abandoned manholes, sprinkler control valves and landscaping, shall be performed, as indicated on the drawings, in a manner acceptable to the Engineer or designated representative. Removal and/or relocation of obstructions will be considered incidental work to this item and will not be paid for directly.

Existing PVC pipe drains in and behind curb shall be removed and replaced as required in new sidewalk and/or curb and gutter. In areas of proposed sidewalk construction, where curb and gutter is to remain in place, existing PVC pipe shall be cut far enough behind the back of curb to allow sufficient room for joint fittings to connect to new or salvaged PVC pipe.

The Contractor shall be responsible for removing and replacing mailboxes that are located in the construction area, while assuring that mail delivery will not be interrupted as a result of the construction activities. Mailboxes shall not be laid on the ground.

All necessary excavation, filling and grading of the slopes adjacent to the completed concrete sidewalks will be considered incidental work pertaining to this item and will not be paid for directly. The adjacent excavation and grading of the slopes shall be done in a manner acceptable to the Engineer or designated representative.

432S.5 Streetscape Furniture Installation Requirements

A. General General

Bicycle racks, benches and chairs, trash receptacles, tree wells and above grade tree wells and planters shall only be installed in sidewalks that are 12 feet (3.66 meters) or wider. When installation is indicated on the Drawings or directed by the Engineer or designated representative, these items shall be permanently installed as indicated in Standard Details 710S-4 and 710S-5; 432S-9B; 432S-7C, and 432S-7F; and 432S-8B. Above grade tree wells shall be installed in conformance with Standard Detail 432S-7E, while above grade tree planters shall be installed in conformance with Standard Detail Nos. 432S-7D and 432S-7G.

B. Location Requirements

1. Benches.

   Benches shall be placed either perpendicular to the curb with the center of the bench on line with trees and light poles and facing toward the building entry, or parallel to the building and within 6” (150 mm) of the building wall, facing out to the street.

   Bench siting shall be in conformance with Standard Detail No. 432S-9C in 12’ (3.6 M) or wider sidewalks and Standard Detail No. 432S-9D in sidewalks of width between 12’ (3.6 M) and 18’ (5.4 M).

2. Bike Racks.

   Bike racks are to be placed perpendicular to the curb with the centerline of the rack on line with trees and light poles.

   Bike rack siting shall be in conformance with Standard Detail No. 710S-6A in 12’ (3.6 M) or wider sidewalks and Standard Detail No. 710S-6B in sidewalks of width between 12’ (3.6 M) and 18’ (5.4 M).

3. Trash Receptacles.

   Trash receptacles shall either be placed along the curb, with the center line of the receptacle on line with the trees and light poles, or shall be located at the building entry in alignment with the structural bay system of the building. If located at the entry there shall be no more than 1 foot (300 mm) clearance between the receptacle and the building wall.

   Trash receptacle siting adjacent to curb ramps within an intersection shall be in conformance with Standard Detail No. 432S-8C in 12’ (3.6 M) or wider sidewalks.

P432S.6 Pedestrian Railing

When a pedestrian railing installation is required along sidewalks for pedestrian protection as indicated on the Drawings or directed by the Engineer or designated representative, this type of pedestrian railing shall be permanently installed in conformance with one of the following designated Standard Details: 707S-1, 707S-2, 707S-3 or 707S-4.

When a pedestrian railing installation is required along portions of sidewalks identified as ‘ramps’ for ADA accessibility purposes as indicated on the Drawings or directed by the Engineer or designated representative, this type of pedestrian railing shall be permanently installed in conformance with one of the following designated Standard Details: 707S-2, 707S-3 or 707S-4.

432S.7 Measurement

Accepted work performed as prescribed by this item will be measured by the square foot (square meter: 1 square meter is equal to 10.764 square feet) of surface area of "Concrete Sidewalk".

Accepted work performed as prescribed by "Sidewalk Ramps" will be measured per each for the type of ramp indicated on the Drawings.

Accepted work performed as prescribed by "Streetscape Appurtenances" will be measured per each for the type of appurtenance indicated on the Drawings.

Accepted work performed as prescribed by "Pedestrian Railing" will be measured per lineal foot of the type of railing indicated on the Drawings.

432S.8 Payment

The work performed as prescribed by this item for concrete sidewalk will be paid for at the unit bid price per square foot for "Concrete Sidewalk" and/or "Sidewalks Reconstruction"; per each for "Concrete Sidewalk Ramps" and "Streetscape Appurtenances" or per lineal foot for "Pedestrian Railing".

The unit bid price for new sidewalk shall include full compensation for excavating and/or removal and/or relocating obstructions, vegetating adjacent areas disturbed by sidewalk construction, preparing the subgrade; for furnishing and placing all materials including cushion material, all reinforcement, bar supports, joints, expansion joint materials, and for any other materials, manipulations, labor, tools, equipment, finishing, curing and incidentals necessary to complete the work.

The unit bid price for sidewalk reconstruction shall include full compensation for excavating and/or removal of existing sidewalk and other obstructions, relocating obstructions, replacing PVC drain pipe, re-vegetating adjacent areas disturbed by sidewalk construction, preparing the subgrade; for furnishing and placing all materials including cushion material, all reinforcement, bar supports, joints, expansion joint materials, and for any other materials, manipulations, labor, tools, equipment, finishing, curing and incidentals necessary to complete the work.

The unit bid price for ramps shall include full compensation for preparing the subgrade when not included as a separate item; for furnishing and placing all materials, manipulation, labor, tools, equipment and incidentals necessary to complete the work. All necessary excavation, filling and grading of the slopes adjacent to the completed concrete paver units will be included in the unit price bid for the item of construction in which this item is used, unless included as a separate pay item in the Contract bid form.

The unit bid price for streetscape appurtenances shall include full compensation for the individual item (i.e. bench, chair, bicycle rack, trash receptacle, street light or above grade tree planter), as well as the removal of existing sidewalk, preparation of footings, furnishing and placing all materials, manipulation and finishing, labor, tools, equipment and incidentals necessary to complete the work.

The unit bid price for pedestrian railing shall include full compensation for the complete installation of the specific pedestrian railing including but not limited to preparation of footings or curb, furnishing and placing all materials, manipulation and finishing, labor, tools, equipment and incidentals necessary to complete the work.

Payment will be made under one of the following:

New Sidewalks

Pay Item 432S-4:	New P.C. Concrete Sidewalks, 4 Inch thickness	Per Square Foot.
Pay Item 432S-5:	New P.C. Concrete Sidewalks, 5 Inch thickness	Per Square Foot.
Pay Item 432S-6:	New P.C. Concrete Sidewalks, 6 Inch thickness	Per Square Foot.
Pay Item 432S-7:	New P.C. Concrete Sidewalks, 7 Inch thickness	Per Square Foot.

Sidewalks Reconstruction

Pay Item 432SR-4:	Reconstruct Concrete Sidewalks to 4 Inch thickness, including removal of existing sidewalk	Per Square Foot.
Pay Item 432SR-5:	Reconstruct Concrete Sidewalks to 5 Inch thickness, including removal of existing sidewalk	Per Square Foot.
Pay Item 432SR-6:	Reconstruct Concrete Sidewalks to 6 Inch thickness, including removal of existing sidewalk	Per Square Foot.
Pay Item 432SR-7:	Reconstruct Concrete Sidewalks to 7 Inch thickness, including removal of existing sidewalk	Per Square Foot.

Ramps

Pay Item 432S - RP-1:	P.C. Sidewalk Curb Ramp with Pavers (Type I)	Per Each.
Pay Item 432S-RP-1A:	P.C. Sidewalk Curb Ramp with Pavers (Type IA)	Per Each.
Pay Item 432S-RP-1B:	P.C. Sidewalk Curb Ramp with Pavers (Type IB)	Per Each.

Streetscape Appurtenances

Pay Item 432S-SAC-1	Streetscape Bench (____ inches in length)	Per Each.
Pay Item 432S-SAC-2	Streetscape Chair	Per Each.
Pay Item 432S-SAC-3	Streetscape Bicycle Rack	Per Each.
Pay Item 432S-SAC-4	Streetscape Trash Receptacle	Per Each.
Pay Item 432S-SAC-5	Streetscape Street Light	Per Each.
Pay Item 432S-SAC-7C	Streetscape Tree Well for Concrete Sidewalks	Per Each.
Pay Item 432S-SAC-7D	Streetscape Above Grade Tree Planters with Bench	Per Each.
Pay Item 432S-SAC-7E	Streetscape Above Grade Tree Well with Seat	Per Each.
Pay Item 432S-SAC-7F	Streetscape Tree Well without Grate	Per Each.
Pay Item 432S-SAC-7G	Streetscape Above Grade Galvanized Steel Tree Planters	Per Each

Pedestrian Railing

Pay Item 432S-PRC-1	Pedestrian Railing (Standard 707S-1)	Per LF.
Pay Item 432S-PRC-2	Pedestrian ADA Railing – Option 1 (Standard 707S-2)	Per LF.
Pay Item 432S-PRC-3	Pedestrian ADA Railing – Option 2 (Standard 707S-3)	Per LF.
Pay Item 432S-PRC-4	Pedestrian ADA Railing – Option 3 (Standard 707S-4)	Per LF.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 432S, “P. C. Concrete Sidewalks”

City of Austin Standard Specifications

Designation	Description
Item No. 111S	Excavation
Item No. 201S	Subgrade Preparation
Item No. 403S	Concrete for Structures
Item No. 406S	Reinforcing Steel
Item No. 407S	Fibrous Concrete
Item No. 408S	Expansion Joint Materials
Item No. 409S	Membrane Curing
Item No. 410S	Concrete Structures
Item No. 480S	Concrete Paving Unit
Item No. 485S	Concrete Paving Units for Sidewalk Ramps
Item No. 604S	Seeding for Erosion Control

City of Austin Standard Details

Designation	Description
432S-1	Sidewalk
432S-2A	Detectable Warning-Paver
432S-3	Type I Curb Ramps-Full Intersection
432S-3A	Type I Curb Ramps-T Intersection
432S-3B	Type IA/IB Curb Ramps-Full Intersection
432S-3C	Type IA/IB Curb Ramps-T Intersection
432S-3D	Combined Curb Ramps-Full Intersection
432S-3E	Combined Curb Ramps-T Intersection
432S-3F	Combined Sidewalk Curb Ramp with Pavers
432S-3G	Combined Sidewalk Curb Ramp with Pavers within Limited ROW
432S-3H	Type I Curb Ramps within PC/PT of Curb and Gutter
432S-5	Type I Sidewalk Curb Ramp
432S-5A	Type IA Sidewalk Curb Ramp
432S-7C	Tree Well for New Trees Planted Within Concrete Sidewalk 3.6 M (12') or Greater
432S-7D	Above Grade Tree Planters
432S-7E	Above Grade Tree Well with Bench
432S-7F	Tree Well Without Grate
432S-7G	Above Grade Galvanized Steel Tree Planters
432S-8B	Trash Receptacle Installation in Concrete Sidewalk
432A-8C	Furnishing Location in 12' (3.6 M) or greater Trash Receptacle Siting
432S-9B	Bench/Chair Installation in Sidewalks
432S-9C	Furnishing Location in 12' (3.6 M) or greater Sidewalks-Bench Siting
432S-9D	Furnishing Location in Greater than 12' (3.6 M) or Less than 18' (5.4 M) Sidewalks-Bench Siting
707S-1	Pedestrian Railing
707S-2	Pedestrian ADA Railing – Option 1
707S-3	Pedestrian ADA Railing – Option 2
707S-4	Pedestrian ADA Railing – Option 3
710S-4	Bicycle Rack Installation in Concrete Sidewalks (Alternate 1)
710S-5	Bicycle Rack Installation in Concrete Sidewalks (Alternate 2)

710S-6A	Furnishing Location in 12' (3.6 M) or greater Sidewalks-Bicycle Rack Siting
710S-6B	Furnishing Location in Greater than 12' (3.6 M) or Less than 18' (5.4 M) Sidewalks-Bicycle Rack Siting

American Disabilities Act, Federal Register; Volume 56, No. 144; July 26, 1991
ADA Accessibility Guidelines For Building And Facilities

Designation	Description
Section 4.29	Detectable Warnings on Walking Surfaces
Section A4.29.2	Detectable Warnings on Walking Surfaces

Architectural Barriers; Texas Civil Statutes, Article 9102; June 14, 1995
Texas Accessibility Standards (TAS)

Designation	Description
Section 4.29	Detectable Warnings on Walking Surfaces
Section A4.29.2	Detectable Warnings on Walking Surfaces

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Contract Documents

Designation	Description
00700	General Conditions
01500	Temporary Facilities
01550	Public Safety and Convenience

City of Austin Utilities Criteria Manual

Designation	Description
Section 5.2.3	Utility Adjustments For Roadway Construction Projects

City of Austin Standard Specifications

Designation	Description
Item No. 102S	Clearing and Grubbing
Item No. 104S	Removing Portland Cement Concrete
Item No. 110S	Street Excavation
Item No. 132S	Embankment
Item No. 203S	Lime Treatment for Materials In Place
Item No. 204S	Portland Cement Treatment for Materials In Place
Item No. 230S	Rolling (Flat Wheel)
Item No. 232S	Rolling (Pneumatic Tire)
Item No. 234S	Rolling (Tamping)
Item No. 236S	Rolling (Proof)
Item No. 360S	Concrete Pavement
Item No. 402S	Controlled Low Strength Material
Item No. 404S	Pneumatically Placed Concrete
Item No. 405S	Concrete Admixtures
Item No. 411S	Surface Finishes for Concrete

433S.1 Description

This item shall govern construction of Portland Cement (p.c.) concrete driveways, as herein specified, on an approved subgrade, in conformity with the lines, grades and cross section indicated on the Drawings, identified in Standard Detail Series 433S, or as established by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

433S.2 Submittals

The submittal requirements of this specification item include:

A. Class A and/or Item 360S p.c. concrete mix design,

B. Type of Installation (i.e. Type I, Flared Type I, Type II, etc.) and construction details (i.e. cushion layer, base, reinforcing steel, joints, curing membrane),

C. Identification of the type, source, mixture, Pure Live Seed (PLS) and rate of application of the seeding.

433S.3 Materials

A. Concrete

The Portland Cement Concrete for a Type I driveway (Standards 433S-1 and 433S-1A shall conform to Class A, Section 403S.7 (Table 4) of Standard Specification Item No. 403S, "Concrete for Structures." The Portland Cement Concrete for a Type II driveway (Standard 433S-2) shall conform to a normal concrete mix design for concrete pavement, Section 360S.4(2) of Standard Specification Item No. 360S, "Concrete Pavement".

B. Reinforcing Steel

Reinforcing steel and welded wire fabric shall conform to Standard Specification Item No. 406S, "Reinforcing Steel".

C. Expansion Joint Materials

Expansion joint materials shall conform to Standard Specification Item No. 408S, "Expansion Joint Materials".

D. Membrane Curing Compound

Membrane curing compound shall conform to Standard Specification Item No. 409S, "Membrane Curing".

E. Cushion Layer

The Cushion layer shall consist of crusher screenings, gravel or coarse sand.

433S.4 Construction Methods

All forms and forming, placement of reinforcement, placement of concrete, form removal, finishing and curing shall conform to Standard Specification Item No. 410S, "Concrete Structures".

A. Subgrade Preparation

The subgrade shall be excavated, prepared and shaped to the lines, grades and cross sections indicated on the Drawings or as directed by the Engineer or designated representative. The subgrade shall be thoroughly compacted in accordance with Standard Specification Item No. 201S, "Subgrade Preparation". A 2-inch (50-mm) minimum compacted thickness cushion shall be spread, wetted thoroughly, tamped and leveled. The cushion shall be moist at the time the p.c. concrete is placed.

If the subgrade is undercut or natural ground is located below the top of subgrade, the necessary backfill material shall conform with Standard Specification Item 130S, "Borrow" and shall be compacted with a mechanical tamper. Hand tamping will not be permitted.

Where the subgrade material consists of gravel or includes 70 percent of rock, the 2-inch (50-mm) cushion layer may not be required. The Engineer or designated representative will determine if the subgrade meets the above requirements.

B. Forms

Forms shall be of metal, well-seasoned wood or other approved material of a section satisfactory to the Engineer or designated representative. Wood forms shall not be less than 2 inches (50 mm) nominal thickness for straight runs and 1-inch (25-mm) nominal thickness for curved runs. Forms shall be a section satisfactory to the Engineer or designated representative and clean, straight, free from warp and of a depth equal to the thickness of the finished work.

All forms shall be securely staked to line and grade and maintained in a true position during the placement of p.c. concrete.

C. Joints

Joints shall be of the type and spacing shown on the Drawings. Expansion joint material, 3/4 inch (19 mm) thick, shall be provided where the new construction abuts the existing sidewalks or driveways or as directed by the Engineer or designated representative. The expansion joint material shall be placed vertically and shall extend the full depth of the p.c. concrete. Similar expansion material shall be placed around all obstructions protruding through the driveway. Weakened plane joints shall be located on 10-foot (3-meter) centers or as directed by the Engineer or designated representative. Normal dimensions of the weakened plane groove joints shall be 1/4-inch (6.25-mm) wide and 3/4 inch (19 mm) deep.

D. Reinforcement

Reinforcement for Type I driveways shall consist of 1 layer of 6 x 6 by W 1.4 x W 1.4 (150 x 150 by MW9 x MW9) wire fabric or No. 3 (10 M) bars placed not more than 18 inches (450 mm) on center, both directions. Reinforcement for Type II driveways shall consist of 1 layer of layer of No. 4 (13M) bars placed no more than 18 inches (450 mm) on center, both directions.

All reinforcements shall be accurately placed equidistant from the top and bottom of the p.c. concrete slab and held firmly in place by means of bar supports of adequate strength and number that will prevent displacement and keep the steel at its proper position. In no instance shall the steel be placed directly on the subgrade or sand cushion layer.

Prior to placement of the concrete, the reinforcement installation shall be inspected by the Engineer or designated representative to insure conformance with the drawings, specifications and this item. In addition, care shall be exercised to keep all steel in its proper position during the placement of p.c. concrete. If during placement of the concrete, the reinforcement is observed to loose bar support, float upward or move in any direction, the placement shall be stopped until corrective action is taken.

Splices in wire fabric shall overlap sufficiently to allow two pairs of transverse wires to be tied together and no splice of less than 6 inches (150 mm) will be permitted. Splices in the No. 3 (10 M) and No. 4 (13M) bars shall have a minimum lap of 12 inches (300 mm).

E. P.C. Concrete Placement and Finishing

The p.c. concrete shall be placed in the forms and spaced, tamped and thoroughly compacted until it entirely covers the surface and has a monolithic finish. The top surface shall be floated and troweled to a uniform smooth surface, then finished with a broom or wood float to a gritty texture unless otherwise indicated on the Drawings. The outer edges and joints shall be rounded with approved tools to a 1/4-inch (6.3 mm) radius. Care shall be exercised to prevent loss of dummy joints or rounded edges when applying the broom finish.

F. Curing

At the proper time after finishing, the surface shall be protected by a membrane compound curing agent in conformance with Standard Specification Item No. 409S, "Membrane Curing" or by wetting cotton or burlap mats. Either method shall be subject to approval by the Engineer or designated representative.

Traffic shall be barricaded from using the driveway for a minimum of 4 days after initial placing and may be opened to traffic only with approval of the Engineer or designated representative.

G. Incidental Work

All necessary excavation, filling and grading of the slopes, adjacent to the completed pcc driveways, will be considered incidental work pertaining to this item and will not be paid for directly.

The adjacent excavation and grading of the slopes shall be done with topsoil conforming to Standard Specification Item No. 130S, "Borrow". When turf is to be established, the preparation of the seedbed shall conform to Standard Specification Item No. 604S, "Seeding for Erosion Control", in a manner acceptable to the Engineer or designated representative.

433S.5 Measurement

Accepted work performed as prescribed by this item will be measured by the square foot (square meters: 1 square meter equals 10.764 square feet) of surface area of the specific type of p.c. concrete driveway.

433S.6 Payment

The work performed as prescribed by this item will be paid for at the unit bid price per square foot for "Concrete Driveways". The unit bid price shall include full compensation for preparation of the subgrade; furnishing and placing all materials, including cushion layer, all reinforcing steel, bar supports and expansion joint materials; and any other materials, manipulations, labor, tools, equipment and incidentals necessary to complete the work.

Payment will be made under:

Pay Item No. 433S-A:	Type I P.C. Concrete Driveway	Per Square Foot.
Pay Item No. 433S-B:	Flared Type I P.C. Concrete Driveway	Per Square Foot.
Pay Item No. 433S-C:	Type II P.C. Concrete Driveway	Per Square Foot.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 433S, "P.C. Concrete Driveways"

City of Austin Standard Specifications

Designation	Description
Item No. 130S	Borrow
Item No. 201S	Subgrade Preparation
Item No. 360S	Concrete Pavement
Item No. 403S	Concrete for Structures, Section 403S.7
Item No. 403S	Concrete for Structures, Table 4: Classes of Concrete
Item No. 406S	Reinforcing Steel
Item No. 408S	Expansion Joint Materials
Item No. 409S	Membrane Curing
Item No. 410S	Concrete Structures
Item No. 604S	Seeding for Erosion Control

City of Austin Standard Details

Designation	Description
No. 433S-1	Type I Driveway (1 & 2 Family Residential Use Only)
No. 433S-1A	Flared Type I Driveway (1 & 2 Family Residential Use Only)
No. 433S-2	Type II Driveway

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 433S, "P.C. Concrete Driveways"

City of Austin Standard Specifications

Designation	Description
Item No. 430S	P.C. Concrete Curb and Gutter
Item No. 431S	Machine Laid PCC Curb and Gutter
Item No. 432S	Concrete Sidewalks
Item No. 434S	P.C. Concrete Medians and Islands
Item No. 436S	P.C. Concrete Valley Gutters
Item No. 470S	Curb Cuts for Sidewalk Ramps and Driveways
Item No. 606S	Fertilizer

Item No. 503S
Frames, Grates, Rings and Covers

503S.1 Description

This item shall govern furnishing and installation of frames, grates, rings and covers for inlets, manholes and other structures indicated on the Drawings.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

503S.2 Submittals

The submittal requirements of this specification item include manufacturer, model number, description, painting requirements and characteristics of frames, grates, rings, covers, height adjustment insert and nuts and bolts required for completion of the work.

503S.3 Materials

The Contractor shall submit descriptive information and evidence that the materials and equipment the Contractor proposes for incorporation in the Work is the kind and quality that satisfies the specified functions and quality. The City of Austin Water and Wastewater Utility Standard Products Lists (SPLs) form a part of these Specifications. Contractors may, when appropriate, elect to use products from the SPLs; however, submittal to the Engineer or designated representative is still required. If the Contractor elects to use any materials from these lists, each product shall be completely and clearly identified by its corresponding SPL number when making the product submittal.

The purpose of the SPLs is to expedite the review by the Engineer or designated representative and, if necessary, the City of Austin Water and Wastewater Utility Standard Products Committee of Contractor product submittals. The SPL's should not be interpreted as being a pre-approved list of products necessarily meeting the requirements for a given construction Project. Items contained in the SPL cannot be substituted for items that are shown on the Drawings, called for in the specifications, or specified in the Bidding Requirements, Contract Forms and Conditions of Contract, unless approved by the Engineer or designated representative in conjunction with the Water and Wastewater Utility Standard Products Committee. The Standard Product List current at the time of plan approval will govern.

A. Welded Steel

Welded steel grates and frames shall conform to the number; size, dimensions and details indicated on the Drawings and shall be welded into an assembly in accordance with those details. Steel shall conform to the requirements of ASTM A 36/A 36M, "Specification for Structural Steel".

B. Castings

Castings, whether Carbon-Steel, Gray Cast Iron or Ductile Iron shall conform to the shape and dimensions indicated on the Drawings and shall be clean substantial castings, free from sand or blowholes or other defects. Surfaces of the castings shall be free from burnt on sand and shall be reasonably smooth. Runners, risers, fins and other cast on pieces shall be removed from the castings and such areas ground smooth. Bearing surfaces between manhole rings and covers or grates and frames shall be cast or machined with such precision that uniform bearing shall be provided throughout the perimeter area of contact. Pairs of machined castings shall be matchmarked to facilitate subsequent identification at installation with the exception of water and wastewater manhole and valve castings. These manhole and valve castings shall be fabricated with such draft, tolerances, bolt hole spacing, etc., that all rings and covers of a particular type or class are interchangeable and match-marking will not be required.

Steel castings shall conform to ASTM A 27/27M, “Specifications for Steel Castings, Carbon, for General Application”. Grade 70-36 (480-250) shall be furnished unless otherwise specified on the Drawings.

Cast iron castings shall conform to ASTM A 48, “Specification for Gray Iron Castings”, Class 30.

Ductile Iron castings shall conform to ASTM A 536, “Specification for Ductile Iron Castings”. Grade 60-40-18 (415-275-125) shall be used unless otherwise indicated on the Drawings.

C. Manhole Cover Riser Rings

Height-adjustment inserts for wastewater manhole rings, which are used for raising standard manhole covers, shall be those models listed in Water and Wastewater Standard Products List item QPL WW-330.

D. Nuts and Bolts

Nuts and bolts shall be hex head 5/8” x 2.5” (16 mm x 63.5 mm) #11 National Coarse Thread, Type 316 stainless steel. For bolted manhole covers, a thin film of an approved "Anti-freeze" compound, approved by the Engineer or designated representative, shall be applied to all bolts.

E. Mortar

Unless otherwise specified or approved by the Engineer or designated representative, the mortar for bedding castings shall consist of one (1) part Portland cement and three (3) parts sand and sufficient water to provide the desired consistency. The gradation of the fine aggregate shall meet the requirements for Grade No. 1, Item No. 403, "Concrete for Structures".

503S.4 Construction Methods

Frames, grates, rings and covers shall be constructed of the specified materials in accordance with the details indicated on the Drawings or in the City of Austin Standard

Details. The Frames, grates, rings and covers shall be placed carefully to the lines or grades indicated on the Drawings or as directed by the Engineer or designated representative.

All welding shall conform to the requirements of the ANSI/AWS Structural Welding Code D1.1. Welded frames, grates, rings and covers shall be given 1 coat of a commercial grade red lead oil paint and 2 coats of commercial grade aluminum paint. All coats shall be a minimum of 1.5 mils (0.4 mm), dry.

Painting of gray iron castings will not be required, except when used in conjunction with structural steel shapes.

503S.5 Measurement and Payment

Frames, grates, rings and covers will not be measured and payment for furnishing all materials, tools, equipment, labor and incidentals to complete the Work will be included in the Bid Items which constitute the complete structures.

End

SPECIFIED Cross Reference Materials
Standard Specification Item Number 503S, "Frames, Grates, Rings and Covers"

City of Austin Standard Specifications

Designation	Description
Item No. 403S	Concrete for Structures

City of Austin Water and Wastewater Standard Products List

Designation	Description
QPL WW-330	Manhole Cover Riser Rings for raising City of Austin Standard Manhole Covers

American Society for Testing Materials (ASTM)

Designation	Description
A36/A36M	Specification for Structural Steel
A27/A27M	Specification for Steel Castings, Carbon, for General Application
A48	Specification for Gray Iron Castings
A536	Specification for Ductile Iron Castings

ANSI/AWS

Designation	Description
Code D 1.1	Structural Welding Code

RELATED Cross Reference Materials
Standard Specification Item Number 503S, "Frames, Grates, Rings and Covers"

City of Austin Standard Specifications

Designation	Description
Item No. 504S	Adjusting Structures
Item No. 510	Pipe

City of Austin Standard Details

Designation	Description
No. 503S-1	457mm (18") Cover and Frame
No. 503S-2S	Storm Sewer Manhole Ring and 610 mm (24") Cover
No. 503S-2W	Sanitary Sewer Manhole Ring and 610 mm (24") Cover
No. 503S-3S	Bolted Storm Sewer Manhole Ring and 610 mm (24") Cover
No. 503S-3W	Bolted Sanitary Sewer Manhole Ring and 610 mm (24") Cover
No. 503S-4S	Storm Sewer Manhole Ring and 813 mm (32") Cover
No. 503S-4W	Sanitary Sewer Manhole Ring and 813 mm (32") Cover
No. 503S-5S	Bolted Storm Sewer Manhole Ring and 813 mm (32") Cover
No. 503S-5W	Watertight Manhole Ring and 813 mm (32") Cover
No. 506S-2	Major Manhole Adjustment
No. 506S-11	Storm Sewer Manhole Details

TxDOT Specifications

Designation	Description
Item 421	Portland Cement Concrete

Item No. 506
Manholes

506.1 Description

This item governs construction of pre-cast and cast-in-place wastewater manholes, storm water manholes, storm water junction boxes and cast-in-place wastewater junction boxes, complete in place, including excavation, installation, backfilling and surface restoration; required items including rings, covers, coatings, and appurtenances; and incidental work such as pumping and drainage necessary to complete the work. Contractor-performed acceptance testing is required for wastewater manholes.

506.2 Qualifications

Applicators of coatings to the interior surfaces of wastewater manholes, as specified in 506S.4.R and 506S.5.J, shall be listed on Standard Products List WW-511.

506.3 Project Submittals

A. Products and Materials

The Contractor shall submit descriptive information and evidence that the materials the Contractor proposes for incorporation in the Work are of the kind and quality that satisfy the requirements in the Contract Documents. The City of Austin Water Utility Standard Products Lists are considered a part of the Specifications for the Work. The Contractor shall use products from the SPLs for all water and wastewater construction unless alternative products are shown on the Drawings; called for in the specifications; or specified in the Bidding Requirements, Contract Forms and Conditions of the Contract.

The products included in the Standard Products Lists current at the time of plan approval shall govern; unless a specific product or products on the lists have subsequently been removed from those SPLs because of quality or performance issues. Products and materials that are not covered by SPLs shall meet the requirements in the contract documents.

Submittals for the products and materials covered by this specification shall include manufacturer catalog sheets, technical data sheets, shop drawings, product or material test results, requirements listed below, and any other information needed to adequately describe the product or material. For products covered by SPLs, the submittal shall include a copy of the applicable SPL with the proposed product identified. An SPL by itself is not considered an adequate submittal.

The submittal requirements of this specification item include:

1. For pre-cast manholes and junction boxes: shop drawings for each structure showing, at a minimum, the Project and Contractor's name: manufacturer's name and plant location; applicable specifications; list of materials (such as adjusting rings, boots, gaskets, and pre-cast sections) by type and quantity; elevation view showing diameter or size, ring and cover size and elevation, ring type (bolted or unbolted, flared top or flared bottom) wall thickness,

elevations of transitions from large diameter sections to smaller diameter sections, base width and thickness, total depth, size of openings, reinforcement, and length of each pre-cast section; structure identification number and station location; pipe line identification; pipe material and size; pipe flowline elevations; plan view showing azimuthal orientation (based on 360 degrees clockwise) of the pipes relative to the outflow pipe; technical data sheets covering pipe-to-manhole or pipe-to-junction box connectors, and gaskets

2. For cast-in-place manholes and junction boxes: formwork drawings sealed by a registered Professional Engineer licensed in the State of Texas with documented experience in formwork design for wall pours that exceed 4 feet in height and slabs that are not ground supported

3. For hydraulic cement concrete; mix components and proportions, material sources, materials test results

4. For mortar: mix components and proportions, material sources, materials test results

5. For non-shrink grout: technical data sheet indicating ASTM type and containing instructions on surface preparation, mixing, placing, and curing procedures

6. For wastewater manhole coatings and linings: technical data sheets that include instructions on surface preparation, mixing, placing, and curing procedures

B. Acceptance Test Records

Submittal of acceptance test records is required for wastewater manholes and shall include as a minimum the following items:

Name of the manhole manufacturer

Interior surface coating type and application method

Model and manufacturer of vacuum tester

Date tested/date re-tested

Indication of whether test passed or failed and statement of corrective action taken if test failed

Test Method Used

Location/station of manhole

Type of base: Precast/cast-in-place

Type of repairs made to the joints

The test records shall also be included as part of the Project records turned in with the acceptance package.

506.4 Materials

A. Concrete

All cast-in-place concrete shall conform to City of Austin Standard Specification Item No. 403S, "Concrete for Structures." Cast in place concrete shall be Class A or as specified on the Drawings. Concrete used in precast concrete manhole base sections, riser sections and appurtenances shall conform to the requirements of Texas Department of Transportation Item 421, Hydraulic Cement Concrete. Concrete for backfill of over-excavated areas shall be City of Austin Class A, or Class J (City of Austin Standard Specification Item 403S, Concrete For Structures) or Controlled Low Strength Material (City of Austin Standard Specification Item 402S) as indicated on the Drawings.

B. Mortar

Mortar shall be composed of one part Portland cement, one part masonry cement (or 1/4 part hydrated lime), and sand equal to 2-1/2 to 3 times the sum of the volumes of the cements and lime used. The sand shall meet the requirements for "Fine Aggregate" as given in Standard Specification Item No. 403S "Concrete For Structures." Mortar shall not be used for any purpose on the inside of wastewater manholes.

C. Grout

Grout shall be the non-shrink type conforming to ASTM C 1107, Packaged, Dry, Hydraulic Cement Grout (Nonshrink), Grade C. Grout shall be used as packaged, with the mixed ingredients requiring only the addition of water.

D. Reinforcement

The reinforcing steel shall conform to the requirements of Standard Specification Item No. 406S, "Reinforcing Steel." Secondary, non-structural steel in cast-in-place stormwater manholes may be replaced by collated fibrillated polypropylene fibers, if approved by the Engineer or designated representative.

E. Brick

The brick for ring adjustment courses and for stormwater manholes shall be of first quality, sound, hard burned, perfectly shaped brick conforming to the requirements of ASTM C 62, Grade SW, or concrete brick meeting the requirements of ASTM C 55, Grade N-1.

F. Rings and Covers

Rings and covers shall conform to the requirements of City of Austin Standard Specification Item No. 503S, "Frames, Grates, Rings and Covers."

1. Replacement Rings and Covers, 24 in Diameter Lids

   This ring and cover shall be used for the replacement of broken rings and covers, minor manhole adjustment, or as otherwise directed by the Engineer or designated representative.

2. Rings and Covers, 32 in. Diameter Lids

This ring and cover shall be used for all new manhole construction, except as otherwise directed by the Engineer or designated representative.

G. Bulkheads

Bulkheads shall meet the requirements of City of Austin Standard Specification Item No. 507S "Bulkheads."

H. Precast Base Sections, Riser Sections, Flat-top Slabs and Cones

Precast concrete base sections, riser sections, flat-top slabs, and cones shall conform to the requirements of ASTM C 478. The width of the invert shall be specifically sized for the connecting pipes. Inverts shall be "U" shaped channels. The channel depth at the point where a pipe connects to the manhole wall, for pipes 24 inches in diameter and smaller, shall be a minimum of three fourths of the diameter of the pipe, with the top of the channel being a smooth transition between the inlet and outlet pipe connection points. For manholes connecting to pipes larger than 24 inches in diameter, the channel depth at the point where a pipe connects to the manhole wall shall be at least equal to the full pipe diameter. Changes in flow direction in the inverts of manholes shall be made by constructing smooth, long-radius sweeps to minimize splashing, turbulence, and eddies. The manhole invert grade shall 1) be a continuation of the inlet and outlet pipe grades carried through to the centerline of the manhole, or 2) have a minimum slope of 2.5 percent between the inlet and outlet pipe inverts, or 3) have a minimum difference of 0.10 feet between the inlet and outlet pipe inverts, whichever provides the maximum difference in invert elevation between the inlet and outlet pipes. In all cases, the bottom(s) of the channel(s) shall provide a smooth transition between the inlet and outlet pipes. Where wastewater lines enter a manhole above the flowline of the outlet, the invert shall be filleted to prevent splashing and solids deposition.

Joints for wastewater base sections, riser sections, and cones shall conform to the requirements of ASTM C 443. Additionally, joint dimensions for 48-inch inside diameter wastewater manhole sections and cones shall comply with City of Austin Standard No. 506S-13, "Wedge Seal Joint Detail, Precast Manhole Section." Joint dimensions for wastewater manhole sections and cones larger than 48-inch inside diameter shall comply with City of Austin Standard No. 506S-12, " O-Ring Joint Detail Precast Manhole Section" or City of Austin Standard No. 506S-13, "Wedge Seal Joint Detail, Precast Manhole Section". Precast bases for 48 inch inside diameter manholes shall have preformed inverts. Inserts acceptable to the Engineer or designated representative shall be embedded in the concrete wall of the manhole sections to facilitate handling; however, through-wall holes for lifting will not be permitted.

I. Precast Junction Boxes

Precast junction boxes shall be allowed only where indicated on the Drawings or acceptable to the Engineer or designated representative.

J. Pipe-to-Manhole and Pipe-to-Junction-Box Connectors

Resilient connectors, ring waterstops, and seals at connections of wastewater pipes to pre-cast and cast-in-place manholes and junction boxes shall be watertight, flexible, resilient and non-corrosive, conforming to ASTM C 923.

Metallic mechanical devices for securing the connectors, ring waterstops, and seals in place shall be Type 304 stainless steel.

K. Precast Flat-Slab Transition/Junction Box Lids

Precast slab transitions and lids shall be designed to safely resist pressures resulting from loads which might result from any combination of forces imposed by an HS-20 loading as defined by the American Association of State Highway and Transportation Officials (AASHTO). The joints of precast slab transitions and of lids for wastewater applications shall conform to the requirements of ASTM C443.

L. Precast-Prefabricated Tee Manholes

Tee manholes shall be allowed only where indicated on the Drawings or as directed by the Engineer or designated representative. The main pipe section shall conform to the requirements of City of Austin Standard Specification Item No. 510, "Pipe." The vertical manhole portion (tee) above the main pipe shall conform to the requirements of the precast components.

The manhole tee shall have a minimum inside diameter of 48 inches and shall rise vertically centered or tangent to the main pipe, as indicated on the Drawings or as directed by the Engineer or designated representative. An access hole less than 48-inches in diameter shall be cut into the main pipe to allow a ledge for support of access ladders. Unless otherwise specified on the Drawings, the main pipe portion of the tee manhole shall be included in the unit price bid for the unit tee manhole price.

M. Precast Grade Rings

Rings shall be reinforced Class A concrete

1. Precast Grade Rings, 24-1/2 inches Inside Diameter

   This adjustment ring shall be used only for adjusting existing manholes with 24 inch diameter lids and for Wastewater Access Device. Inside to outside diameter dimension of ring shall be 6 inches with a thickness of 3 inches to 6 inches.

2. Precast Grade Rings, 35 inches Inside Diameter

   This adjustment ring shall be used for all new manhole construction with 32 inch diameter lids. Inside to outside diameter dimension of ring shall be 6 inches with a thickness of 2 inches to 6 inches.

N. High Density Polyethylene Grade Rings

Plastic grade (adjusting) rings shall be injection molded from high density polyethylene identified according to ASTM D4976. Reprocessable and recyclable ethylene plastic materials are allowed. Manufacturers of HDPE adjusting rings shall be listed on SPL WW-703.

O. Controlled Low Strength Material

Controlled low strength material (CLSM) shall meet Standard Specification Item 402S, Controlled Low Strength Material.

P. Cement Stabilized Sand

Cement stabilized sand for bedding or backfilling shall contain 2 bags of Portland cement per cubic yard. The sand shall meet the requirements for "Fine Aggregate" in Standard Specification Item 403S, Concrete for Structures.

Q. Waterproofing Joint Materials

O-rings and wedge seals for the joints of all wastewater manholes, and for stormwater manholes when indicated on the Drawings, shall conform to the requirements of ASTM C443. Cold applied preformed plastic gaskets for stormwater manholes shall be as specified in City of Austin Standard Specification Item No. 510, “Pipe.” Plastic seals wrapped around manholes at joints, and hydrophillic waterstops installed in joints, shall be listed on SPL WW-146A. PVC waterstops installed in joints and waterproofing compounds applied to the exterior surfaces of manholes and junction boxes shall be as specified in the Contract Documents.

R. Interior Surface Coatings for Wastewater Manholes

Interior surface coatings for wastewater manholes shall be either: as specified on the Drawings, as designated in writing by the Engineer or designated representative, or as included on SPL WW-511, which lists acceptable products, uses and applicators.

S. Structural Lining Systems for Wastewater Manholes

Structural lining systems for wastewater manholes shall be either: as specified on the Drawings, as designated in writing by the Engineer or designated representative, or as included on SPL WW-511A.

506.5 Construction

A. General

A minimum horizontal separation of 12 inches shall be maintained between adjacent pipes inside and outside a manhole or junction box. Pipe ends within the base section or junction box walls shall not be relied upon to support overlying manhole dead and live load weights. All wastewater branch connections to new or existing mains shall be made at manholes, with the branch pipe crown installed at an elevation no lower than the elevation of the effluent pipe crown. Changes in flow direction in the inverts shall be made by constructing smooth, long-radius sweeps to minimize splashing, turbulence, and eddies. Where wastewater lines enter the manhole up to 24 inches above the flowline of the outlet, the invert shall be sloped upward in a U-shaped channel three-fourths of the diameter of the incoming pipe to receive the flow, thus preventing splashing or solids deposition. A drop pipe shall be provided for a wastewater pipe entering a manhole whenever the invert cannot be constructed to prevent splashing and solids deposition. Construction of extensions to existing systems shall require placement of bulkheads at locations indicated or directed by the Engineer or designated representative.

Unless otherwise indicated on the Drawings, stormwater manholes shall have eccentric cones and wastewater manholes shall have concentric cones, except on manholes over large mains where an eccentric cone shall be situated to provide access to an invert ledge. Eccentric cones may be used where conflicts with other

utilities dictate. Flat-slab tops may be used only where clearance problems are encountered or where specified on the Drawings. Cast-in-place wastewater junction boxes shall be allowed only where indicated on the Drawings or where accepted by the Engineer or designated representative.

B. Foundation Support

Manholes shall be founded at the established elevations on uniformly stable subgrade. Unstable subgrade shall be over-excavated a minimum of 12 inches and replaced with a material acceptable to the Engineer or designated representative. Precast base units shall be founded and leveled on a 6 inch thick layer of coarse aggregate bedding. A pipe section with a prefabricated tee manhole and half the length of the adjoining pipe sections on each side shall be founded on a minimum of 6 inch thick layer of unreinforced Class A concrete (City of Austin Standard Specification Item No. 403S, “Concrete For Structures”). The cast-in-place concrete cradle shall be placed against undisturbed trench walls up to the pipe’s springline.

C. Cast-in-Place Concrete

Structural concrete work shall conform to Standard Specification Item No. 410S, Concrete for Structures. Forms shall be used for all slabs that are not ground supported and for all vertical surfaces above the foundation level. Formwork shall be designed according to American Concrete Institute ACI 347, Guide to Formwork for Concrete. Outside forms on vertical surfaces may be omitted where concrete can be cast against the surrounding earthen material that can be trimmed to a smooth vertical face.

D. Manhole Bases

Pre-cast bases shall conform to requirements in 506.4.H.

Cast-in-place bases shall have a minimum thickness of 12 inches at the invert flowline. The widths of all manhole inverts shall be specifically sized for the connecting pipes. Inverts shall be “U” shaped channels. The channel depth at the point where a pipe connects to the manhole wall, for pipes 24 inches in diameter and smaller, shall be a minimum of three-fourths of the pipe diameter, with the top of the channel being a smooth transition between the inlet and outlet pipe connection points. For manholes connecting to pipes greater than 24 inches in diameter, the channel depth at the point where a pipe connects to the manhole wall shall be equal to the full pipe diameter. The manhole invert grade shall

1) be a continuation of the inlet and outlet pipe grades carried through to the centerline of the manhole, or
2) have a minimum slope of 2.5 percent between the inlet and outlet pipe inverts, or
3) have a minimum difference of 0.10 feet between the inlet and outlet pipe inverts,

whichever provides the maximum difference in invert elevation between the inlet and outlet pipes. In all cases, the bottom(s) of the channel(s) shall provide a smooth transition between the inlet and outlet pipes. Changes in flow direction in the inverts of manholes shall be made by constructing smooth, large-radius sweeps to prevent splashing, turbulence, and eddies. The lowermost riser section

may be set in the Portland cement concrete, while still plastic, after which the base shall be cured a minimum of 24 hours prior to proceeding with construction of the manhole up to 12 feet in depth. The base shall be cured an additional 24 hours prior to continuing construction above the 12-foot level.

Wastewater manholes having cast-in-place bases may be constructed over existing wastewater pipes and the top half of the pipe removed to facilitate invert construction, except where the existing pipe is PVC, in which case, the entire pipe shall be removed from inside the manhole. The manhole floor shall rise outwardly from the springline elevation of the pipe, approximately one inch for each 12 inch of run (8 percent slope). The floors of stormwater manholes, also, shall rise outwardly from the springline elevation of the pipe, approximately one inch for each 12 inches of run (8 percent slope).

Wastewater manholes with lines larger than 18 inches shall require pre-cast bases; manholes constructed over in-service mains however, may be built on cast-in-place bases if the flow cannot be interrupted.

E. Pipe Connections to Manholes and Junctions Boxes

Wastewater pipe connections to manholes and junction boxes shall be made using flexible, resilient, and non-corrosive watertight boot connectors or ring waterstops acceptable to the Engineer and conforming to the requirements of ASTM C-923. Any voids in the annular space between the pipe and boot connector or ring waterstop and the inside of the manhole wall shall be filled with non-shrink grout to prevent solids collection.

F. Pipe Connections to Existing Manholes and Junction Boxes

Wastewater pipe connections to existing manholes and junction boxes shall be made by removing the wall section by coring or alternative method approved by the Engineer or designated representative; installing flexible, resilient, and non-corrosive boot connectors or ring waterstops acceptable to the Engineer or designated representative and conforming to the requirements of ASTM C-923; filling any voids in the annular space between the pipe and boot connector or ring waterstop and the inside of the manhole or junction box wall with non-shrink grout; rebuilding the invert to conform to Section 506S.5.D; rehabilitating the interior walls with structural lining material listed on SPL WW-511A, and coating the interior of the manhole with material listed on SPL WW-511.

G. Waterproofing

PVC waterstops, hydrophillic waterstops, joint wrapping, and waterproofing compounds shall be installed as specified. Material wrapped around manholes at joints shall be listed on SPL WW-146A regardless of whether installation of the material is required by the Contract for waterproofing or is volunteered by the Contractor for ensuring acceptance of the manhole joints.

H. Backfilling

Backfilling of manholes shall conform to the density requirements of City of Austin Standard Specification Item No.510, Pipe. Manhole construction in roadways may be staged to facilitate pavement base construction. Manholes constructed to interim elevations to facilitate interim construction shall be covered with steel plates

that conform to the requirements of City of Austin Standard 804S-4, sheets 5, 6 and 7, Steel Plating. Steel plates on wastewater manholes shall be set in mortar to minimize inflow of storm water runoff. Manholes shall be completed to finish elevation prior to placement of the roadway's finish surface except on pavement reconstruction projects, where castings may be adjusted after paving is completed. The excavation for completion of manhole construction shall be backfilled in accordance with City of Austin Standards for Trench Repair.

I. Height Adjustment of Manholes

1. General

All adjustments shall be completed prior to the placement of the final roadway surface except on pavement reconstruction projects, where castings may be adjusted after paving is completed.

Brick shall not be used in making height adjustments to wastewater manholes. Mortar shall not be used for any purpose on the inside of wastewater manholes.

Manhole components to be reused shall be carefully removed and the contact areas shall be cleaned of all mortar, concrete, grease and sealing compounds. Any items broken in the process of removal and cleaning shall be replaced in kind by the Contractor at its expense.

If the adjustment involves lowering the top of a manhole, a sufficient depth of pre-cast concrete rings or brick courses shall be removed to permit reconstruction. Existing mortar shall be cleaned from the top surface remaining in place and from all brick or concrete rings to be reused and the manhole rebuilt to the required elevation. The manhole ring and cover shall then be installed with the top surface conforming to the proposed grade.

If the adjustment involves raising the elevation of the top of the manhole in accordance with Minor Manhole Height Adjustment," the top of brick or concrete ring shall be cleaned and built up vertically to the new elevation, using new or salvaged concrete rings or bricks and the ring and cover installed with the top surface conforming to the proposed grade.

After rings and covers are set to grade, the inside and outside of the precast concrete grade rings shall be wiped with non-shrink grout to form a durable surface and water-tight joints. The grouted surface shall be smooth and even with the manhole cone section. Grout shall not be placed when the atmospheric temperature is at or below 40F. If a sudden drop in temperature below 40F occurs or tempartures below 40F are predicted, the grouted surfaces shall be protected against freezing for at least 24 hours.

2. Minor Manhole Height Adjustment (New and Existing Manholes)

Minor manhole height adjustments shall be performed as indicated on City of Austin Standard 506S-4, "Minor Manhole Height Adjustment", and shall consist of adding precast reinforced concrete rings to adjust new and existing manholes to final grade. Brick shall not be used in making height adjustments to wastewater manholes.

If the adjustment involves raising the elevation of the top of the manhole, the top of brick or concrete ring shall be cleaned and built up vertically to the new elevation, using new or salvaged concrete rings or bricks and the ring and cover installed with the top surface conforming to the proposed grade.

For new manhole construction, the maximum allowable throat or chimney height, including the depth of the ring casting, shall be limited to 21 inches of vertical face on the interior surface. For adjustments of existing manholes that fall within the limits of overlay and street reconstruction projects, the maximum vertical allowable height, including the depth of the ring casting, shall be limited to 27 inches of vertical face on the interior surface. All other existing manholes shall have a maximum allowable throat or chimney height adjustment, including the depth of the ring casting, of 12 inches of vertical face on the interior surface. Any adjustment that will exceed these requirements shall be accomplished as indicated on City of Austin Standard 506S-2, Major Manhole Height Adjustment and as described below. Manholes not located in paved areas shall have bolted covers. Manholes located within paved areas (street right of way only) shall be standard non-bolted unless otherwise noted on the drawings.

3. Major Manhole Height Adjustment (Existing Manholes Only)

Any adjustment that exceeds the requirements of Minor Manhole Adjustments, shall be accomplished as indicated on City of Austin Standard 506S-2, Major Manhole Height Adjustment, and shall consist of any combination of removing the concrete rings, and/or the manhole cone section, and/or the straight riser section of the manhole in order to bring the manhole to final grade. Major manhole adjustments shall apply only to existing manholes. Manholes not located in paved areas shall have bolted covers. Manholes located within paved areas (street right of way only) shall be standard non-bolted unless otherwise noted on the drawings.

J. Interior Coatings of Wastewater Manholes and Junction Boxes

The interior surfaces of all Portland cement concrete wastewater manholes and junction boxes shall be coated with products specified either on the Drawings, designated in writing by the Engineer or representative, or listed on SPL WW-511. Product selection shall conform to usage described in that SPL. Surface preparation shall follow the product manufacturer's recommended procedures contained in technical data sheets unless otherwise specified in the contract documents. The Contractor shall measure the coating thickness according to ASTM D 6132, Nondestructive Measurement of Dry Film Thickness of Applied Organic Coatings Over Concrete Using an Ultrasonic Gage. Thickness measures shall be made at locations designated by the Engineer or designated representative. All thickness measurements shall be witnessed by the Engineer or designated representative.

K. Structural Linings of Existing Wastewater Manholes

The interior surfaces of existing wastewater manholes and junction boxes at locations shown in the Drawings or as designated by the Engineer shall be strengthened by application of structural lining systems either as specified on the Drawings, directed in writing by the Engineer or designated representative, or listed

on SPL WW-511A. Selection of products for coating the interior of existing manholes shall be based on the condition of the manholes. Surface preparation shall follow the product manufacturer's recommended procedures contained in technical data sheets unless otherwise specified in the contract documents.

L. Abandonment of Existing Manholes

Manholes designated on the Drawings for abandonment, shall be removed to a level not less than four feet below grade. Two-foot long sections of the inlet and outlet pipes shall be cut and removed on the outside of the manhole, the ends of the remaining pipe and the pipe sections penetrating the manhole wall shall be securely plugged, and the structure filled with material in accordance with Standard 506S-15 or as directed by the Engineer or designated representative.

506.6 Acceptance Testing of Wastewater Manholes

Manholes shall be tested separately and independently of the wastewater lines.

A. Test by the Vacuum Method

A vacuum test shall be performed by the Contractor prior to backfilling those manholes that fall within the right-of-way that require detouring of vehicular traffic. A second vacuum test will not be required after backfilling and compaction is complete unless there is evidence that the manhole has been damaged or disturbed subsequent to the initial vacuum test.

For manhole installations which do not require detouring of vehicular traffic, the vacuum method is recommended and may be used by the Contractor prior to backfilling the manhole to insure proper installation so that defects may be located and repaired; however, a vacuum test shall be performed after backfilling, and compaction are complete. Testing after backfill and compaction are complete will be the basis for acceptance of the manhole.

1. Equipment

   a) The manhole vacuum tester shall be a device approved for use by the Engineer or designated representative.

   b) Pipe sealing plugs shall have a load resisting capacity equal to or greater than that required for the size of the connected pipe to be sealed.

2. Procedures - applicable to new 48-inch diameter manholes

   a) Manhole section interiors shall be carefully inspected; units found to have through-wall lift holes, or any penetration of the interior surface by inserts provided to facilitate handling, will not be accepted. Coating shall be applied after the testing unless coating is applied before installation or unless it is applied at the factory. All lift holes and exterior joints shall be plugged with an acceptable non-shrink grout. No grout shall be placed in horizontal joints. Tests shall be performed before grouting the invert or around pipe penetrations and before coating the interior surfaces of the manhole or junction box.

b) After cleaning the interior surfaces of the manhole, the Contractor shall place and inflate pneumatic plugs in all of the connecting pipes to isolate the manhole; sealing pressure within the plugs shall be as recommended by the plug manufacturer. Plugs and the ends of pipes connected by flexible boots shall be blocked to prevent their movement during the vacuum test.

c) The vacuum test head shall be placed on the top of the cone section or, inside of the top of the manhole cone section, and the compression seal band inflated to the pressure recommended by its manufacturer. The vacuum pump shall be connected to the outlet port with the valve open. When a vacuum of 10 inches of mercury (-5 psig) has been attained, the valve shall be closed and the time noted. Tampering with the test equipment will not be allowed.

d) The manhole shall have passed the test if the vacuum does not drop below 9 inches of mercury (-4.5 psig) within 3 minutes of the time the valve was closed. The actual vacuum shall be recorded at the end of the 3 minutes during which the valve was closed.

e) When the standard vacuum test cannot be performed because of design or material constraints (examples: T-Type manholes, T-Lock Liners, or other reasons acceptable to the Engineer or designated representative), testing of individual joints shall be performed as directed by the Engineer or designated representative.

B. Test by the Exfiltration Method

At the discretion of the Engineer or designated representative, the Contractor may substitute the Exfiltration Method of testing for the Vacuum test described in Section 506.6. A. above. This method may only be used when ground water is not present. If ground water is present a Vacuum Test shall be used unless otherwise directed by the Engineer or designated representative. All backfilling and compaction shall be completed prior to the commencement of testing.

The procedures for the test shall include the following:

1. Manhole section interiors shall be carefully inspected; units found to have through-wall lift holes, or any penetration of the interior surface by inserts provided to facilitate handling, will not be accepted. Coating shall be applied after the testing unless coating is applied before field assembly, or at the factory. All lift holes and exterior joints shall be plugged with an acceptable non-shrink grout. No grout shall be placed in horizontal joints. Tests shall be performed before grouting the invert or around pipe penetrations and before coating the interior surfaces of the manhole or junction box.

2. After cleaning the interior surface of the manhole, the Contractor shall place and inflate pneumatic plugs in all of the connecting pipes to isolate the manhole; sealing pressure within the plugs shall be as recommended by the plug manufacturer.

3. Concrete manholes shall be filled with water or otherwise thoroughly wetted for a period of 24 hours prior to testing.

4. At the start of the test, the manhole shall be filled to the top with water. The test time shall be 1 hour. The Construction Inspector must be present for observation during the entire time of the test. Permissible loss of water in the 1-hour test time is 0.025 gallons per diameter foot, per foot of manhole depth. For a 4-foot diameter manhole, this quantity converts to a maximum permissible drop in the water level (from the top of the manhole cone) of 0.1 inches per foot of manhole depth or 1.0 inches for a 10-foot deep manhole.

C. Failure to Pass the Test – Records of Tests

If the manhole fails to pass the initial test method as described in (A) Test by the Vacuum Method and, if allowed, (B) Test by the Exfiltration Method, or if visible groundwater leakage into the manhole is observed, the Contractor shall locate the leak, if necessary by disassembly of the manhole. The Contractor shall check the gaskets and replace them if necessary. The Contractor may re-lubricate the joints and re-assemble the manhole, or the Contractor may install an acceptable exterior joint sealing product (see City of Austin Standard Products List Item SPL WW-146A) on all joints and then retest the manhole. If any manhole fails the vacuum and/or exfiltration test twice, the Contractor shall consider replacing that manhole. If the Contractor chooses to attempt to repair that manhole, the manhole must be retested until it passes. In no case shall cold applied preformed plastic gaskets be used for repair. Records of all manhole testing shall be made available to the Engineer or designated representative at the close of each working day, or as otherwise directed by the Engineer or designated representative. Any damaged or visually defective products, or any products out of acceptable tolerance shall be removed from the site.

D. Inspection

The Engineer or designated representative shall make a visual inspection of each manhole after it has passed the testing requirements and is considered to be in its final condition. The inspection shall determine the completeness of the manhole; any defects shall be corrected to the satisfaction of Engineer or designated representative.

506.7 Measurement

A "Junction Box" and "Box Manholes" will be measured by each structure of the indicated size regardless of depth.

A "Standard Pre-cast Manhole with Pre-cast Base", "Standard Pre-cast Manhole with Cast-in-Place (CIP) Base", “Special Manhole", "Drop Manhole with Pre-cast Base", "Drop Manhole with Cast-in-Place (CIP) Base”, "Centered Tee Manhole", or "Tangent Tee Manhole" will be measured by each structure of the indicated size for the first 8 feet of depth.

An "Extra Depth Manhole" will be measured by linear vertical foot of Standard Pre-cast Manhole with Pre-cast Base, Standard Pre-cast Manhole with CIP Base, Drop Manhole with Pre-cast Base, Drop Manhole with CIP Base, Special Manhole, Centered Tee Manhole, or Tangent Tee Manhole of the indicated size in excess of eight feet of depth.

Manhole depth will be measured from the invert flow line to the finished surface elevation.

"Minor Manhole Height Adjustment" and "Major Manhole Height Adjustment" will be measured by each unit for the indicated size. Only existing manholes will be measured for minor or major manhole height adjustment.

"Connection to Existing Manhole or Junction Box" will be measured per each for the indicated type of structure and location.

"Structural Lining" will be measured by the linear vertical foot for the indicated structure.

New manholes constructed to interim elevations to facilitate stage construction shall be measured as one unit regardless of the number of interim elevations constructed. All labor, materials and other expenses necessary for the stage construction shall be included in the unit price bid for the completed unit. Cost of abandonment of existing manholes shall be included in the unit price bid for the completed unit, unless Pay Item No. 506 AB is indicated on the Drawings and identified in Standard Contract Bid Form 00300U.

506.8 Payment

Payment for completed junction boxes and manholes of the type indicated on the Drawings shall be made at the appropriate unit bid price. The unit bid price shall include all labor, equipment, materials, (including but not limited to frames and grates, rings and covers, adjusting rings, cone sections, riser sections, gaskets, drop piping and fittings, bases, pipe-to-manhole connectors, concrete, reinforcing steel, non-shrink grout, mortar, joint wrap where specified, and, for wastewater manholes, interior coatings), time and incidentals necessary to complete the work.

Payment for a "Junction Box" and "Box Manhole" will be made at the unit price bid for the indicated size, complete in place.

Payment for the first 8 feet of a "Standard Pre-cast Manhole with Pre-cast Base", "Standard Pre-cast Manhole with Cast-in-Place (CIP) Base", "Special Manhole", "Drop Manhole with Pre-cast Base", "Drop Manhole with Cast-in-Place (CIP) Base","Centered Tee Manhole", or "Tangent Tee Manhole" will be made at the unit price bid for the indicated type and size, complete in place.

Payment for that portion of a Standard Pre-cast Manhole with Pre-cast Base, Standard Pre-cast Manhole with CIP Base, Drop Manhole with Pre-cast Base, Drop Manhole with CIP Base, Special Manhole, Centered Tee Manhole, or Tangent Tee Manhole in excess of 8 feet in depth will be made at the unit price bid for "Extra Depth Manhole" of the indicated type and size, complete in place.

Payment for "Minor Manhole Height Adjustment" and "Major Manhole Height Adjustment" will be made at the unit bid price, complete in place.

Payment for "Structural Lining" will be made at the unit price per linear vertical foot, which will include surface preparation, environmental adjustments, lining application, and curing, as required.

Payment for "Connection to Existing Manhole or Junction Box" shall be made at the unit price per connection and will include removing the wall section by coring or alternative method approved by the Engineer or designated representative, rehabilitating the interior walls, rebuilding the invert, and preparing and coating the interior surfaces of the structure.

When indicated in the Drawings, abandonment of existing manholes shall be made at the unit price for abandonment.

The intended use of each item shall be designated by a two-letter code (Wastewater = WW; Stormwater = SW) in the spaces provided after the pay item number:

Pay Item No. 506S M__:	Standard Pre-cast Manhole w/Pre-cast Base, ___ Dia.	Per Each.
Pay Item No. 506S M1__:	Standard Pre-Cast Manhole w/CIP Base, ___ Dia.	Per Each.
Pay Item No. 506S S__:	Special Manhole, ___ Dia.	Per Each.
Pay Item No. 506S D__:	Drop Manhole w/Pre-cast Base, ___ Dia.	Per Each.
Pay Item No. 506S D1__:	Drop Manhole w/CIP Base, ___ Dia.	Per Each.
Pay Item No. 506S C__:	Centered Tee Manhole, __ Dia. x ___ Dia.	Per Each.
Pay Item No. 506S T__:	Tangent Tee Manhole, ___ Dia. x ___ Dia.	Per Each.
Pay Item No. 506S J__:	Junction Box, ___ Ft. x ___ Ft.	Per Each.
Pay Item No. 506S B__:	Box Manhole ___ Ft. x ___ Ft.	Per Each.
Pay Item No. 506S 2__:	Major Manhole Height Adjustment, ___ Dia.	Per Each.
Pay Item No. 506S 4__:	Minor Manhole Height Adjustment, ___ Dia.	Per Each.
Pay Item No. 506S AB__:	Abandonment of existing Manholes:	Per Each.
Pay Item No. 506S EDM__	Extra Depth of Manhole, ___ Dia.	Per Linear Vert. Foot.
Pay Item No. 506S SL__:	Structural Lining of _____:	Per Linear Vert. Foot.
Pay Item No. 506S CN__:	Connection to Existing _____:	Per Each.

End

***SPECIFIC* CROSS REFERENCE MATERIALS**
Standard Specification Item No. 506, "Manholes"

City of Austin Standard Specifications

Designation	Description
Item 403S	Concrete For Structures
Item 406S	Reinforcing Steel
Item 402S	Controlled Low Strength Material
Item 410S	Concrete Structures
Item 503S	Frames, Grates, Rings and Covers
Item 504S	Adjusting Structures
Item 507S	Bulkheads
Item 510	Pipe

Texas Department of Transportation Standard Specifications
For Construction and Maintenance of Highways, Streets and Bridges

Designation	Description
Item 421	Hydraulic Cement Concrete

City of Austin Utilities Criteria Manual

Designation	Description
Section 2.8.0	Abandonment of Facilities
Subsection 2.8.2	Manholes

City of Austin Water Utility Documents

Designation	Description
SPL WW-146A	Manhole Seals, Plastic, Watertight
SPL WW-511	Lining System for Wastewater Manholes
SPL WW-511A	Structural Lining System for Wastewater Manholes
SPL WW-703	Adjusting (grade) rings for manhole chimney sections

City of Austin Standard

Designation	Description
506S-2	Major Manhole Height Adjustment
506S-4	Minor Manhole Height Adjustment
506S-15	Abandoned Manhole
506S-12	O-Ring Joint Detail, Precast Manhole Section
506S-13	Wedge Seal Joint Detail, Precast Manhole Section Adjustment
506S-15	Abandoned Manhole
804S-4, 5, 6 and 7 of 9	Steel Plating

City of Austin Standard Contract

Designation	Description
00300U	Bid Form (Unit Prices)

American Society for Testing and Materials (ASTM)

Designation	Description
ASTM C 55	Specification for Concrete Building Brick
ASTM C 62	Specification for Building Brick Solid Masonry Units Made from Clay of Shale
ASTM C478/C478M	Standard Specification for Precast Concrete Manhole
ASTM C443/C443M	Specification for Joints for Circular Concrete Sewer and Culvert Pipe, Using Rubber Gaskets
ASTM C923/C923M	Specification for Resilient Connectors Between Reinforced Concrete Manhole Structures Pipes
ASTM C1107	Specification for Packaged Dry, Hydraulic-Cement Grout (Nonshrink)
ASTM D6132	Specification for Polyethylene Plastics Molding and Extrusion Materials
D4976	Test Method for Nondestructive Measurement of Dry Film Thickness of Applied Organic Coating Over Concrete Using an Ultrasonic Gage

American Concrete Institute

Designation	Description

Item 347	Guide to Formwork for Concrete

***RELATED* CROSS REFERENCE MATERIALS**
Standard Specification Item No. 506, "Manholes"

City of Austin Utilities Criteria Manual

Designation	Description
Section 2	Water and Wastewater Design Criteria

City of Austin Standards

Designation	Description
1100S-1	Casting Adjustments
503S-4S	Storm Sewer Manhole Ring and 32" Cover
503S-4W	Sanitary Sewer Manhole Ring and 32" Cover
503S-5S	Bolted Storm Sewer Manhole Ring and 32" Cover
503S-5W	Watertight Manhole Ring and 32" Cover (W&WW)
506S-1	Manhole Invert Plan
506S-5	Typical Box Manhole 30" and Larger Pipe
506S-7	Precast Manhole with Drop Inlet on Cast in Place Foundation
506S-8	Precast Manhole with Drop Inlet on Precast Base
506S-9	Precast Manhole On Cast-In-Place Foundation
506S-10	Wastewater Manhole on Precast Base
506S-11	Storm Sewer Manhole Details

American Association of State Highway and Transportation Officials (AASHTO)

Designation	Description
M306	Standard Specifications for Drainage Structure Castings

509S.1 Description

This item shall govern the designing, furnishing, installing, maintaining and removing or abandoning of temporary Excavation Safety Systems consisting of trench shields, aluminum hydraulic shoring, timber shoring, trench jacks, tieback or braced sheeting, tieback slurry walls, soil nailing, rock bolting, tieback or braced soldier piles and lagging, and other systems for protecting workers in excavations. This item shall also govern the designing and constructing of sloping and benching systems for protecting workers in excavations.

At a minimum, the Excavation Safety Systems shall conform to United States Department of Labor Rules 29 CFR, Occupational Safety and Health Administration, Part 1926 Safety and Health Regulations for Construction, Subpart P, Excavation (hereinafter called OSHA).

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

509S.2 Definitions

"Competent Person" shall mean one who is capable of identifying existing and predictable hazards in the surroundings, or working conditions which are unsanitary, hazardous, or dangerous to employees, and who has authorization to take prompt corrective measures to eliminate them. The competent person shall be capable of interpreting the manufacturer's data sheets and interpreting and implementing the Excavation Safety System Plan.

An "Excavation" shall mean any cut, cavity, trench, or depression in an earth surface, formed by earth removed by the Contractor. The Contractor shall provide an Excavation Safety System for all excavations except when 1) the excavation is in stable rock as determined by the Texas-licensed Professional Engineer who prepared the Contractor's Excavation Safety System Plan or 2) the excavation is less than 5 feet (1.52 m) in depth and examination of the ground by the Contractor's competent person provides no indication of a potential cave-in.

"Trench" (trench excavation) shall mean any narrow excavation (in relation to its length) made below the surface of the ground. In general, the depth shall be greater than the width, but the width of a trench (measured at the bottom) shall not be greater than 15 feet (4.56 m). Excavation Safety Systems for such trenches shall be defined as "Trench Excavation Safety Protective Systems".

If the Contractor installs or constructs forms or other structures in an excavation such that the dimension measured from the forms or structures to the sides of the excavation is reduced to 15 feet (4.6 m) or less (measured at the bottom of the excavation), those excavations shall also be defined as a Trench if workers must enter it. Excavation Safety Systems for such trenches shall also be defined as "Trench Excavation Safety Protective Systems".

509S.3 Excavation Safety System Submittals

A. The Notice to Proceed with construction may be issued by the Owner before the Contractor has submitted the necessary Excavation Safety Plan(s); however, excavation shall not proceed until the Owner has received the Contractor's Excavation Safety Plan(s) for the Project.

B. Prior to Starting Excavation

Prior to starting any Excavation, the Contractor shall submit to the Owner:

1. A certificate indicating that the Contractor's Competent Person(s) has completed training in an excavation safety program based on OSHA regulations within the past 5 years.
2. Manufacturer's tabulated data or other tabulated data for Excavation Safety Systems consisting of pre-engineered protective systems such as trench shields, aluminum hydraulic shoring, timber shoring, pneumatic shoring, or trench jacks, or benching or sloping or other protective systems that are not designed specifically for the Project.

   Manufacturer's tabulated data shall meet the requirements in OSHA and shall describe the specific equipment to be used on the Project. Tabulated data must bear the seal of the licensed professional engineer who approved the data. Manufacturer's tabulated data shall be an attachment to the Contractor's Excavation Safety System Plan described below.

509S.4 Excavation Safety System Plan

The Contractor shall prepare an Excavation Safety System Plan (hereafter called the "Plan") specifically for the Project. The Contractor shall retain a Texas-licensed Professional Engineer to prepare the Plan. On City-funded projects, the Contractor must follow qualifications-based procedures to procure the required Professional Engineering services, according to Chapter 2254 of the Texas Government Code.

The Contractor shall be responsible for obtaining geotechnical information necessary for design of the Excavation Safety System. If geotechnical information for design of the Project has been acquired by the Owner or designated representative, it shall be provided to the Contractor for information purposes subject to the provisions of City of Austin Standard Contract Section 00220, "Geotechnical Data."

A. The Plan for Excavation Safety Systems consisting of pre-engineered protective systems such as trench shields, aluminum hydraulic shoring, timber shoring, pneumatic shoring, or trench jacks, or benching or sloping or other protective systems that are not designed specifically for the Project shall include:

   1. Detailed Drawings of the Excavation Safety System(s) that will provide worker protection conforming to OSHA. The Drawings shall note the required load carrying capacity, dimensions, materials, and other physical properties or characteristics in sufficient detail to describe thoroughly and completely the Excavation Safety System(s).
   2. Drawings, notes, or tables clearly detailing the specific areas of the Project in which each Excavation Safety System shall be used, the permissible size of the excavation, the length of time that the excavation shall remain open, the means of egress from the excavation, the location of material storage sites in relation to the excavation, the methods for placing/compacting bedding/backfill within the safety of the system, any excavation safety equipment restrictions and subsequent removal of the system.
   3. Recommendations and limitations for using the Excavation Safety Systems.
   4. A Certificate of Insurance of the Excavation Safety System Engineer's Professional Liability Insurance coverage. For City-funded projects, coverage meeting the requirements of Standard Contact Documents Section 00810 shall be provided. For privately funded projects the coverage shall be at least $1,000,000.

B. The Plan for Excavation Safety Systems consisting of tieback or braced sheeting, tieback or braced soldier piles and lagging, slurry walls, soil nailing, rock bolting or other protective systems that are designed specifically for the Project shall include:

1. Detailed Drawings of the Excavation Safety System(s) that will provide worker protection conforming to OSHA. The Drawings shall note the design assumptions, design criteria, factors of safety, applicable codes, dimensions, components, types of materials, and other physical properties or characteristics in sufficient detail to describe thoroughly and completely the Excavation Safety System(s).
2. Detailed technical specifications for the Excavation Safety System addressing the properties of the materials, construction means and methods, quality control and quality assurance testing, performance monitoring, and monitoring of adjacent features, as appropriate.
3. Drawings that clearly detail the specific areas of the Project in which each type of system shall be used and showing the plan and elevation (vertical profile) views.
4. Drawings, notes or tables clearly detailing the length of time that the excavation shall remain open, the means of egress from the excavation, the location of material storage sites in relation to the excavation, the methods for placing/compacting bedding/backfill within the safety of the system, any excavation safety equipment restrictions and subsequent removal or abandonment of the system or parts thereof.
5. Recommendations and limitations for using the Excavation Safety Systems.
6. A Certificate of Insurance of the Excavation Safety System Engineer's Professional Liability Insurance coverage. For City-funded projects, coverage meeting the requirements of Standard Contract Documents Section 00810 shall be provided. For privately funded projects the coverage shall be at least $1,000,000.

509S.5 Excavation Safety System Submittal Review

Review of the Excavation Safety System submittal conducted by the Owner or designated representative shall only relate to conformance with the requirements herein. The Owner's failure to note exceptions to the submittal shall not relieve the Contractor of any or all responsibility or liability for the adequacy of the Excavation Safety System. The Contractor shall remain solely and completely responsible for all Excavation Safety Systems and for the associated means, methods, procedures, and materials.

509S.6 Contractor’s Responsibility

The Contractor shall be responsible for implementing the Excavation Safety System Plan and for confirming that the Excavation Safety System(s) used on the Project meets the requirements of the Plan.

The Contractor’s Competent Person(s) shall be on the Project whenever workers are in an excavation meeting the definitions of a Trench given in 509S.2.

509S.7 Construction Methods

The Contractor's Competent Person(s) shall maintain a copy of appropriate OSHA regulations onsite and shall implement OSHA excavation safety regulations at the work site. The Contractor shall perform all excavation in a safe manner and shall maintain the Excavation Safety Systems to prevent death or injury to personnel or damage to structures, utilities or property in or near excavation.

If evidence of possible cave-ins or earthen slides is apparent or an installed Excavation Safety System is damaged, the Contractor shall immediately cease work in the excavation, evacuate

personnel from any potentially hazardous areas and notify the Owner. Personnel shall not be allowed to re-enter the excavation until necessary repairs or replacements are completed and are inspected and approved by the Contractor's Competent Person(s). Repair and replacement of damaged Excavation Safety System shall be at the Contractor's sole expense.

509S.8 Changed Conditions

When changed conditions require modifications to the Excavation Safety System, the Contractor shall provide to the Owner or designated representative a new design or an alternate Excavation Safety System Plan that is proposed by the Contractor's Excavation Safety System Engineer to address the changed conditions. Copies of the new design or alternate system shall be provided to the Owner or designated representative in accordance with the requirements of section 509S.3, "Excavation Safety System Plan Submittals". A copy of the most current Excavation Safety System Plan shall be maintained on site and made available to inspection and enforcement officials at all times.

Any changes to the Excavation Safety System Plan that are initiated by the Contractor for operational efficiency or as a result of changed conditions, that could be reasonably anticipated, will not be cause for contract time extension or cost adjustment. When changes to the Excavation Safety System Plan are necessitated by severe and uncharacteristic natural conditions or other conditions not reasonably within the control of the Contractor, the Contractor may make a written request to the Owner for a Change Order to address the anticipated work. The Contractor shall notify the Owner in writing within 24 hours of the occurrence of changed conditions that the Contractor anticipates the submittal of a claim for additional compensation. Under 'Changed Conditions" the work deemed immediately necessary by the Contractor to protect the safety of workers and public, equipment or materials may only be accomplished until the Owner or designated representative has a reasonable opportunity to investigate the Contractor's written request for a Change Order and respond in writing to the request.

509S.9 Measurement

Trench Excavation Safety Protective Systems will only be measured and paid for those trenches that workers would reasonably be expected to enter.

Trench Excavation Safety Protective Systems for Trenches excavated to a final width (measured at the bottom of the excavation) not exceeding 15 feet (4.56 m) shall be measured by the linear foot (meter: 1 meter equals 3.281 feet) through manholes, bore pits, receiving pits, and other appurtenances along the centerline of the trench. This method of measurement shall apply to any and all protective systems, including but not limited to tieback or braced sheeting, tieback or braced soldier piles and lagging, slurry walls, soil nails, rock bolts, shoring, trench boxes, and sloping or benching as used to provide a Trench Excavation Safety Protective System in accordance with the Excavation Safety System Plan.

Trench Excavation Safety Protective Systems for Trenches created by installation or construction of forms or other structures in an excavation whose width is greater than 15 feet (4.56 m) such that the dimension measured from the forms or structures to the sides of the excavation is reduced to 15 feet (4.56 m) or less (measured at the bottom of the excavation) shall be measured by the linear foot along the centerline of the Trench. Where forms or structures create multiple Trenches in one excavation, each Trench shall be measured separately. This method of measurement shall apply to any and all protective systems, including but not limited to tieback or braced sheeting, tieback or braced soldier piles and lagging, slurry walls, soil nails, rock bolts, shoring, trench boxes, and sloping or benching as used to provide a Trench Excavation Safety Protective System in accordance with the Excavation Safety System Plan.

509S.10 Payment

Payment for Trench Excavation Safety Protective Systems, measured as prescribed above, will be made at unit bid price per centerline linear foot of Trench. The unit bid price shall include full compensation for designing, furnishing, installing the system; for dewatering, and for maintaining, replacing, repairing and removing the Trench Excavation Safety Protective System and for sloping, special clearing, and excavation necessary to safely implement the Excavation Safety System Plan. No payment will be made for Trench Excavation Safety Protective Systems made necessary by the Contractor's selection of an optional design or sequence of work that creates the need for the Trench Excavation Safety Protective System.

Payment will be made under the following:

Pay Item No. 509S-1: Trench Excavation Safety Protective Systems, (all depths) Per Linear Foot.

END

SPECIFIC Cross Reference Materials
Standard Specification Item No. 509S, "Excavation Safety Systems"

City of Austin Standard Contract Documents

Designation	Description
Section 00020	Invitation for Bids
Section 00220	Geotechnical Data
Section 00650	Certificate of Insurance
Section 00700, Article 6.11	Safety and Protection
Section 810	Supplemental General Conditions

29 CFR, Occupational Safety and Health Administration, Part 1926 Safety and Health Regulations for Construction, Subpart P, Excavation
Texas Health and Safety Code Title 9 Chapter 756 Subchapter C
Texas Government Code Chapter 2254

RELATED Cross Reference Materials
Standard Specification Item No. 509S, "Excavation Safety Systems"

Texas Department of Transportation Standard Specifications
For Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item 104	Removing Concrete
Item 110	Excavation
Item 402	Trench Excavation Protection

City of Austin Standard Specification Items

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 130S	Borrow

Item No. 132S	Embankment
Item No. 201S	Subgrade Preparation
Item No. 402S	Controlled Low Strength Material
Item No. 501S	Jacking or Boring Pipe
Item No. 503S	Frames, Grates, Rings and Covers
Item No. 504S	Adjusting Structures
Item No. 505S	Concrete Encasement and Encasement Pipe
Item No. 506	Manholes
Item No. 507S	Bulkheads
Item No. 510	Pipe
Item No. 511S	Water Valves
Item No. 593S	Concrete Retards
Item No. 594S	Gabions and Revet Mattresses

ITEM NO. 510

PIPE

510.1 - Description

This item governs the furnishing and installing all pipe and/or materials for constructing pipe mains, sewers, laterals, stubs, inlet leads, service connections, culverts, temporary service lines and temporary diversion lines, including all applicable Work such as excavating, bedding, jointing, backfilling materials, tests, concrete trench cap, concrete cap and encasement, etc., prescribed under this item in accordance with the provisions of the Edwards Aquifer Protection Ordinance, when applicable, and City of Austin Utility Criteria Manual, Section 5, "Working in Public Rights-of-Way." The pipe shall be of the sizes, types, class and dimensions indicated or as designated by the E/A and shall include all joints or connections to new or existing mains, pipes, sewers, manholes, inlets, structures, etc., as may be required to complete the Work in accordance with specifications and published standard practices of the trade associations for the material specified and to the lines and grades indicated. This item shall include any pumping, bailing, and drainage when indicated or applicable. Unless otherwise provided, this item shall consist of the removal and disposition of trees, stumps and other obstructions, old structures or portions thereof such as house foundations, old sewers, masonry or concrete walls, the plugging of the ends of abandoned piped utilities cut and left in place and the restoration of existing utilities damaged in the process of excavation, cutting and restoration of pavement and base courses, the furnishing and placing of select bedding, backfilling and cement or lime stabilized backfill, the hauling and disposition of surplus materials, bridging of trenches and other provisions for maintenance of traffic or access as indicated.

510.2 - Materials

The Contractor shall submit descriptive information and evidence that the materials and equipment the Contractor proposes for incorporation into the Work are of the kind and quality that satisfies the specified functions and quality. Austin Water Utility Standard Products Lists (SPL) form a part of the Specifications. Contractors may, when appropriate, elect to use products from the SPL; however, submittal to the E/A is still required. Should the Contractor elect to use any materials from these lists, each product shall be completely and clearly identified by its corresponding SPL number when making the product submittal. This will expedite the review process in which the E/A, and, if necessary, the Austin Water Utility Standard Products Committee, decides whether the products meet the Contract requirements and the specific use foreseen by the E/A in the design of this engineered Project. The purpose of the SPL's is to expedite review, by the E/A and, if necessary, the Austin Water Utility Standard Products Committee, of Contractor product submittals. The SPL's shall not be considered as being a pre-approved list of products necessarily meeting the requirements of the Project. Items contained in the SPL cannot be substituted for items shown on the Drawings, or called for in the specifications, or specified in the Bidding Requirements, Contract Forms and Conditions of Contract, unless approved by the E/A in conjunction with the Austin Water Utility Standard Products Committee. The Standard Product List current at the time of plan approval will govern.

(1) Concrete

Concrete shall conform to Item No. 403S, "Concrete for Structures".

(2) Coarse Aggregate

Coarse aggregate shall conform to Item No. 403S, "Concrete for Structures" or one of the following:

(a) Pipe Bedding Stone

Pipe bedding stone shall be clean gravel, crushed gravel or crushed limestone, free of mud, clay, vegetation or other debris, conforming to ASTM C 33 for stone quality. Size gradation shall conform to ASTM C-33 No. 57 or No. 67 or the following Table:

SIEVE SIZE	% RETAINED BY WEIGHT
1½″	0
1″	0—10
½′	40—85
#4	90—100
#8	95—100

(b) Foundation Rock

Foundation rock shall be well graded coarse aggregate ranging in size from 2 to 8 inches.

(c) Flexible Base

Flexible base shall conform to Item No. 210S, "Flexible Base".

(3) Fine Aggregate

(a) Concrete and Mortar Sand

Fine aggregate shall conform to Item No. 403S, "Concrete for Structures".

(b) Bedding Sand

Sand for use as pipe bedding shall be clean, granular and homogeneous material composed mainly of mineral matter, free of mud, silt, clay lumps or clods, vegetation or debris. The material removed by decantation TxDOT Test Method Tex-406-A, plus the weight of any clay lumps, shall not exceed 4.5 percent by weight.

The resistivity shall not be less than 3000 ohms-cm as determined by TxDOT Test Method Tex-129-E. Size gradation of sand for bedding shall be as follows:

GRADATION TABLE	
SIEVE SIZE	% RETAINED BY WEIGHT
¼″	0
#60	75—100
#100	95—100

(c) Stone Screenings

Stone screenings shall be free of mud, clay, vegetation or other debris, and shall conform to the following Table:

SIEVE SIZE	% PASSING
3/8 ″	100
No. 4	95 to 100
No. 8	80 to 100
No. 16	50 to 85
No. 30	25 to 60
No. 50	10 to 30
No. 100	2 to 10

All screenings shall be the result of a rock crushing operation.

(4) Controlled Low Strength Material

Controlled Low Strength Material (CLSM) shall conform to Item 402S, "Controlled Low Strength Material.

(5) Pea Gravel

Pea gravel bedding shall be clean washed material, hard and insoluble in water, free of mud, clay, silt, vegetation or other debris. Stone quality shall meet ASTM C 33. Size gradation shall be as follows:

SIEVE SIZE	% RETAINED BY WEIGHT
¾″	0
½″	0—25
¼″	90—100

(6) Select Backfill or Borrow

This material shall consist of borrow or suitable material excavated from the trench. It shall be free of stones or rocks over 8 inches and shall have a plasticity index of less than 20. The moisture content at the time of compaction shall be within 2 percent of optimum as determined by TxDOT Test Method Tex-114-E. Sandy loam borrow will not be allowed unless shown on the Drawings or authorized by the E/A.

All suitable materials from excavation operations not required for backfilling the trench may be placed in embankments, if applicable. All unsuitable materials that cannot be made suitable shall be considered surplus excavated materials as described in 510.3(13). The Contractor may, if approved by the engineer, modify unsuitable materials to make them suitable for use. Modification may include drying, removal or crushing of over-size material, and lime or cement treatment.

(7) Cement Stabilized Backfill

When indicated or directed by the E/A, all backfill shall be with cement-stabilized backfill rather than the usual materials. Unless otherwise indicated, cement stabilized backfill material shall consist of a mixture of the dry constituents described for Class J Concrete. The cement and aggregates shall be thoroughly dry mixed with no water added to the mixture except as may be directed by the E/A.

(8) Pipe

General

Fire line leads and fire hydrant leads shall be ductile iron. Domestic water services shall not be supplied from fire service leads, unless the domestic and fire connections are on separately valved branches with an approved backflow prevention device in the fire service branch. All wastewater force mains shall be constructed of ductile iron pipe Pressure Class 250 minimum for pipe greater than 12-inch size and Pressure Class 350 for pipe 12-inch size and smaller. Wastewater pipe shall be in accordance with Austin Water Utility's Standard Products List SPL WW-534 and shall have a corrosion resistant interior lining acceptable to the Owner.

All water pipe within utility easements on private property shall be Ductile Iron Pipe, Pressure Class 350 minimum for pipe 12-inch size and smaller and Pressure Class 250 minimum for pipe greater than 12-inch size wrapped as indicated. For sizes over 24 inches, Concrete Pressure Pipe, steel cylinder type, conforming to the requirements of AWWA C-301 will be acceptable.

There may be no service connections to Concrete Pressure Pipe installed in utility easements on private property. Approved service clamps or saddles shall be used when tapping ductile iron pipe 12 inch size and smaller. All service tubing (¾ inch thru 2 inches) installed in utility easements on private property shall be 150 psi annealed seamless Type K copper tubing with no sweat or soldered joints.

All reclaimed water mains shall be constructed of ductile iron pipe, Pressure Class 350 minimum for pipe 12-inch size and smaller and pressure class 250 for pipe greater than 12-inch size. For mains 12-inch size and smaller, PVC pipe, conforming to the requirements of AWWA C-900, DR 14 shall be acceptable. Reclaimed water pipe shall be manufactured purple, painted purple, or wrapped in purple polyethylene film wrap.

Manufacturers of concrete pipe and pipe larger than 24-inch diameter shall have a quality control program consisting of one or more of the following: 1) a quality management system certified by the American National Standards Institute (ANSI) or National Sanitation Foundation (NSF) to comply with ISO 9001:2000, 2) a quality management system certified by the QCast

Program following the requirements of the ACPA Plant Certification Manual, 3) a quality management system certified by the National Precast Concrete Association 4) a quality control program approved by the OWNER prior to submittal of bids for the PROJECT, or 5) an independent, third party quality control testing and inspection firm for testing and inspecting pipe produced for the PROJECT and approved by the OWNER prior to submittal of bids for the PROJECT. All such quality control programs shall be paid for by the manufacturer. It is the intent of this requirement that the manufacturer will document all appropriate tests and inspections with sampling and inspection criteria, frequency of testing and inspection, date of testing and inspection and date on which every piece was manufactured. Required testing and inspection, including that by an independent, third party, shall be performed full-time during production of pipe for the PROJECT. When requested by the OWNER, the manufacturer will provide copies of test data and results and inspection reports with the shipment of pipe for the PROJECT. Test data and results and inspection reports shall be traceable to specific pipe lots or pieces. Owner approval of the manufacturer's quality control program will expire after three years, at which time the manufacturer must present a current quality control program for approval in order to retain listing on the applicable SPL. Owner approval of the Concrete Pipe manufacturer's quality control program will expire after three years, at which time the manufacturer must present a current quality control program for approval.

The quality of materials, the process of manufacture and the finished pipe shall be subject to inspection and approval by the E/A at the pipe manufacturing plant and at the project site prior to and during installation. Plant inspections shall be conducted at the discretion of the City Representative. Only manufacturers having a quality control program of the type described above will be considered as approved providers of concrete pipe and pipe products as listed in the Standard Products List (SPL).

All water distribution pipe and fittings shall be listed in the Fire Protection Equipment Directory published by the Underwriter's Laboratories, Inc., or shall be Factory Mutual approved for fire service. All water pipe and related products shall be registered by the National Sanitation Foundation as having been certified to meet NSF/ANSI Standard 61.

(a) Reserved

(b) Iron Pipe

Iron pipe shall be ductile iron pipe meeting all requirements of standards as follows:

-For push-on and mechanical joint pipe: AWWA C-151

-For flanged pipe: AWWA C-115

Barrels shall have a nominal thickness required by Table 1 of AWWA C-115, which thickness corresponds to Special Class 53 in sizes through 54 inch, and Class 350 in 60 and 64-inch sizes. Flanges shall be ductile iron (gray iron is not acceptable); they shall be as shown in ANSI/AWWA C115/A21.15 and shall conform to dimensions shown in Table 2 and Figure 1 of AWWA C115. These flanges are the same in all respects as flanges shown in ANSI/AWWA C110/A21.10 for fittings and are standard for all flanges used with pipe, valve, and equipment units in the City of Austin water distribution and wastewater force main systems. Flanges shall be fabricated and attached to the pipe barrels by U.S. fabricators using flanges and pipe barrels of U.S. manufacture. If fabrication is to be by other than the pipe barrel manufacturer, a complete product submittal and approval by the Austin Water Utility will be required. Additionally, such fabricator shall furnish certification that each fabricated joint has been satisfactorily tested hydrostatically at a minimum pressure of 300 psi.

-Linings and Coating:

Interior surfaces of all iron potable or reclaimed water pipe shall be cement-mortar lined and seal coated as required by AWWA C104. Interior surfaces of all iron wastewater line and force main pipe shall be coated with a non-corrosive lining material as indicated on Austin Water Utility's Standard Products List SPL WW-534. Pipe exteriors shall be coated as required by the applicable pipe specification. The type and brand of interior lining shall be clearly marked on the outside of the pipe and fittings. Except as authorized by the E/A, only one type and brand of pipe lining shall be used on a given project.

Except as described above for flanged pipe (Thickness Class 53) and where not otherwise indicated, ductile iron pipe shall be minimum Class 250 as defined by ANSI/AWWA C150/A21.50-current; all ductile iron pipe and flanges shall meet the following minimum physical requirements:

Grade 60-42-10:

-Minimum tensile strength: 60,000 psi (414 mPa).

-Minimum yield strength: 42,000 psi (290 mPa).

-Minimum elongation: 10 percent.

The flanges for AWWA C115 pipe may be also be made from:

Grade 70-50-05:

-Minimum tensile strength: 70,000 psi (483 mPa).

-Minimum yield strength: 50,000 psi (345 mPa).

-Minimum elongation: 5 percent.

1. Ductile Iron Fittings:

   Fittings shall be push-on, flanged or mechanical joint as indicated or approved and shall meet all requirements of standards as follows:

   -Sizes 4 inch through 24 inch: AWWA C-110 or AWWA C-153

   -Sizes larger than 24 inch: AWWA C-110.

   -Lining and Coating:

   Interior surfaces or all iron potable/reclaimed water pipe fittings shall be lined with cement- mortar and seal coated as required by AWWA C104. Interior surfaces of all iron wastewater and force main fittings shall be coated with a non-corrosive lining material acceptable to Owner. Fitting exteriors shall be coated as required by the applicable pipe specification.

2. Joint Materials

   Gaskets for mechanical joints shall conform to ANSI/AWWA A21.11/C-111.

   Joining of slip joint iron pipe shall, without exception, be accomplished with the natural or synthetic rubber gaskets of the manufacturer of that particular pipe being used. A joint lubricant shall be used and applicable recommendations of the manufacturer shall be followed.

   Gaskets for flanged joints shall be continuous full face gaskets, of 1/8 inch minimum thickness of natural or synthetic rubber, cloth-reinforced rubber or neoprene material,

preferably of deformed cross section design and shall meet all applicable requirements of ANSI/AWWA A21.11/C-111 for gaskets. They shall be manufactured by, or satisfy all recommendations of, the manufacturer of the pipe/fittings being used and be fabricated for use with Class 125 ANSI B16.1 flanges.

Tee-head bolts, nuts and washers for mechanical joints shall be high strength, low alloy, corrosion resistant steel stock equal to "COR-TEN A" having UNC Class 2 rolled threads or alloyed ductile iron conforming to ASTM A 536; either shall be fabricated in accordance with ANSI/AWWA A21.11/C-111.

Hex head bolts and nuts shall satisfy the chemical and mechanical requirements of ASTM A449 SAE Grade 5 plain, and shall be fabricated in accordance with ASTM B 18.2 with UNC Class 2 rolled threads.

Either Tee-Head or Hex-Head bolts, nuts and washers as required, shall be protected with bonded fluoro-polymer corrosion resistant coating where specifically required by the E/A.

All threaded fasteners shall be marked with a readily visible symbol cast, forged or stamped on each nut and bolt, which will identify the fastener material and grade. The producer and the supplier shall provide adequate literature to facilitate such identification; painted markings are not acceptable.

3. Polyethylene Film Wrap

All iron pipe, fittings and accessories shall be wrapped with standard 8 mil (minimum) low density polyethylene film or 4-mil (minimum) cross laminated high-density polyethylene conforming to AWWA C-105, with all edges overlapped and taped securely with duct tape to provide a continuous wrap to prevent contact between the piping and the surrounding backfill. Repair all punctures of the polyethylene, including those caused in the placement of bedding aggregates, with duct tape to restore the continuous protective wrap before backfilling. Polyethylene film wrap for reclaimed water pipe shall be purple.

4. Marking

Each pipe joint and fitting shall be marked as required by the applicable AWWA specification. This includes in all cases: Manufacturer's identification, Country where cast, year of casting, and "DUCTILE" or "DI". Barrels of flanged pipe shall show thickness class; others shall show pressure class. The flanges of pipe sections shall be stamped with the fabricators identification; fittings shall show pressure rating, the nominal diameter of openings and the number of degrees for bends. Painted markings are not acceptable.

5. Warning Tape

Warning tape for identifying restrained joint pipe and fittings shall be yellow and shall have black lettering at least 2inches high that reads "Restrained Joint / Junta de Restriccion" at intervals not exceeding 24 inches. The warning tape shall be polypropylene having a minimum thickness of 2 mils, a minimum width of 3 inches, and adhesive backing on the side opposite the lettering.

(c) Concrete

1. General

Pipe shall conform to ASTM C 76 for Circular Pipe. Concrete pipe smaller than 12 inches in diameter shall conform to ASTM C 14, Extra Strength. All pipe shall be machine made or cast by a process which will provide uniform placement of the

concrete in the form and compaction by mechanical devices, which will assure a dense concrete. Concrete shall be mixed in a central batch plant or other approved batching facility from which the quality and uniformity of the concrete can be assured. Transit mixed concrete shall not be acceptable for use in precast pipe. The pipe shall be Class III or the class indicated. Storm sewer pipe shall be of the tongue and groove or 0-ring joint design. Wastewater pipe shall be of the 0-ring joint design; it shall be acceptably lined for corrosion protection.

2. Marking

   Each joint of pipe shall be marked with the pipe class, the date of manufacture, the manufacturer's name or trade mark, diameter of pipe and orientation, if required.

   Pipe marking shall be waterproof and conform to ASTM C 76.

3. Minimum Age for Shipment

   Pipe shall be considered ready for shipment when it conforms to the tests specified in ASTM C 76.

4. Joint Materials

   When installing storm sewers (or storm drains), the Contractor shall have the option of using joints with preformed flexible joint sealants or with rubber gaskets. Preformed flexible joint sealants for storm drain joints shall comply with ASTM C990, and rubber gaskets for storm drain joints shall comply with ASTM C 1619. Mortar shall not be used to seal pre-fabricated joints. Pipe manufacturer shall be responsible for submitting to the Owner a detailed design of the joint upon request. The pipe manufacturer shall be responsible for submitting to the Owner a complete list of joint sizes showing the minimum size of material to be used with each size joint, along with complete instructions on recommended installation procedures. Quality control testing at the manufacturing plant shall be in accordance with Texas Department of Transportation (TxDOT) Departmental Materials Specifications (DMS) 7310, "Reinforced Concrete Pipe And Machine-Made Precast Concrete Box Culvert Fabrication And Plant Qualification". The pipe manufacturer shall be verified as compliant with TxDOT DMS 7310 at time of pipe delivery to the jobsite.

   a. Mortar

      Mortar for joints shall meet the requirements set forth below in "Mortar".

   b. Cold Applied Preformed Plastic Gaskets

      Cold Applied Plastic Gaskets shall be suitable for sealing joints of tongue and groove concrete pipe. The gasket sealing the joint shall be produced from blends of refined hydrocarbon resins and plasticizing compounds reinforced with inert mineral filler and shall contain no solvents, irritating fumes or obnoxious odors. The gasket joint sealer shall not depend on oxidizing, evaporating or chemical action for its adhesive or cohesive strength and shall be supplied in extruded rope form of suitable cross section. The size of the plastic gasket joint sealer shall be in accordance with the manufacturer's recommendations and sufficient to obtain squeeze-out around the joint. The gasket joint sealer shall be protected by a suitable removable wrapper that may be removed longitudinally without disturbing the joint sealer to facilitate application.

      The chemical composition of the gasket joint sealing compound as shipped shall meet the following requirements:

Composition (% by weight)	Test Method	Typical Analysis
Bitumen (petroleum plastic content)	ASTM D 4	50-70
Ash-inert Mineral Water	Tex-526-C	30-50
Volatile Matter (at 325 F)	Tex-506-C	2.0 Maximum

The gasket joint sealing compound when immersed for 30 days at ambient room temperature separately in 5 percent solution of caustic potash, a mixture of 5 percent hydrochloric acid, a 5 percent solution of sulfuric acid and a saturated H2S solution shall show no visible deterioration.

The physical properties of the gasket joint sealing compound as shipped shall meet the following requirements:

Property	Test Method	Typical Analysis	
		Minimum	Maximum
Specific Gravity at 77 F	ASTM D 71	1.20	1.35
Ductility at 77F (cm) Minimum	Tex-503-C	5.0	
Softening point	Tex-505-C	275 F	
Penetration:			
32 F (300 g) 60 sec	Tex-502-C	75	
77 F (150 g) 5 sec	Tex-502-C	50	120
115 F (150 g) 5 sec	Tex-502-C		150
Flashpoint C.O.C. F	Tex-504-C	600 F	
Fire Point C.O.C. F	Tex-504-C	625 F	

When constructing wastewater lines, the Contractor shall use 0-ring gasket joints conforming to ASTM C 443. Just before making a joint, the ends of the pipe shall be clean, dry, free of blisters or foreign matter and shall be wire brushed. For O-ring joints, the gasket and the inside surface of the bell shall be lubricated with a light film of soft vegetable soap compound to facilitate assembly of the joint. The rubber O-ring gasket shall be stretched uniformly in the joint. Wedge seal type ("Forsheda" pre-lubricated) gaskets may be used if joint details submitted are approved; installation of such gaskets shall be in strict accordance with the manufacturer's recommendations, and shall be the sole element depended upon to make the joint flexible and watertight.

In wastewater lines no horizontal or vertical angles in the alignment of pipes shall be permitted unless indicated. The spigot shall be centered in the bell, the pipe pushed uniformly home and brought into true alignment. Bedding material shall be placed and tamped against pipe to secure the joint.

5. Bends

When horizontal or vertical angles in the alignment of storm sewers are indicated, the bend or angle shall be constructed by cutting on a bias one or both pipes as may be required for the alignment indicated. The pipe cut shall be sufficiently long to allow exposing the reinforcement, which shall be bent, welded and incorporated into the pipe bend and reinforced concrete collar to maintain the structural integrity. The collar shall be 6 inches minimum, reinforced with #4 bars on a 1 foot center both directions. Builder's hardware cloth may be used on the outside of the joint to aid in holding cementing materials in place. Plywood, fiberboard or other materials placed on the inside of the pipe as formwork shall be removed as soon as the joint materials have obtained initial set, after which the inside surface of the pipe joint shall be finished smooth and true to the line and grade established. The Contractor may use prefabricated bends meeting the specification requirements in lieu of field fabricated bends. All bends shall be watertight, have a smooth flow line and be equal or greater in strength to the adjacent pipe.

Horizontal or vertical changes in alignment in wastewater lines shall be accomplished by use of manholes. With the E/A's approval, horizontal changes in alignment may be made by the "Joint Deflection" method. Joint deflection is limited by regulations of the Texas Commission on Environmental Quality (TCEQ) to 80 percent of the maximum recommended by the manufacturer; such deflection may not exceed 5 degrees at any joint. Changes in alignment using pipe flexure shall not be allowed.

6. Sulfide and Corrosion Control

All concrete pipe used for wastewater installations shall be protected from sulfide and corrosion damage by using limestone aggregate.

(d) Concrete Steel Cylinder (CSC) Pipe

1. General Requirements

The Contractor shall submit to the E/A for approval along with other required data a tabulated layout schedule with reference to the stationing and grade lines to be used.

The manufacturer shall furnish all fittings and special pieces required for closures, bends, branches, manholes, air valves, blow offs and connections to main line valves and other fittings as indicated.

Each pipe length, fitting and special joint shall have plainly marked on the bell end of the pipe, the head condition for which it is designed. In addition, marking shall be required to indicate the location of each pipe length or special joint in the line and such markings will be referenced to the layout schedules and drawings and submitted for approval.

Concrete steel cylinder fittings shall be tested as required by the applicable AWWA Standards.

2. Design and Inspection

Where not otherwise indicated, concrete steel cylinder pipe shall be Class 150, designed to withstand a vacuum of not less than 28 feet of water. Valve reducers, tees and outlets from a pipe run shall be designed and fabricated so that all stresses are carried by the steel forming the fitting or outlet.

Concrete steel cylinder pipe shall meet one of the following specifications:

AWWA C-301 - Any Size

AWWA C-303 - 24-inch maximum size

All pipe flanges shall conform to AWWA C-207, requirements for standard steel flanges of pressure classes corresponding to the pipe class.

Pipe to be installed in a tunnel or encasement shall be manufactured with 1 inch thick by 24-inch wide skid bands of mechanically impacted mortar in addition to the normal coating.

All concrete steel cylinder fittings shall be constructed of steel plate of adequate strength to withstand both internal pressure and external loading. Rod reinforcing shall not be used to figure the required steel area. The fittings shall have a concrete lining and 1 inch minimum coating of cement mortar, except that centrifugally spun lining need not be reinforced.

Minimum lining thickness shall be ½ inch for 16-inch pipe and ¾ inch for sizes larger than 16-inch pipe. Where it is impractical to place such concrete protection on interior surfaces of small outlets, 2 coats of "Bitumastic Tank Solution" shall be applied.

No fitting shall be made by cutting of standard pipe, except that outlets of less than 75 percent of the pipe diameter may be placed in a standard pipe. Beveled spigots may be placed on standard pipe.

3. Joint Materials

Joints shall be of the rubber gasket type conforming to the applicable standards. The inside and outside recesses between the bell and spigot shall be completely filled with Cement Grout in accordance with the pipe manufacturer's recommendations. Grout materials for jointing such pipe, unless otherwise indicated, shall be as described herein.

(e) Reserved

(f) Polyethylene Tubing

1. General

All polyethylene (PE) tubing shall be high density, high molecular weight plastic tubing meeting ASTM D2737; it shall be pressure rated at 200 psi working pressure and

must bear the National Sanitation Foundation seal of approval for potable water service. Pipe manufacturers shall be listed on SPL WW-65.

2. Materials

Polyethylene plastics shall be Designation PE3408 (Grade P34 with hydrostatic design stress of 800 psi).

3. Markings

Permanent marking on the tubing shall include the following at intervals of not more than 5 feet:

Nominal tubing size.

Type of plastic material, i.e., PE 3408.

Dimension Ratio (SDR) and pressure rating in psi for water at 73.4 F (e.g., SDR-9, 200 psi).

ASTM D 2737 designation.

Manufacturer's name or trademark, code and seal of approval (NSF mark) of the National Sanitation Foundation.

Polyethylene tubing for reclaimed service lines shall be purple.

4. Tube Size

PE tubing shall be standard copper tube size outside diameter, with Standard Dimension Ratio (SDR) of 9.

(g) Copper Tubing

All copper service tubing shall be annealed seamless Type K water tube meeting ASTM B88 and rated at 150 psi working pressure. The tubing shall be homogenous throughout and free from cracks, holes, crimping, foreign inclusions or other defects. It shall be uniform in density and other physical properties. Copper tubing for reclaimed water shall be wrapped in purple polyethylene film wrap. Pipe manufacturers shall be listed on SPL WW-613.

(h) Service Connection Fittings

All fittings used in customer service connection - tapping mains, connecting meters, etc. - must be currently listed on the applicable Water and Wastewater Standard Products List (SPL WW-68), or called for in the City of Austin Standard Details (520 - series).

(i) Brass Goods

All brass valves, couplings, bends, connections, nipples and miscellaneous brass pipe fittings and accessories used in meter connections, service lines, air release piping assemblies, and wherever needed in the water distribution system, shall conform to the City of Austin Standards, Austin Water Utility Standard Products Lists, and AWWA C-800, except as herein modified or supplemented.

Unless otherwise noted, the goods described herein shall be fabricated of standard Red Brass (Waterworks Brass) meeting ASTM B62 or B584, alloy 83600, consisting of 85 percent copper and 5 percent each of tin, lead and zinc.

Exposed threads shall be covered with plastic caps or sheeting to protect the threads.

Brass goods of each type and class shall be compatible with other fittings in common usage for similar purposes. Where not otherwise indicated, all such materials shall meet the following requirements:

Inlet threads of corporation valves shall be AWWA iron pipe (IP) thread (male); outlets of service saddles shall be tapped with AWWA IP thread (female). AWWA IP threads shall conform to ANSI/ASME B1.20.1 as required by AWWA C800 for "General Purpose (Inch) Pipe Threads". For ¾" and 1″ sizes only, corporation valve inlet threads, and the internal threads of saddles may be the AWWA taper thread conforming to AWWA C800 Figure 1 and Table 6. External threads of corporation valve inlet must be compatible with internal threads of the service saddle.

Connections of all new tubing, and of tubing repairs wherever possible, shall be by compression fittings. Compression connections shall be designed to provide a seal and to retain the tubing, without slippage, at a working water pressure of 150 psig.

Flanges shall conform to ANSI B16.1, Class 125, as to dimensions, drillings, etc. Copper tubing, when used, shall be Type K tubing having dimensions and weights given in Table A.1 of AWWA C800.

Brass pipe shall conform to the weights and dimensions for Extra Strong pipe given in Table A.2 of AWWA C800.

All fittings shall be suitable for use at hydrostatic working pressures up to 150 psig (hydrostatic testing of installed systems is at 200 psig).

(j) Reserved

(k) Polyvinyl Chloride Potable/Reclaimed Water Pipe

1. General

All polyvinyl chloride (PVC) potable/reclaimed water pipe shall be of the rigid (UNPLASTICIZED) type and must bear the National Sanitation Foundation seal of approval for potable water pipe. Each joint of pipe shall consist of single continuous extrusion; bells or other components attached by solvent welding are not acceptable. Pipe shall be pressure rated at 200 psi (SDR-14).

Pipe shall have push-on, rubber gasket joints of the bell and spigot type with thickened integral bells with rubber gasket joints. The wall thickness of each pipe bell and joint coupling must be greater than the standard pipe barrel thickness. Clearance must be provided in every gasket joint for both lateral pipe deflection and for linear expansion and contraction. Concrete thrust blocking shall be placed behind bends and tees. Concrete support cradles or blocking shall be required for support of all fire hydrants, valves and AWWA C110 fittings; such support shall be provided for AWWA C153 fittings when required by the E/A.

2. Applicable Specifications

Except as modified or supplemented herein, PVC pipe shall meet the following standards:

AWWA C-900, or SDR 14 for PVC Pressure Pipe, in 4, 6, 8 and 12 inch nominal sizes, having Cast Iron Pipe size outside diameters.

Fittings used with PVC Pressure pipe shall be AWWA C-110 or AWWA C-153 compact ductile iron fittings.

All pipe 4 inches and larger must be approved Underwriter's Laboratories for use in buried water supply and fire protection systems.

3. Material Requirements

All pipe and fittings shall be made from clean, virgin, NSF certified, Class 12454B PVC. Clean reworked materials generated from the manufacturers own production may be used within the current limits of the referenced AWWA C-900.

4. Marking

PVC for reclaimed piping shall be purple or wrapped in purple polyethylene film wrap.

Permanent marking on each joint of pipe shall include the following at intervals of not more than 5 feet:

Nominal pipe size and OD base (e.g., 4 CIPS).

Type of plastic material (e.g., PVC 12454B).

Standard Dimension Ratio and the pressure rating in psi for water at 73 F (e.g., SDR 18, 150 psi).

AWWA designation with which the pipe complies (e.g., AWWA C-900).

Manufacturer's name or code and the National Sanitation Foundation (NSF) mark.

5. Tracer Tape

Inductive Tracer Detection Tape shall be placed directly above the centerline of all non-metallic pipe a minimum of 12 inches below subgrade or, in areas outside the limits of pavement, a minimum of 18 inches below finished grade. The tracer tape shall be encased in a protective, inert, plastic jacket and color coded according to American Public Works Association Uniform Color Code. Except for minimum depth of cover, the tracer tape shall be placed according to manufacturer's recommendations. Manufacturers must be listed on SPL WW-597.

(l) Polyvinyl Chloride (PVC) Pipe (Nonpressure) and Fittings

1. General

PVC sewer and wastewater pipe and fittings 6 through 15 inch diameter shall conform to ASTM D 3034. Pipe shall have minimum cell classification of 12364 or 12454. Fittings shall have cell classification of 12454 or 13343. Pipe stiffness shall be at least 115 psi as determined by ASTM D 2412. Pipe manufacturers shall be on SPL WW-227, and fitting manufacturers shall be on SPL WW-227B.

PVC sewer and wastewater pipe and fittings 18 through 27 inch diameter shall conform to ASTM F 679. Pipe shall have minimum cell classification of 12364 or 12454. Pipe stiffness shall be at least 72 psi as determined by ASTM D 2412. Pipe manufacturers shall be on SPL WW-227A, and fitting manufacturers shall be on SPL WW-227B.

2. Joints

PVC pipe and fitting shall have elastomeric gasket joints conforming to ASTM D 3212. Gaskets shall conform to ASTM F 477.

3. Pipe Markings

Pipe meeting ASTM D 3034 shall have permanent marking on the pipe that includes the following at intervals of not more than 5 feet:

Manufacturer's name and/or trademark and code.

Nominal pipe size.

PVC cell classification per ASTM D 1784.

The legend "SDR-_ _ PVC Sewer Pipe" (SDR 26, 23.5. or less is required)

The designation "ASTM D 3034"

Pipe meeting ASTM F 679 shall have permanent marking that includes the following at intervals of not more than 5 feet:

Manufacturer's name or trademark and code

Nominal pipe size

PVC cell classification per ASTM D 1784

Pipe stiffness designation "PS _ _ PVC Sewer Pipe" (PS of at least 72 is required

The designation "ASTM F 679"

4. Fitting Markings

Fittings meeting ASTM D 3034 shall have permanent marking that includes the following:

Manufacturer's name or trademark

Nominal size

The material designation "PVC"

The designation, "ASTM F 679"

Fittings meeting ASTM F 679 shall have permanent marking that includes the following:

Manufacturer's name or trademark and code

Nominal size

The material designation "PVC"

The designation "ASTM F 679"

5. Tracer Tape

Inductive Tracer Detection Tape shall be placed directly above the centerline of all non-metallic pipe a minimum of 12 inches below subgrade or, in areas outside the limits of pavement, a minimum of 18 inches below finished grade. The tracer tape shall be encased in a protective, inert, plastic jacket and color coded according to American Public Works Association Uniform Color Code. Except for minimum depth of cover, the tracer tape shall be placed according to manufacturer's recommendations. Manufacturers must be listed on SPL WW-597.

(m) Steel Pipe

1. Standard Weight

   ASTM A 53, Schedule 40.

2. Extra Heavy Weight

   Seamless ASTM A 53, Schedule 80.

3. Encasement Pipe

   a. For direct-bury installations, pipe shall conform to ASTM A134 with minimum thickness of 3/8 inch (9.5 mm).

   b. For jacked installations, pipe shall conform to requirements on drawings.

4. Fittings

   Nipples and fittings extra strong Federal Specification WW-N 351 or WW-P 521.

5. Coatings

   Black or galvanized as indicated.

(n) Welded Steel Pipe and Fittings for Water-Pipe

1. General Reference Standards Specification.

   Specifications of the American Water Works Association (AWWA) listed below shall apply to this Section.

   C-200 Steel Water Pipe 6 inches and larger.

   C-205 Cement-Mortar Protective Lining and Coating for Steel Water Pipe, 4 inches and larger, Shop Applied.

   C-206 Field Welding of Steel Water Pipe.

   C-207 Steel Pipe Flanges for Waterworks Services, Sizes 4 inches through 144 inches.

   C-208 Dimensions for Steel Water Pipe Fittings.

   C-602 Cement-Mortar Lining of Water Pipelines, 4 inches and larger in Place.

2. Submittals

   Furnish Shop Drawings, product data, design calculations and test reports as described below:

   a. Certified copies of mill tests confirming the type of materials used in steel plates, mill pipe flanges and bolts and nuts to show compliance with the requirements of the applicable standards.

   b. Complete and dimensional working drawings of all pipe layouts. Shop Drawings shall include the grade of material, size, wall thickness of the pipe and fittings, type and location of fittings and the type and limits of the lining and coating systems of the pipe and fittings.

   c. Product data to show compliance of all couplings, supports, fittings, coatings and related items.

3. Job Conditions

a. The internal design pressure of all steel pipe and fittings shall be as indicated.

b. The interior of all steel pipe for potable water, 4 inches and larger, shall be cement-mortar lined.

4. Manufacturing

a. Description

Pipe shall comply with AWWA C-200.

(1) Circumferential deflection of all pipe in-place shall not exceed 2.0 percent of pipe diameter.

(2) Diameter

Nominal pipe diameter shall be the inside diameter of lining or pipe barrel, unless otherwise designated in Job Conditions.

b. Wall Thickness

(1) Steel pipe wall thickness shall be designed for the internal and external loads specified in this section. The cylinder thickness needed to resist internal pressure shall be based on an allowable stress in the steel equal to ½ the minimum yield stress of the material used.

5. Fittings

a. Welded

Fabricated steel fittings shall be of the same material as pipe and shall comply with AWWA C-208.

6. Flanges

a. Flanges shall comply with the requirements of AWWA C-207, Class D or Class E. The class shall be based on operating conditions and mating flanges of valves and equipment.

b. Gaskets shall be cloth-inserted rubber, 1/8 inch thick.

c. Flanges shall be flat faced with a serrated finish.

7. Pipe Joints

a. Lap Joints for Field Welding

(1) Lap joints for field welding shall conform to AWWA C-206. This item applies only to pipes 72 inches in diameter and larger.

(2) The bell ends shall be formed by pressing on a hydraulic expander or a plug die. After forming, the minimum radius of curvature of the bell end at any point shall not be less than 15 times the thickness of the steel shell. Bell ends shall be formed in a manner to avoid impairment of the physical properties of the steel shell. Joints shall permit a lap at least 1 ½ inches when assembled. The longitudinal or spiral weld on the inside of the bell end and the outside of the spigot end on each section of pipe shall be ground flush with the plate surface. The inside edge of the bell and the outside edge of the spigot shall be scarfed or lightly ground to remove the sharp edges or burrs.

b. Bell and Spigot Joints with O-Ring Gasket

(1) Bell and spigot joints with rubber gasket shall conform to AWWA C-200.

(2) The bell and spigot ends shall be so designed that when the joint is assembled, it will be self-centered and the gasket will be confined to an annular space in such manner that movement of the pipe or hydrostatic pressure cannot displace it. Compression of the gasket when the joint is completed shall not be dependent upon water pressure in the pipe and shall be adequate to ensure a watertight seal when subjected to the specified conditions of service. Bell and spigot ends shall be welded on preformed shapes. The bell and spigot ends shall conform to the reviewed Shop Drawings.

8. Interior and Exterior Protective Surface Coatings

a. Exterior Surface to be mortar coated shall conform to AWWA C-205 for shop application and AWWA C-602 for field application. Pipe materials shall be the product of an organization, which has had not less than 5 years successful experience manufacturing pipe materials, and the design and manufacture of the pipe, including all materials, shall be the product of one company.

b. All surfaces except as noted in c and d below shall receive shop application of mortar lining and coating.

c. Field Welded Joints. After installation, clean, line and coat unlined or uncoated ends adjacent to welded field joints, including the weld proper, as specified for pipe adjacent to the weld. Potable water only shall be used in the preparation of any cement, mortar, or grout lining.

d. Machined Surfaces. Shop coat machined surfaces with a rust preventative compound. After jointing surfaces, remaining exposed surfaces shall be coated per a) and b) above.

(o) Corrugated Metal Pipe

1. General

Pipe shall be corrugated continuous lock or welded seam helically corrugated pipe. Corrugated metal pipe may be galvanized steel, aluminized steel or aluminum conforming to the following:

Galvanized Steel AASHTO M 218

Aluminized Steel AASHTO M 274

Aluminum AASHTO M 197

Where reference is made herein to gage of metal, the reference is to U.S. Standard Gage for uncoated sheets. Tables in AASHTO M 218 and AASHTO M 274 list thickness for coated sheets in inches. The Tables in AASHTO M 197 list thickness in inches for clad aluminum sheets.

Sampling and testing of metal sheets and coils used for corrugated metal pipe shall be in accordance with TXDOT Test Method Tex-708-I.

Damaged spelter coating shall be repaired by thoroughly wire brushing the damaged area and removing all loose, cracked or weld-burned spelter coating. The cleaned area shall be painted with a zinc dust-zinc oxide paint conforming to Federal Specifications TT-P 641b. Damaged pipe shall be rejected and removed from the project.

Damaged aluminized coating shall be repaired in accordance with the manufacturer's recommendations.

The following information shall be clearly marked on each section of pipe:

Thickness and corrugations

Trade Mark of the manufacturer

Specification compliance

2. Fabrication

a. Steel Pipe

Galvanized or aluminized steel pipe shall be full circle or arch pipe conforming to AASHTO M 36, Type I or Type II as indicated.

It may be fabricated with circumferential corrugations; lap joint construction with riveted or spot welded seams or it may be fabricated with helical corrugations with continuous helical lock seam or ultra high frequency resistance butt-welded seams.

b. Aluminum Pipe

Pipe shall conform to AASHTO M 196, Type I, circular pipe or Type II, pipe arch as indicated. It may be fabricated with circumferential corrugations; lap joint construction with riveted or spot welded seams or it may be fabricated with helical corrugations with a continuous helical lock seam.

Portions of aluminum pipe that are to be in contact with high chloride concrete or metal other than aluminum, shall be insulated from these materials by a coating of bituminous material. The coating applied to the pipe or pipe arch to provide insulation between the aluminum and other material shall extend a minimum distance of 1 foot beyond the area of contact.

3. Selection of Gages

The pipe diameter, permissible corrugations and required gauges for circular pipe shall be as indicated on the drawings.

For pipe arch, the span, rise, gage, corrugation size and coating thickness shall be as shown on the drawings. A tolerance of plus or minus 1 inch or 2 percent of equivalent circular diameter, whichever is greater, will be permissible in span and rise, with all dimensions measured from the inside crests of the corrugations.

4. Joint Material

Except as otherwise indicated, coupling bands and other hardware for galvanized or aluminized steel pipe shall conform to AASHTO M 36 for steel pipe and AASHTO M 196 for aluminum pipe. Field joints for each type of corrugated metal pipe shall maintain pipe alignment during construction and prevent infiltration of soil material during the life of the installation.

Coupling bands shall be not more than 3 nominal sheet thickness lighter than the thickness of the pipe to be connected and in no case lighter than 0.052 inch for steel or 0.048 inch for aluminum.

Coupling bands shall be made of the same base metal and coating (metallic or otherwise) as the pipe.

Coupling bands shall lap equally on each of the pipes being connected to form a tightly closed joint after installation.

Pipes furnished with circumferential corrugations shall be field jointed with corrugated locking bands. This includes pipe with helical corrugations, which has reformed circumferential corrugations on the ends. The locking bands shall securely fit into at least one full circumferential corrugation on each of the pipe ends being coupled. The minimum width of the corrugated locking bands shall be as shown below for the corrugation which corresponds to the end circumferential corrugations on the pipes being joined:

10½ inches wide for 2 2/3 inches × ½-inch corrugations.

12 inches wide for 3 inches × 1 inch or 5 inches × 1-inch corrugations.

Helical pipe without circumferential end corrugations will be permitted only when it is necessary to join a new pipe to an existing pipe, which was installed with no circumferential end corrugations. In this event pipe furnished with helical corrugations at the ends shall be field jointed with either helically corrugated bands or with bands with projections or dimples. The minimum width of helically corrugated bands shall conform to the following:

12 inches wide for pipe diameters up to and including 72 inches.

14 inches wide for 1 inch deep helical end corrugations.

Bands with projections shall have circumferential rows of projections with one projection for each corrugation. The width of bands with projections shall be not less than the following:

12 inches wide for pipe diameters up to and including 72 inches.

The bands shall have 2 circumferential rows of projections.

16¼ inches wide for pipe diameters of 78 inches and greater.

The bands shall have 4 circumferential rows of projections.

Unless otherwise indicated, all bolts for coupling bands shall be ½-inch diameter. Bands 12 inches wide or less shall have a minimum of 2 bolts and bands greater than 12 inches wide shall have a minimum of 3 bolts.

Galvanized bolts may be hot dip galvanized conforming to AASHTO M 232, mechanically galvanized to provide the same requirements as AASHTO M 232 or electro-galvanized per ASTM A 164 Type RS.

5. Additional Coatings or Linings

a. Bituminous Coated

Bituminous Coated pipe or pipe arch shall be as indicated both as to base metal and fabrication and in addition shall be coated inside and out with a bituminous coating which shall meet the performance requirements set forth herein. The bituminous coating shall be 99.5 percent soluble in carbon bisulphide. The pipe shall be uniformly coated inside and out to a minimum thickness of 0.05 inch, measured on the crests of the corrugations.

The bituminous coating shall adhere to the metal tenaciously, shall not chip off in handling and shall protect the pipe from deterioration as evidenced by samples prepared from the coating material successfully meeting the Shock Test and Flow Test in accordance with Test Method Tex-522-C.

b. Paved Invert

Where a Paved Invert is indicated, the pipe or pipe arch, in addition to the fully coated treatment described above, shall receive additional bituminous material of the same specification as above, applied to the bottom quarter of the circumference to form a smooth pavement with a minimum thickness of 1/8 inch above the crests of the corrugations.

c. Cement Lined

(1) General

Except as modified herein, pipe shall conform to AASHTO M 36 for lock seam or welded helically corrugated steel pipe. Pipe shall be of full circle and shall be fabricated with two annular corrugations for purposes of joining pipes together with band couplers. Lock seams shall develop the seam strength as required in Table 3 of AASHTO M 36. Concrete lining shall conform to the following:

Composition

Concrete for the lining shall be composed of cement, fine aggregate and water that are well mixed and of such consistency as to produce a dense, homogeneous, non-segregated lining.

Cement

Portland Cement shall conform to AASHTO M 85.

Aggregate

Aggregates shall conform to AASHTO M 6 except that the requirements for gradation and uniformity of gradation shall not apply.

Mixture

The aggregates shall be sized, graded, proportioned and thoroughly mixed with such proportions of cement and water as will produce a homogenous concrete mixture of such quality that the pipe will conform to the design requirements indicated. In no case, however, shall the proportions of Portland Cement, blended cement or Portland Cement plus pozzolanic admixture be less than 470 lb/cu. yd of concrete.

Thickness

The lining shall have a minimum thickness of 1/8 inch above the crest of the corrugations.

Lining Procedures

The lining shall be plant applied by a machine traveling through a stationary pipe. The rate of travel of the machine and the rate of concrete placement shall be mechanically regulated so as to produce a homogenous nonsegregated lining throughout.

Surface Finish

The lining machine shall also mechanically trowel the concrete lining as the unit moves through the pipe.

Certification

Furnish manufacturer's standard certification of compliance upon request of the purchaser.

Joints

Pipe shall be joined together with coupling bands made from steel sheets to an indicated thickness of 0.064 inch (12 ga.). Coupling bands shall be formed with two corrugations that are spaced to provide seating in the third corrugation of each pipe end without creating more than ½ inch ± annular space between pipe ends when joined together.

Bands shall be drawn together by two ½ inch galvanized bolts through the use of a bar and strap suitably welded to the band.

When O-ring gaskets are indicated they shall be placed in the first corrugation of each pipe and shall be compressed by tightening the coupling band. Rubber O-ring gaskets shall conform to Section 5.9, ASTM C 361.

(2) Causes for Rejection

Pipe shall be subject to rejection on account of failure to conform to any of the indications. Individual sections of pipe may be rejected because of any of the following:

Damaged ends, where such damage would prevent making satisfactory joint.

Defects that indicate poor quality of work and could not be easily repaired in the field.

Severe dents or bends in the metal itself.

If concrete lining is broken out, pipe may be rejected or at the discretion of the E/A, repaired in the field in accordance with the manufacturer's recommendation.

Hairline cracks or contraction cracks in the concrete lining are to be expected and does not constitute cause for rejection.

d. Fiber Bonded

Where fiber bonded pipe is indicated, the pipe or pipe arch shall be formed from sheets whose base metal shall be as indicated. In addition, the sheets shall have been coated with a layer of fibers, applied in sheet form by pressing them into a molten metallic bonding. If a paved invert is indicated it shall be in accordance with the procedure outlined above. The test for spelter coating above is waived for fiber bonded pipe.

6. Slotted Drain Storm Sewers

The pipes for the slotted drain and slotted drain outfall shall be helically corrugated, lock seam or welded seam pipe. Materials and fabrication shall be in accordance with the above. The metal thickness shall be a minimum 16 gage.

The chimney assemblies shall be constructed of 3/16 inch welded plate or machine formed 14 gage galvanized steel sheets. The height of the chimney required shall be

as indicated. Metal for the welded plate slot shall meet the requirements of ASTM A 36 and the completed plate slot shall be galvanized after fabrication in accordance with ASTM A 123.

Weld areas and the heat affected zones where the slot is welded to the corrugated pipe shall be thoroughly cleaned and painted with a good quality asphalt base aluminum paint.

7. Mortar

Mortar shall be composed of 1 part Type I Portland Cement and 2 parts clean, sharp mortar sand suitably graded for the purpose and conforming in other respects to the provisions for fine aggregate of Item No. 403, "Concrete for Structures". Hydrated lime or lime putty may be added to the mix, but in no case shall it exceed 10 percent by weight of the total dry mix.

(9) Geotextile Filter Fabric for Pipe Bedding Material

Geotextile filter fabric for pipe bedding material shall be Hanes Geo Components - TerraTex NO4.5 (AOS US Standard Sieve 70) geotextile fabric or approved equal.

510.3 - Construction Methods

(1) General

Prior to commencing this Work, all erosion control and tree protection measures required shall be in place and all utilities located and protected as set forth in "General Conditions". Clearing the site shall conform to Item No. 102S, "Clearing and Grubbing". Maintenance of environmental quality protection shall comply with all requirements of "General Conditions" and Item No. 601S, "Salvaging and Placing Topsoil".

The Contractor shall Work such that a reasonable minimum of disturbance to existing utilities will result. Particular care shall be exercised to avoid the cutting or breakage of all existing utilities. If at any time the Contractor's operations damage the utilities in place, the Contractor shall immediately notify the owner of the utility to make the necessary repairs. When active wastewater sewer lines are cut in the trenching operations, temporary flumes shall be provided across the trench while open and the lines shall be restored when the backfilling has progressed to the original bedding lines of the sewer so cut.

The Contractor shall inform utility owners sufficiently in advance of the Contractor's operations to enable such utility owners to reroute, provide temporary detours or to make other adjustments to utility lines in order that the Contractor may Work with a minimum of delay and expense. The Contractor shall cooperate with all utility owners concerned in effecting any utility adjustments necessary and shall not hold the City liable for any expense due to delay or additional Work because of conflicts arising from existing utilities.

The Contractor shall do all trenching in accordance with the provisions and the directions of the E/A as to the amount of trench left unfilled at any time. All excavation and backfilling shall be accomplished as indicated and in compliance with State Statutes.

Where excavation for a pipe line is required in an existing City street, a street cut permit is required and control of traffic shall be as indicated in accordance with the Texas Manual on Uniform Traffic Control Devices.

Wherever existing utility branch connections, sewers, drains, conduits, ducts, pipes or structures present obstructions to the grade and alignment of the pipe, they shall be permanently supported, removed, relocated or reconstructed by the Contractor through cooperation with the owner of the utility, structure or obstruction involved. In those instances

where their relocation or reconstruction is impractical, a deviation from line and grade will be ordered by the E/A and the change shall be made in the manner directed.

Adequate temporary support, protection and maintenance of all underground and surface utility structures, drains, sewers and other obstructions encountered in the progress of the Work shall be furnished by, and at the expense of, the Contractor and as approved by the E/A.

Where traffic must cross open trenches, the Contractor shall provide suitable bridges in conformance with Standard 804S-4. Adequate provisions shall be made for the flow of sewers; drains and watercourses encountered during construction and any structures, which may have been disturbed, shall be satisfactorily restored upon completion of Work.

When rainfall or runoff is occurring or is forecast by the U.S. Weather Service, the Contractor shall not perform or attempt any excavation or other earth moving Work in or near the flood plain of any stream or watercourse or on slopes subject to erosion or runoff, unless given specific approval by the E/A. When such conditions delay the Work, an extension of time for working day contracts will be allowed in accordance with "General Conditions".

(2) Water Line/New Wastewater Line Separation

Separation between water, reclaimed water, and wastewater lines shall be provided as shown in the Drawings.

Crossings of water, reclaimed water, and wastewater lines shall conform to details in the Drawings.

Wastewater manholes within 9 feet of water and reclaimed water lines shall be made watertight according to details in the Drawings.

(3) Utility and Storm Sewer Crossings

When the Contractor installs a pipe that crosses under a utility or storm sewer structure and the top of the pipe is within 18 inches of the bottom of the structure, the pipe shall be backfilled as shown in the Drawings. When the Contractor installs a pipe that crosses under a utility or storm sewer structure that is not shown in the Drawings, the pipe shall be backfilled as directed by the Engineer. Payment for backfilling pipe at utility or storm sewer structures not shown in the Drawings shall be by Change Order.

(4) Trench Excavation

Excavation in a paved street shall be preceded by saw cutting completely through any asphaltic cement concrete or Portland cement concrete surface, base, or subbase to the underlying subgrade. This requirement shall not apply to excavations made with trenching machines that use a rotating continuous belt or chain for cutting and removing of material.

Underground piped utilities shall be constructed in an open cut in accordance with Federal regulations, applicable State Statutes conforming to Item No. 509S, "Excavation Safety Systems" and with a trench width and depth described below. When pipe is to be constructed in fill above the natural ground, Contractor shall construct embankment to an elevation not less than one foot above the top of the pipe, after which trench is excavated. Required vertical sides shall be sheeted and braced as indicated to maintain the sides of the required vertical excavation throughout the construction period. Adequacy of the design of sheeting and bracing shall be the responsibility of the Contractor's design professional. The Contractor shall be responsible for installation as indicated. After the pipe has been laid and the backfill placed and compacted to 12 inches above the top of the pipe, any sheeting, shoring and bracing required may be removed with special care to insure that the pipe is not disturbed. As each piece of sheeting is removed, the space left by its removal must be thoroughly filled and compacted with suitable material and provisions made to prevent the sides of the trench from caving until the

backfill has been completed. Any sheeting left in place will not be paid for and shall be included in the unit price bid for pipe.

(5) Trench Width

Trenches for water, reclaimed, and wastewater lines shall have a clear width on each side beyond the outside surfaces of the pipe bell or coupling of not less than 6 inches nor more than 12 inches.

Trenches for Storm Sewers up to 42 inches shall have a width of 1 foot on each side beyond the outside surfaces of the pipe. Pipes more than 42 inches shall have a trench width not to exceed 18 inches on each side beyond the outside surfaces of the pipe.

If the trench width within the pipe zone exceeds this maximum, the entire pipe zone shall be refilled with approved backfill material, thoroughly compacted to a minimum of 95 percent of maximum density as determined by TxDOT Test Method Tex-114-E and then re-excavated to the proper grade and dimensions. Excavation along curves and bends shall be so oriented that the trench and pipe are approximately centered on the centerline of the curve, using short lengths of pipe and/or bend fittings if necessary.

For all utilities to be constructed in fill above natural ground, the embankment shall first be constructed to an elevation not less than 1 foot above the top of the utility after which excavation for the utility shall be made.

(6) Trench Depth and Depth of Cover

All pipe and in-line appurtenances shall be laid to the grades indicated. The depth of cover shall be measured from the established finish grade, natural ground surface, subgrade for staged construction, street or other permanent surface to the top or uppermost projection of the pipe.

(a) Where not otherwise indicated, all potable/reclaimed water piping shall be laid to the following minimum depths:

1. Potable/reclaimed water piping installed in undisturbed ground in easements of undeveloped areas, which are not within existing or planned streets, roads or other traffic areas shall be laid with at least 36 inches of cover.

2. Potable/reclaimed water piping installed in existing streets, roads or other traffic areas shall be laid with at least 48 inches of cover below finish grade.

3. Unless approved by the E/A, installation of potable/reclaimed water piping in proposed new streets will not be permitted until paving and drainage plans have been approved and the roadway traffic areas excavated to the specified or standard paving subgrade, with all parkways and sidewalk areas graded according to any applicable provisions of the drainage plans or sloped upward from the curb line to the right-of-way line at a minimum slope of ¼ inch per foot. Piping and appurtenances installed in such proposed streets shall be laid with at least 36 inches of cover below the actual subgrade.

(b) Where not otherwise indicated, all wastewater piping shall be laid to the following minimum depths:

1. Wastewater piping installed in natural ground in easements or other undeveloped areas, which are not within existing or planned streets, roads or other traffic areas shall be laid with at least 42 inches of cover.

2. Wastewater piping installed in existing streets, roads or other traffic areas shall be laid with at least 66 inches of cover.

3. Wastewater piping installed in such proposed streets shall be laid with at least 48 inches of cover below the actual subgrade.

(7) Classification of Excavation

Excavation will not be considered or paid for as a separate item of Work, so excavated material will not be classified as to type or measured as to quantity. Full payment for all excavation required for the construction shall be included in the various unit or lump sum Contract prices for the various items of Work installed, complete in place. No extra compensation, special treatment or other consideration will be allowed due to rock, pavement, caving, sheeting and bracing, falling or rising water, working under and in the proximity of trees or any other handicaps to excavation.

(8) Dewatering Excavation

Underground piped utilities shall not be constructed or the pipe laid in the presence of water. All water shall be removed from the excavation prior to the pipe placing operation to insure a dry firm granular bed on which to place the underground piped utilities and shall be maintained in such unwatered condition until all concrete and mortar is set. Removal of water may be accomplished by bailing, pumping or by a well-point installation as conditions warrant.

In the event that the excavation cannot be dewatered to the point where the pipe bedding is free of mud, a seal shall be used in the bottom of the excavation. Such seal shall consist of Class B concrete, conforming to Item No. 403, "Concrete for Structures", with a minimum depth of 3 inches.

(9) Trench Conditions

Before attempting to lay pipe, all water, slush, debris, loose material, etc., encountered in the trench must be pumped or bailed out and the trench must be kept clean and dry while the pipe is laid and backfilled. Where needed, sump pits shall be dug adjoining the trench and pumped as necessary to keep the excavation dewatered.

Backfilling shall closely follow pipe laying so that no pipe is left exposed and unattended after initial assembly. All open ends, outlets or other openings in the pipe shall be protected from damage and shall be properly plugged and blocked watertight to prevent the entrance of trench water, dirt, etc. The interior of the pipeline shall at all times be kept clean, dry and unobstructed.

Where the soil encountered at established footing grade is a quicksand, saturated or unstable material, the following procedure shall be used unless other methods are indicated:

All unstable soils shall be removed to a depth of a minimum 2 feet below bottom of piped utility or as required to stabilize the trench foundation. Such excavation shall be carried out for the entire trench width.

All unstable soil so removed shall be replaced with a concrete seal, foundation rock or coarse aggregate materials placed across the entire trench width in uniform layers not to exceed 6 inches, loose measure and compacted by mechanical tamping or other means which shall provide a stable foundation for the utility.

Forms, sheathing and bracing, pumping, additional excavation and backfill required in unstable trench conditions shall be included in the unit price bid for pipe.

(10) Blasting

All blasting shall conform to the provisions of the "General Conditions" and/or "Public Safety and Convenience".

(11) Removing Old Structures

When out of service masonry structures or foundations are encountered in the excavation, such obstructions shall be removed for the full width of the trench and to a depth of 1 foot below the bottom of the trench. When abandoned inlets or manholes are encountered and no plan

provision is made for adjustment or connection to the new sewers, such manholes and inlets within the construction limits shall be removed completely to a depth 1 foot below the bottom of the trench. In each instance, the bottom of the trench shall be restored to grade by backfilling and compacting by the methods provided above. Where the trench cuts through storm or wastewater sewers which are known to be abandoned, these sewers shall be cut flush with the sides of the trench and blocked with a concrete plug in a manner satisfactory to the E/A. When old structures are encountered, which are not visible from the existing surface and are still in service, they shall be protected and adjusted as required to the finished grade.

(12) Lines and Grades

Grades, lines and levels shall conform to the General Conditions and/or "Grades, Lines and Levels". Any damage to the above by the Contractor shall be re-established at the Contractor's expense. The Contractor shall furnish copies of all field notes and "cut sheets" to the City.

The location of the lines and grades indicated may be changed only by direction of the E/A. It is understood that the Contractor will be paid for Work actually performed on the basis of the unit Contract prices and that the Contractor shall make no claim for damages or loss of anticipated profits due to the change of location or grade.

All necessary batter boards or electronic devices for controlling the Work shall be furnished by, and at the expense of, the Contactor. Batter boards shall be of adequate size material and shall be supported substantially. The boards and all location stakes must be protected from possible damage or change of location. The Contractor shall furnish good, sound twilled lines for use in achieving lines and grades and the necessary plummets and graduated poles.

The Contractor shall submit to the E/A at least 6 copies of any layout Drawings from the pipe manufacturer for review and approval. The Contractor shall submit the layout Drawings at least 30 days in advance of any actual construction of the project. The E/A will forward all comments of the review to the Contractor for revision. Revisions shall be made and forwarded to the E/A for his acceptance. Prior to commencement of the Project, reviewed layout Drawings will be sent to the Contractor marked for construction.

Should the Contractor's procedures not produce a finished pipe placed to grade and alignment, the pipe shall be removed and relayed and the Contractors procedures modified to the satisfaction of the E/A. No additional compensation shall be paid for the removal and relaying of pipe required above.

(13) Surplus Excavated Materials

Excess material or material which cannot be made suitable for use in embankments will be declared surplus by the E/A and shall become the property of the Contractor to dispose of off site at a permitted fill site, without liability to the City or any individual. Such surplus material shall be removed from the Work site promptly following the completion of the portion of the utility involved.

(14) Pipe Bedding Envelope

Pipe shall be installed in a continuous bedding envelope of the type shown on the drawings or as described herein. The envelope shall extend the full trench width, to a depth of at least 6 inches (150 mm) below the pipe and to a depth of the springline of storm water pipe and at least 12 inches (300 mm) above water, reclaimed, and wastewater pipe.

(a) Standard Bedding Materials

USE/PIPE	Cement	Natural or	Pea	PIPE BEDDING STONE

MATERIAL	Stabilized Backfill	Mf'd Sand	Gravel	Uncrushed Gravel	Crushed Gravel	Crushed Stone	Stone Screenings
WATER and RECLAIMED WATER							
Welded Steel	X					X	
Service Tubing ¾" to 2½"		X	X				X
WATER and RECLAIMED WATER (Ductile Iron)							
Up to 15 Inch ID		X	X	X			X
Larger Than 15 Inch ID			X	X			
WATER and RECLAIMED WATER (PVC only) and WASTEWATER							
Up to 15 Inch ID		X	X	X	X	X	X
Larger Than 15 Inch ID			X	X	X	X	
STORMWATER							
Concrete		X	X	X	X	X	X
Metal		X	X	X			X

(b) General requirements and limitations governing bedding selection.

(1) Crushed gravel or crushed stone shall not be used with polyethylene tubing or polyethylene film wrap.

(2) Uncrushed gravel may be used with polyethylene film wrap in trenches up to 6 feet deep and in deeper trenches where ample trench width, a tremmie, or conditions will allow controlled placement of the gravel without damaging the polyethylene wrap.

(3) Bedding shall be placed in lifts not exceeding 8 inches loose thickness and compacted thoroughly to provide uniform support for the pipe barrel and to fill all voids around the pipe.

(4) Pea Gravel or bedding stone shall be used in blasted trenches.

(c) Requirements to prevent particle migration.

Bedding material shall be compatible with the materials in the trench bottom, walls and backfill so that particle migration from, into or through the bedding is minimized. The E/A may require one or more of the following measures to minimize particle migration: use of impervious cut-off collars; selected bedding materials, such as pea gravel or bedding stone mixed with sand; filter fabric envelopment of the bedding; cement stabilized backfill; or other approved materials or methods. Measures to minimize particle migration will be shown on the Drawings or designated by the E/A, and, unless provisions for payment are provided in the contract documents, the cost of these measures shall be agreed by change order. The following limitations shall apply.

(1) Sand, alone, shall not be used in watercourses, in trenches where groundwater is present, or in trenches with grades greater than 5 percent.

(2) Pea gravel or bedding stone, alone, shall not be used in the street right-of-way within 5 feet of subgrade elevation in trenches that are 3 feet or wider.

(3) Each gravel or bedding stone, alone, shall not be used where the trench bottom, sides, or backfill is composed of non-cementitious, silty or sandy soils having plasticity indices less than 20, as determined by the E/A.

(4) Sand, alone, shall not be used for installation of concrete storm water pipe unless the bedding envelope is wrapped with a geotextile membrane and the joints of the stormdrain conduit are wrapped to prevent the migration of fines into the bedding envelope and into the stormdrain conduit.

(5) For concrete storm water pipe, if pea gravel, uncrushed gravel, crushed gravel, crushed stone, or combination thereof is used for pipe bedding material, a geotextile filter fabric shall be placed around the perimeter of the joint.

(15) Laying Pipe

No pipe shall be installed in the trench until excavation has been completed, the bottom of the trench graded and the trench completed as indicated.

Laying of corrugated metal pipes on the prepared foundation shall be started at the outlet end with the separate sections firmly joined together, with outside laps of circumferential joints pointing upstream and with longitudinal laps on the sides. Any metal in joints, which is not protected by galvanizing, shall be coated with suitable asphaltum paint. Proper facilities shall be provided for hoisting and lowering the sections of pipe into the trench without damaging the pipe or disturbing the prepared foundation and the sides of the trench. Any pipe which is not in alignment or which shows any undue settlement after laying or damage, shall be taken up and re-laid without extra compensation.

Multiple installations of corrugated pipe or arches shall be laid with the centerlines of individual barrels parallel. When not otherwise indicated, clear distances of 2 feet between outer surfaces of adjacent pipes shall be maintained.

No debris shall remain in the drainways or drainage structures.

All recommendations of the manufacturer shall be carefully observed during handling and installation of each material. Unless otherwise indicated, all materials shall be delivered to the project by the manufacturer or agent and unloaded as directed by the Contractor. Each piece shall be placed facing the proper direction near to where it will be installed.

The interior of all pipe, fittings and other accessories shall be kept free from dirt and foreign matter at all times and stored in a manner that will protect them from damage. Stockpiled materials shall be stacked so as to minimize entrance of foreign matter.

The interior of all pipeline components shall be clean, dry and unobstructed when installed.

Piping materials shall not be skidded or rolled against other pipe, etc. and under no circumstances shall pipe, fittings or other accessories be dropped or jolted.

During handling and placement, materials shall be carefully observed and inspected and any damaged, defective or unsound materials shall be marked, rejected and removed from the job site. Minor damage shall be marked and repaired in a manner satisfactory to the E/A. Joints, which have been placed, but not joined, backfilled, etc., shall be protected in a manner satisfactory to the E/A.

(16) Assembling of Pipe

Angular spacing of all joints shall meet the manufacturer's recommendations for the pipe and accessories being used. Side outlets shall be rotated so that the operating stems of valves shall be vertical when the valves are installed. Pressure pipe shall be laid with bell ends facing the direction of pipe installation. Pipe end bells shall be placed upgrade for all wastewater lines.

Orientation marks, when applicable, shall be in their proper position before pipe is seated.

Before joining any pipe, all foreign matter, lumps, blisters, excess coal tar coating, oil or grease shall be removed from the ends of each pipe and the pipe ends shall then be wire brushed and wiped clean and dry. Pipe ends shall be kept clean until joints are made.

Every precaution shall be taken to prevent foreign material from entering the pipe during installation. No debris, tools, clothing or other materials shall be placed in the pipe.

(17) Joints

(a) Mortar (Storm Drain joints only)

Pipe ends shall be clean, free of asphalt or other contaminants, which will inhibit the bond of the mortar to the pipe. The pipe ends shall be moistened immediately prior to placing the mortar in the joint.

(b) Cold Applied Preformed Plastic Gaskets (Storm Drain joints only)

The pipe ends shall be clean and the joint material applied to the dry pipe. In cold weather, the joint material shall be heated to facilitate the seal of the joint.

(c) O-Ring and Push-on Joints

Just before making a joint the ends of the pipe shall be clean, dry, free of any foreign matter, lump blisters, excessive coal tar coating and grease or oil and shall be wire brushed. The gasket and the inside surface of the bell shall be lubricated with a light film of soft vegetable soap compound (Flax Soap) to facilitate telescoping the joints. The rubber gasket if not factory installed shall be stretched uniformly as it is placed in the spigot groove to insure a uniform volume of rubber around the circumference of the groove. The spigot shall be centered in the bell, the pipe pushed home uniformly and brought into true alignment. Bedding material shall be placed and tamped against pipe to secure the joint. Care should be taken to prevent dirt or foreign matter from entering the joint space.

(d) Bolted Joints

All flanged, mechanical or other bolted joints shall be joined with nuts and bolts and be coated as indicated above in Iron Pipe.

(e) Storm Drain Joints

Storm drain joints sealed with preformed flexible joint sealants shall be provided and installed in compliance with ASTM C990. Storm drain joints sealed with rubber gaskets shall comply with ASTM C443 Install joint sealants in accordance with the pipe and joint sealant manufacturers' recommendations. Place the joint sealer so that no dirt or other deleterious materials come in contact with the joint sealing material. Pull or push home the pipe with enough force to properly seal the joint with the final joint opening (gap) on the inside of the installed pipe being less than or equal to the pipe manufacturer's recommended dimensions. Protrusion of joint material greater than 1/8 " into the interior of the pipe will not be accepted. Excess joint material will be removed to within 1/8 "of pipe surface. Observe joint sealant manufacturer's recommendations for installation temperature of the joint sealant. Apply joint sealant to pipe joint immediately before placing pipe in trench, and then connect pipe to previously laid pipe.

If inspection (video or other means) reveal C-990 joints that show signs of backfill infiltration, or where joints or conduits exhibit excessive joint gap or are otherwise defective, then the contractor has the following options:

1. Conduits less than 36-inches in any dimension: pour a concrete collar around the joint or wrap joint with a wrap meeting requirements of ASTM C-877 or approved equal.
2. Conduits greater than or equal to 36-inches in all dimensions: repair joints using joint repair techniques recommended by the manufacturer to achieve a completed system that meets all Contract requirements.

(18) Pressure Pipe Laying

(a) Grout for Concrete Steel Cylinder Pipe (CSC) and Welded Steel Pipe

Aggregate, cement, etc., shall be as indicated in "Mortar" herein. Potable water shall be used in the preparation of any cement, mortar, or grout lining.

Grout shall be poured into the recess between the bell and spigot on the outside of the pipe and contained by a joint wrapper ("diaper") recommended by the pipe manufacturer. The wrapper shall have a minimum width of 7 inches for 30 inch and smaller and 9 inches for larger pipe, secured to the pipe by "Band Iron" steel straps. The grout shall be poured in one continuous operation in such manner that after shrinkage and curing the joint recess shall be completely filled.

Mortar for the inside recess shall be of the consistency of plaster. The inside recess between the bell and spigot shall be filled with mortar after the pipe joint on either side of the recess has been backfilled and well tamped with no less than one pipe joint installed ahead of the pipe forming the recess. The mortar shall completely fill the recess and shall be trowelled and packed into place and finished off smooth with the inside of the pipe.

The Contractor shall inspect the joint after the mortar has set and make repairs of any pockets, cracks or other defects caused by shrinkage to the satisfaction of the E/A. The inside surface shall be cleared of any mortar droppings, cement, water, slurry, etc., before they have become set and shall be cleared of any other foreign matter. The inside surface of the pipe shall be left clean and smooth.

Pipe shall be handled at all times with wide non abrasive slings, belts or other equipment designed to prevent damage to the coating and all such equipment shall be kept in such repair that its continued use is not injurious to the coating. The use of tongs, bare pinch-bars, chain slings, rope slings without canvas covers, canvas or composition belt slings with protruding rivets, pipe hooks without proper padding or any other handling equipment, which the E/A deems to be injurious to the coating, shall not be permitted. The spacing of

pipe supports required to handle the pipe shall be adequate to prevent cracking or damage to the cement mortar lining.

(19) Placing Pipe in Tunnels

Piping installed as a carrier pipe in a tunnel, encasement pipe, etc., shall have uniform alignment, grade, bearing and conform to the reviewed Shop Drawings. All necessary casing spacers, bedding material, grout cradle or paving, bracing, blocking, etc., as stipulated by the Contract or as may be required to provide and maintain the required pipe alignment and grade, shall be provided by the Contractor at no cost except as provided by the Bid Items. This shall include casing spacers acceptable to the Owner attached to the carrier pipe in accordance with the manufacturer's recommendations. The insertion pushing forces shall not exceed the pipe manufacturer's recommendation. Such carrier piping shall have flexible bolted or gasketed push-on joints or Concrete Steel Cylinder pipe installed as follows:

(a) 21 Inch Pipe and Smaller

Prior to placing the pipe in the tunnel, the inside joint recess at the bell shall be buttered with cement mortar.

After the joint is engaged, the excess mortar shall be smoothed by pulling a tight fitting swab through the joint. Cement mortar protection shall then be placed in the normal manner to the exterior of the joint and allowed to harden sufficiently to avoid dislodgment during installation. If time is of the essence, a quick setting compound may be used.

(b) 24 Inch Pipe and Larger

Each length of pipe shall be pushed into the tunnel as single units. A flexible mastic sealer shall be applied to the exterior of the joint prior to joint engagement. The surfaces receiving the mastic sealer shall be cleaned and primed in accordance with the manufacturer's recommendation. Sufficient quantities of the mastic sealer shall be applied to assure complete protection of all steel in the joint area. The interior of the joint shall be filled with cement mortar in the normal manner after the pipe is in its final position within the tunnel.

(20) Temporary Pipe Plugs, Caps, Bulkheads and Trench Caps

Temporary plugs, caps or plywood bulkheads shall be installed to close all openings of the pipe and fittings when pipeline construction is not in progress.

All temporary end plugs or caps shall be secured to the pipe as provided under Item No. 507, "Bulkheads".

Trench caps shall be reinforced Class D concrete as indicated.

(21) Corrosion Control

(a) Protective Covering

Unless otherwise indicated, all flanges, nuts, bolts, threaded outlets and all other iron or steel components buried and in contact with earth or backfill shall be wrapped with 8-mil (minimum) polyethylene film meeting ANSI/AWWA C-105 to provide a continuous wrap.

(22) Pipe Anchorage, Support and Protection

Pressure pipeline tees, plugs, caps and bends exceeding 22½ degrees; other bends as directed shall be securely anchored by suitable concrete thrust blocking or by approved metal harness. Unless otherwise indicated, on 24 inch or larger piping, all bends greater than 11 ¼ degrees shall be anchored as described herein.

Storm sewers on steep grades shall be lugged as indicated.

(a) Concrete Thrust Blocking

Concrete for use as reaction or thrust blocking shall be Class B conforming to Item No. 403, "Concrete for Structures".

Concrete blocking shall be placed between solid ground and the fitting to be anchored. The area of bearing on the pipe and on the ground shall be as indicated or directed by the E/A. The blocking shall, unless otherwise indicated, be so placed that the pipe, fittings and joints will be accessible for repair.

The trench shall be excavated at least 6 inches outside the outermost projections of the pipe or appurtenance and the trench walls shaped or undercut according to the detail Drawings or as required to provide adequate space and bearing area for the concrete.

The pipe and fittings shall be adequately weighted and laterally braced to prevent floating, shifting or straining of the pipeline while the concrete is being placed and taking initial set. The Contractor shall be solely responsible for the sufficiency of such restraints.

(b) Metal Thrust Restraint

Fabricated thrust restraint systems such as those described below may be approved for use instead of concrete blocking. To obtain approval, the project Drawings must include sufficient drawings, notes, schedules, etc., to assure that the proposed restraints as installed will be adequate to prevent undesirable movement of the piping components. Such restraint systems may only be used where and as specifically detailed and scheduled on approved Project Drawings.

1. Thrust Harness

   A metal thrust harness of tie rods, pipe clamps or lugs, turnbuckles, etc., may be approved. All carbon steel components of such systems, including nuts and washers, shall be hot-dip galvanized; all other members shall be cast ductile iron. After installation, the entire assembly shall be wrapped with 8-mil polyethylene film, overlapped and taped in place with duct tape to form a continuous protective wrap.

2. Restrained Joints

   Piping or fitting systems utilizing integral mechanically restrained joints may be approved. All components of such systems shall be standard manufactured products fabricated from cast ductile iron, hot-dip galvanized steel, brass or other corrosion resistant materials and the entire assembly shall be protected with a continuous film wrap as described for 1. above. Manufacturers of pipe with restrained joints integral to the pipe shall be listed on SPL WW-27F. All pipe and fitting systems with restrained joints shall be identified by applying an adhesive-backed warning tape to the top of the pipe and for the full length of the pipe, regardless of the type of pipe. For plastic pipes the warning tape shall be applied directly to the top of the pipe. For metal pipes and fittings the warning tape shall be applied to the top of the polyethylene film wrap. The warning tape shall conform to 510.2(8)(b)5.

   Location, configuration and description of such products shall be specifically detailed on the Drawings. (Add-on attachments such as retainer glands, all-thread rods, etc., are not acceptable.)

(c) Concrete Encasement, Cradles, Caps and Seals

When trench foundation is excessively wet or unstable or installation of water or wastewater pipe will result in less than 30 inches of cover, Contractor shall notify E/A. E/A may require Contractor to install a concrete seal, cradle, cap, encasement or other appropriate action.

All concrete cap, etc., shall be continuous and begin and end within 6 inches of pipe joints. Concrete cap, cradle and encasement shall conform to City of Austin Standard No. 510S-1, "Concrete Trench Cap". The pipe shall be well secured to prevent shifting or flotation while the concrete is being placed.

(d) Anchorage Bulkheads

Concrete bulkheads keyed into the undisturbed earth shall be placed as indicated to support and anchor the pipe and/or backfill against end thrust, slippage on slopes, etc. Concrete material and placement shall be Class A, Item No. 403, "Concrete for Structures".

(e) Trench Caps, Concrete Rip-Rap and Shaped Retards

Where called for by the Contract or as directed by the E/A, concrete trench caps, concrete rip-rap and/or shaped retards shall be placed as detailed by the Drawings as protection against erosion. Concrete material and placement shall be Class B, Item No. 403, "Concrete for Structures".

(23) Wastewater Connections

(a) Connections to Mains 12 Inches and Smaller

All branch connections of new main lines shall be made by use of manholes.

Service stubs shall be installed as indicated. Minimum grade shall be 1 percent downward to main and minimum cover shall be 4½ feet at the curb. Standard plugs shall be installed in the dead end before backfilling.

Where a service connection to a main 12 inches or smaller is indicated, a wye, tee or double wye shall be installed.

Where a service connection to a main 15 inches or larger is indicated, a field tap may be made with the pipes installed crown to crown. The tap should be made conforming to the pipe manufacturer's recommendations with the E/A's approval.

Where not otherwise indicated, (wastewater) service connections shall be installed so that the outlet is at an angle of not more than 45 degrees above horizontal at the main line.

(b) Connections to the Existing System

Unless otherwise specified by the E/A, all connections made to existing mains shall be made at manholes with the crown of the inlet pipe installed at the same elevation as the crown of the existing pipe. Service stubs installed on the existing system shall be installed by use of tapping saddles unless otherwise approved by the E/A. Extreme care shall be exercised to prevent material from depositing in the existing pipe as the taps are being made.

When connections to existing mains are made, a temporary plug approved by the E/A must be installed downstream in the manhole to prevent water and debris from entering the existing system before Final Completion. These plugs shall be removed after the castings are adjusted to finish grade or prior to Final Completion.

(c) Connecting Existing Services to New Mains

Where wastewater services currently exist and are being replaced from the main to the property line, those services shall be physically located at the property line prior to installing any new mains into which the services will be connected. Where wastewater services currently exist but are not being replaced to the property line, those services shall

be physically located at the point of connection between the new and existing pipes prior to installing any new mains into which the services will be connected.

(24) Potable or Reclaimed Water System Connections

All necessary connections of new piping or accessories to the existing potable or reclaimed water system shall be made by, and at the expense of, the Contractor. To minimize any inconvenience from outages, the Contractor shall schedule all such connections in advance and such schedule must be approved by the E/A before beginning any Work.

(a) Shutoffs

The City will make all shutoffs on existing potable or reclaimed water mains. The Contractor shall be required to notify the Owner's Representative in writing a least twenty five (25) Calendar Days prior to the anticipated date for a wet-connection. The Owner's Representative is defined as the City Inspector. The Owner's Representative will notify any affected utility customers at least 48 hours prior to the shutoff. Austin Water (AW) will make the shutoff after ensuring that all appropriate measures have been taken to protect the potable or reclaimed water system, customers and employees.

The City will operate all valves to fill existing mains. Where a newly constructed main has not been placed in service and has only one connection to the potable or reclaimed system, the Contractor may operate one valve to fill the main after approval has been obtained from AW. The operation of the valve is to be conducted under the immediate supervision of the Owner's Representative.

Water for the Work shall be metered and furnished by the Contractor in accordance with Section 01500 of the Standard Contract Documents.

(b) Wet Connections to Existing Potable or Reclaimed Water System

The Contractor shall make all wet connections called for by the Contract or required to complete the Work. Two connections to an existing line performed during the same shutout, at the same time and at a distance less than 50 linear feet apart, will be considered one wet connection. Two connections to an existing line performed during the same shutout, at the same time and at a distance equal to, or greater than 50 linear feet will be considered two wet connections. A wet connection shall include draining and cutting into existing piping and connecting a new pipeline or other extension into the existing pressure piping, forming an addition to the potable or reclaimed water transmission and distribution network.

The Contract price for wet connections shall be full payment for all necessary shutoffs, excavation, removing plugs and fittings, pumping water to drain the lines, cutting in new fittings, blocking and anchoring piping, bedding and backfilling, placing the lines and service and all site cleanup.

No water containing detectable amounts of chlorine may be drained, released or discharged until specific planning and appropriate preparations to handle, dilute and dispose of such chlorinated water are approved in advance by the City and the disposal operations will be witnessed by an authorized representative from the City.

(c) Pressure Taps to Existing Potable or Reclaimed Water System

The Contractor shall make all pressure taps called for by the Contract Documents or required to complete the Work. A pressure tap shall consist of connecting new piping to the existing potable or reclaimed water system by drilling into the existing pipe while it is carrying water under normal pressure without taking the existing piping out of service.

Unless otherwise provided by the Contract, the Contractor shall, at the Contractor's expense, perform all necessary excavation, furnish and install the tapping sleeve, valve and accessories, provide the tapping machine, drill the tap and shall block, anchor and backfill the piping, valve and all accessories, place the new piping in service and perform all site cleanup. When the City makes the tap, City forces are not obligated or expected to perform any Work except to provide tapping machine and drill the actual hole. If City crews are to make the tap, fiscal arrangements must be made in advance at the Taps Office, Waller Creek Center, 625 East 10th Street.

If a private Contractor makes the tap, an AW Inspector must be present. "Size on size" taps will not be permitted, unless made by use of an approved full bodied mechanical joint tapping sleeve. Concrete blocking shall be placed behind and under all tap sleeves 24 hours prior to making the wet tap.

(d) Service Connections

Service connection taps into PVC or AC pipe or into CI or DI pipe 12 inches or smaller shall be made using either a service clamp or saddle or a tapping sleeve as recommended by the pipe manufacturer and as approved by the E/A. Direct tapping of these pipes will not be permitted.

All potable or reclaimed water service connections shall be installed so that the outlet is at an angle of not more than 45 degrees above horizontal at the main line.

Precautions should be taken to ensure that the tapping saddle or sleeve is placed on the pipe straight to prevent any binding or deformation of the PVC pipe. The mounting chain or U-bolt strap must be tight.

Tapping shall be performed with a sharp shell type cutter so designed that it will smoothly penetrate heavy walled PVC DR14 and 200 psi AC and will retain and extract the coupon from the pipe.

(25) Backfilling

(a) General

Special emphasis is placed upon the need to obtain uniform density throughout the backfill material. The maximum lift of backfill shall be determined by the compaction equipment selected and in no case shall it exceed 18 inches, loose measurement.

No heavy equipment, which might damage pipe, will be allowed over the pipe until sufficient cover has been placed and compacted. All internal pipe bracing installed or recommended by the manufacturer shall be kept in place until the pipe bedding and trench backfill have been completed over the braced pipe section. Testing of the completed backfill in streets and under and around structures shall meet the specified density requirements. Initial testing shall not be at Contractor's expense and shall conform to the "General Conditions."

(b) General Corrugated Metal Pipe

After the corrugated metal pipe structure has been completely assembled on the proper line and grade and headwalls constructed where indicated; selected material free from rocks over 8 inches in size from excavation or borrow, as approved by the E/A, shall be placed along both sides of the completed structures equally, in uniform layers not exceeding 6 inches in depth (loose measurement), sprinkled if required and thoroughly compacted between adjacent structures and between the structures and the sides of the trench.

Backfill material shall be compacted to the same density requirements as indicated for the adjoining sections of embankment in accordance with the governing specifications thereof. Above the ¾ point of the structure, the fill shall be placed uniformly on each side of the pipe in layers not to exceed 12 inches, loose measure.

Prior to adding each new layer of loose backfill material, until a minimum of 12 inches of cover is obtained over the crown of the pipe, an inspection will be made of the inside periphery of the corrugated metal structure to determine if any floating, local or unequal deformation has occurred as a result of improper construction methods.

(c) Backfill Materials

The Engineer or designated representative may approve any of the following well graded materials as backfill:

1. Select trench material
2. Sand
3. Crushed rock cuttings
4. Rock cuttings
5. Foundation Rock
6. Blasted material with fines and rock
7. Cement stabilized material
8. Borrow

Within the 100-year flood plain, sand will not be permitted for backfilling. The Engineer or designated representative will approve the topsoil for areas to be seeded or sodded.

(d) Backfill in Street Right-of-Way

Placement of backfill under existing or future pavement structures and within 2 feet of any structures shall be compacted to the specified density using any method, type and size of equipment, which will produce the specified compaction without damaging the pipe or bedding. Placement of backfill greater than 2 feet beyond structures in right-of-way shall conform to (g) below.

The thickness of lifts, prior to compaction, shall depend upon the type of sprinkling and compacting equipment used and the test results thereby obtained. Prior to and in conjunction with the compaction operation, each lift shall be brought to the moisture content necessary to obtain the specified density and shall be placed in a uniform thickness to ensure uniform compaction over the entire lift. Testing for density shall be in accordance with Test Method Tex-114-E and Test Method Tex-115-E.

It is highly desirable that the backfill lifts be placed in a flat (or level) configuration; however when approved by the Engineer or designated representative, the backfill lifts may be placed at gradients (percent of vertical rise or fall to horizontal run) that do not exceed 30%.

The proposed gradient for each lift or series of lifts shall be established based on the capabilities of the equipment proposed to attain the required compaction.

Each lift of backfill must provide the density as specified herein. Swelling soils (soils with a minimum Liquid Limit of 50, more than 50% passing a #200 sieve and a plasticity index greater than 22) shall be sprinkled as required to provide not less than optimum moisture nor more than 2 percent over optimum moisture content and compacted to the extent necessary to provide not less than 95 percent nor more than 102 percent of the density as

determined in accordance with Test Method Tex-114-E. Non-swelling soils shall be sprinkled as specified and compacted to the extent necessary to provide not less than 95 percent of the density as determined in accordance with Test Method Tex-114-E.

After each lift of backfill is complete, tests may be made by the Engineer or designated representative. If the material fails to meet the density indicated, the course shall be reworked as necessary to obtain the indicated compaction and the compaction method shall be altered on subsequent Work to obtain indicated density.

At any time, the Engineer or designated representative may order proof rolling to test the uniformity of compaction of the backfill lifts. All irregularities, depressions, weak or soft spots that develop shall be corrected immediately by the Contractor.

If the backfill, due to any reason, loses the specified stability, density or finish before the pavement structure is placed, it shall be recompacted and refinished at the sole expense of the Contractor. Excessive loss of moisture in the subgrade shall be prevented by sprinkling, sealing or covering with a subsequent backfill layer or granular material. Excessive loss of moisture shall be construed to exist when the subgrade soil moisture content is more than 4 percent below the optimum of compaction ratio density. Backfill shall be placed from the top of the bedding material to the existing grade, base course, subgrade or as specified. The remainder of the street backfill shall either be Flexible Base, Concrete or Hot Mix Asphalt Concrete as specified on the drawings or replacement "in kind" to the surface of the materials originally removed for placement of the pipe.

(e) Backfill in County Street or State Highway Right-of-Way

All Work within the right-of-way shall meet the requirements of (d) above, as a minimum and shall meet the requirements of the permit issued by the County when their requirements are more stringent. Prior to the start of construction, the Contractor shall be responsible for contacting the appropriate TxDOT office or County Commissioner's Precinct Office and following the operating procedures in effect for utility cut permits and pavement repair under their jurisdiction. Approval for all completed Work in the State or County right-of-way shall be obtained from the appropriate Official prior to final payment by the Owner.

(f) Backfill in Railroad Right-of-Way

All Work within the railroad right-of-way shall meet the requirements of (d) above, as a minimum and shall meet the requirements of the permit issued by the Railroad Owner when their requirements are more stringent. Approval for all completed Work in the railroad right of way shall be obtained from the Railroad prior to Final Completion.

(g) Backfill in Easements

Where not otherwise indicated, Contractor may select whatever methods and procedures may be necessary to restore entire Work area to a safe, useful and geologically stable condition with a minimum density of 85 percent or a density superior to that prior to construction.

In and near flood plain of all streams and watercourses, under or adjacent to utilities, structures, etc. all backfill shall be compacted to a density of not less than 95 percent conforming to TxDOT Test Method Tex-114-E, unless otherwise directed by E/A.

All soil areas disturbed by construction shall be covered with top soil and seeded conforming to Item No. 604, "Seeding for Erosion Control". All turf, drainways and drainage structures shall be constructed or replaced to their original condition or better. No debris shall remain in the drainways or drainage structures.

(h) Temporary Trench Repair/Surfacing

If details of temporary trench repair/surfacing are not provided in the contract documents, the Contractor shall submit for approval of the E/A (1) a plan for temporary trench repair for areas that will be open to traffic but will be excavated later for full depth repair, and (2) a proposed method for covering trenches to maintain access to properties. The temporary surfacing shall afford a smooth riding surface and shall be maintained by the Contractor the entire time the temporary surface is in place.

(i) Permanent Trench Repair

The Contractor shall install permanent trench repairs conforming to details in the drawings.

(26) Quality Testing for Installed Pipe

(a) Wastewater Pipe Acceptance Testing

After wastewater pipe has been backfilled, the Contractor shall perform infiltration tests, exfiltration tests, or low pressure air tests as determined by the E/A. In addition, the Contractor shall perform deflection tests and shall assist OWNER'S personnel, as directed, in performing pipeline settlement tests. The Contractor shall be responsible for making appropriate repairs to those elements that do not pass any of these tests.

(b) Exfiltration Test

Water for the Work shall be metered and furnished by the Contractor in accordance with Section 01500 of the Standard Contract Documents.

Exfiltration testing shall be performed by the Contractor when determined by the E/A to be the appropriate test method. Exfiltration testing shall conform to requirements of the Texas Commission on Environmental Quality given in the Texas Administrative Code Title 30 Part 1 Chapter 317 Rule §317.2.

(c) Infiltration Test

Infiltration testing shall be performed by the Contractor when determined by the E/A to be the appropriate test method. Infiltration testing shall conform to requirements of the Texas Commission on Environmental Quality given in the Texas Administrative Code Title 30 Part 1 Chapter 317 Rule §317.2.

(d) Pipeline Settlement Test

During the infiltration test or after the exfiltration test, the pipe will be TV inspected for possible settlement. When air testing has been used, water shall be flowed into the pipe to permit meaningful observations. Any pipe settlement which causes excessive ponding of water in the pipe shall be cause for rejection. Excessive ponding shall be defined as a golf ball (1 5/8 ″ dia.) submerged at any point along the line.

(e) Low Pressure Air Test of Gravity Flow Wastewater Lines

(1) General

Wastewater lines up to 33-inch diameter shall be air tested between manholes. Wastewater lines 36-inch in diameter and larger shall be either air tested between manholes or at pipe joints. Backfilling to grade shall be completed before the test and all laterals and stubs shall be capped or plugged by the Contractor so as not to allow air losses, which could cause an erroneous, test result. Manholes shall be plugged so they are isolated from the pipe and cannot be included in the test.

All plugs used to close the sewer for the air test shall be capable of resisting the internal pressures and must be securely braced. Place all air testing equipment above

ground and allow no one to enter a manhole or trench where a plugged sewer is under pressure. Release all pressure before the plugs are removed. The testing equipment used must include a pressure relief device designed to relieve pressure in the sewer under test at 10 psi or less and must allow continuous monitoring of the test pressures in order to avoid excessive pressure. Use care to avoid the flooding of the air inlet by infiltrated ground water. (Inject the air at the upper plug if possible.) Use only qualified personnel to conduct the test.

(2) Ground Water

Since the presence of ground water will affect the test results, test holes shall be dug to the pipe zone at intervals of not more than 100 feet and the average height of ground water above the pipe (if any) shall be determined before starting the test.

(3) Test Procedure

The E/A may, at any time, require a calibration check of the instrumentation used. Use a pressure gauge having minimum divisions of 0.10 psi and an accuracy of 0.0625 psi. (One ounce per square inch.) All air used shall pass through a single control panel. Clean the sewer to be tested and remove all debris where indicated. Wet the sewer prior to testing. The average back pressure of any groundwater shall be determined (0.433 psi) for each foot of average water depth (if any) above the sewer.

Add air slowly to the section of sewer being tested until the internal air pressure is raised to 3.5 psig greater than the average back pressure of any ground water that may submerge the pipe. After the internal test pressure is reached, allow at least 2 minutes for the air temperature to stabilize, adding only the amount of air required to maintain pressure. After the temperature stabilization period, disconnect the air supply. Determine and record the time in seconds that is required for the internal air pressure to drop from 3.5 psig to 2.5 psig greater than the average backpressure of any ground water that may submerge the pipe.

For pipe less than 36-inch diameter, compare the time recorded with the time computed using the following equation:

$T = (0.0850 \times D \times K) \div Q$, where

T = time for pressure to drop 1.0 pounds per square inch gauge in seconds;

$K = 0.000419 \times D \times L$, but not less than 1.0

D = nominal inside diameter, in inches, as marked on the pipe;

L = length of line of same pipe size in feet; and

Q = rate of loss, 0.0015 cubic feet per minute per square foot of internal surface area (ft3/min/ft sq) shall be used.

Because a K value of less than 1.0 shall not be used, there are minimum test times for each pipe diameter as shown in the following table:

Table For Low Pressure Air Testing of Pipe

Pipe Diameter	Minimum Time	Minimum Time Applies to All Pipes Shorter than	Time for Longer Pipes

(inches)	(seconds)	(feet)	(seconds)
8	454	298	1.520 × L
10 (See Note 1)	567	239	2.374 × L
12	680	199	3.419 × L
15	850	159	5.342 × L
18	1020	133	7.693 × L
21	1190	114	10.471 × L
24	1360	100	13.676 × L
30	1700	80	21.369 × L

Note 1. 10-inch diameter pipe to be used only by AW maintenance personnel.

Note 2. The test parameter for pipes larger than 30-inch diameter shall be shown on the construction plans.

Any drop in pressure, from 3.5 psig to 2.5 psig (adjusted for groundwater level), in a time less than that required by the above equation or table shall be cause for rejection. When the line tested includes more than one size pipe, the minimum time shall be that given for the largest size pipe included.

When joint testing, the minimum time allowable for the pressure to drop from 3.5 pounds per square inch to 2.5 pounds per square inch gauge during a joint test, regardless of pipe size, shall be twenty (20) seconds. A drop in pressure from 3.5 psig to 2.5 psig (adjusted for groundwater level) in less than twenty seconds shall be cause for rejection.

Manholes must be tested separately and independently. All manholes must be hydrostatically tested with a maximum loss allowance of 0.025 gallon per foot diameter per foot of head per hour.

When lines are air tested, manholes are to be tested separately by exfiltration or vacuum method (see Standard Specification Item No. 506S, "Manholes").

(f) Deflection Test

Deflection tests shall be performed by the Contractor on all flexible and semi-rigid wastewater pipes. The tests shall be conducted after the final backfill has been in place at least 30 days. Testing for in-place deflection shall be with a pipe mandrel at 95% of the inside diameter of the pipe. A second test of flexible and semi-rigid wastewater pipes 18

inch size and larger, also with a pipe mandrel sized at 95% of the inside diameter of the pipe, shall be conducted by the Contractor 30 days before the warranty expires on the Contractor's Work.

Contractor shall submit proposed pipe mandrels to the E/A or the E/A's designated representative for concurrence prior to testing the line.

Test(s) must be performed without mechanical pulling devices and must be witnessed by the E/A or the E/A's designated representative.

Any deficiencies noted shall be corrected by the Contractor and the test(s) shall be redone.

(g) Inspection of Installed Storm Drain Conduits

(1) General

All storm drain conduits (pipe and box culvert) shall be inspected for conformance to the requirements of this specification. Smart Housing, low/moderate income housing, and projects that are 100-percent privately funded are exempt from the cost of the initial video inspection. All deficiencies revealed by inspection shall be corrected. Video re-inspection meeting the requirements of this specification shall be provided at the Contractor's expense to show that deficiencies have been corrected satisfactorily. Further, the contractor shall provide video in complete segments (manhole to manhole) versus specific deficiency locations.

Projects that are not exempt from the cost of the initial video inspection are also subject to the following constraints:

- All inspectors utilized by the Contractor for video inspection shall be NASSCO-PACP certified for a minimum of 3 years.

- The Contractor will be required to inspect, assess, and record the condition of the storm drain pipe using National Association of Sewer Service Companies (NASSCOs) Pipeline Assessment Certification Program (PACP) coding standards.

(2) Video Inspection of Installed Storm Drain Conduits

Contractor shall provide all labor, equipment, material and supplies and perform all operations required to conduct internal closed-circuit television and video recording of all storm drain conduits. Video recording of each storm drain conduit section shall be conducted after the trench has been backfilled and prior to placement of permanent pavement repairs or permanent pavement reconstruction. The video recording shall be provided to the Owner for review. Contractor shall not place permanent pavement repairs or permanent pavement reconstruction over the storm drain conduit until Owner has reviewed the video and agrees that there are no defects in the storm drain conduit installation shown in the video submitted by the Contractor or shown in any video acquired by the Owner through other means. Placement of permanent pavement repair or permanent pavement reconstruction over the installed storm drain conduit before the Owner acknowledges no defects shall be at the Contractor's risk. Any defects revealed by the video inspection shall be corrected at the Contractor's expense and a new video submitted to the Owner for review prior to acceptance of the conduit.

All video work shall be conducted under the direct full-time supervision of a NASSCO-PACP certified operator.

The conduit inspection camera shall have the capability of panning plus/minus 275 degrees and rotating 360 degrees. The television camera shall be specifically designed and constructed for such use. The camera shall be operative in 100% humidity conditions. Camera shall have an accurate footage counter that displays on the monitor the exact distance of the camera (to the nearest tenth of a foot) from the centerline of the starting manhole or access point. Camera shall have height adjustment so that the camera lens is always centered within plus/minus 10% of the center axis of the conduit being videoed. Camera shall provide a minimum of 460 lines of horizontal resolution and 400 lines of vertical resolution. Camera shall be equipped with a remote iris to control the illumination range for an acceptable picture. Geometrical distortion of the image shall not exceed one percent (1%). The video image produced by each camera shall be calibrated using a Marconi Resolution Chart No. 1 or equivalent.

Lighting for the camera shall be sufficient to allow a clear picture of the entire periphery of the conduit without loss of contrast, flare out of picture or shadowing. A reflector in front of the camera may be required to enhance lighting in dark or large sized conduit. The video camera shall be capable of showing on the digital display the Owner's name, Project name, Contractor name, date, line size and material, conduit identification, and ongoing footage counter. The camera, television monitor, and other components of the video system shall be capable of producing a picture quality satisfactory to the satisfaction of the Owner. The recording of the internal condition of the storm drain conduit shall be clear, accurate, focused and in color. If the recording fails to meet these requirements, the, equipment shall be removed and replaced with equipment that is suitable. No payment will be made for an unsatisfactory recording.

If during video inspection, water is encountered inside the conduit, the conduit shall be dewatered by the Contractor. The storm drain section must be dry. Video recording conducted while the camera is floating is not acceptable unless approved by the Owner.

If during video inspection, debris is encountered that prohibits a proper inspection of the conduit, the Contractor shall remove the debris before proceeding.

All video shall be documented using a data logger and reporting system that are PACP compliant and which use codes as established by the National Association of Sewer Service Companies (NASSCO)s - Pipeline Assessment and Certification Program (PACP).

Computer printed location records shall be kept by the Contractor and shall clearly show the location and orientation of all points of significance such as joints, conduit connections, connections at manholes and inlets, and defects. Copy of all records shall be supplied to the Owner. Noted defects shall be documented as color digital files and color hard copy print-outs. Photo logs shall accompany each photo submitted.

The video recording shall supply a visual and audio record of the storm drain conduits that may be replayed. Video recordings shall include an audio track recorded by the video technician during the actual video work describing the parameters of the storm drain conduit being videoed (i.e. location, depth, diameter, pipe material), as well as describing connections, defects and unusual conditions observed during the video work. Video recording playback shall be at the same speed that it was recorded. Slow motion or stop-motion playback features may be supplied at the option of the Contractor. Once videoed, the CDs/DVDs shall be labeled and become the property of the Owner. The Contractor shall have all video and necessary playback equipment readily accessible for review by the Owner while the project is under construction.

Post-installation video shall not be completed until all work is completed on a section of storm drain conduit. Post-installation video work shall be completed by the Contractor in the presence of the Owner. The post-installation video work shall be completed to confirm that the storm drain conduits are free of defects. Provide a color video showing the completed work. Prepare and submit video logs providing location of storm drain conduit along with location of any defects. Manhole and inlet work shall be complete prior to post-installation video work.

For post-installation video, exercise the full capabilities of the camera equipment to document the completion and conformance of the storm drain installation work with the Contract Documents. Provide a full 360-degree view of conduit, all joints, and all connections. The camera shall be moved through the storm drain conduit in either direction at a moderate rate, stopping and slowly panning when necessary to permit proper documentation of the conduit condition at each pipe connection, joint, and defect. In no case shall the camera be pulled at a speed greater than 30 feet per minute. Manual winches, power winches, TV cable, and powered rewinds or other devices that do not obstruct the camera view or interfere with proper documentation of the storm drain conditions shall be used to move the camera through the storm drain conduit. When manually operated winches are used to pull the camera through the conduit, telephones or other suitable means of communication shall be set up between the two access points of the conduit being videoed to insure good communication between members of the video crew.

Distance measurements shall be provided to an accuracy of one tenth of a foot.

Video shall be continuous for each storm drain conduit segment. Do not show a single segment on more than one CD/DVD, unless specifically allowed by the Owner.

Contractor shall submit to Owner the following:

A. National Association of Sewer Service Companies (NASSCO) Pipeline Assessment and Certification Program (PACP) certification of operators who will be performing video work.

B. Compact Disc (CD) or Digital Video Disc (DVD) of recording of storm drain conduits (concrete storm water pipe or box culvert).

   a. The color CD or DVD shall include a digital color key map in a format acceptable to the Owner with each segment of storm drain conduit labeled with the appropriate inspection ID on the map.

   b. The file folder for each segment of the storm drain conduit shall have a unique name based on the Owner's approved inspection naming convention and shall contain the following:

      i. Video files

      ii. Video inspection logs with information coded in accordance with the PACP

      iii. Photo logs

      iv. A report summarizing the results of the video inspection

      v. A proposed method of repair for any defects discovered.

(3) Time commitments from City for projects that are exempt from the cost of the initial video inspection

Projects that are exempt from the cost of the initial video inspection are afforded the following time commitments from the City.

A. Initial inspection - contractor must inform the City of Austin construction inspector assigned to the project in writing that all stormdrain infrastructure for the project has been completed according to the permit and is ready for inspection. The inspector will then notify the Watershed Protection Department (WPD) in writing that the all of the stormdrain infrastructure for the project has been completed and is ready for inspection. The WPD is allowed 15-days to complete inspection from written notification by the inspector. The outcome of this item does not impact the one-year warranty requirements.

B. Video re-inspection by the contractor for deficient installed stormdrain infrastructure. The contractor must submit the video inspection data as defined in this specification to the City of Austin construction inspector assigned to the project along with a written letter of transmittal certified by a professional engineer stating that all identified stormdrain infrastructure installation deficiencies for the project have been corrected. The inspector will then notify the Watershed Protection Department (WPD) in writing and convey the video inspection data to the WPD. The WPD is allowed 15-days to complete review of the data from the date of delivery by the inspector.

(27) Pressure Pipe Hydrostatic Testing

After the pipe has been installed and backfilled and all service laterals, fire hydrants and other appurtenances installed and connected, a pressure test, followed by a leakage test, will be conducted by the City. The City will furnish the pump and gauges for the tests. The Contractor shall be present and shall furnish all necessary assistance for conducting the tests. The specified test pressures will be based on the elevation of the lowest point of the line or section under test. Before applying the specified test pressure, all air shall be expelled from the pipe. If permanent air vents are not located at all high points, the Contractor shall install corporation cocks at such points.

All drain hydrant and fire hydrant leads, with the main 6-inch gate valve open, the hydrant valve seats closed and no nozzle caps removed, shall be included in the test.

(a) Pressure Test

The entire project or each valved section shall be tested, at a constant pressure of 200 psi for a sufficient period (approximately 10 minutes) to discover defective materials or substandard work. The Contractor assumes all risks associated with testing against valves. Repairs shall be made by the Contractor to correct any defective materials or substandard work. The Contractor shall pre-test new lines before requesting pressure tests by City Forces. The Contractor shall have new lines pressurized to a minimum of 100 psi, on the date of testing, prior to arrival of City Forces.

(b) Leakage Test

A leakage test will follow the pressure test and will be conducted on the entire project or each valved section. The Contractor assumes all risks associated with testing against valves. The leakage test shall be conducted at 150 psi for at least 2 hours. The test pressure shall not vary by more than ±5 psi for the duration of the test.

(1) Allowable Leakage

Leakage shall be defined as the quantity of water that must be supplied into any test section of pipe to maintain the specified leakage test pressure after the air in the pipeline has been expelled and the pipe has been filled with water.

No pipe installation will be accepted if leakage exceeds the amount given by the following formula:

$$\text{Allowable leakage (gal/hr)} = [L \times D] \div 10{,}875$$

Where L = length of pipe tested, in feet
D= nominal pipe diameter, in inches, as marked on the pipe

(2) Location and Correction of Leakage

If such testing discloses leakage in excess of this specified allowable, the Contractor, at the Contractor's expense, shall locate and correct all defects in the pipeline until the leakage is within the indicated allowance.

All visible leakage in pipe shall also be corrected by Contractor at the Contractor's expense.

(28) Service Charges for Testing

Initial testing performed by City forces for the Contractor will be at the City's expense. Retesting, by City forces, of Contractor's work that fails initial testing will be at the Contractor's expense. The City's charge for retests will be a base fee plus an hourly rate published in the current AW Fee Schedule. On City-funded projects, the charges incurred by the City for retesting will be deducted from funds due the Contractor. On non-City-funded projects, the charges incurred by the City for retesting will be billed to the Contractor. The City will withhold acceptance of the Contractor's work until the Contractor has paid the City for the retesting costs.

(29) Disinfection of Potable Water Lines

Prior to performing any disinfection of potable water lines, the Contractor shall submit a Disinfection Plan (Plan) and obtain approval in accordance with COA specification 01300, Submittals. The Plan shall comply with AWWA C651 (Disinfecting Water Mains) and AWWA C655 (Field Dechlorination), latest editions, and shall be developed using one of the following templates, unless otherwise approved by the Engineer and/or AW: Disinfection Plan for Tablet/Granule Method, or Disinfection Plan for Continuous-Feed Method. Templates for these two methods are located at http://www.austintexas.gov/department/construction-standards . The Contractor shall decide which disinfection method to use for a given project. The Slug Method and Spray Method are also acceptable if better suited for disinfection. The initial plan shall be submitted for review a minimum of 60 calendar days prior to when the water main is scheduled to be placed into service, or at the preconstruction conference if the project requires that the waterline be placed in service in less than 60 days, as indicated in the Contractor's Construction Schedule. If any appurtenances are required for injection, sampling, or flushing purposes that are not shown in the original plan/profile sheets, then the Contractor shall include the appurtenances in the project Record Drawings. The Contractor shall disinfect potable water lines only in accordance with an approved Plan.

(a) Preventing Contamination

The Contractor shall protect all piping materials from contamination during storage, handling and installation. Prior to disinfection, the pipeline interior shall be clean, dry and unobstructed. All openings in the pipeline shall be closed with watertight plugs when pipe laying is stopped at the close of the day's work.

(b) Cleaning

Prior to disinfection the Contractor shall clean the pipeline to remove foreign matter. For pipelines 16″ in diameter or smaller, cleaning shall consist of flushing the pipeline. For pipelines greater than 16″ in diameter, cleaning shall be performed by operating hydrants and blow-offs located at low points in the pipeline, or by mechanical means (sweeping or pigging. Water for the Work shall be metered and furnished by the Contractor in accordance with Section 01500 of the Standard Contract Documents.

(c) Procedure and Dosage

For pipelines 16" or smaller in diameter, the Contractor may use either the AWWA C-651 "Tablet/Granular Method" or the "Continuous Feed Method" for disinfecting the pipeline. The Contractor, at its expense, will supply the test gauges and the Sodium Hypochlorite conforming to ANSI/AWWA B300, which contains approximately 5 percent to fifteen percent available chlorine, and will submit for approval a written plan for the disinfection process. Calcium Hypochlorite conforming to ANSI/AWWA B300, which contains approximately 65 percent available chlorine by weight, may be used in granular form or in 5 g tablets for 16″ diameter or smaller lines, if it is included as part of the written plan of disinfection that is approved by the City of Austin. The Contractor, at its expense, shall provide all other equipment, supplies and the necessary labor to perform the disinfection under the general supervision of the City.

One connection to the existing system will be allowed with a valve arranged to prevent the strong disinfecting dosage from flowing back into the existing water supply piping. The valve shall be kept closed and locked in a valve box with the lid painted red. No other connection shall be made until the disinfection of the new line is complete and the water samples have met the established criteria. The valve shall remain closed at all times except when filling or flushing the line and must be staffed during these operations. As an option, backflow prevention in the form of a reduced pressure backflow assembly may be provided if the valve is left unattended. The new pipeline shall be filled completely with disinfecting solution by feeding the concentrated chlorine and approved water from the existing system uniformly into the new piping in such proportions that every part of the line has a minimum concentration of 25 mg/liter available chlorine.

The disinfecting solution shall be retained in the piping for at least 16 hours and all valves, hydrants, services, stubs, etc. shall be operated so as to disinfect all their parts. After this retention period, the water shall contain no less than 10 mg/liter chlorine throughout the treated section of the pipeline.

For pipelines larger than 16″ in diameter, the Contractor may use the AWWA C-651 "Slug Method" for disinfecting the pipeline. Chlorine shall be fed at a constant rate and at a sufficient concentration at one end of the pipeline to develop a slug of chlorinated water having not less than 100 mg/liter of free chlorine. The Contractor shall move the slug through the main so that all interior surfaces are exposed to the slug for at least three (3) hours. The chlorine concentration in the slug shall be measured as it moves through the pipeline. If the chlorine concentration drops below 50 mg/liter, the Contractor shall stop the slug and feed additional chlorine to the head of the slug to restore the chlorine concentration to at least 100 mg/liter before proceeding. As the slug flows past fittings and valves, related valves and hydrants shall be operated so as to disinfect appurtenances and pipe branches.

Unless otherwise indicated, all quantities specified herein refer to measurements required by the testing procedures included in the current edition of "Standard Methods". The chlorine concentration at each step in the disinfection procedure shall be verified by chlorine residual determinations.

(d) Final Flushing

The heavily chlorinated water shall then be carefully flushed from the potable water line by a dechlorination process until the chlorine concentration is no higher than the residual generally prevailing in the existing distribution system. This is necessary to insure that there is no injury or damage to the public, the water system or the environment. The plans and preparations of the Contractor must be approved by the City before flushing of the line may begin. The Contractor will supply the Dechlorination chemical conforming to ANSI/AWWA C655. Additionally the flushing must be witnessed by an authorized representative of the City.

Approval for discharge of the diluted chlorine water or heavily chlorinated water into the wastewater system must be obtained from AW. The line flushing operations shall be regulated by the Contractor so as not to overload the wastewater system or cause damage to the odor feed systems at the lift stations. The City shall designate its own representative to oversee the work.

Daily notice of line discharging must be reported to the AW Dispatch office.

(e) Bacteriological Testing

After disinfection and final flushing, samples shall be collected per one of the two options. Option A: Before approving a main for release, take an initial set of samples and then resample again after a minimum of 16 hours. Both sets of samples must pass for the main to be approved for release. Option B: Before approving a main for release, let it sit for a minimum of 16 hours without any water use. Then collect two sets of samples a minimum of 15 minutes apart while the sampling taps are left running. Both sets of samples must pass for the main to be approved for release. The two (2) sets of water samples from the line will be tested for bacteriological quality by the City and must be found free of coliform organisms before the pipeline may be placed in service. Each set shall consist of one (1) sample that is drawn from the end of the main, at least one from each branch greater than one pipe length, and additional samples that are collected at intervals of not more than 1,200 feet along the pipeline. All stubs shall be tested before connections are made to existing systems.

The Contractor, at its expense, shall install sufficient sampling taps at proper locations along the pipeline. Each sampling tap shall consist of a standard corporation cock installed in the line and extended with a copper tubing gooseneck assembly. After samples have been collected, the gooseneck assembly may be removed and retained for future use.

Samples for bacteriological analysis will only be collected from suitable sampling taps in sterile bottles treated with sodium thiosulfate. Samples shall not be drawn from hoses or unregulated sources. The City, at its expense, will furnish the sterile sample bottles and may, at its discretion, collect the test samples with City personnel.

If the initial disinfection fails to produce acceptable sample test results, the disinfection procedure shall be repeated at the Contractor's expense. Before the piping may be placed in service, two (2) consecutive sets of acceptable test results must be obtained.

An acceptable test sample is one in which: (1) the chlorine level is similar to the level of the existing distribution system; (2) there is no free chlorine and (3) total coliform organisms are absent. An invalid sample is one, which has excessive free chlorine, silt or non-coliform growth as defined in the current issue of the "Standards Methods." If unacceptable sample results are obtained for any pipe, the Contractor may, with the concurrence of the Inspector, for one time only flush the lines and then collect a second series of test samples for testing by the City. After this flushing sequence is completed, any pipe with one or more failed samples must be disinfected again in accordance with the approved disinfection procedure followed by appropriate sampling and testing of the water.

The City of Austin Water Quality Laboratory will notify the assigned City of Austin Inspector in writing of all test results. The Inspector will subsequently notify the Contractor of all test results. The Water Quality Laboratory will not release test results directly to the Contractor.

(30) Cleanup and Restoration

It shall be the Contractor's responsibility to keep the construction site neat, clean and orderly at all times. Cleanup shall be vigorous and continuous to minimize traffic hazards or obstructions along the streets and to driveways. Trenching, backfill, pavement repair (as necessary), and cleanup shall be coordinated as directed by the City. The E/A will regulate

the amount of open ditch and may halt additional trenching if cleanup is not adequate to allow for orderly traffic flow and access.

Materials at the site shall be stored in a neat and orderly manner so as not to obstruct pedestrian or vehicular traffic. All damaged material shall be removed from the construction site immediately and disposed of in a proper manner. All surplus excavated materials shall become the property of the Contractor for disposal at the Contractor's expense. After trenching, the Contractor shall immediately remove all excavated materials unsuitable for or in excess of, backfill requirements. Immediately following the pipe laying Work as it progresses, the Contractor shall backfill, grade and compact all excavations as provided elsewhere. The backfill placed at that time shall meet all compaction test requirements. The Contractor shall immediately clean up and remove all unused soil, waste and debris and restore all surfaces and improvements to a condition equal or superior to that before construction began and to an appearance which complements the surroundings. The Contractor shall grade and dress the top 6 inches of earth surfaces with soil or other material similar and equal to the surrounding, fill and smooth any visible tracks or ruts, replace and re-establish all damaged or disturbed turf or other vegetation and otherwise make every effort to encourage the return of the entire surface and all improvements to a pleasant appearance and useful condition appropriate and complementary to the surroundings and equal or similar to that before construction began.

Placement of the final lift of permanent pavement, if a pavement is required, shall begin immediately after all testing of each segment of piping is satisfactorily completed.

(31) Valve Turn Walk-though

As part of the acceptance of Water or Reclaimed Water pressure pipe, an AW Valve Walk-through will be performed after an initial inspection by the Owner's Representative to identify any deficient items. If deficient items are present during the AW Valve Walk-Through and the project fails acceptance, a re-inspection fee will apply and must be paid before a re-inspection is scheduled to confirm correction of deficient items. See AW Fee Schedule for the current Distribution Walk-Through Re-inspection Fee.

(32) 2-inch Jumper Hose

During connections to the water distribution system, the Contractor may be required to install a temporary jumper hose between the unpressurized water segment and an adjacent pressurized water segment for the purpose of maintaining water service to customers who can't operate without water service during the connection. The jumper shall include an approved backflow preventer and be of adequate size and pressure rating to maintain service to the customer. It shall be polyethylene tubing meeting the requirements of COA SPL WW-65. The jumper hose and other components in the temporary service shall be disinfected, and bacteriological samples will be taken and pass before the temporary service is provided to the customer. Contractor shall provide adequate protection for the jumper hose in vehicular traffic areas at all times during use.

Source: Rule No. R161-17.05 , 5-31-2017; Rule No. R161-17.19 , 11-28-2017; Rule No. R161-18.23 , 12-8-2018.

510.4 - Measurement

Pipe will be measured by the linear foot for the various types, sizes and classes. Parallel lines will be measured individually.

Where a line ties into an existing system, the length of the new line will be measured from the visible end of the existing system at the completed joint. Unless otherwise indicated, the length of water, reclaimed,

and wastewater lines will be measured along pipe horizontal centerline stationing through fittings, valves, manholes, and other appurtenances.

Ductile iron fittings, whether standard mechanical joint or integral factory restrained joint type, will be measured by the ton and paid for in accordance with the schedule in Standard Products List WW-27C. Bolts, glands and gaskets will not be measured for payment. Steel cylinder concrete pipe fittings and welded steel pipe fittings will not be measured separately and are included in the unit price for the respective pipe bid items.

Factory restrained joint pipe meeting the requirements of Standard Products List WW-27F will be measured by the linear foot. The estimated quantity on the bid form is only for restrained joint pipe having integral mechanically restrained joints.

Connecting a new water, wastewater, or reclaimed water service to an existing, comparable type of private service will be measured by each connection. Service pipe from the main to the service connection will be measured by the linear foot.

The Contractor shall be responsible for removing and treating ground water flowing into a trench up to a baseline flow rate of 350 gpm of sustained flow for each mainline open trench (no more that 300 linear feet open trench per work zone segment is allowed at one time). This baseline flow rate is not a prediction of ground water conditions to be expected on the Project. Rather, it establishes contract terms regarding the quantity of ground water for which the contractor is responsible without extra or separate compensation. The flow rate must exceed 350 gpm continuously for at least 4 consecutive hours to be considered sustained flow. It is expected that trench dewatering for this baseline rate may be accomplished with a single 3-inch trash-type pump per open trench; however, measured flow rate, not pump size, type or characteristics shall be used to determine if the baseline rate has been exceeded. Flow rate shall be determined by measurements made at the discharge point of the water treatment facilities. Surface storm water flowing into a trench shall be the Contractor's responsibility to remove and treat without compensation, regardless of inflow rate or volume.

Adjustment of elevations during construction resulting in changes in flow line elevations of plus or minus two feet or less will not be considered for credit or additional compensation and no measurement for payment will be made.

Stormwater pipe will be measured along the slope of the pipe. Where drainage pipe ties into inlets, headwalls, catch basins, manholes, junction boxes or other structures that length of pipe tying into the structure wall will be included for measurement but no other portion of the structure length or width will be so included.

Excavation and backfill, when included as pipe installation will not be measured as such but shall be included in the unit price bid for constructing pipe and measured as pipe complete in place including excavation and backfill.

When pay items are provided for the other components of the system, measurement will be made as addressed hereunder.

Video inspection of newly installed box culverts and storm drain pipe will be measured per linear foot of pipe videoed.

Jumper hose will be measured per linear foot of hose installed, including all depths, excavation and backfill, complete, and in place.

Source: Rule No. R161-17.05 , 5-31-2017.

510.5 - Payment

Payment for pipe, measured as prescribed above, will be made at the unit price bid per linear foot for the various sizes of pipe, of the materials and type indicated, unless unstable material is encountered or trench excavation and backfill is bid as a separate item.

The concrete seal, foundation rock or coarse aggregate when used as directed in unstable material will be paid for at the unit price bid per cubic yard, which shall be full payment for all excavation and removal of unsuitable material and furnishing, placing and compacting the foundation rock, coarse aggregate or other approved material all complete in place.

Excavation and backfill, when included as a separate pay item, will be paid for by Pay Item No. 510-E or 510-F.

No separate payment will be made for dewatering a trench with ground water inflow of less than the baseline rate of 350 gpm of sustained flow as described above. Dewatering of those trenches shall be included in the contract unit price of the Pipe pay item. Payment for dewatering a trench with ground water inflow exceeding 350 gpm of sustained flow shall be agreed by change order. Dewatering of bore pits shall be included in the contract unit price for Bore Entry Pit or Exit Pit regardless of inflow rate or volume unless specified otherwise in the bid item for Bore Entry Pit or Exit Pit.

(1) Pipe

Payment for pipe, measured as prescribed above, will be made at the unit price bid per linear foot complete-in-place as designed and represented in the Drawings and other Contract documents. Restrained joint pipe meeting the requirements of Standard Products List WW-27F will be paid for separately at the unit price bid per linear foot. Unless otherwise provided herein, as separate pay item(s), the bid price per linear foot of pipe shall include the following:

a. clearing

b. constructing any necessary embankment

c. excavation

d. disposal of surplus or unusable excavated material

e. furnishing, hauling and placing pipe

f. field constructed joints, collars, temporary plugs, caps or bulkheads

g. all necessary lugs, rods or braces

h. pipe coatings and protection

i. connections to existing systems or structures, concrete blocking and thrust blocks and restrained joints

j. preparing, shaping, pumping for dewatering, and shoring of trenches

k. bedding materials

l. backfill materials

m. hauling, placing and preparing bedding materials

n. particle migration measures

o. hauling, moving, placing and compacting backfill materials

p. temporary and permanent pavement repairs and maintenance

q. temporary removal and replacement of pavement, curb, drainage structures, driveways, sidewalks and any other improvements damaged or removed during construction

r. cleanup

s. vertical stack on deep wastewater services

t. all other incidentals necessary to complete the pipe installation as indicated.

u. pipe joint restraint devices, where specified or allowed, meeting Standard Products List WW-27A or WW-27G.

No separate payment will be made for thrust restraint measures.

Steel cylinder concrete pipe fittings and welded steel pipe fittings will not be paid for separately. These will be included in the unit price bid for the bid item Pipe.

(2) Concrete Cradles and Seals

When called for in the Bid, concrete cradles and seals will be paid for at the unit Contract price bid per linear foot for the size of pipe specified, complete in place.

(3) Concrete Retards

When called for in the Bid, Concrete retards will be paid under Item No. 593S, Concrete Retards."

(4) Boring or Jacking.

When called for in the Bid, boring or jacking will be paid under Item 501S, "Jacking or Boring Pipe.

(5) Wet Connections to Potable or Reclaimed Water Mains

When called for in the bid, wet connections will be paid at the unit price bid per each, complete in place, according to the size of the main that is in service and shall be full compensation for all Work required to make the connection and place the pipe in service. (See subsection 510.3 'Construction Methods' part (24) (b) 'Wet Connections to Existing Water System').

(6) Fittings

Ductile iron fittings, furnished in accordance with these specifications, will be paid for at the unit price bid per ton, complete in place, according to the schedule of weights in Standard Products List WW-27C. Bolts, glands, and gaskets will not be paid for separately and shall be included in the contract unit price for fittings.

(7) Concrete Trench Cap and Encasement

Where the distance between the top of the concrete encasement and the top of the trench cap is less than 36 inches, the concrete cap and encasement shall be poured as one unit and paid for under this bid item at the Contract price bid per linear foot. When the distance above is greater than 36 inches or when the trench cap is placed separately, the trench cap shall be paid for as a separate item, per linear foot, complete in place.

(8) Cement-Stabilized Backfill

Cement-stabilized backfill will be paid for at the unit price bid per linear foot and shall be full payment to the Contractor for furnishing and installing the required material, mixed, placed and cured complete in place.

(9) Concrete Encasement

When called for in the Bid, Concrete Pipe Encasement will be paid under Item No. 505S, "Encasement and Encasement Pipe".

(10) Pressure Taps

Pressure taps will be paid for at the unit price bid, complete in place, according to the size tap made and the size main tapped and shall be full payment for furnishing all necessary materials,

including tapping sleeve and valve, making the tap, testing and placing the connection in service.

(11) Excavation Safety Systems

When called for in Bid, Trench Safety Systems shall conform to Item No. 509S, "Excavation Safety Systems."

(12) Connecting a New Water, Wastewater, or Reclaimed Water Service to an existing, comparable type of private service will be paid for at the unit price bid, complete in place, according to the size of new service and size of existing private service, and shall be full payment for furnishing and installing all necessary materials, such as cleanouts, pipe, couplings, and fittings, and including excavation and backfill.

(13) Video Inspection

Video Inspection of Newly Installed Box Culverts and Storm Drain Pipe will be paid for at the unit price bid per linear foot and shall be full payment for all labor, equipment, and materials required for video inspection per this specification, including all submittals of CD/DVD as required.

(14) Jumper Hose

Jumper Hose will be paid at the unit bid price, complete and in place, including installation and removal of all materials necessary to provide a fully functional jumper hose. This item shall also include adequate protection for the jumper hose within vehicular traffic areas.

Source: Rule No. R161-17.05 , 5-31-2017.

Payment, when included as a Contract pay item, will be made under one of the following:

Pay Item No. 510-AR___Dia.:	Pipe, ___ Dia. ___ Type (all depths), including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-ARRJ___Dia.:	Factory Restrained Joint Pipe, ___ Dia., Class ___ Ductile Iron, (all depths) including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-BR___×___Dia.:	Connecting New ___ Service to Existing Private Service (___ Dia. New Service to ___ Dia. Private Service)	Per Each.
Pay Item No. 510-CR:	Pipe Excavation, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-DR:	Pipe Trench Backfill, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-ER:	Concrete Seal or Cradle, ___ Dia. Pipe	Per Linear Foot.

Pay Item No. 510-FR:	Concrete Trench Cap, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-GR:	Concrete Cap and Encasement, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-HR:	Cement Stabilized Backfill, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-IR: ___ × ___ Dia.:	Pressure Taps, ___ Dia. × ___ Dia.	Per Each.
Pay Item No. 510-JR: ___ × ___ Dia.:	Wet Connections, ___ Dia. × ___ Dia.	Per Each.
Pay Item No. 510-KR:	Ductile Iron Fittings	Per Ton.
Pay Item No. 510-ASD___Dia.:	Pipe, ___ Dia. (all depths), including excavation and backfill	Per Linear Foot.
Pay Item No. 510-CSD:	Pipe Excavation, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-DSD:	Pipe Trench Backfill, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-ESD:	Concrete Seal or Cradle, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-FSD:	Concrete Trench Cap, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-GSD:	Concrete Cap and Encasement, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-HSD:	Cement Stabilized Backfill, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-AW___ Dia.:	Pipe, ___ Dia. ___ Type (all depths), including excavation and backfill	Per Linear Foot

Pay Item No. 510-AWRJ___ Dia.:	Factory Restrained Joint Pipe, ___ Dia., Class Ductile Iron, (all depths) including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-BW___ × ___ Dia.:	Connecting New ___ Service to Existing Private Service (___ Dia. New Service to ___ Dia. Private Service)	Per Each.
Pay Item No. 510-CW:	Pipe Excavation, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-DW:	Pipe Trench Backfill, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-EW:	Concrete Seal or Cradle, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-FW:	Concrete Trench Cap, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-GW:	Concrete Cap and Encasement, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-HW:	Cement Stabilized Backfill, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-IW:___ × ___ Dia.:	Pressure Taps, ___ Dia. × ___ Dia.	Per Each.
Pay Item No. 510-JW: ___ × ___ Dia.:	Wet Connections, ___ Dia. × ___ Dia.	Per Each.
Pay Item No. 510-KW:	Ductile Iron Fittings	Per Ton.
Pay Item No. 510-AWW: ___ Dia.:	Pipe, ___ Dia. ___ Type (all depths), including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-AWWRJ___ Dia.:	Factory Restrained Joint Pipe, ___ Dia., Class ductile Iron, (all depths) including Excavation and Backfill	Per Linear Foot.
Pay Item No. 510-BWW___ × ___ Dia.:	Connecting New ___ Service to Existing Private Service (___ Dia. New Service to ___ Dia. Private Service)	Per Each.

Pay Item No. 510-CWW:	Pipe Excavation, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-DWW:	Pipe Trench Backfill, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-EWW:	Concrete Seal or Cradle, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-FWW:	Concrete Trench Cap, ___ Ft. Width	Per Linear Foot.
Pay Item No. 510-GWW:	Concrete Cap and Encasement, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-HWW:	Cement Stabilized Backfill, ___ Dia. Pipe	Per Linear Foot.
Pay Item No. 510-KWW:	Ductile Iron Fittings	Per Ton.
Pay Item No. 510-VIDEO	Video Inspection of Newly Installed Box Culverts and Storm Drain Pipe	Per Linear Foot.
Pay Item No. 510-JH	2-inch Jumper Hose	Per Linear Foot.

An "R" after the pay item indicates the use for reclaimed water.

An "SD" after the pay item indicates the use for storm drain.

A "W" after the pay item indicates the use for water.

A "WW" after the pay item indicates the use for wastewater.

Source: Rule No. R161-17.05 , 5-31-2017.

End

Applicable References:

Standard Specifications Manual: Item Nos. Ref: 102S, 210S, 402S, 403, 501S, 505S, 506, 507S, 509S, 593S, 601S, 604S

Standards Manual: Standard Detail Nos. 510S-1, (520 - series).

Design Criteria Manuals: Utilities Criteria Manual, Section 5.

511S.1 Description

This item shall govern the valves furnished and installed as indicated on the Drawings. Unless otherwise indicated on the Drawings, all valves 4 inches (102 mm) and larger shall be AWWA-type valves of suitable design and fully equipped for service buried in the earth, without need for further modification and shall be wrapped with 8-mil (0.2 mm) polyethylene film with all edges and laps securely taped to provide a continuous wrap. For reclaimed water piping, the polyethylene film shall be purple. Where not indicated, the Contractor may use valves with any type end-joint allowed for fittings of the pipe class being used. Unless otherwise indicated on the Drawings, all valve stems shall be adjusted to situate the operating nut not more than 24 inches (0.6 meters) below the proposed ground or paving surface of the finished project. Laydown valves shall not be used unless indicated otherwise on the Drawings by call out. Standard details shall not be an indicator of options.

This specification is applicable for projects or work involving either inch-pounds or SI units. Within the text, inch-pound units are given preference followed by SI units shown within parentheses.

511S.2 Materials

The Contractor shall submit descriptive information and evidence that the materials and equipment the Contractor proposes for incorporation in the Work is of the kind and quality that satisfies the specified functions and quality. The City of Austin Water and Wastewater Utility Standard Products Lists (SPL) are considered to form a part of these Specifications. Contractors may, when appropriate, elect to use products from the SPL; however, submittal to the Engineer/Architect (E/A) is still required. If the Contractor elects to use any materials from these lists, each product shall be completely and clearly identified by its corresponding SPL number when making the product submittal. This will expedite the review process in which the E/A, and, if necessary, the Water and Wastewater Utility Standard Products Committee, decide whether the products meet the Contract requirements and the specific use foreseen by the E/A in the design of this engineered Project.

The SPL's should not be interpreted as being a pre-approved list of products necessarily meeting the requirements for a given construction Project. Items contained in the SPL cannot be substituted for items shown on the Drawings, or called for in the specifications, or specified in the Bidding Requirements, Contract Forms and Conditions of Contract, unless approved by the E/A in conjunction with the Water and Wastewater Utility Standard Products Committee. The Standard Product List current at the time of plan approval will govern.

A) Samples, Inspection and Testing Requirements:

All tests and inspections called for by the applicable standards shall be performed by the manufacturer. Upon request, results of these tests shall be made available to the purchaser.

B) Other Requirements:

Each submittal shall be accompanied by:

1) Complete data covering:

a). the operator, including type and size, model number, etc.,

b). the name and address of the manufacturer's nearest service facility,

c). the number of turns to fully open or close the valve.

2) Detailed instructions for calibrating the limit stops for open and closed positions, and

3) Any other information that may be necessary to operate and maintain the operator.

4) Complete dimensional data and installation instructions for the valve assembly as it is to be installed, including the operator.

5) Complete replacement parts lists and drawings, identifying every part for both the valve and operator.

511S.3 Valves

A) Iron-Body Gate Valves

Resilient-seated gate valves for potable or reclaimed service, including tapping valves, shall conform to AWWA C-509 and Standard Products List item WW-282.

Reduced-wall, resilient-seated gate valves for potable or reclaimed service, including tapping valves, shall conform to AWWA C-515 and Standard Products List item WW-700,

Metal-seated gate valves for potable or reclaimed service, including tapping valves, shall conform to AWWA C-500 and Standard Products List item WW-132.

1) Stem Seals: All valves shall have approved O-ring type stem seals. At least two O-rings shall be in contact with the valve stem where it penetrates the valve body.

2) Operation: All valves shall have non-rising stems with a 2" (50 mm) square operating nut, or with a spoke type handwheel when so ordered, turning clockwise to close.

3) Gearing: Gate valves in 24 inch (610 mm) and larger sizes shall be geared and, when necessary for proper bury depth and cover, shall be the horizontal bevel-geared type enclosed in a lubricated gear case.

4) Bypass: Unless otherwise indicated on the Drawings, 16 inch (406 mm) and larger metal-seated gate valves shall be equipped with a bypass of the non-rising stem type which meets the same AWWA standard required for the main valve.

5) Valve Ends: Valve ends shall be push-on, flanged or mechanical joint, as indicated or approved.

   Tapping valves shall have inlet flanges conforming to MSS SP-60, with boltholes drilled per ANSI B16.1 Class 125. Seat rings and body casting shall be over-sized as required to accommodate full size cutters; the outlet end shall be constructed and drilled to allow the drilling machine adapter to be attached directly to the valve.

6) Gear Case: All geared valves shall have enclosed gear cases of the extended type, attached to the valve bonnet in a manner that makes it possible to replace the stem seal without disassembly and without disturbing the gears, bearing or gear lubricant. Gear cases shall be designed and fabricated with an opening to atmosphere so that leakage past the stem seal does not enter the gear case.

7) Valve Body: Double disc gate valves in 16 inch (406 mm) and larger sizes installed in the horizontal position shall have bronze rollers, tracks, scrapers, etc. For reclaimed water valves, the body shall be manufactured in purple, factory painted purple, or field painted purple.

B) Butterfly Valves:

Unless otherwise indicated, all valves shall conform to the current "AWWA" Standard C-504, "Rubber-Seated Butterfly Valves", Class 150B, except as modified or supplemented herein.

1) Functional Requirements

a). Valves shall be the short body design and shall have flanged connections on both ends unless otherwise called for.

b). Valves shall be of such design that the valve discs will not vibrate or flutter when operated in a throttled position. Valve discs shall be secured to the shafts by means of keys or pins so arranged that the valve discs can be readily removed without damage thereto. All keys and pins used in securing valve discs to shafts shall be stainless steel or monel. Valve discs shall be stainless steel or ductile iron, ASTM A 536, Grade 65-45-12 (448-310-12); seating edge shall be stainless steel or other corrosion resistant material.

c). Valve shafts shall be constructed of wrought stainless steel or monel. The ends of the shaft shall be permanently marked to indicate the position of the disc on the shaft.

d). All buried valves shall have approved manufacturer's O-ring type or split V type "Chevron" shaft seals. When O-ring seals are used, there shall be at least two O-rings in contact with the valve shaft where it penetrates the valve body.

On 24 inch (635 mm) and larger valves, the seat shall be completely replaceable and/or adjustable with common hand tools without disassembling the valve from the pipeline.

Rubber seats located on the valve disc shall be mechanically secured with stainless steel retainer rings and fasteners.

e). Unless otherwise indicated, valves shall be provided with manual operators with vertical stems and 2 inches (50 mm) square operating nut turning clockwise to close and equipped with a valve disc position indicator. All keys or pins shall be stainless steel or monel. Buried valves shall have the valve stems extended or adjusted to locate the top of the operating nut no more than 24 inches (0.6 meter) below finish grade.

f). Unless otherwise indicated, motorized butterfly valves shall be equipped with 230/460 volt, 3-phase reversing motor operators, extended as required to locate the center line of the operator shaft approximately 4 feet to 4 feet, 6 inches (1.2 to 1.4 meters) above finish grade. Operators shall be equipped with cast iron or malleable iron manual override hand wheel with a valve position indicator, local push button controls, lighted status/position indicator, torque and travel limit switches and all switches, relays and controls (except external power and signal wiring) necessary for both local and remote operation.

2) Performance Requirements

a). Unless otherwise indicated, valve operators shall be sized to seat, unseat, open and close the valve with 150 psi (1 megapascal) shutoff pressure differential across the disk and allow a flow velocity of 16 feet (4.9 meters) per second past the disc in either direction.

b). Motorized valve motors shall be capable of producing at least 140 percent of the torque required to operate the valves under conditions of maximum non-shock shutoff pressure without exceeding a permissible temperature rise of 131^0F over

104^0F ambient (55 degrees Celsius over 40 degrees Celsius ambient); they shall have a duty rating of not less than 15 minutes and shall be capable of operating the valve through 4 1/2 cycles against full unbalanced pressure without exceeding the permissible temperature rise. Motors shall be suitable for operating the valve under maximum differential pressure when voltage to motor terminals is 80 percent of nominal voltage. Motor bearings shall be permanently lubricated and sealed.

C) Ball Valves:

Ball valves shall be brass, bronze, stainless steel or PVC as indicated on the Drawings or Details or as approved by the Engineer or designated representative.

D) Air-Vacuum Release Valves

1) Valves shall be combination air-release, air-vacuum units having small and large orifice units contained and operating within a single body or assembled unit.

The small orifice system shall automatically release small volumes of air while the pipe is operating under normal conditions. The large air-vacuum orifice system shall automatically exhaust large volumes of air while the pipe is being filled and shall permit immediate re-entry of air while being drained.

Valves shall be rated for at least 150 psi (1 megapascal) {maximum} normal service pressure.

2) Material Requirements

Valve exterior bodies and covers shall be cast iron or reinforced nylon.

Internal bushings, hinge pins, float guide and retaining screws, pins, etc., shall be stainless steel, bronze, nylon or Buna-N rubber.

Orifice seats shall be Buna-N rubber.

Floats shall be stainless steel, nylon or Buna-N rubber, rated at 1000 psi (6.9 megapascals).

Unless otherwise indicated, these valves shall be as included in the Standard Products List (SPL WW-367 for water, WW-462 for wastewater force mains).

E) Fire Hydrants

All fire hydrants shall be Dry Barrel, Traffic Model (break-away), Post Type having Compression Type Main Valves with 5 1/4" (133 mm) opening, closing with line pressure. Approved models are listed on SPL WW-3 of the Water and Wastewater Utility Standard Products List.

1) Applicable Specifications

AWWA C-502 current: "AWWA Standard for Dry-Barrel Fire Hydrants".

NFPA 1963: "National (American) Standard Fire Hose Coupling Screw Thread" and City of Austin 4 inch (102 mm) Fire Hose Connection Standard (Available upon request from the Austin Water Utility's Standards Committee Chairperson at 972-0204).

ANSI A-21.11 current: "American National Standard for Rubber Gasket Joints for Cast Iron and Ductile Iron Pressure Pipe and Fittings".

2) Functional Requirements

Design Working Pressure shall be 200 psi (1.38 megapascals) and a test pressure of 400 psi (2.76 megapascals).

Inlet shall be side connection hub end for mechanical joint (ANSI A-21.11-current). Shoe shall be rigidly designed to prevent breakage.

Lower Barrel shall be rigid to assure above ground break at traffic feature. Bury length of hydrant shall be four (4) feet (1.2 meters) minimum, five (5) feet (1.5 meters) maximum (hydrant lead pipe may be elbowed up from main using restrained joints; flanged joints in lead pipes are not allowed). Flange type connections between hydrant shoe, barrel sections and bonnet shall have minimum of 6 corrosion resistant bolts.

Hydrant Main Valve shall be 5 1/4 inch (133 mm) I.D. Valve stem design shall meet requirements of AWWA C502, with Operating Nut turning clockwise to close. Operating Nut shall be pentagonal, 1 1/2 inch (38 mm) point to flat at base, and 1 7/16 inches (36.5 mm) at top and 1 inch (25 mm) minimum height. Seat ring shall be bronze (bronze to bronze threading), and shall be removable with lightweight stem wrench. Valve mechanisms shall be flushed with each operation of valve; there shall be a minimum of two (2) drain ports.

Traffic Feature shall have replaceable breakaway ferrous metal stem coupling held to stem by readily removable type 302 or 304 stainless steel fastenings. Breakaway flange or frangible lugs shall be designed to assure aboveground break. Breakaway or frangible bolts will not be acceptable.

Outlet Nozzles shall be located approximately 18 inches (450 mm) above ground. Each hydrant shall have two (2) 2 1/2 inch (63.5 mm) nozzles 180 degrees apart with National (American) Standard Fire Hose Coupling Screw Thread NFPA 1963 and one (1) 4 inch (102 mm) pumper nozzle with City of Austin standard thread–six (6) threads per inch (25 mm) "Higbee" cut, 4.8590 inch (123.4 mm) O.D., 4.6425 inch (117.9 mm) root diameter. Nozzles shall be threaded or cam-locked, O-ring sealed, and shall have type 302 or 304 stainless steel locking devices. Nozzle caps (without chains) and cap gaskets shall be furnished on the hydrant. The cap nut shall have the same configuration as the operating nut.

Hydrants shall be Dry-Top Construction, factory lubricated oil or grease with the lubricant plug readily accessible. The system shall be described for City approval.

A blue Type II-B-B reflectorized pavement marker, conforming to Standard Specification Item No. 863S, shall be placed 2 to 3 feet (0.6 to 0.9 meters) offset from the centerline of paved streets, on the side of and in line with, all newly installed fire hydrants.

Hydrant shall have double O-ring seals in a bronze stem sheath housing to assure separation of lubricant from water and shall have a weather cap or seal, or both, as approved by the Owner, to provide complete weather protection.

3) Material Requirements

All below ground bolts shall be corrosion resistant. The hydrant valve shall be Neoprene, 90-durometer minimum. The seat ring, drain ring, operating nut and nozzles shall be bronze, AWWA C-502 current, containing not over 16 percent zinc. Break-away stem coupling shall be of ferrous material; its retaining pins, bolts, nuts, etc. of type 302 or 304 stainless steel.

Coatings shall be durable and applied to clean surfaces. Exterior surfaces above ground shall receive a coating of the type and color specified in the applicable version of City of Austin SPL WW-3. The coating shall be applied according to coating manufacturer's

specifications. Other exposed ferrous metal shall receive asphalt-based varnish, or approved equal, applied according to the coating manufacturer's specifications.

F) Pressure/Flow Control Valves:

All control valves to regulate pressure, flow, etc., in City lines shall be models listed in the City of Austin Water and Wastewater Standard Products List (SPL).

G) Drain Valves:

Drain valve materials and installation shall conform to City of Austin Standard Detail No. 511S-9A.

H) Valve Stem Extensions:

Valve stem extensions shall consist of a single piece of the required length with a socket on one end and a nut on the other.

511S.4 Construction Methods

A) Setting Valves, Drains and Air Releases

Unless otherwise indicated, main line valves, drain valves and piping, air and vacuum release assemblies and other miscellaneous accessories shall be set and jointed in the manner described for cleaning, laying, and jointing pipe.

Unless otherwise indicated, valves shall be set at the locations shown on the Drawings and such that their location does not confict with other appurtenances such as curb ramps. Valves shall be installed so that the tops of operating stems will be at the proper elevation required for the piping at the location indicated above. Valve boxes and valve stem casings shall be firmly supported and maintained, centered and aligned plumb over the valve or operating stem, with the top of the box or casing installed flush with the finished ground or pavement in existing streets, and installed with the top of the box or casing approximately 6 inches (150 mm) below the standard street subgrade in streets which are excavated for paving construction or where such excavation is scheduled or elsewhere as directed by the Engineer or designated representative.

Drainage branches or air blowoffs shall not be connected to any sanitary sewer or submerged in any stream or be installed in any other manner that will permit back siphonage into the distribution system (see City of Austin "Standard Detail Drawings- Series 500/500S"). Every drain line and every air release line shall have a full sized independent gate valve flanged directly to the main. Flap-valves, shear gates, etc., will not be accepted.

B) Setting Fire Hydrants:

Fire hydrants shall be located in a manner to provide accessibility and in such a manner that the possibility of damage from vehicles or conflict with pedestrian travel_will be minimized. Unless otherwise directed, the setting of any hydrant shall conform to the following:

Hydrants between curb and sidewalk on public streets shall be installed as shown on Standard 511S-17, with outermost point of large nozzle cap 6" to 18" (150 mm to 450 mm) behind back of curb. Where walk abuts curb, and in other public areas or in commercial areas, dimension from gutter face of curb to outermost part of any nozzle cap shall be not less than 3 feet (0.9 meters), nor more than 6 feet (1.8 meters), except that no part of a hydrant or its nozzle caps shall be within 6 inches (150 mm) of any sidewalk or pedestrian ramp. Any fire hydrant placed near a street corner shall be no less than 20 feet (6 meters) from the curb line

point of tangency. Fire hydrants shall not be installed within nine feet (2.75 meters) vertically or horizontally of any sanitary sewer line regardless of construction.

All hydrants shall stand plumb; those near curbs shall have the 4-inch (102 mm) nozzle facing the curb and perpendicular to it. The hydrant bury mark shall be located at ground or other finish grade; nozzles of all new hydrants shall be approximately 18 inches (450 mm) above grade. Lower barrel length shall not exceed 5 feet (1.5 meters). Barrel extensions are not permitted unless approved by the Engineer or designated representative. Each hydrant shall be connected to the main by 6-inch (152 mm) ductile iron pipe; a 6-inch (152 mm) gate valve shall be installed in the line for individual shutoff of each new hydrant.

Below each hydrant, a drainage pit 2 feet (0.6 meter) in diameter and 2 feet (0.6 meter) deep shall be excavated and filled with compacted coarse gravel or broken stone mixed with coarse sand under and around the bowl of the hydrant, except where thrust blocking is located (City of Austin Specification Item 510 and Standard Detail 510-6 and to a level 6 inches (150 mm) above the hydrant drain opening.

The hydrant drainage pit shall not be connected to a sanitary sewer. The drain gravel shall be covered with filter fabric to prevent blockage of voids in the gravel by migration of backfill material. The bowl of each hydrant shall be well braced against unexcavated earth at the end of the trench with concrete thrust blocking (taking care not to obstruct the hydrant drain holes), or the hydrant shall be tied to the pipe with approved metal harness rods and clamps. The fire line shall be provided with joint restraint from the main line to the fire hydrant. Hydrants shall be thoroughly cleaned of dirt or foreign matter before setting.

Fire hydrants on mains under construction shall be securely wrapped with a poly wrap bag or envelope taped into place. When the mains are accepted and placed in service the bag shall be removed.

C) Pressure Taps: Refer to Section 510.3 (24) of Standard Specification Item Number 510, "Pipe".

D) Plugging Dead Ends

Standard plugs shall be inserted into the bells of all dead ends of pipes, tees or crosses and spigot ends shall be capped. All end plugs or caps shall be secured to the pipe conforming to Section 510.3 (22) of Standard Specification Item Number 510, "Pipe".

E) Protective Covering:

Unless otherwise indicated, all flanges, nuts, bolts, threaded outlets and all other steel component shall be coal tar coated and shall be wrapped with standard minimum 8-mil (0.2 mm) low density polyethylene film or a minimum 4-mil (0.1 mm) cross laminated high-density polyethylene meeting ANSI/AWWA Specification C-105-current, with all edges and laps taped securely to provide a continuous and watertight wrap. Repair all punctures of the polyethylene, including those caused in the placement of bedding aggregates, with duct tape to restore the continuous protective wrap before backfilling. For reclaimed water piping, the polyethylene shall be purple.

F) Valve Box, Casing and Cover:

Stems of all buried valves shall be protected by valve box assemblies. Valve box castings shall conform to ASTM A 48, Class 30B. Testing shall be verified by the manufacturer at the time of shipment. Each casting shall have cast upon it a distinct mark identifying the manufacturer and the country of origin. Valve boxes and covers for potable water shall be round. Valve boxes and covers for reclaimed water piping shall be square and shall have “Reclaimed Water” indicated on the lid.

G) Drain Valve Installations:

Refer to City of Austin Standards 511S-9A.

H) Air Release Assemblies:

Refer to City of Austin Standards 511S-1A, 511S-1B, 511S-2A, 511S-2B, 511S-3A and 511S-3B.

I) Pressure/Flow Control Valves:

Assemblies shall be installed as indicated.

J) Connections to Existing System:

Refer to Item No. 510, "Pipe" for connections to the existing system.

K) Shutoffs:

Refer to Item No. 510, "Pipe" for shutoffs.

511S.5 Measurement

All types of valves will be measured per each. Fire hydrants and drain valve assemblies will be measured per each. Fire Hydrant barrel extensions will be measured per vertical foot (meter: 1 meter equals 3.28 feet). Pressure/Flow control valve assemblies and both manual and automatic air release assemblies will be measured per each. Reflectorized pavement markers for identifying the location of newly installed fire hydrants shall be measured per each, as per Standard Specification Item No. 863S.7.

Bury depths exceeding 5.5 feet (1.68 meters) are defined as Additional Bury Depths. Additional bury depths will only be measured if indicated on the Drawings and identified in the Standard Contract Bid Form 00300U; otherwise, the unit bid price for each completed unit includes all depths.

511S.6 Payment

Payment shall include full compensation, in accordance with the pay item established in the bid, for excavation, furnishing, hauling and placing valves, drain valve assemblies, fire hydrants and barrel extensions including anchorage and all incidental materials and work; preparing, shaping, dewatering, bedding, placing and compacting backfill materials and for all other incidentals necessary to complete the installation, as indicated in the Drawings, complete in place.
Payment for iron fittings and for wet connections is covered in Section 510.6 of Standard Specification Item 510, “Pipe".

Payment for excavation safety systems is covered in Section 509S.10 of Standard Specification Item 509S, Excavation Safety Systems.

A) Valves: Valves will be paid for at the unit bid price for the size and type valve installed, including valve stem casing and cover, excavation and backfill, setting, adjusting to grade, anchoring in place, and other appurtenances necessary for proper operation.

B) Fire Hydrants: Fire Hydrants installation shall be paid for at the unit bid price, which includes all necessary labor and materials to set, adjust to grade and anchor the hydrant body, barrel extensions, concrete block, gravel drain, and other appurtenances necessary for proper operation; but shall not include pipe and valve between the main line and fire hydrant base.

C) Pressure or Flow Control Valve Assemblies: Pressure control and flow control valve assemblies will be paid for at the unit bid price, including box or vault, setting, adjusting to grade, anchoring in place,

adjusting the control device to the required conditions, providing other appurtenances necessary for proper operation, and placing in operation.

D) Drain Valve Assemblies: Drain valve installation shall be paid for at the unit bid price , which includes all necessary labor and materials to set, adjust to grade and anchor the bends, vertical piping, blind flange, joint restraint devices, concrete blocking, concrete pad, and other appurtenances necessary for proper operation; but shall not include pipe and valve between the main line and drain valve buried bend.

E) Manual Air Release Assemblies: Manual air release installations will be paid for at the unit bid price and shall include valves, fittings, pipe, tapping the main, box and cover, and other appurtenances necessary for proper operation.

F) Automatic Combination Air/Vacuum Release Valve Assembly: Automatic air-vacuum release assemblies will be paid for at the unit bid price and will include the main line tap or outlet, all pipe, valves, fittings, box or vault and cover, and other appurtenances necessary for proper operation.

G) Additional Bury Depth: Additional bury depth will be paid for at the unit bid price, which will include all work necessary to install units with bury depths exceeding 5.5 feet (1.68 meters).

H) Fire Hydrant Barrel Extensions: Hydrant barrel extensions will be paid for at the unit bid price which will include necessary hardware and rod extensions.

I) Reflectorized Pavement Markers: Pavement markers will be paid for at the unit bid price, which will include necessary surface preparation and adhesive, as per Standard Specification Item No. 863S.8.

Payment, when included as a contract pay item, will be made under one of the following:

Pay Item No. 511S-A:	Valves, _____ Type, _____Diameter	Per Each.
Pay Item No. 511S-B:	Fire Hydrants (See Standard No. 511S-17)	Per Each.
Pay Item No. 511S- C:	Pressure or Flow Control Valve Assemblies	Per Each.
Pay Item No. 511S- D:	Drain Valve Assemblies (See Standard No. 511S-9A)	Per Each.
Pay Item No. 511S- E:	Manual Air Release Assemblies, ____Diameter	Per Each.
Pay Item No. 511S- F:	Automatic Combination Air/Vacuum Release Valve Assembly, _____ Diameter.	Per Each.
Pay Item No. 511S- G:	Additional Bury Depth	Per Vertical Foot.
Pay Item No. 511S-H:	Fire Hydrant Barrel Extensions	Per Vertical Foot

END

SPECIFIC CROSS REFERENCE MATERIALS
Specification 511S, "Water Valves"

City of Austin Standard Specification Items

Designation	Description
Item No. 510	Pipe
Section-510.3 (22)	Pipe Anchorage, Support and Protection
Section-510.3(24)	Water System Connections

City of Austin Standard Details

Designation	Description
511S-1A	25 mm (1") – 76 mm (2") Vented Air Release Valve Installation (Type I)
511S-1B	25 mm (1") – 76 mm (2") Non-Vented Air Release Valve Installation (Type I)
511S-2A	Type II - 76 mm (3") or Larger Vented Air/Vacuum Valve Installation

511S-2B	Type II - 76 mm (3”) or Larger Non-Vented Air/Vacuum Valve Installation
511S-3A	Type III - 76mm (3”) or Larger Vented Air/Vacuum Valve Installation
511S-3B	Type III-76mm (3”) or Larger Non-Vented Air/Vacuum Valve Installation
511S-9A	Drain Valve Assembly
511S-17	Standard Fire Hydrant Installation

SPECIFIC CROSS REFERENCE MATERIALS (Continued)
Specification 511S, “Water Valves”

City of Austin W/WW Standard Products

Designation	Description
WW-3	Standard Products List for Fire Hydrants
WW-132	Standard Products List for Metal-Seated Gate Valves, AWWA C-500
WW-282	Standard Products List for Resilient-Seated Gate Valves, AWWA C-509
WW-367	Standard Products List for Air Release Valves for Water
WW-462	Standard Products List for Air Release/Vacuum Relief Valves for Wastewater
WW-700	Standard Products List for Resilient-Seated Gate Valves, AWWA C-515

ANSI/AWWA Standards

Designation	Description
A-21.11	American National Standard for Rubber Gasket Joints for Cast Iron and Ductile Iron Pressure Pipe and Fittings
C-105	American National Standard for Polyethylene Encasement for Ductile-Iron Pipe
C-500	Metal-Seated Gate Valves for Water Supply Service
C-502	Dry-Barrel Fire Hydrants
C-504	Rubber-Seated Butterfly Valves
C-509	Resilient Seated Gate Valves for Water and Sewerage Systems
C-515	Reduced-Wall, Resilient-Seated Gate Valves For Water Supply Service

ASTM Standards

Designation	Description
ASTM A48/A48M	Specification for Gray Iron Castings
ASTM A 536	Specification for Ductile Iron Castings

National Fire Protection Association (NFPA)

1963	National (American) Standard Fire Hose Coupling Screw Thread

RELATED CROSS REFERENCE MATERIALS
Specification 511S, “Water Valves”

City of Austin Standard Specification Items

Designation	Description
Item No. 501S	Jacking or Boring Pipe
Item No. 503S	Frames, Grates, Rings and Covers
Item No. 505S	Concrete Encasement and Encasement Pipe
Item No. 506S	Manholes
Item No. 507S	Bulkheads
Item No. 508S	Miscellaneous Structures and Appurtenances
Item No. 509S	Excavation Safety Systems

Item No. 602S
Sodding for Erosion Control

602S.1 Description

This item shall govern planting of Bermuda grass; St. Augustine or other acceptable grass sod at locations indicated on the Drawings or as directed by the Engineer or designated representative in accordance with this Standard Specification Item.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

602S.2 Submittals

The submittal requirements for this specification item shall include the identification of the type and source of sodding, the type of mulch, type of tacking agent and type and rate of application of fertilizer.

602S.3 Materials

A. Block and Mulch Sod

The sod shall consist of live, growing Bermuda Grass, St. Augustine grass, when shown on the Drawings, or other acceptable grass sod indicated on the Drawings secured from sources that are approved by the Engineer or designated representative. Bermuda Grass sod, St. Augustine sod or other grass sod as shown on the Drawings shall have a healthy, virile root system of dense, thickly matted roots throughout the soil of the sod for a minimum thickness of 1 inch (25 millimeters). The thickness measure does not include grass. The sod shall be cut in rectangular pieces with its shortest side not less than 12 inches (300 mm). The Contractor shall not use sod from areas where the grass is thinned out nor where the grass roots have been dried out by exposure to the air and sun to such an extent as to damage its ability to grow when transplanted.

The sod shall be substantially free from noxious weeds, Johnson grass or other grasses and shall not contain any matter deleterious to its growth or which might affect its subsistence or hardiness when transplanted. Unless the area has been closely pastured, it shall be closely mowed and raked to remove all weeds and long standing stems. Sources from which sod is to be secured shall be approved by the Engineer or designated representative.

Care shall be taken at all times to retain the native soil of the roots of the sod during the process of excavating, hauling and planting. Sod material shall be kept moist from the time it is dug until it is planted. The sod existing at the source shall be watered to the extent required by the Engineer or designated representative prior to excavating.

B. Fertilizer

Fertilizer and the rate of application shall conform to the requirements of Standard Specification Item No. 606S, "Fertilizer".

C. Mulch

Straw mulch shall be oat, wheat or rice straw. Hay mulch may be substituted for straw mulch and shall be Prairie Grass; Bermuda grass or other hay approved by the Engineer or designated representative. The hay or straw mulch shall be free of Johnson grass or other noxious weeds and foreign materials. It shall be kept in a dry condition and shall not be molded or rotted.

D. Water

Water shall be furnished by the Contractor and shall be clean and free of industrial wastes and other substances harmful to the growth of sod or to the area irrigated.

E. Tacking Agents

Tacking agents for straw or hay mulch shall be as shown on the Drawings.

602S.4 Planting Season

All planting shall be done between April and November except as specifically authorized in writing by the Engineer or designated representative.

602S.5 Construction Methods

A. General

After the designated areas have been completed to the lines, grade and cross sections indicated on the Drawings, the surface shall be worked to a depth of not less than 4 inches (100 mm) with a disc, tiller or other equipment approved by the Engineer or designated representative. Fertilizer nutrients shall be applied and tilled. Areas that become crusted shall be reworked to an acceptable condition before sodding. Sodding of the type specified shall conform to the requirements of this Specification Item. The Contractor shall give continuous care to the sodded area until the sod is accepted.

B. Placement

The sod shall be placed on the prepared surface with the edges in close contact and alternate courses staggered. In ditches the sod shall be placed with the longer dimension perpendicular to the flow of water in the ditch. On slopes, starting at the bottom of the slope, the sod shall be placed with the longer dimension parallel to the contours of the ground. The exposed edges of sod shall be buried flush with the adjacent soil. On slopes exceeding 3:1 or where the sod may be displaced, the sod shall be pegged with not less than 4 stakes or ground staples per square yard (square meter) with at least 1 stake or ground staple for each piece of sod.

Pegs shall be of wood lath or similar material, pointed and driven with the flat side against the slope, 6 inches (150 mm) into the ground, leaving approximately 1/2 inch (12.5 mm) of the top above the ground. Ground staples shall not be less than

13 inches (330 mm) in length and shall be constructed of No. 11 gage (3 mm) wire that is bent to form a "U" approximately 1 inch (25 mm) in width.

C. Watering

Immediately after the area is sodded, it shall be watered with a minimum of 5 gallons of water per square yard (22.5 liters per square meter) and at 10 day intervals as needed and as directed by the Engineer or designated representative. Subsequent to the initial application water shall be applied at a minimum rate of 3 gallons per square yard (13.5 liters per square meter), as required on the Drawings or as directed by the Engineer or designated representative until final acceptance by the City or until the grass uniformly reaches a height of 2 1/2 inches (62.5 mm).

Availability of water from the Austin Water Utility will be limited as stated under the Water Conservation Standard, City of Austin Land Development Code Chapter 6-2, Article II, " Water Use Management Plan Established".

The use of potable water will be restricted as stated in City of Austin Land Development Code Sections 6-4-73, 6-4-54, 6-4-63, 6-4-64, 6-4-65, 6-4-81, 6-4-92, 15-9-37(D) and 15-9-101(B).

D. Finishing

Where applicable, the shoulders, slopes and ditches shall be smoothed after planting has been completed and shaped to conform to the desired cross sections shown on the Drawings. Any excess soil from planting operations shall be spread uniformly over adjacent areas or disposed of as directed by the Engineer or designated representative so that the completed surfaces will present a neat appearance. All sodded areas shall be rolled after the initial watering application, when sufficiently dry.

602S.6 Block Sodding

At locations indicated on the Drawings or where directed by the Engineer or designated representative, sod blocks shall be carefully placed on the prepared areas. The fertilizer shall then be applied in accordance with the applicable provisions of Item No. 606S, "Fertilizer" and thoroughly watered. When sufficiently dry, the sodded area shall be rolled or tamped to form a thoroughly compacted, solid mat. Any voids left in the block sodding shall be filled with additional sod and tamped. Surfaces of block sod which, in the opinion of the Engineer or designated representative may slide due to the height and slope of the surface or nature of the soil, shall be pegged with wooden pegs driven through the sod blocks into firm earth sufficiently close to hold the block sod firmly in place. Edges along curbs and drives, walkways, etc., shall be carefully trimmed and maintained until the sodding is accepted.

602S.7 Mulch Sodding

The sod source shall be disked in 2 directions cutting the sod thoroughly to a depth of not less than 4 inches (100 mm). Sod material shall be excavated to a depth of not more than 2 inches (50 mm) below the existing root system, being careful to avoid having soil containing no grass roots. The disked sod may be windrowed or otherwise

handled in a manner satisfactory to the Engineer or designated representative. The material shall be rejected if not kept in a moist condition.

Prior to placement of mulch sod, the cut slopes shall be scarified by plowing furrows 4 inches (100 mm) to 6 inches (150 mm) deep along horizontal slope lines at 2 foot (600 mm) vertical intervals. Excavated material from the furrows shall not protrude more than 3 inches (75 mm) above the original surface of the cut. Fertilizer shall be distributed uniformly over the area in accordance with the applicable provisions of Item No. 606S, "Fertilizer". The sod shall then be deposited upon the prepared area and spread uniformly to the thickness indicated on the Drawings.

Any section that is not true to lines and cross sections shall be remedied by the addition of sod material or by reshaping the material to meet the requirements of "Finishing"[Section 602S.5 (4)]. After the sod material has been spread and shaped, it shall be thoroughly wetted and compacted with a corrugated roller of the "Cultipacker" type. All rolling of slope areas shall be on the contour.

602S.8 Measurement

Work and acceptable material for "Sodding for Erosion Control" will be measured by the square yard (square meter: 1 square meter is equal to 1.196 square yards) complete in place with a minimum of 95 percent growth with a 2 1/2 inch (62.5 mm) stand of grass.

602S.9 Payment

The work performed and materials furnished and measured as provided under "Measurement" will be paid for at the unit bid price for Bermuda Block Sodding", "St. Augustine Block Sodding", "Bermuda Mulch Sodding" or "Other Approved Grass Sodding". The prices shall each represent full compensation for completion of the work including all water applications, rolling, pegging and fertilizer as indicated on the Drawings.

Payment will be made under one of the following:

Pay Item No. 602S-A:	Bermuda Block Sodding -	Per Square Yard.
Pay Item No. 602S-B:	St. Augustine Block Sodding -	Per Square Yard.
Pay Item No. 602S-C:	Bermuda Mulch Sodding -	Per Square Yard.
Pay Item No. 602S-D*:*	Grass Sodding -	Per Square Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 602S, “Sodding for Erosion Control”

City of Austin Land Development Code

Designation	*Description*
Chapter 4-2, Article II	Emergency and Peak Day Water Use Management

City of Austin Standard Specification Items

Designation	*Description*
Item No. 606S	Fertilizer

City of Austin Land Development Code

Designation	*Description*
Section 6-4-52	Water Use Management Plan Established
Section 6-4-53	Applicability
Section 6-4-54	Compliance Required
Section 6-4-63	Permanent Water Use Restrictions
Section 6-4-64	Water Conservation Stage One Regulations
Section 6-4-65	Water Conservation Stage Two Regulations
Section 6-4-81	Variance
Section 6-4-92	Penalty
Section 15-9-37(D)	Customer's Responsibilities
Section 15-9-101(B)	Basis for Termination of Service

RELATED CROSS REFERENCE MATERIALS
Specification 602S, "Sodding for Erosion Control"

City of Austin Standard Specification Items

Designation	*Description*
Item No. 110S	Street Excavation
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 132S	Embankment
Item No. 601S	Salvaging and Placing Topsoil
Item No. 604S	Seeding for Erosion Control
Item No. 608S	Planting
Item No. 610S	Preservation of Trees and Other Vegetation

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	*Description*
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 160	Furnishing and Placing Topsoil
Item No. 162	Sodding for Erosion Control
Item No. 164	Seeding for Erosion Control
Item No. 166	Fertilizer
Item No. 168	Vegetative Watering
Item No. 204	Sprinkling

Item No. 606S
Fertilizer

606S.1 Description

This item shall govern the provision and distribution of fertilizer over the areas indicated on the Drawings and in accordance with these specifications.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, inch-pound units are given preference with SI units shown within parentheses.

606S.2 Submittals

The submittal requirements for this specification item shall include:

A. Type of soil(s) at the site.
B. Type(s) of re-vegetation (seeding, sodding, etc).
C. Type(s) of fertilizer.
D. Rate(s) of application of fertilizer.
E. Chemical analysis of the fertilizer(s).

606S.3 Materials

All fertilizer used on site shall be delivered in bags or containers, which are clearly labeled and show the analysis. The figures in the analysis shall represent the percent of nitrogen, phosphoric acid and potash nutrients, respectively, as determined by the methods of the Association of Official Agricultural Chemists. The fertilizer may be subject to testing by the State Chemist in accordance with the Texas Fertilizer Law. A pelleted or granulated fertilizer shall be used.. Fifty percent or greater of the Nitrogen required shall be in the form of Nitrate Nitrogen ($N0_3$). The remaining Nitrogen required may be in the form of Urea Nitrogen [$CO(NH_2)_2$].

The total amount of nutrients furnished and applied per acre (hectare: 1 hectare equals 2.471 acres) shall equal or exceed that specified for each nutrient.

606S.4 Construction Methods

General requirements and criterion for vegetative activities, including fertilizing, for the City of Austin are presented in Section 1.4.4, "Vegetative Practice", and Section 1.5.4, "Revegetation Criteria" of the City of Austin Environmental Criteria Manual.

The fertilizer type and rate of application should be based on chemical tests of representative soil samples taken after completion of construction and ground work. Appropriate initial fertilizer application rates for the Austin area (in lieu of recommendations from soil testing) are provided in the sections of the City of Austin Environmental Criteria Manual identified below:

A. Permanent seeding. - [Section 1.4.4.B.4].
B. Restoring Climax Grasses - [Section 1.5.5.E].
C. Sod. -. [Section 1.4.4.E.5].
D. Maintenance of Mulch Sod. - [Section 1.4.4.C.4].

Pelleted or granulated fertilizer shall be applied uniformly into the soil to a depth of 4 inches (100 mm) over the area specified on the Drawings to be fertilized and in the manner directed for the particular item of work. The fertilizer shall be dry and in good physical condition. Fertilizer that is powdered or caked will be rejected. Distribution of the fertilizer for the particular item of work shall meet the approval of the Engineer or Designated Representative.

Maintenance fertilizing shall be applied every 6 months after the new sod or grass is placed or until the work is accepted by the City.

The fertilizer may also be applied with the hydromulch

606S.5 Measurement

Work and acceptable material for "Fertilizer" will be measured by the normal ton of 2,000 pounds (megagrams: 1 megagram equals 1.1023 tons) or by the 100 pounds (50 kilograms: 1 kilogram equals 2.205 pounds) as determined by approved scales or guaranteed weight of sacks shown by the manufacturer.

606S.6 Payment

The work performed and materials furnished and measured as provided under "Measurement" shall be included in the unit price bid for the item of construction in which fertilizer is used, unless specified in the Drawings as a Pay Item.

When fertilizer is specified on the Drawings as a pay item or included in the contract bid form, the work performed and materials furnished and measured as provided under "Measurement" will be paid for at the unit bid price for "Fertilizer" of the analysis specified on the Drawings. The unit bid price shall include full compensation for furnishing all materials and performing all operations necessary to complete the work.

Payment, when specified, will be made under one of the following:

Pay Item No. 606S-A:	Fertilizer	Per Ton.
Pay Item No. 606S-B:	Fertilizer	Per 100 Pounds.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 606S "Fertilizer"

City of Austin Environmental Criteria Manual

Designation	Description
Section 1.4.4.B.4	Design Criteria of Section B. Critical Area Stabilization (with Permanent Seeding)
Section 1.4.4.C.4	Design Criteria of Section C. Critical Area Stabilization (with Mulch Sod)
Section 1.4.4.E.5	Site Preparation of Section E. Critical Area Stabilization (with Sod)
Section 1.5.5.E	Fertilizer, Section E of 1.5.5, "Restoring Climax Grasses"

RELATED CROSS REFERENCE MATERIALS
Specification Item 606S "Fertilizer"

City of Austin Technical Specifications

Designation	Description
Item No. 601S	Salvaging and Placing Topsoil
Item No. 602S	Sodding for Erosion Control
Item No. 604S	Seeding for Erosion Control
Item No. 605S	Soil Retention Blanket
Item No. 607S	Slope Stabilization
Item No. 608S	Planting
Item No. 609S	Native Grassland Seeding and Planting for Erosion Control
Item No. 610S	Preservation of Trees and Other Vegetation

ITEM NO. 610S

PRESERVATION OF TREES AND OTHER VEGETATION

610S.1 - Description and Definitions

This item shall govern the proper care, protection and treatment of trees and other vegetation in the vicinity of the permitted development activity (as defined in Land Development Code 25-1-21(27)). All work shall be performed in accordance with the City approved drawings and specifications (e.g. Standard Series 600) or as approved by the City Arborist (as defined below). Tree pruning and/or treatments shall be performed under the direct supervision of a qualified arborist (as defined below) or as allowed by the City Arborist.

Definitions

City Arborist - City official designated by the Director of the Planning and Development Review Department (Land Development Code 25-8-603) or as designated by the City Arborist.

Oak wilt - a tree disease caused by a fungus "Ceratocystis fagacearum" that infects the vascular system of Oak "genus Quercus" trees and prevents water transport through the trunk and canopy of the tree. This usually fatal tree disease can be spread by certain insects that come into contact with tree wounds or by interconnected tree roots. February through June is a high risk period due to the stage of the fungus and insect activity. See section 610S.4(H) for additional requirements for preventing Oak wilt infection.

Qualified Arborist - an individual engaged in the profession of arboriculture or closely related field who, through experience, education, and related training, possesses the competence to provide for, or supervise, the management of trees and other woody plants (as defined in the most current version of ANSI A300 (Part 1)-2001, section 4.1).

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text and accompanying tables, the inch-pound units are given preference followed by SI units shown within parentheses.

610S.2 - Submittals

The following is a list of the minimum submittal requirements for this specification item shall include:

A. Identification of the location, type of protective fencing (i.e. A, B or C), materials of construction and installation details;

B. Qualified Arborist credentials (i.e. proof of certification from the International Society of Arboriculture, licenses, resume and/or references);

C. Type, location and construction details for proposed tree wells;

D. Location, type, materials of construction and installation details for permeable paving;

E. Proposed nutrient mix specifications and when required by the City Arborist, soil and/or foliar analysis for fertilizer applications.

610S.3 - Materials

A. Protective Fencing and Signage

Protective fencing is designated as the materials used to protect the root zones of trees as illustrated in City of Austin Standard Detail 610S-1. Three basic types of protective fencing materials are allowed by the City of Austin. Type A and Type B are typical applications and shall be installed where damage potential to a tree root system is high, while Type C shall be installed where damage potential is minimal. The specific type of protective fencing for the work shall be as indicated on the drawings. Type C fence materials shall be subject to approval by the City Arborist. Type C fencing

shall be replaced by Type A or Type B fencing as directed by the City Arborist if it fails to perform the necessary function.

1. Type A Chain Link fence (Typical Application-high potential damage)

   Type A protective fencing shall be installed in accordance with City of Austin Standard Details 610S-2 and 610S-4 and shall consist of a minimum five-foot (1.5 meters) high chain link fencing with tubular steel support poles or "T" posts.

2. Type B Wood Fence (Typical Application-high potential damage)

   Type B protective fencing shall be installed in accordance with City of Austin Standard Details 610S-3 and 610S-5 and shall consist of any vertical planking attached to 2x4-inch (50 x 100 mm) horizontal stringers which are supported by 2x4-inch (50 x 100 mm) intermediate vertical supports and a 4x4-inch (100 x 100 mm) at every fourth vertical support .

3. Type C Other Materials (Limited Application-minimal potential damage)

   The following materials may be permitted as alternates for limited or temporary applications (3 days or less) where tree damage potential is minimal (as determined by the City Arborist):

   (a) High visibility plastic construction fencing.

   The fabric shall be 4 feet (1.2 meters) in width and made of high density polyethylene resin, extruded and stretched to provide a highly visible international orange, non-fading fence. The fabric shall remain flexible from -60°F to 200°F (-16°C to 93°C) and shall be inert to most chemicals and acid. The fabric pattern may vary from diamond to circular with a minimum unit weight of 0.4 lbs./Ft. (0.6 kilograms per meter).

   The fabric shall have a 4 foot (1.2 meters) width minimum tensile yield strength (Horizontal) of 2000 psi [13.9 megaPascals], ultimate tensile strength of 2680 psi [18.5 megaPascals] (Horizontal) and a maximum opening no greater than 2 inches (50 mm).

   (b) Other approved equivalent restraining material.

   The fencing materials, identified in (a) and (b) above, shall be supported bysteel pipe, tee posts, U posts or 2″ × 4″ (50 mm x 100 mm) timber posts that are a minimum of 5½ feet (1.68 meters) in height and spaced no more than 8 feet (2.44 meters) on centers. The fabric shall be secured to post by bands or wire ties.

4. Signage

   A laminated sign, no smaller than 8.5 X 11 inches, shall be posted on each tree protective device, and at least every 100 linear feet on protective fencing, identifying the following information: Tree & Root Protection Zone, Per City of Austin code (Chapter 25-8, Subchapter B, Article 1) this protective device is to remain in place for the entirety of the development project and illegal removal is subject to fines and work suspensions. Additional information can be obtained at the City Arborist (512-974-1876) web site (http://www.ci.austin.tx.us/trees). Zona de Protección del Árbol y las Raíces: el dispositivo protector debe quedarse en el lugar para la totalidad del proyecto de la construcción. Para información adicional, contacta la Arborista Municipal (512) 974-1876 o http://www.ci.austin.tx.us/trees/trees_spanish.htm.

B. Trunk Protection (Limited Application)

When indicated on the drawings or directed by the City Arborist tree trunk protection shall be provided in accordance with City of Austin Standard Details 610S-4 and 610S-5. Tree trunk protection shall consist of any 2 x 4-inch (50 x 100 mm) or 2 x 6-inch (50 x 150 mm) planking or plastic strapping and shall be attached in a manner that does not damage the tree.

C. Tree Dressing

Wound treatments should not be used to cover wounds or pruning cuts, except when recommended for disease (see section 610S.4 (H)), insect, mistletoe, or sprout control (from ANSI A300 (Part 1)-2001, section 5.4.1).

D. Tree Wells for Raised Grades

When existing grades are raised by more than 4 inches (10.16 cm), the tree root system shall be protected by the installation of tree wells in accordance with City of Austin Standard Detail 610S-6. Native stone or non-toxic timber shall be used for the separator wall of the well and PVC conforming to ASTM D-2729, SDR-35 shall be used for the aeration systems in fill areas.

E. Permeable Paving (Environmental Criteria Manual Section 3.5.A.1)

Permeable segmented pavers in conjunction with PVC pipe aeration system or concrete on gravel base with cored holes shall be used to protect existing tree root zones when indicated on the drawings or directed by the City Arborist.

F. Fertilizer

Humate/nutrient solutions with mycorrhizae components or soil injection at recommended rates are to be used when appropriate. Construction which will be completed in less than 90 days may use materials at half the recommended rates. Alternative organic fertilizer materials are acceptable when approved by the City Arborist.

610S.4 - Construction Methods

A. Protective Fencing

All trees and shrubs in the proximity of the construction site shall be carefully checked for damage prior to initiation of the permitted development activity.

All individual or groups of trees, shrubs, and natural areas shown to be protected on the drawings or identified to be protected by the City Arborist, shall be protected during construction with temporary fencing as indicated on the drawings or as directed by the City Arborist.

Protective fences (section 610S.4.A) shall be installed prior to the start of any site preparation work (clearing, grubbing, or grading), and shall be maintained in functioning condition throughout all phases of the construction project.

Protective fence locations in close proximity to intersecting streets or drives shall adhere to the sight distance (Section 1.3.1.C.6) and desirable sight triangle (Figure 1-6 criteria found in the City of Austin Transportation Criteria Manual).

1. Protective fences shall be constructed at the locations (typically the outer limits of the critical root zone) and with materials indicated on the drawings to prevent the following (Environment Criteria Manual, Appendix P-2, Note 6):
   (a) Soil compaction in the root zone area resulting from vehicular traffic or storage of equipment or materials.
   (b) Critical root zone disturbances due to grade changes [greater than 4″ (10.16 cm) cut or fill] or trenching not reviewed and authorized by the City Arborist.
   (c) Damage to exposed roots, trunks or limbs by mechanical equipment.
   (d) Other activities detrimental to trees such as chemical storage, concrete truck cleaning, and fires.
2. Exceptions to the installation of protective fences at the tree drip lines may be permitted in the following cases:

(a) Where there is to be an approved grade change, impermeable paving surface, tree well, or other such site development, the fence shall be erected no more than 2 feet (0.6 meters) beyond the area of disturbance unless approved by the City Arborist;

(b) When permeable paving is to be installed within a tree's critical root zone, the fence shall be erected at the outer limits of the permeable paving area (prior to any site grading so that this enclosed area is graded separately to minimize root damage);

(c) When trees are located close to a proposed building or other construction activity (Environment Criteria Manual, Appendix P-2, Note 6.c), the fence shall be erected up to 10 feet (3 meters) to allow work space between the fence and the structure. Apply organic mulch to a depth of 8 inches [30.48 cm] in the unprotected root zone area;

(d) When there are street-side pedestrian walkways, fences shall be constructed in a manner that does not obstruct safe passage;

(e) When there are severe space constraints due to tract size or other special requirements, the Contractor shall contact the City Arborist to discuss alternatives.

When any of the exceptions listed above will result in a fence being located closer than five (5) feet (1.5 meters) to a tree trunk, the Contractor shall also protect the trunk with strapped-on planking to a height of 8 feet [2.4 meters] (or to the limits of lower branching) in addition to the fencing requirement (City of Austin Standard Details 610S-4 and 610S-5).

B. Pruning and Repair of Damage

Tree pruning, to provide clearance for the work and/or to remove hazards, shall be performed under the direct supervision of a qualified arborist and shall follow standards identified in ANSI A300 (Part 1), "Pruning". A minimum clearance height of eight (8) feet (2.4 meters) above the street level must be provided and maintained for all existing trees if adjacent to a sidewalk. However, if the limbs of trees overhang the curb line or edge of travel lane of any street, a minimum clearance height of fourteen (14) feet (4.2 meters) is required (Transportation Criteria manual section 6.2.3,A, 4, "Clearance Height"). Pruning shall provide the minimum clearance needed to perform the work or remove a hazard unless otherwise directed by the City Arborist to comply with transportation criteria or to mitigate for damage.

If tree damage compromises a tree's structural integrity then the area shall be adequately secured until a qualified arborist makes an assessment of the tree and corrective actions are completed with approval from the City Arborist. Damage to oak trees shall be treated immediately, with consideration for site safety, to reduce the risk of Oak Wilt infection (See 610S.4.H, "Oak Wilt Prevention"). Tree root wounds shall be treated to remove loose, damaged tissue from in and around the wound or if necessary the root shall be cut cleanly and covered with topsoil, or other material approved by the City Arborist, to prevent drying of root tissue and to create a favorable environment for root sprouting. Trunk wounds shall also be treated to remove loose, damaged tissue around the wound. Tree canopy repairs shall be performed in accordance with the most current version of ANSI A300 (Part 1), "Pruning", to prevent further damage to the tree and to promote recovery of the tree to sound condition. The ANSI standard describes proper pruning methods for limb removal and for making finish pruning cuts.

Trees damaged or removed without prior approval or where minimum design criteria is exceeded due to failure to maintain approved tree protection shall be mitigated (Environmental Criteria Manual section 3.5.4, "Mitigation Measures") in accordance with Land Development Code Chapter 25-8, Subchapter B, Article 1.

All trees damaged during construction shall receive an application of fertilizer within the drip line conforming to Standard Specification Item No. 606S, "Fertilizer" at the rate of 4 pounds per caliper inch (.07 kilograms per caliper mm).

C. Cutting and Filling Around Trees

When the depth of an excavation or embankment exceeds 4 inches (10.16 cm) within the critical root zone of any tree with a trunk diameter greater than 8 inches (200 mm), the City Arborist may require a tree well to be constructed per the City of Austin approved specifications and details (Section 610S.3.D and City of Austin Standard Detail 610S-6).

D. Paving Around Trees

Where new paving within the ½ critical root zone of any tree greater than a 8 inches (10.16 cm) diameter is approved, a permeable pavement and aeration system may be required by the City Arborist per the City of Austin Standard Detail (Section 610S.3.E, Environmental Criteria Manual Section 3.5.3.A.1 and Figure 3-8) must be installed as indicated on the Drawings, except for street construction.

E. Tree Removal

Tree removal shall comply with Land Development Code Chapter 25-8, Subchapter B, Article 1. An approved permit, or an approved site plan is required for removal of trees 8″ and larger (see Environmental Criteria manual section 3.3.2.A.2 and figure 3-1 for measurement standards) with additional requirements for City Parkland properties and for Hill Country Roadway Corridor sites. Trees 19 inches in diameter and greater are defined as protected trees and require specific review from the City Arborist to approve a permit or site plan for removal. In addition heritage trees require a more extensive evaluation by the City Arborist and may require rulings from boards and commissions.

All trees to be removed shall be performed in a manner that does not damage the canopies, trunks or root systems of remaining trees and that protects all existing facilities, improvements and vegetation. Removal of oak trees shall follow the Oak Wilt Prevention procedures per the City of Austin Standards (Section 610S.4,(H)). All tree material shall be removed from the site unless authorized by the City Arborist or if it will be used as wood chips or mulch.

When a tree or shrub is scheduled for removal, it shall be cut to a maximum depth of 12 inches (30.5 cm) below the surrounding grade (the tree(s) should be removed at grade, and with hand saws, in situations where other tree root systems are present which are to be preserved). When applicable, after tree removal, soil shall be placed in the hole to a depth matching the existing grade.

All damage resulting from tree removal or pruning shall be repaired at the Contractor's own expense and shall follow guidelines in this specification.

F. Final Cleanup

All temporary tree and shrub preservation and protection measures shall be removed when the construction has been completed and any mulch applications shall be removed or reduced to no more than 3 inches (7.62 cm) depth.

G. Root Zone Aeration and Fertilization

As a component of an effective remedial tree care program per Environmental Criteria Manual section 3.5.4, preserved trees within the limits of construction may require soil aeration and supplemental nutrients. Soil and/or foliar analysis should be used to determine the need for supplemental nutrients. The City Arborist may require these analyses as part of a comprehensive tree care plan. Soil pH shall be considered when determining the fertilization composition as soil pH influences the tree's ability to uptake nutrients from the soil. If analyses indicate the need for supplemental nutrients, then humate/nutrient solutions with mycorrhizae components are highly recommended. In addition, soil analysis may be needed to determine if organic material or beneficial microorganisms are needed to improve soil health. Materials and methods are to be approved by the City Arborist (512-974-1876) prior to application. The owner or general contractor shall select a fertilization contractor and ensure coordination with the City Arborist.

Pre-construction treatment should be applied in the appropriate season; ideally the season preceding the proposed construction. Minimally, areas to be treated include the entire critical root zone of trees as depicted on the City approved plans. Treatment should include, but not limited to, fertilization, soil treatment, mulching, and proper pruning.

Post-construction treatment should occur during final revegetation or as determined by a qualified arborist after construction. Construction activities often result in a reduction in soil macro and micro pores and an increase in soil bulk density. To ameliorate the degraded soil conditions, aeration via water and/or air injected into the soil is needed or by other methods as approved by the City Arborist. The proposed nutrient mix specifications and soil and/or foliar analysis results need to be provided to and approved by the City Arborist prior to application (Fax # 512-974-3010). Construction which will be completed in less than 90 days may use materials at ½ recommended rates. Alternative organic fertilizer materials are acceptable when approved by the City Arborist. Within 7 days after fertilization is performed, the contractor shall provide documentation of the work performed to the City Arborist, Planning and Development Review Department. P.O. Box 1088, Austin, TX 78767. This note should be referenced as item #1 in the Sequence of Construction.

H. Oak Wilt Prevention Policy

1. Purpose and Scope

   The purpose of this Oak Wilt Prevention Policy is to identify measures that city staff and city-hired contractors and their sub-contractors, who perform the services of removing or trimming trees, will take to prevent the spread of oak wilt.

2. Definitions

   Oak Wilt Disease: A tree disease caused by the fungus, Ceratocystis fagacearum. The fungus infects the vascular system of a tree. The vascular system contains vessels which transport moisture throughout the tree. The vessels of an infected tree effectively become blocked by the infection of the fungus, and cannot transport adequate moisture to sustain a healthy or living tree. In most cases, the end result is tree mortality.

3. Prevention Policy

   (a) Prior to beginning field work, all city staff associated with projects involving potential contact with oak trees shall be made aware of the city's official Oak Wilt Policy by receiving and reading a written copy of this policy. Staff receiving a written copy of the policy shall include, but not limited to, project managers, equipment operators responsible for removing or trimming trees, or operators using heavy equipment which could cause wounding of susceptible oaks in the use of the equipment. In addition, individual city departments will provide a written copy of the Oak Wilt Policy to contractors participating in city projects in areas where oak trees are present before initiating field work.

   (b) When possible, city staff and contractors should avoid trimming, pruning, or wounding Live Oaks and Red Oaks (Spanish, Shumard, Texas Red, and Blackjack oaks) from February through June.

   (c) At all times and irrespective of limb size, all cuts and wounds to oak trees shall be dressed immediately using a non-phytotoxic tree wound dressing. Stump cuts and damaged roots (both above and below ground) shall also be dressed.

   (d) Disinfection of pruning tools, saws, and related equipment is mandatory during the trimming or pruning of oak trees. Disinfection of tree removal and trimming equipment shall occur before work begins in a project area, between work in individual oak trees, and again prior to leaving a project area. Acceptable disinfectants include either aerosol disinfectant or a 10 percent bleach-water solution.

*NOTE: Although this policy would require the disinfection of pruning equipment before and between oak trees as a precaution, research does not substantiate disinfection as a means of preventing the transmission of the oak wilt disease.

4. Disposal Policy

(a) Chipping or shredding the wood from infected trees to use as mulch is an acceptable means of recycling the wood. Chipping or shredding allows the wood to dry out quickly, thereby killing the fungus.

(b) Burning diseased wood is an acceptable means of disposal. Burning diseased logs will kill the fungus, and the fungus will not spread with the smoke.

(c) Logs from diseased Red Oaks, that are not chipped, shredded, or burned shall be disposed of at a landfill.

(d) Firewood from diseased Red Oak trees shall not be stored near healthy trees where fungal spores or insects that carry the spores have the potential to spread the fungus to healthy trees. It is recommended to store oak firewood under a sheet of clear plastic, tightly sealing the edges of plastic with soil or bricks. Doing so will prevent any spore carrying beetles from escaping and will solarize and heat the stored firewood to speed the drying process. It is also recommended to use clear plastic, as black plastic will reveal any escape holes to the beetles.

(e) In situations where diseased Red Oak trees are identified and are not accessible for chipping, shredding, or removal, the trunk of the diseased tree should be girdled, and the stem treated with an appropriate herbicide to deaden the tree and hasten the desiccation and drying of the wood below the minimum moisture content that could support the development of fungal spores.

610S.5 - Measurement

Tree and shrub pruning, fencing, drains, fertilization, etc. will not be measured for payment unless included as a contract pay item. Tree wells for tree protection will be measured by the units, complete in place, conforming to the Drawings and City of Austin Standard Detail 610S-6, "Tree Protection, Tree Wells".

Removal of existing trees will be measured per each tree.

610S.6 - Payment

The work and materials prescribed herein with the exception of the Protective Fencing and Tree Well (Tree Protection) will not be paid for directly but shall be included in the unit price bid for the item of construction in which this activity is used, unless a payment item is included as a contract pay item.

Payment will be made under:

Pay Item 610S-A:	Protective Fencing Type A Chain Link fence (Typical Application-high damage potential)	Per Lineal Foot
Pay Item 610S-B:	Protective Fencing Type B Wood Fence (Typical Application-high damage potential)	Per Lineal Foot
Pay Item 610S-C:	Protective Fencing Type C Other Materials (Limited Application-minimal damage potential)	Per Lineal Foot

Pay Item 610S-D:	Tree Well (Tree Protection)	Per Each
Pay Item 610S-E:	Tree Trunk Protection (Wood Planking)	Per Each
Pay Item 610S-R:	Removal of Existing Trees	Per Each

Source: Rule No. R161-18.24 , 12-7-2018.

End

SPECIFIC CROSS REFERENCE MATERIALS	
Specification Item 610S, "Preservation of Trees and Other Vegetation"	
City of Austin Standard Specification Items	
Designation	Description
Item No. 606S	Fertilizer
City of Austin Standard Details	
Designation	Description
Item No. 610S-1	Tree Protection Fence Locations
Item No. 610S-2	Tree Protection Fence, Type A, Chainlink
Item No. 610S-3	Tree Protection Fence, Type B, Wood
Item No. 610S-4	Tree Protection Fence, Modified Type A, Chainlink

Item No. 610S-5	Tree Protection Fence, Modified Type B, Wood
Item No. 610S-6	Tree Protection, Tree Wells
City of Austin Transportation Criteria Manual	
Designation	Description
Section 1.3.1.C.6	Sight Distance
Section 6.2.3.A.4	Clearance Height
Figure 1-6	Desirable Sight Triangle
City of Austin Environmental Criteria Manual	
Designation	Description
Appendix P-2, Note 6	Exceptions to Installing Fences
Appendix P-2, Note 6c	Trees close to proposed buildings - - -
Appendix P-6	Remedial Tree Care Notes
Section 3.3.2.A.2	Diameter of trees - - -
Section 3.5.0	Design Criteria
Section 3.5.3.A.1	Permeable Paving
Figure 3-8	Example of Minimum Design Criteria Applied to Permeable Parking
City of Austin Land Development Code	

Designation	Description
Section 25-8-603	Tree Protection Administration
Section 25-8-623	Inspection by City Arborist

ASTM, American Society for Testing and Materials

Designation	Description
D-2729	Specification for Poly (Vinyl Chloride) (PVC) Sewer Pipe and Fittings

RELATED CROSS REFERENCE MATERIALS

Specification 610S, "Preservation of Trees and Other Vegetation"

City of Austin Standard Specification Items

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 132S	Embankment
Item No. 608S	Planting

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges	
Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 132	Embankment
Item No. 158	Specialized Excavation Work
Item No. 160	Furnishing and Placing Topsoil
Item No. 166	Fertilizer
Item No. 168	Vegetative Watering

Item No. 620S
Filter Fabric

620S.1 Description

This item shall govern the furnishing of materials and for placement of filter fabric as indicated on the Drawings or directed by the Engineer or designated representative. Filter Fabric shall have the capability for allowing the passage of ground water through it without transporting the soil placed around the filter fabric.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

620S.2 Submittals

The submittal requirements of this specification item include:

A. catalog cuts,
B. samples of material selected,
C. testing results,
D. manufacturer's recommended installation procedures, and
E. manufacturer certification of compliance with this specification.

620S.3 Materials

A. General

The fabric shall be constructed exclusively of synthetic thermoplastic fibers and may be either woven or non-woven to form a mat of uniform quality. Fabric fibers may be either continuous or discontinuous and oriented in either a random or an aligned pattern throughout the fabric. The fabric shall be mildew resistant, rot proof and shall be satisfactory for use in a wet soil and aggregate environment. The fabric shall contain ultraviolet stabilizers and shall have non-raveling edges.

B. Physical Requirements

The fabric shall meet the requirements of table 1, when sampled and tested in accordance with the methods indicated in the table below.

For applications such as water quality facility underdrain wrappings that require a high flow-through rate or when specified by the Engineer, the fabric shall be woven mono-filament and meet the requirements of Table 2.

All material shall be shipped with suitable wrapping to protect the fabric during shipping and storage at the job site.

620S.4 Construction Methods

The submittal requirements shall be completed before any materials are ordered.

The "Filter Fabric" shall be installed in accordance with the manufacturer's recommendations, as indicated on the Drawings or as directed by the Engineer or

designated representative. When lapping is required, it shall be in accordance with the manufacturer's recommendations. Backfilling around the Filter Fabric shall be done in such a manner that the Filter Fabric material will not be damaged during the placement.

TABLE 1: FILTER FABRIC REQUIREMENTS

Original Physical Properties	Test Method	Requirements
Fabric weight (mass), on an ambient temperature air-dried tension free sample, expressed in oz/ sq. yd (grams/ square meter)	TxDoT Tex-616-J*	Underdrains/Slope Stabilization 4.0 (135) minimum
		Gabions and Revet Mattresses 6.0 (200) minimum
Water flow rate by falling head method, 7.9 inches (20 cm) to 3.9 inches (10 cm) on 2 inch (50 mm) ID cylinder with 1 inch (25 mm) diameter orifice, with flow rate expressed in gal/sq.ft/minute (liters/square meter/minute).	TxDoT Tex-616-J*	80 (3,260) minimum
Breaking load in either machine or cross-machine direction, expressed in pounds (newtons)	ASTM D-1682 grab method G**	100 (445) minimum
Equivalent opening size for US Standard (SI) sieves.	CW-02215	70 to 100 (212 to 150μm)
"Apparent elongation" at breaking load in either machine or cross-machine direction, expressed as percent	ASTM D-1682 grab method G**	100 maximum

* TxDoT Tex-616-J, "Testing of Construction Fibers

** ASTM D 1682 grab method G, "Test Methods for Breaking Load and Elongation of Textile Fabrics"* as modified by TxDoT Test Method Tex-616-J

*** CW-02215, US Army Corps of Engineers, Civil Works Construction Guide Specification "Plastic Filter Fabric".

TABLE 2: HIGH FLOW FILTER FABRIC REQUIREMENTS

Property	Test Method	Requirements
Fabric weight	D 3776	3.0 ounces/square yard, minimum
Ultaviolet (UV) Radiation Stability	D 4355	70% strength retained minimum, After 500 hours in xenon arc device
Mullen burst strength	D- 3786	120 pound per square inch minimum
Water Flow Rate	D-4491	275 gallons/minute/square feet, minimum

620S.5 Measurement

Work and acceptable material for "Filter Fabric" and “High Flow Filter Fabric” will be measured by the square yard (square meter: 1 square meter equals 1.196 square yards), complete in place.

620S.6 Payment

The work performed and the materials furnished and measured as provided under "Measurement" will be paid at the unit bid price for "Filter Fabric". The unit bid price, when included in the contract as a pay item, shall include full compensation for all materials, excavation and backfilling and all manipulations, labor, tools, equipment and incidentals necessary to complete the work.

Payment will be made under:

Pay Item No. 620S-A:	Filter Fabric	Per Square Yard.
Pay Item No. 620S-B:	High Flow Filter Fabric	Per Square Yard.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 620S, “Filter Fabric"

American Society for Testing and Materials (ASTM)

Designation	Description
D 1682	Test Methods for Breaking Load and Elongation of Textile Fabrics
D 3776	Standard Test Method for Mass Per Unit Area (Weight) of Fabric
D 4355	Test Methods for Deterioration of Geotextiles By Exposure to Ultraviolet Light, Moisture and Heat in a Xenon Arc Type Apparatus
D 3786	Standard Test Method for Bursting Strength of Textile Fabrics – Diaphragm Bursting Strength Tester Method
D 4491	Standard Test Method for Water Permeability of Geotextiles by Permittivity

Texas Department of Transportation Manual of Testing Procedures

Designation	Description
Tex-616-J	Testing of Construction Fabrics

RELATED CROSS REFERENCE MATERIALS

City of Austin Environmental Criteria Manual

Designation	Description
Section 1.4.2.E	Rock Berm
Section 1.6.5.A.4	Sand Filtration Bed Details

City of Austin Standard Details

Designation	Description
Number 639S-1	Rock Berm
Number 661-1	Sand Bed Filtration Configurations Using Geomembrane Liner
Number 661-2	Sand Bed Filtration Configurations Using Clay Liner/No Liner Required
Number 661-3	Biofiltration Bed Configurations Using Geomembrane/Clay Liner Required

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 401	Structural Excavation and Backfill
Item No. 602S	Sodding for Erosion Control
Item No. 604S	Seeding for Erosion Control
Item No. 605S	Soil Retention Blanket
Item No. 606S	Fertilizer
Item No. 608S	Planting
Item No. 610S	Preservation of Trees and Other Vegetation

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 132	Embankment
Item No. 158	Specialized Excavation Work
Item No. 166	Fertilizer
Item No. 168	Vegetative Watering
Item No. 169	Soil Retention Blanket
Item No. 204	Sprinkling

Item No. 632S
Storm Inlet Sediment Trap

632S.1 Description

This item governs the construction of a temporary silt basin around a drainage structure, the maintenance of the trap, the removal of silt accumulations until the trap is no longer required, the restoration of the area to the final grade and the re-vegetation of the disturbed area.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

632S.2 Submittals

The submittal requirements for this specification item shall include:

A. Locations and Types of inlet traps (yard or curb drain).

B. Seeding

1. Identification of the type, source, mixture, pure Live Seed (PLS) and rate of application,
2. Type of mulch,
3. Type of tacking agent, and
4. Type and rate of application of fertilizer.

632S.3 Materials

A. Seeding

Seeding for re-vegetation shall conform to Standard Specification Item No. 604S, "Seeding for Erosion Control".

B. Embankment

Embankment shall conform to Standard Specification Item No. 132S, "Embankment".

632S.4 Construction Methods

The area under the embankment shall be cleared, grubbed and stripped of any vegetation and root material in conformance with Standard Specification Item 102S, "Clearing and Grubbing".

Construction operations shall be carried out in such a manner that erosion and water pollution shall be minimized.

Sediment shall be removed and the trap shall be restored to its original dimensions when the sediment has accumulated to 1/2 the design depth of the trap. The sediment, that is removed, shall be deposited in an approved area and in such a manner that it will not erode.

The structure shall be inspected monthly and after each rain and repairs made as needed by the Contractor throughout the duration of this contract or until the Engineer or designated representative provides written permission to remove the structure.

When the trap is no longer required, the Contractor shall remove the silt accumulation and backfill the trap in accordance with Standard Specification Item No. 130S, "Borrow" or Standard Specification Item No. 132S, "Embankment". Any material placed shall be compacted in 8-inch (200 mm) lifts, loose measure and compacted to the required density by mechanical means.

The temporary Storm Inlet Sediment Trap shall be removed, when directed by the Engineer or designated representative, and the area leveled off and protected by erosion control measures appropriate for the terrain as indicated on the Drawings and/or Standard Detail Number 632S-1, "Storm Inlet Sediment Trap". Permanent Storm Inlet Sediment Traps shall be seeded and comply with all the requirements for Item No. 604S, "Seeding for Erosion Control".

632S.5 Measurement

Acceptable work performed as prescribed by this item will be measured by the cubic foot (cubic meter: 1 cubic meter equals 35.31 cubic feet) of sediment trap complete in place.

632S.6 Payment

The Work performed and the materials furnished for this item as provided under "Measurement" will be paid for at the unit bid price per cubic foot of sediment trap constructed. The Unit Bid Price shall include full compensation for: (a) furnishing, hauling and placing all materials including all labor, tools, equipment and the incidentals needed to complete the work, (b) maintaining the trap, (c) removing any silt accumulations, (d) removing, regrading and disposing of all silt and debris, (e) regrading and placing embankment and (f) re-vegetation of area upon removal of the trap.

Payment will be made under:

Pay Item No. 632S:	Storm Inlet Sediment Trap	Per Cubic Foot.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification 632S, “Storm Inlet Sediment Trap"

City of Austin Standard Details

Designation	Description
Number 632S-1	Storm Inlet Sediment Trap

City of Austin Standard Specifications

Designation	Description
Item No. 102S	Clearing and Grubbing
Item No. 130S	Borrow
Item No. 132S	Embankment
Item No. 604S	Seeding for Erosion Control

RELATED CROSS REFERENCE MATERIALS
Specification 632S, “Storm Inlet Sediment Trap"

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 401	Structural Excavation and Backfill
Item No. 602S	Sodding for Erosion Control
Item No. 605S	Soil Retention Blanket
Item No. 606S	Fertilizer
Item No. 608S	Planting
Item No. 610S	Preservation of Trees and Other Vegetation

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way
Item No. 110	Excavation
Item No. 132	Embankment
Item No. 158	Specialized Excavation Work
Item No. 166	Fertilizer
Item No. 168	Vegetative Watering
Item No. 169	Soil Retention Blanket
Item No. 204	Sprinkling

Item No. 641S
Stabilized Construction Entrance

641S.1 Description

This item governs the construction of a stabilized pad of crushed stone located at any point where traffic will be entering or leaving a construction site to or from a public right of way, street, alley, sidewalk or parking area. The removal of the stabilized pad of crushed stone shall also be included in the item. The purpose of a stabilized construction entrance is to reduce or eliminate the tracking or deposition of sediment onto public right of way (Environmental Criteria Manual Section 1.4.2.N.4).

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

641S.2 Submittals

The submittal requirements for this specification item shall include:

A. Source, type and gradation of rock

B. Drainage technique (i.e. drainage swale or entrance grading) proposed to prevent runoff from exiting the construction site.

641S.3 Materials

Aggregate for construction shall conform to the following gradation:

Table 1: Aggregate Gradation Chart (TEX 401-A, % Retained per sieve)	
US 5 inch (SI 125 mm)	US 3 inch (SI 75 mm)
0	100

641S.4 Construction Methods

All trees, brush, stumps, obstructions and other objectionable material shall be removed and disposed of in a manner that will not interfere with the excavation and construction of the entrance as indicated on the Drawings or as presented in Standard Details No. 641S-1. The entrance shall not drain onto the public right of way or shall not allow surface water runoff to exit the construction site.

When necessary, vehicle wheels shall be cleaned to remove sediment prior to entrance onto public right of way. When vehicle washing is required, it shall be done on an area stabilized with crushed stone, which drains into an approved sediment trap or sediment basin. All sediment shall be prevented from entering any storm drain, ditch or watercourse through use of sand bags, gravel, boards, silt fence (Standard Specification Item No 642S) or other methods approved by the Engineer or designated representative.

The entrance shall be maintained in a condition that will prevent tracking or disposition of sediment onto public right of way. This restriction may require periodic top dressing with additional stone as conditions demand, as well as the repair and/or cleanout of any measures used to trap sediment. All sediment that is spilled, dropped, washed or tracked onto public right of way must be removed immediately.

641S.5 Measurement

Acceptable work performed as prescribed in this item will be measured by unit of each stabilized construction entrance installed.

641S.6 Payment

The work performed and materials furnished and measured as provided under "Measurement" will be paid for at the unit bid price per lineal foot of "Stabilized Construction Entrance". The price shall include full compensation for furnishing, hauling and placing all materials, labor, tools, equipment and incidentals necessary to complete the work including inspecting, repairing, replacing and relocating existing fencing, removal of silt and removal and disposal of all materials at the completion of construction.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 641S: Stabilized Construction Entrance Per Each.

End

SPECIFIC CROSS REFERENCE MATERIALS

Specification 641S, "Stabilized Construction Entrance (SCE)"

City of Austin Environmental Criteria Manual

Designation	Description
Section 1.4.2.N.4	Stabilized Construction Entrance "Design Criteria"

City of Austin Standard Details

Designation	Description
Number 641S-1	Stabilized Construction Entrance

City of Austin Standard Specifications

Designation	Description
Item No. 642S	Silt Fence (SF)

RELATED CROSS REFERENCE MATERIALS

City of Austin Environmental Criteria Manual

Designation	Description
Section 1.4.2.J	Sandbag Berm
Figure 1-11	Sand Bag Berm
Section 1.4.2.G	Silt Fence

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 401S	Structural Excavation and Backfill
Item No. 610S	Preservation of Trees and Other Vegetation

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 100	Preparing Right of Way

Item No. 110	Excavation
Item No. 132	Embankment
Item No. 158	Specialized Excavation Work
Item No. 168	Vegetative Watering

ITEM NO. 642S
SILT FENCE

642S.1 Description

This item shall govern the provision and placement of a silt fence fabric fence (Environmental Criteria Manual Section 1.4.5.G) including maintenance of the fence, removal of accumulated silt, removal of the silt fence and re-vegetation of disturbed areas upon completion of the project.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

642S.2 Submittals

The submittal requirements for this specification item shall include:

A. Source, manufacturer, characteristics and test data for the silt fence fabric,

B. Manufacturer, characteristics and test data for the posts and wire fence.

C. Re-vegetation program, including:

1. Identification of the type, source, mixture, Pure Live Seed (PLS) and rate of application of the seeding.
2. Type of mulch.
3. Type of tacking agent.
4. Type and rate of application of fertilizer.

642S.3 Materials

A. Fabric

1. General:

   The silt fence fabric shall be of nonwoven polypropylene, polyethylene or polyamide thermoplastic fibers with non-raveling edges. The silt fence fabric shall be non-biodegradable, inert to most soil chemicals, ultraviolet resistant, unaffected by moisture or other weather conditions, and permeable to water while retaining sediment. The silt fence fabric shall be supplied in rolls a minimum of 36 inches (0.9 meter) wide.

2. Physical Requirements:

   The fabric shall meet the requirements presented in Table 1, when sampled and tested in accordance with the methods indicated herein, on Standard Detail No. 642S-1 and/or on the Drawings.

B. Posts:

Posts shall be steel Tee or Y-posts, not less than 4 feet (1.22 meters) in length with a minimum weight of 1.25 pounds per foot (1.86 kilograms per meter) with a minimum Brinell Hardness of 143. Hangers shall be adequate to secure fence and fabric to posts. Posts and anchor plates shall conform to ASTM A-702. Caps are required (*not specifying discretionary criteria).

C. Wire Fence:

Wire fence shall be welded wire fabric 2 in. x 4 in. 12.5 SWG, wire diameter 0.099 in (±0.005 in.), and shall conform to Standard Specification Item No. 406, "Reinforcing Steel".

TABLE 1. Silt Fence Fabric Requirements

Physical Properties	Method	Requirements
Fabric Weight in ounces per square yard (grams/square meter)	TEX-616-J[1]	5.0 minimum (150 minimum)
Equivalent Sieve Opening Size: US Standard (SI Standard sieve size)	CW-02215[2]	40 to 100 (425 to 150 □m)
Mullen Burst Strength: lbs. per sq. inch (psi) megaPascal (mPa)	ASTM D-3786[3]	280 minimum (1.9 minimum)
Ultraviolet Resistance; % Strength Retention	ASTM D-1682[4]	70 minimum

[1] TxDoT Test Method Tex-616-J, "Testing of Construction Fabrics".
[2] US Army Corps of Engineers Civil Works Construction Guide Specification CW-02215, "Plastic Filter Fabric".
[3] ASTM D-3786, " Test Method for Hydraulic Bursting Strength of Knitting Goods and Nonwoven Fabrics: Diaphragm Bursting Strength Tester Method".
[4] ASTM D-1682, " Test Methods for Breaking Load and Elongation of Textile Fabrics ".

642S.4 Construction Methods

The silt fence fabric shall be securely attached to the posts and the wire support fence with the bottom 12 inches (300 mm) of the material buried in a trench a minimum of 6 inches (150 mm) deep and 6 inches (150 mm) wide to prevent sediment from passing under the fence. When the silt fence is constructed on impervious material, a 12-inch (300-mm) flap of fabric shall be extended upstream from the bottom of the silt fence and weighted to limit particulate loss. No horizontal joints will be allowed in the silt fence fabric. Vertical joints shall be overlapped a minimum of 12 inches (300 mm) with the ends sewn or otherwise securely tied.

The silt fence shall be a minimum of 24 inches (0.6 meter) high. Posts shall be embedded a minimum of 12 inches (300 mm) in the ground, placed a maximum of 8 feet (2.4 meters) apart and set on a slight angle toward the anticipated runoff source. When

directed by the Engineer or designated representative, posts shall be set at specified intervals to support concentrated loads.

* Per OSHA §1926.701, 'all protruding reinforcing steel, onto and into which employees could fall, shall be guarded to eliminate the hazard of impalement'. Caps must be large enough to dissipate the forces of impact to prevent impalement from a reasonably foreseeable fall distance. It should be noted that the use of impalement protection caps is but one method of protection; covers or wooden troughs can be another means of meeting the guarding requirement. For City of Austin purposes, this also applies to t-posts and wooden stakes.

The silt fence shall be repaired, replaced, and/or relocated when necessary or as directed by the Engineer or designated representative. Accumulated silt shall be removed when it reaches a depth of 6 inches (150 mm).

642S. 5 Measurement

The work performed and the materials furnished under this item will be measured by the lineal foot of "Silt Fence", complete in place.

642S.6 Payment

The work performed and materials furnished and measured as provided under "Measurement" will be paid for at the unit bid price per lineal foot of "Silt Fence". The price shall include full compensation for furnishing, hauling and placing all materials, labor, tools, equipment and incidentals necessary to complete the work including inspecting, repairing, replacing and relocating the fence, removal of silt and removal and disposal of all materials at the completion of construction in and re-vegetation of disturbed areas.

Payment will be made under:

Pay Item No. 642S:	Silt Fence for Erosion Control	Per Lineal Foot.

END

SPECIFIC CROSS REFERENCE MATERIALS
Specification 642S, "Silt Fence"

City of Austin Environmental Criteria Manual

Designation	Description
Section 1.4.5.G	Silt Fence

City of Austin Standard Details

Designation	Description
Number 642S-1	Silt Fence

City of Austin Technical Specifications

Designation	Description
Item No. 406	Reinforcing Steel

American Society For Testing and Materials (ASTM)

Designation	Description
A-702	Specification for Steel Fence Posts and Assemblies, Hot Wrought
D-1682	Test Methods for Breaking Load and Elongation of Textile Fabrics
D-3786	Test Method for Hydraulic Bursting Strength of Knitting Goods and Nonwoven Fabrics: Diaphragm Bursting Strength Tester Method

Texas Department of Transportation Manual of Testing Procedures

Designation	Description
Tex-616-J	Testing of Construction Fabrics

U.S. Army Corps of Engineers

Designation	Description
CW-02215	Civil Works Construction Guide Specification "Plastic Filter Fabric"

RELATED CROSS REFERENCE MATERIALS
Specification 642S, "Silt Fence"

City of Austin Environmental Criteria Manual

Designation	Description
Table 1-1.3	Recommended Design Values For Functional Controls
Table 1-2	Maximum Water Depth At The Barrier

City of Austin Standard Specifications

Designation	Description
Item No. 101S	Preparing Right of Way
Item No. 102S	Clearing and Grubbing
Item No. 111S	Excavation
Item No. 120S	Channel Excavation
Item No. 401S	Structural Excavation and Backfill
Item No. 610S	Preservation of Trees and Other Vegetation

Item No. 700S
Mobilization

700S.1 Description

This item shall govern the mobilization of personnel, equipment and materials at the work site for other contract items that will be performed by the Contractor. Mobilization shall include, but not be limited to the movement of equipment, personnel, material, supplies, etc. to the Work site; the installation of temporary facilities (when not paid for separately) and the establishment of office and other necessary facilities prior to the initiation of the Work. The cost of the Payment Bond and Performance Bond on the Work that is delayed due to circumstances beyond Contractor's control, a closed construction season or for the convenience of the City of Austin will be considered part of the mobilization item under this Contract.

700S.2 Measurement.

Measurement of the Specification Item, "Mobilization", as specified herein as "Total Mobilization Payment", will be by the "Lump Sum", as the Work progresses.

700S.3 Payment.

The adjusted contract amount as used below is defined as the original contract amount less the lump sum bid for Mobilization and any payments for materials or equipment not yet incorporated in the Work. The Contractor shall submit a lump sum amount for Payment Item No. 700S-TM, "Total Mobilization Payment".

"Initial Mobilization Payout" as used below is defined as:

1. 8% of the original contract amount for projects with an original contract amount of $ 0.5 million or less; or
2. 4% of the original contract amount for projects with an original contract amount greater than $ 0.5 million.

In those instances where the "Initial Mobilization Payout", as defined above, exceeds the "Total Mobilization Payment" lump sum bid item (i.e. Payment Item No. 700S-TM), the "Total Mobilization Payment" shall be used as the "Initial Mobilization Payout". In no instance shall the "Initial Mobilization Payout" exceed the "Total Mobilization Payment" bid item.

Partial payments of the "Initial Mobilization Payout" shall be as follows:

A. Upon presentation of a paid invoice for the Payment Bond, Performance Bond and/or required insurance, the Contractor will be paid that cost from the amount bid for "Total Mobilization Payment".

B. The Mobilization of tunnel boring machines, batch plants or other similar facilities, along with supporting materials and equipment, to the work site or to the vicinity of the Work site will be considered as partial Mobilization under this contract. The Contractor shall provide a certified statement of the Contractor's

expenditure for the Mobilization and setup of the facility and supporting equipment. Upon approval by the Engineer or designated representative, the certified expenditure will be paid from the amount bid for the Specification Item, “Total Mobilization Payment”. In no case shall the combined amount for all of these facilities be more than 10 percent of the Mobilization “Total Mobilization Payment" lump sum bid or one (1) percent of the total contract amount, whichever is less.

C. When one (1) percent of the adjusted contract amount is earned, 50 percent of the "Initial Mobilization Payout” will be paid. Previous payments under this item will be deducted from this amount.

D. When five (5) percent of the adjusted contract amount is earned, seventy-five (75) of the "Initial Mobilization Payout” will be paid. Previous payments under this item will be deducted from this amount.

E. When ten (10) percent of the adjusted contract amount is earned, one hundred (100) percent of the "Initial Mobilization Payout” will be paid. Previous payments under this item will be deducted from this amount.

F. Payment for the remainder of Pay Item No. 700S-TM, “Total Mobilization Payment” will be made upon receipt of the final pay estimate.

Payment will be made under:

Pay Item No. 700S-TM: **"**Total Mobilization Payment" Lump Sum

END

RELATED CROSS REFERENCE MATERIALS
Specification 700S, “MOBILIZATION”

City of Austin Standard Contract Documents

Designation	Description
00020	Invitation for Bids
00100	Instructions To Bidders
00300	Bid Form
00425	Insurance Cost Form
00500	Agreement
00610	Performance Bond
00620	Bid Bond
00650	Certificate of Insurance
00700	General Conditions
00810	Supplemental General Conditions
00820	Modifications to Bidding Requirements & Contract Forms
01010	Summary of Work
01300	Submittals
01500	Temporary Facilities
01550	Public Safety and Convenience
01700	Contract Closeout
01710	Final Cleaning

Item 703
Fencing for Excavations

703.1 Description

This item to consist of temporary safety fencing supported on posts and constructed of materials as indicated and removed when excavation is backfilled.

703.2 Materials

(1) Fabric

(a) Fabric to be 4 feet in width, made of high density polyethylene resin, extruded and stretched to provide a highly visible international orange, non-fading fence which will remain flexible from -60 F to 200 F, and be inert to most chemicals and acid. Pattern may vary from diamond to circular with a minimum weight per foot of 0.4 lbs./Ft., a 4 foot width minimum tensile yield strength (Horiz.) of 2000 psi, ultimate tensile strength of 2680 psi (Horiz.) and a maximum opening no greater than 2 inches.

(2) Metal Posts

Steel pipe, tee posts, U posts or 2" x 4' timber posts, 5-1/2 feet in length minimum, spaced no more than 8 feet on centers. Fabric to be secured to post by bands or wire ties.

703.3 Construction Methods

Prior to commencing construction suitable “Barricades, signs and traffic handling” devices to be installed to protect workers and public. Safety fencing to be erected to lines and grades indicated. Excavations within 750 ft. of schools or day care centers require special attention by Contractor to secure entry while work is in progress. Fence to be installed prior to excavation and maintained until excavation is backfilled. Fence to be placed a minimum of 4 feet from edge of excavation. Posts to be driven in ground a minimum of 18 inches. At completion of each day's work, safety fencing to be pulled taut, and entry secured. When safety fence is no longer needed, Contractor to remove fence and posts and patch any damage to surfaces.

703.4 Measurement

Safety fencing to be measured by linear foot of fence measured along ground; gates will not be measured separately.

703.5 Payment

Work performed and materials furnished as prescribed by this item, measured as provided under "Measurement", to be paid for at the unit price bid for "Safety Fencing" which price to be full compensation for furnishing, installing and removing safety fencing and gates, including posts, bands or ties, and for manipulations, labor, tools, equipment and incidentals necessary to complete the work, removal and patching damaged surfaces.

Payment will be made under:

Pay Item 703:	Safety Fencing	Per Linear Foot

END

Item No. 801S
Constructing A Detour

801S.1 Description

This item shall govern: 1) the construction, manipulation, maintenance and removal, if required, of construction detours of the length and to the lines, grades and typical sections indicated on the Drawing; and 2) the provision for installation, movement, replacement, maintenance, cleaning and removal, as required, of all detour markers, signs, barricades and other devices used in traffic control and handling at the construction site upon completion of the work, as indicated on the Drawings or as directed by the Engineer or designated representative.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

801S.2 Submittals

The submittal requirements of this specification item include:

A. Type D HMAC mix design,
B. Type and Construction of the barricade, and
C. Identification of the type, source, mixture, Percent Live Seed (PLS) and rate of application of the seeding.

801S.3 Materials

A. Flexible Base:

Flexible Base shall conform to Standard Specification Item No. 210S, "Flexible Base ".

B. Stabilized Base:

When an HMAC Type A or B stabilized base is indicated on the Drawings, it shall conform to Standard Specification Item No. 340S, "Hot Mix Asphaltic Concrete Pavement" and if an asphalt Stabilized Base is shown on the Drawings, it shall conform to Standard Specification Item No. 206S, "Asphalt Stabilized Base (Plant Mix)".

C. Prime Coat:

Prime Coat shall conform to Standard Specification Item No. 306S, "Prime Coat".

D. Tack Coat:

Tack Coat shall conform to Standard Specification Item No. 307S, "Tack Coat".

E. Seal Coat:

Seal Coat shall conform to Standard Specification Item No. 312S, "Seal Coat".

F. Hot Mix Asphaltic Concrete Pavement:

Hot Mix shall be Type C or D, as shown on the Drawings, conforming to Standard Specification Item No. 340S, "Hot Mix Asphaltic Concrete Pavement".

G. Construction Pavement Markings:

1. Traffic Tape shall conform to Standard Specification Item No. 864S, "Abbreviated Pavement Markings".
2. Pavement Paint shall conform to Standard Specification Item No. 860S, "Pavement Marking Paint (Reflectorized)".
3. Pavement Markers shall conform to Standard Specification Item No. 871S, "Reflectorized Pavement Markers".
4. Work Zone Pavement Markings shall conform to Standard Specification Item No. 870S, "Work Zone Pavement Markings".

H. Barricades, Signs and Traffic Handling

Barricades, Signs and Traffic Handling shall conform to Standard Specification Item No. 803S, "Barricades, Signs and Traffic Handling". All barricades shall be constructed with one of the following materials/combinations:

1. Wood
2. Wood and Steel
3. Plastic

I. Seeding

Seeding shall conform to Item No. 604S, "Seeding for Erosion Control".

801S.4 Construction Methods

The detours shall be constructed at the locations and to the lines and grades indicated on the Drawings. It shall be the entire responsibility of the Contractor to provide for the passage of traffic in comfort and safety without creating a dust problem.

Flexible base material shall be deposited on the prepared subgrade, sprinkled, bladed, compacted and shaped to conform to the typical sections indicated on the Drawings, conforming to the City of Austin Standard Specification Item No. 210S, “Flexible Base”. The finished base shall receive surfacing where indicated on the Drawings in accordance with the pertinent City of Austin Standard Specification surfacing items.

After the detours are no longer needed for traffic, those materials, indicated for removal, shall become the property of the Contractor and shall be disposed of off the project. The site shall then either be restored to the original configuration and contours of the ground or to a landscape with a pleasing appearance that is composed of natural rounded slopes with re-vegetation / seeding.

All barricades, signs and other types of devices listed above shall conform to details indicated on the Drawings and/or in the City of Austin Standard Details and shall comply with the Texas Manual on Uniform Traffic Control Devices (TMUTCD).

801S.5 Maintenance

It shall be the Contractor's responsibility to maintain the construction detour and to repair the surface markers, striping and storm water drainage system as long as the detour is required.

801S.6 Measurement

"Constructing A Detour", when included in the contract as a pay item, will be measured by the lump sum.

801S.7 Payment

The work and materials presented herein will not be paid for directly, but shall be included in the unit price bid for the item of construction in which the activity is used, unless included as a separate pay item in the contract.

When specified for payment in the contract bid form, it shall be paid at the lump sum bid for "Constructing A Detour". The price shall include full compensation for all work, herein, specified, including the furnishing of all materials, equipment, tools, labor and incidentals necessary to complete the work.

Payment, when included as a contract pay item, will be made under:

Pay Item No. 801S: Constructing A Detour Per Lump Sum.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 801S, "Constructing A Detour"

City of Austin Standard Specifications

Designation	Description
Item No. 206S	Asphalt Stabilized Base
Item No. 210S	Flexible Base
Item No. 306S	Prime Coat
Item No. 307S	Tack Coat
Item No. 312S	Seal Coat
Item No. 340S	Hot Mix Asphaltic Concrete Pavement
Item No. 604S	Seeding for Erosion Control
Item No. 803S	Barricades, Signs and Traffic Handling
Item No. 860S	Pavement Marking Paint
Item No. 864S	Abbreviated Pavement Markings
Item No. 870S	Work Zone Pavement Markings"
Item No. 871S	Reflectorized Pavement Markers"

Texas Department of Transportation Technical Documents:

Designation	Description
(TMUTCD)	Texas Manual on Uniform Traffic Control Devices

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 801S, "Constructing A Detour"

City of Austin Standard Specifications

Designation	Description
Item No. 301S	Asphalts, Oils and Emulsions
Item No. 302S	Aggregates for Surface Treatments
Item No. 360	Concrete Pavement
Item No. 865S	Non-Reflectorized Traffic Buttons

RELATED CROSS REFERENCE MATERIALS - Continued
Specification Item No. 801S, "Constructing A Detour"

City of Austin Standard Specifications

Designation	Description
Item No. 866S	Jiggle Bar Tile
Item No. 867S	Epoxy Adhesive
Item No. 873S	Prefabricated Pavement Markers
Item No. 873S	Raised Pavement Markers
Item No. 874S	Eliminating Existing Pavement Markings and Markers
Item No. 875S	Pavement Surface Preparation For Markings

City of Austin Standard Details

Designation	Description
863S-1	Pavement Buttons (Reflectorized-Type I & Type II)
865S-1	Traffic Buttons (Non-Reflectorized)

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 502	Barricades, Signs and Traffic Handling
Item No. 508	Constructing Detours
Item No. 510	One-Way Traffic Control
Item No. 512	Portable Concrete Traffic Barrier
Item No. 514	Permanent Concrete Traffic Barrier
Item No. 662	Work Zone Pavement Markings
Item No. 666	Reflectorized Pavement Markings
Item No. 667	Prefabricated Pavement Markings
Item No. 672	Raised Pavement Markers
Item No. 677	Eliminating Existing Pavement Markings and Markers
Item No. 678	Pavement Surface Preparation For Markings

Item No. 802S
Project Signs

802S.1 Description

This item shall govern furnishing, fabricating, erecting, maintaining and removing Project Signs on Capital Improvement Projects (C.I.P.), Bond Program Projects and for project identification at other construction sites, when required on the Drawings. The C.I.P. signs shall be constructed in accordance with Standards 802S-1, 802S-1A, 802S-2, 802S-2A, 802S-2B and 804S-5 or as indicated on the Drawings.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

802S.2 Materials

A. Sign Face

Sign face shall be manufactured on standard exterior waterproof plywood sheets or other suitable material approved by the Engineer or designated representative. Unless indicated otherwise on the Standard Details or Drawings, the thickness of the plywood sheet shall be a minimum of ¾ inches (19 mm).

B. Posts

Lumber posts, of the size indicated on the Standard Details or on the Drawings, shall be pressure treated with pentachlorophenol.

C. Paint

Exterior oil base paint, colors as indicated on the Standard Details or on the Drawings.

D. Decals for Capital Improvement Projects and Bond Program Projects

City seal shall be in color using the 4 color process. Electronic images, in EPS format, are available from the Public Works Website (http://www.ci.austin.tx.us/publicworks/techspecs.htm) for downloading.

802S.3 Installation

The signs shall be erected at each major entrance to the project for maximum public identification and exposure. At locations where construction is confined to a specific area, the installed sign size shall be 4 x 8 foot (1.2 x 2.4 meter). At locations where C.I.P. roadway construction is in progress, such as a street paving or construction of a sidewalk, the sign shall be 2 x 3 foot (0.2 x 0.8 meter). Signs for Bond Program Projects shall be 3 x 4 foot (0.9 x 1.2 meters).

The signs shall be posted on portable wood frames or stanchions and will be located in the proximity of the work area as construction progresses. All lumber shall be painted with 2 coats of paint as indicated herein, on the Standard Details or in the Drawings.

In special cases the size of the sign may be changed to meet special requirements, but general proportions shall be maintained.

It shall be the responsibility of the Contractor to maintain and relocate signs, if necessary during the progression of the project. Care shall be exercised to assure that placement of the signs does not interfere with or cause sight obstruction to vehicular and pedestrian traffic.

For projects located on a street with curb and gutter, signs shall be installed no closer than 2 feet (0.6 meter) from the face of curb on the street.

For projects located on a street without curb and gutter, signs shall be installed no closer than 6 feet (1.8 meters) from the edge of street pavement.

The Contractor may install, at the Contractor's own expense, company signs to identify the Contractor, architectural firm, etc. Signs are to be securely attached to the posts at locations indicated on the Drawings and shall not be larger than 18 x 36 inches (0.45 x 0.90 meter).

802S.4 Measurement

The CIP contract and/or Bond Program, signs shall be measured by either lump sum or per each.

802S.5 Payment

The work performed and the materials furnished as prescribed by this item shall be paid for by lump sum or per each price bid only. The 'lump sum' bid or 'per each' price bid shall include full compensation for all work performed and all materials furnished in constructing, transporting, maintaining and removing the signs as specified on the Drawings and as directed by the Engineer or designated representative.

Payment will be made under one of the following:

Pay Item No. 802S-A C.I.P.: C.I.P. Project Signs	Lump Sum.
Pay Item No. 802S-B C.I.P.: C.I.P. Project Sign	Per Each.
Pay Item No. 802S-A BOND: Bond Project Signs	Lump Sum.
Pay Item No. 802S-B BOND: Bond Project Sign	Per Each.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 802S, "Project Signs"

City of Austin Standard Details

Designation	Description
Item No. 802S-1	2.4 m x 1.2 m (8'x4') C. I. P. Building Project Sign
Item No. 802S-1A	2.4 m x 1.2 m (8'x4')Bond Program Building Project Sign
Item No. 802S-2	600 mm x 900 mm (24" x 36")C. I. P. Movable Sign Type II
Item No. 802S-2A	600 mm x 900 mm (24" x 36")Joint C. I. P. Movable Sign Type II
Item No. 802S-2B	900 mm x1.2 m (36" x 48") Bond Program Project Movable Sign Type II
Item No. 804S-5	Typical CMTA / C.I.P. Sign Locations

803S.1 Description

This item shall govern for providing, installing, moving, replacing, maintaining, cleaning and removing upon completion of the work, all temporary or permanent street closure barricades, signs, cones, lights or other devices required to handle the traffic in conformance with the current edition of the Texas Manual of Uniform Traffic Control Devices for Street and Highways and as indicated on the Drawings or directed by the Engineer or designated representative.

Constructing A Detour, if required, shall conform to Standard Specification Item No. 801S, " Constructing A Detour". Capital Improvement Project Signs shall conform to Standard Specification Item No. 802S, " Project Signs".

This item shall also include the installation of all required safety fencing as described in the latest adopted version of Standard Detail 804S-4.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

803S.2 Submittals

The submittal requirements of this specification item include:

A. Type of Barricade and proposed materials and Construction of the barricade,

B. Test results for Retro-Reflective sheeting.

803S.3 Materials

All barricades, signs, cones, lights and other types of devices to handle traffic, as indicated on the Drawings or directed by the Engineer or designated representative, shall conform to details shown on the Drawings or those indicated in the Texas Manual on Uniform Traffic Control Devices (TMUTCD).

803S.4 Construction Methods

Prior to commencement of construction, suitable "Barricades, Signs and Traffic Handling" devices shall be installed to protect the workers and the public.

The Contractor shall be responsible for the installation of all markers, signs and barricades in accordance with the Drawings and in conformance with the Texas Manual on Uniform Traffic Control Devices (TMUTCD) and/or as indicated on the Drawings or directed by the Engineer or designated representative. If, in the opinion of the Engineer or designated representative, additional markers, signs or barricades are needed in the interest of safety, the Contractor will install such as are required or as directed by the Engineer or designated representative. All changes and/or revisions to the detour/traffic control plan shall be approved by the Engineer or designated representative.

Lumber shall be painted with 2 coats of paint as indicated on the Drawings.

803S.5 Maintenance

It shall be the Contractor's responsibility to maintain, clean, move and replace if necessary, barricades, signs and traffic handling devices during the time required for construction of the project. Permanent barricades shall be constructed as required after the completion of the street by drilling holes to place the posts and concrete foundations. Foundation concrete shall be cured before the rails are attached. When no longer needed, all temporary Barricades, Signs and Traffic Handling Devices shall be removed and the area restored to its original condition or as directed by the Engineer or designated representative.

803S.6 Measurement

The work performed and material furnished as prescribed by this item, City of Austin Standard Details, details included on the Drawings or indicated in the TMUTCD shall be measured as follows:

A. Pavement Markings.

   All pavement marking required for proper installation of the designated Traffic Control Plans and Details, as well as required removal of existing pavement marking, shall be measured and paid for under Standard Specification Item No. 870S, “Work Zone Pavement Markings” and Standard Specification Item No. 874S, “Eliminating Existing Pavement Markings”.

B. Barricades, Signs and Traffic Handling.

   All work performed and material furnished as prescribed by this item, City of Austin Standard Details, details shown on the Drawings or indicated in the TMUTCD, that are not included in the above paragraph, shall be measured by the number of calendar days, working days or months of actual service.

   Traffic control for the project will be measured and paid for once per contract defined time period, i.e. either per Calendar Day, Working day or Month at the contract rate, regardless of the number of set-ups, locations or streets under construction.

C. Safety Fencing

   Safety fencing will be measured by the lineal foot.

803S.7 Payment

The work performed and materials furnished as prescribed by this item, measured as provided under section “803S.6 Measurement” shall be paid for at the contract unit price for barricades, signs and traffic handling. This unit price shall include full compensation for furnishing, placement and removal of all materials and for all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item No. 803S -CD:	Barricades, Signs, and Traffic Handling	Per Calendar Day.
Pay Item No. 803S-WD:	Barricades, Signs, and Traffic Handling	Per Working Day.
Pay Item No. 803S-MO:	Barricades, Signs, and Traffic Handling	Per Month.
Pay Item No. 803S-SF:	Safety Fence	Per Lineal Foot.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item No. 803S, "Barricades, Signs and Traffic Handling"

City of Austin Standard Specifications

Designation	Description
Item No. 801S	Constructing A Detour
Item No. 802S	Project Signs
Item No. 870S	Work Zone Pavement Markings
Item No. 874S	Eliminating Existing Pavement Markings and Markers

Texas Technical Documents:

Designation	Description
(TMUTCD)	Texas Manual on Uniform Traffic Control Devices

RELATED CROSS REFERENCE MATERIALS
Specification Item No. 803S, "Barricades, Signs and Traffic Handling"

City of Austin Standard Specifications

Designation	Description
Item No. 403S	Concrete for Structures
Item No. 860S	Pavement Marking Paint (Reflectorized)
Item No. 863S	Reflectorized Pavement Markers
Item No. 864S	Abbreviated Pavement Markings
Item No. 867S	Epoxy Adhesive
Item No. 871S	Reflectorized Pavement Markings
Item No. 875S	Pavement Surface Preparation For Markings

City of Austin Standard Details

Designation	Description
803S-1	Street-End Barricades

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 502	Barricades, Signs and Traffic Handling
Item No. 508	Constructing Detours
Item No. 510	One-Way Traffic Control
Item No. 512	Portable Concrete Traffic Barrier
Item No. 514	Permanent Concrete Traffic Barrier
Item No. 662	Work Zone Pavement Markings
Item No. 666	Reflectorized Pavement Markings
Item No. 667	Prefabricated Pavement Markings
Item No. 672	Raised Pavement Markers
Item No. 677	Eliminating Existing Pavement Markings and Markers
Item No. 678	Pavement Surface Preparation For Markings

Item No. **863S**
Reflectorized Pavement Markers

863S.1 Description

This item governs reflectorized pavement markers to be used to delineate traffic lanes or fire hydrants.

This specification is applicable for projects or work involving either inch-pound or SI units. Within the text, the inch-pound units are given preference followed by SI units shown within parentheses.

863S.2 Submittals

The submittal requirements of this specification item include:

A. List of specific application(s) [i.e. type: (reflectorized Type I-A, I-C or II-A-A, II-B-B or II-C-R)] and applicable epoxy system and adhesive types [867S.5].

B. Specific manufacturer with test results and technical specifications for proposed pavement markers.

C. Manufacturer's recommendations for surface preparation, cleaning, placement temperatures and installation instructions.

D. Adhesive components and mixing recommendations.

863S.3 Materials

All materials shall meet the requirements as specified below and indicated on City of Austin Standard Detail 863S-1, "Pavement Markers (Reflectorized - Type I & II)". The pavement markers shall comply with TxDoT Departmental Materials Specifications DMS-4210.

A. Design and Shape

The outer surface of the marker shall be smooth and all corners and edges exposed to traffic must be rounded. The base of the marker shall have a width of 4.0 inches + 1/2 inch (100 mm + 13 mm) and shall have a minimum area exposed to traffic of 12.5 square inches (8000 square mm). The maximum height shall be 3/4 inch (19 mm). The maximum slope of the reflector face or faces shall be not more than 30 degrees from the horizontal.

The bottom surface of the markers shall be of a design for adhesion with epoxy adhesives to comply with TxDoT Test Method Tex-611-J.

The marker shall be designed to show no change in shape or color when subjected to the requirements of TxDoT Test Method Tex-846-B, at a temperature of 140°F (60°C) with the marker in a vertical position.

B. Optical

1. Definitions

(a) Horizontal entrance angle is defined as being in a plane parallel to the base of the road marker, between a line in the direction of the incident light and a line that is perpendicular to the leading edge of the reflective surface.

(b) Divergence angle shall mean the angle at the reflector between observer's line of sight and the direction of the light incident on the marker.

(c) Specific intensity shall mean candle power of the returned light at the chosen divergence and entrance angles for each footcandle of incident light per reflective face. TxDoT Test Method Tex-842-B will be used to determine specific intensity.

2. Performance

For the pavement markers the specific intensity of the reflecting surface at a 15-degree divergence angle shall be not less than the following when the incident light is parallel to the base of the marker.

	Specific Intensity	
Horizontal Entrance Angle, Degrees	Crystal	Amber
0	3.0	2.0
20	1.5	1.0

The specific intensity of the marker shall not be less than 80 percent of the above minimum values after being subjected to heat test of TxDoT Test Method Tex-846-B.

C. Pavement Marker Types

Pavement markers shall be of the following types:

1. Type I-A shall contain an approach face that reflects amber light. The body, other than the reflective face, shall be yellow.
2. Type I-C shall contain an approach face that reflects white light. The body, other than the reflective face, shall be white, silver white or light gray.
3. Type II-A-A, shall contain two reflective faces (approach and trailing), each of which shall reflect amber light. The body, other than the reflective faces, shall be yellow.
4. Type II-B-B shall contain two reflective faces (approach and trailing) with glass covered pneumatic reflective faces, each of which shall reflect blue light. The body, other than the reflective faces, shall be blue.
5. Type II-C-R shall contain two reflective faces (approach and trailing), one of which reflects white light and one of which reflects red light. The body, other than the reflective faces, shall be either white, silver white or light gray or one-half white, silver white or light gray on the side that reflects white light and one-half red on the side that reflects red light.

   The reflective faces of the Type II markers shall be located so that the direction from one face shall be directly opposite the direction of reflections of the other face.

863S.4 Sampling

Sampling will be conducted in accordance with TxDoT Test Method Tex-729-I.

863S.5 Testing

The Contractor shall certify that the markers meet the requirements defined in the specification and meet or exceed the applicable tests required. All testing will be in accordance with the TxDoT manual of Testing Procedures. Applicable tests shall include the following:

Tex-611-J: Adhesion Requirements

Tex-842-B: Light Retroreflectivity

Tex-846-B: Heat Resistance

Blue markers' color will conform to Fire Department requirements.

863S.6 Construction Methods

The Contractor shall use a crew experienced in the work of installing reflectorized pavement markers and in the necessary traffic control for such operations on the roadway surface and shall supply all the equipment, personnel, traffic control and materials necessary for the placement of the pavement markings as indicated on the Drawings or as directed by the Engineer or designated representative. All work shall conform to the current edition of the Texas Manual of Uniform Traffic Control Devices (TMUTCD), The City of Austin Transportation Criteria Manual and Standard Detail 863S-1.

All reflectorized pavement markers shall be from the same manufacturer. Surfaces to which markers are to be attached by an adhesive shall be prepared by any method approved by the Engineer or designated representative to ensure that the surface is free of dirt, curing compound, grease, oil, moisture, loose or unsound pavement markings and any other material which would adversely affect the adhesive bond. Unless indicated otherwise on the Drawings, surface preparation for installation of raised reflectorized pavement markers will not be paid for directly, but shall be included in the unit price bid for this specification item.

Guides to mark the lateral location of pavement markings shall be established as indicated on the Drawings or as directed by the Engineer or designated representative. The Contractor will establish the pavement marking guides and the Engineer or designated representative will verify the location of the guides prior to final installation.

The pavement markers shall be placed in proper alignment with the Guides. The deviation rate in alignment shall not exceed 1 inch per 200 feet (25 millimeters per 60 meters) of roadway. The maximum deviation shall not exceed 2 inches (50 millimeters) nor shall any deviation be abrupt.

Markers placed which are not in alignment indicated on the Drawings shall be removed by the Contractor at the Contractor's expense. Removal shall be in accordance with Specification Item 874S except for measurement and payment. Guides placed on the roadway for alignment purposes shall not establish a permanent marking on the roadway.

The Reflectorized Pavement Markers shall be applied using an approved epoxy adhesive (City of Austin Standard Specification Item 867S) to the lines and spacings as indicated on the Drawings or as directed by the Engineer or designated representative. The adhesive shall be applied in sufficient quantity to ensure that 100 percent of the bonding area of the pavement markers shall be in contact with the adhesive. The adhesive shall be applied in accordance with the manufacturer's recommendations.

Pavement markers shall be placed immediately after the adhesive is applied and shall be firmly bonded to the pavement. Adhesive or any other material that impairs functional reflectivity will not be acceptable.

When deemed necessary by the Engineer or designated representative, the Contractor, at the Contractor's expense, shall place any additional pilot markings required to facilitate the placement of the permanent markings in the alignment specified. Any and all additional markings placed on the roadway for alignment purposes shall be temporary in nature and shall not establish a permanent marking on the roadway. Materials used for pilot markings and equipment used to place such markings shall be approved by the Engineer or designated representative.

863S.7 Measurement

Reflectorized Pavement Marker will be measured as per each, complete in place.

863S.8 Payment

Payment will be made at the unit bid price per each. The price shall include full compensation for all work performed and all materials furnished in constructing, transporting and placing the markers.

Payment will be made under:

Pay Item No. 863S -1:	Reflectorized Pavement Markers (Type I-A) -	Per Each.
Pay Item No. 863S -2:	Reflectorized Pavement Markers (Type I-C) -	Per Each.
Pay Item No. 863S -3:	Reflectorized Pavement Markers (Type II-A-A) -	Per Each.
Pay Item No. 863S -4:	Reflectorized Pavement Markers (Type II-B-B) -	Per Each.
Pay Item No. 863S -5:	Reflectorized Pavement Markers (Type II-C-R) -	Per Each.

End

SPECIFIC CROSS REFERENCE MATERIALS
Specification Item 863S " Reflectorized Pavement Markers"

Texas Department of Transportation: Manual of Testing Procedures

Designation	Description
Tex 611-J	Adhesion Test For Traffic Buttons, Markers, and Jiggle Bars
Tex-729-I	Sampling of Traffic Markers
Tex-842-B	Method for Measuring Retroreflectivity
Tex-846-B	Method of Testing The Heat Resistance of Reflector Units

Texas Department of Transportation: Departmental Materials Specifications

Designation	Description
DMS-4210	Pavement Markers (All Weather Reflectorized

City of Austin Standard Details

Designation	Description
863S-1	Pavement Buttons (Reflectorized-Type I & Type II)

City of Austin Standard Specifications

Designation	Description
Item No. 867S	Epoxy Adhesive
Item No. 874S	Eliminating Existing Pavement Markings and Markers
Item No. 875S	Pavement Surface Preparation For Markings

City of Austin Transportation Criteria Manual

Designation	Description
Section 8	Traffic Control

State of Texas Manual on Uniform Traffic Control Devices for Streets and Highways

Designation	Description
Part III	Markings
Part VI	Traffic Controls for Street and Highway Construction, Maintenance, Utility and Incident Management Operations
Part VI, Article D	Markings
Part VI, Article F	Control of Traffic Through Work Areas

RELATED CROSS REFERENCE MATERIALS

City of Austin Standard Specifications

Designation	Description
Item No. 865S	Non-Reflectorized Traffic Buttons
Item No. 870S	Work Zone Pavement Markings
Item No. 871S	Reflectorized Pavement Markings
Item No. 873S	Raised Pavement Markers

Texas Department of Transportation: Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges

Designation	Description
Item No. 666	Reflectorized Pavement Markings
Item No. 672	Raised Pavement Markers
Item No. 677	Eliminating Existing Pavement Markings and Markers
Item No. 678	Pavement Surface Preparation For Markings

SPECIAL PROVISION To
Standard Specification Item 110S
Street Excavation

For this project Item 110S, Street Excavation, of the City of Austin Standard Technical Specifications is hereby amended with respect to the clauses cited below. No other clauses or requirements of this Section of the City of Austin Standard Specifications are waived or changed.

Section 110S.6 Payment

Delete the entire section and replace with the following:

When Item 110S is not included on Contract Form 00300U as a bid item, the work performed, including subgrade preparation, materials furnished, equipment, labor, tools and incidentals shall not be paid directly but will be considered subsidiary to the unit price for items of construction in which these materials are used.

End

SPECIAL PROVISION To
Standard Specification Item 506
Manholes

For this project Item 506, Manholes, of the City of Austin Standard Technical Specifications is hereby amended with respect to the clauses cited below. No other clauses or requirements of this Section of the City of Austin Standard Specifications are waived or changed.

Section 506.5 Construction

Add the following item under construction:

M. Abandonment of Existing Clean Out:

Clean out designated on the drawing to be abandoned, shall be removed to a level no less than four feet below grade. The remaining clean out stub shall be filled with cement stabilized sand. The excavation shall be backfilled and repaired per City of Austin standard trench repair detail.

Section 506.8 Payment

The unit bid price for abandonment of existing clean out shall include all labor, equipment, and material including but not limited to locating clean out, by-pass pumping, excavation, removal and disposal of pipe, plugging clean out, site restoration. Any incidental and operations necessary to complete the work that does not have specific bid item shall be included on this pay item.

Add the following item under payment:

Pay Item No. SP506S-AB-WWCO	Abandon Existing Wastewater Cleanout	Each

End

SPECIAL PROVISION To
Standard Specification Item 510
Pipe

For this project Item 510S, Manholes, of the City of Austin Standard Technical Specifications is hereby amended with respect to the clauses cited below. No other clauses or requirements of this Section of the City of Austin Standard Specifications are waived or changed.

Section 510.5 Payment

Add the following item under payment:

(14) Cut and Plug Existing Water/ Wastewater Line:

Existing water or wastewater line designated on the drawing to be cut and plug, shall be cut flush, and blocked water tight with concrete plug in a manner satisfactory to City representative. The excavation shall be backfilled and repaired per City of Austin standard trench repair detail. The unit bid price for cutting and plugging existing water and wastewater line shall include all labor, equipment, and material including but not limited to excavation, by-pass pumping, excavation, cleaning, removal and disposal of pipe, cap, site restoration. Any incidental and operations necessary to complete the work that does not have specific bid item shall be included on this pay item.

Add the following items under payment:

Pay Item No. SP510-CP-W	Cut and Plug Existing Water Line	Each
Pay Item No. SP510-CP-WW	Cut and Plug Existing Wastewater Line	Each

End

SPECIAL PROVISION To
Standard Specification Item 511S
Water Valves

For this project Item 511S, Water Valves, of the City of Austin Standard Technical Specifications is hereby amended with respect to the clauses cited below. No other clauses or requirements of this Section of the City of Austin Standard Specifications are waived or changed.

Section 511S.6 Payment

Add the following paragraph under payment

The unit bid price for removing and salvaging existing fire hydrant shall include excavation, removal, coordination with City staff, hauling and transporting to City's designated yard, backfilling, provide temporary shut off, plugging existing lead pipe, concrete thrust blocking removal, site restoration and other incidental and operations necessary to complete the work.

The unit bid price for abandoning existing gate valve in place shall include excavation, removal, coordination with City staff, backfilling, provide temporary shut off, plugging, concrete thrust blocking and concrete valve box pad removal, valve box and its extension removal, site restoration and other incidental and operations necessary to complete the work.

Add the following item under payment:

Pay Item No. SP511S-FH-R	Remove and salvage existing fire hydrant	Each
Pay Item No. SP511S-GV-A	Abandon existing gate valve in place	Each

End

SPECIAL PROVISION To
Standard Specification Item 632S
Storm Inlet Sediment Trap

For this project Item 632S, Storm Inlet Sediment Trap, of the City of Austin Standard Technical Specifications is hereby amended with respect to the clauses cited below. No other clauses or requirements of this Section of the City of Austin Standard Specifications are waived or changed.

Section 632S.6 Payment

Add the following item under payment:

Pay Item No. SP632S	Storm Inlet Sediment Trap	Each

End

SPECIAL PROVISION To
Standard Specification Item 703
Fencing for Excavation

For this project Item 703, Fencing for Excavation, of the City of Austin Standard Technical Specifications is hereby amended with respect to the clauses cited below. No other clauses or requirements of this Section of the City of Austin Standard Specifications are waived or changed.

Section 703.5 Payment

Delete the entire section and replace with the following:

When 703 is not included on Contract Form 00300U as a bid item, the work performed, materials furnished, equipment, labor, tools and incidentals shall not be paid directly but will be considered subsidiary to the unit price for items of construction in which these materials are used.

End

PART 1 GENERAL

1.01 SCOPE

A. This specification covers the excavation, handling, loading, temporary storage, transportation and disposal of contaminated soils and water encountered during the installation of the proposed water and wastewater line. The proposed improvement location is generally bounded by 53rd Street on the north, IH-35 & Harmon Avenue on the east, E. 48th Street on the south, and Airport Blvd. on the west. An environmental constraint map dated 11 April 2018 prepared by Baer Engineering and Environmental Consulting Inc. is available separately from the project manual. Geotechnical report dated 6 July 2018 prepared by Holt Engineering is available and provided as part of the project manual. If the CONTRACTOR encounters, during excavation and/or earth moving for the work, soil or groundwater that is contaminated, discolored, has a noticeable odor or is otherwise out of the ordinary, the CONTRACTOR shall immediately notify the OWNER and follow the procedures set forth in this Section.

1.02 REGULATORY REQUIREMENTS

A. Work covered under this specification shall be performed in accordance with all applicable local, state, and federal regulations, statues, codes, rules, ordinances and policies. In the event of a conflict, the more stringent standards shall apply. Applicable regulations and laws include, but are not limited to:

- *Code of Federal Regulations, Title 29, Part 1910.120 Hazardous Waste Operations and Emergency Response* (29 CFR § 1910.120). U.S. Government Printing Office, Washington, DC.
- RG-022 – Texas Natural Resource Conservation Commission. *Classifying and Coding of Industrial and Hazardous Waste*. Austin, TX.
- SW-846 - U.S. Environmental Protection Agency. *Test Methods for Evaluating Solid Waste, Physical/Chemical Methods, Vol. I*. Washington, DC.
- *Texas Administrative Code, Title 30, Chapter 335* (30 TAC § 335). Office of the Secretary of State, Austin, TX.
- *Texas Administrative Code, Title 30, Chapter 350* (37 TAC § 350). Office of the Secretary of State, Austin, TX.
- *Texas Administrative Code, Title 37, Chapter 16* (37 TAC § 16). Office of the Secretary of State, Austin, TX.
- *Austin City Code, Volume 1, Title IV § 4-1-82*
- *Austin City Code, Volume 1, Title XVIII § 18-2-003*

1.03 HEALTH AND SAFETY

A. The CONTRACTOR shall be responsible for developing, implementing, and maintaining a health and safety program for their personnel including subcontractors. Prior to commencement of work, the CONTRACTOR shall submit a site-specific

Health and Safety Plan (HASP) to the OWNER for review. *The HASP shall be prepared and signed by a certified safety professional (CSP) or a certified industrial hygienist (CIH).* The resume of the CSP or CIH shall be submitted as an attachment to the HASP and shall document their qualifications and applicable experience. In addition to the health and safety requirements as described in the sewer construction specifications, the HASP shall address exposure of workers to contaminated soil and groundwater, temporary storage, transportation and disposal of contaminated materials. The HASP shall be prepared in accordance with the requirements of 29 CFR 1910.120 and shall contain, at minimum, the following sections:

- Project Description
- Site Description
- Summary of Field Activities
- Listing of Field Staff including Project Manager, On-site Manager, and Health and Safety Officer
- Emergency Contact Information
- Site Control Measures
- Identification of Environmental Hazards
- Protective Equipment
- Exposure Limits for Chemicals of Concern
- Monitoring Requirements and Action Levels
- Decontamination Procedures
- Disposal Procedures
- Employee Training Records
- *Resume of CSP or CIH*

1.04 RECORD KEEPING

A. When performing work within the scope of this specification, the CONTRACTOR shall be responsible for maintaining a Project record on-site that includes:

1. A copy of the CONTRACTOR's HASP;
2. A daily sign in sheet including the signatures of all personnel, regardless of affiliation, who enter the site acknowledging that they;
   i. Have read and understood the CONTRACTOR'S Site Specific HASP;
   ii. Meet the training requirements described in the CONTRACTOR HASP; and
   iii. Have been made aware of potential site hazards including environmental hazards.
3. A copy of all waste manifests or load tickets generated during the transport of contaminated soils or water in accordance with Section 3.07 of this Specification.

4. A copy of all waste manifests or scale tickets generated during the disposal of contaminated soils or water in accordance with Section 3.08 of this Specification.

PART 2 PRODUCTS

2.01 PLASTIC SHEETING

A. The CONTRACTOR shall use plastic sheeting at least 6 mil thick for lining of all trucks, transport vehicles, soil stockpiles, and roll-off boxes.

B. Plastic sheeting shall be used and or applied in a manner to prevent migration of soils and contaminants from soils. Soil stockpiles must be placed on, and covered by, plastic sheeting. Under no circumstances will leakage of fluids from soil stockpiles, roll-off boxes or transport trucks be allowed.

PART 3 EXECUTION

3.01 EXCAVATION

A. During excavation of soils as required by the work, the CONTRACTOR shall place all excavated soils into soil stockpiles or lined roll-off containers in the designated staging area. For areas beyond the originally identified location, the CONTRACTOR shall notify the OWNER if soil or groundwater is encountered that is contaminated, discolored, has a noticeable odor or is otherwise out of the ordinary. This notification shall be made immediately upon encountering contaminated soil and groundwater beyond the limits initially identified.

B. If the excavation fills with water such that the CONTRACTOR cannot perform construction activities in accordance with the construction specifications, the OWNER shall determine, if the water is potentially contaminated in accordance with Section 3.03 of this specification. The CONTRACTOR shall collect water that is found to be potentially contaminated in a clean temporary storage tank.

3.02 MONITORING

A. During excavation activities, the CONTRACTOR shall be responsible for monitoring the excavation for potentially hazardous vapor concentrations and preventing exposure of workers to contaminated media in accordance with their health and safety plan.

B. If contaminated soils or groundwater, (soil or groundwater that is discolored, has a noticeable odor or is otherwise out of the ordinary) are encountered in areas beyond the originally identified location, CONTRACTOR shall immediately notify the OWNER or OWNER'S REPRESENTATIVE, who will screen excavated soils. The CONTRACTOR shall abide by the directions of the OWNER'S REPRESENTATIVE and shall provide the OWNER'S REPRESENTATIVE the opportunity to screen soils in accordance with the following procedure:

1. The OWNER'S REPRESENTATIVE will screen excavated soil with a photoionization detector (PID). If OWNER or OWNER's REPRESENTATIVE determines that readings are above pre-determined action levels, the CONTRACTOR shall stage soils in soil stockpiles or roll-offs separate from other fill materials.
2. If the OWNER'S REPRESENTATIVE determines that soils are contaminated by visual inspection or odor, the CONTRACTOR shall stage soils in soil stockpiles or roll-offs separate from the other fill materials.

3.03 COLLECTION OF SAMPLES

A. The OWNER or OWNER'S REPRESENTATIVE will collect soil samples from stockpiled soil that is suspected to be contaminated, confirmation samples from clean soil stockpiles, and samples of potentially contaminated groundwater based on the procedures defined in Section 3.02 of this specification. The OWNER shall pay for any testing undertaken for soil that is suspected of contamination due to existing conditions. The OWNER or OWNER'S REPRESENTATIVE will perform waste characterization (testing) of the soil and water, and the CONTRACTOR shall abide by the waste characterization decisions of the OWNER. Depending on the type of contamination discovered, testing duration may be up to three (3) weeks. Testing may need to be conducted on an ongoing basis as additional contaminated soil is discovered. Soils that are thought to be contaminated must remain in the staging area and protected from rainfall and contact by the CONTRACTOR until the OWNER determines how the soil is to be disposed in accordance with Section 3.07 of this Specification.

3.04 TEMPORARY STORAGE

A. Soils that are determined by the OWNER or OWNER'S REPRESENTATIVE to be potentially contaminated by shall be staged in soil stockpiles or roll-off containers separately from soils that are to be used as fill. Soil stockpiles shall be placed on, and covered by, plastic sheeting. Roll-off containers shall be covered to prevent accumulation of water in the container. The roll-off containers shall be located so that they do not block surface drainage pathways, or prevent access to storm sewer inlets or manholes. The CONTRACTOR must ensure that roll-off containers and soil stockpiles are completely sealed and covered. The CONTRACTOR will be responsible for replacing or repairing any roll-off box found to be leaking or in poor condition.

B. Water that is determined by the OWNER or OWNER'S REPRESENTATIVE to be contaminated shall be collected as required to allow work. Such water shall be collected and temporarily stored in clean, sealed tank(s) by CONTRACTOR. The CONTRACTOR shall place tank(s) such that they do not block surface drainage pathways, storm sewer inlets or manholes. The CONTRACTOR shall be responsible for repairing or replacing any tanks that are found to be leaking or in poor condition.

C. During storage, contaminated soil and groundwater containers shall be placed within designated or approved areas. The limits of these areas shall be indicated via barricades, flagging, and/or fencing and access to storage areas shall be res

3.05 CLASSIFICATION OF SOILS AND WATER

A. The OWNER or OWNER's REPRESENTATIVE will determine the waste classification of soils and groundwater for the purpose of proper disposal.

B. Confirmation samples collected from clean soil must have Total Petroleum Hydrocarbon (TPH) concentrations, as measured by Method TX 1005, less than 60 mg/kg per Texas Risk Reduction Program Tier 1 Protective Concentration Levels. Soils with TPH concentrations greater than 60 mg/kg but less than 1500 mg/kg are

classified as Class 2 industrial non-hazardous waste and must be disposed in accordance with Section 3.07 at a permitted Class 2 industrial waste landfill.

C. Soils with TPH concentration greater than or equal to 1500 mg/kg are classified as Class I industrial non-hazardous wastes and must be disposed at a permitted Class I landfill.

D. Groundwater with TPH concentrations less than 0.73 mg/L is unregulated and can be disposed of by the contractor in accordance with city stormwater disposal regulations. Groundwater with TPH concentrations greater than 0.73 mg/L but less than 1500 mg/l TPH concentration is classified as Class 2 industrial, non-hazardous waste. Groundwater with TPH concentration greater than or equal to 1500 mg/l must be classified as Class I industrial non-hazardous waste.

3.06 TRANSPORTATION

A. The CONTRACTOR shall perform transport operations in a manner that precludes the spread of contamination. The CONTRACTOR shall remediate waste spillage in transport in accordance with applicable requirements of 30 TAC 335.93, 330.34, and other applicable Federal, State, and local regulations at no additional cost to the OWNER.

Open waste transport vehicles shall be covered by the CONTRACTOR prior to leaving the project site. Covers shall be constructed from water-resistant material with sufficient strength to withstand wind loads during transit. Covers shall effectively prevent release of dust from the transport vehicle. Covers shall have tie-downs or other restraint mechanisms necessary to securely fasten them to the transport vehicle.

Waste transport vehicles shall not leave the project site until the OWNER or OWNER'S REPRESENTATIVE signs the waste manifest as generator of the waste. The CONTRACTOR shall not sign any waste manifest or shipping papers as generator. Payment will not be made for any waste shipment that leaves the site without signatory approval of OWNER or OWNER's REPRESENTATIVE.

The CONTRACTOR shall line all trucks transporting potentially contaminated or known contaminated soils with plastic liner as described in Section 2.01 of this specification. The liner shall be secured in such a manner as to prevent the leaking of liquid materials from the truck bed. The CONTRACTOR shall be responsible for ensuring that trucks leaving the site are NOT leaking liquid materials, and shall be responsible for sealing or re-lining any trucks that are leaking liquids. The CONTRACTOR shall also be responsible for clean-up of any releases.

B. The CONTRACTOR shall retain a copy of all waste manifests and load tickets for each waste shipment prior to off-site transportation, for record purposes. The CONTRACTOR shall submit a copy of all waste manifests and load tickets to the OWNER within THREE (3) business days of transport. The CONTRACTOR shall notify the OWNER whenever a waste shipment does not arrive at the approved disposal site in a timely manner.

The CONTRACTOR will inspect vehicles before they enter or exit the Project site to verify compliance with decontamination criteria provided in Part A of this Section.

The CONTRACTOR shall be responsible to remedy deficiencies identified by OWNER or OWNER REPRESENTATIVES.

C. All transport vehicles shall be properly licensed, labeled and placarded in a manner consistent with TCEQ and DOT regulations for material being transported.

3.07 DISPOSAL

A. The CONTRACTOR shall submit contact information for off-site hazardous and non-hazardous waste transfer, storage, processing, and disposal facilities prior to the commencement of work to the OWNER for approval. The OWNER or appointed representative must review and approve of all off-site disposal facilities prior to commencement of work. In the event that the CONTRACTOR does not receive approval from the OWNER or the appointed representatives for the selected off-site disposal facility prior to starting work, the CONTRACTOR will be responsible for all costs incurred in identifying an alternative off-site disposal facility and the cost of staging any contaminated material until a facility acceptable to the OWNER is identified.

B. The CONTRACTOR shall retain a copy of all waste manifests, certificates of disposal, and load or weight tickets from disposal facility on-site for the duration of the project and submit copies of the waste manifests, certificates of disposal, and load or weight tickets with the corresponding Application for Progress Payment.

3.08 DECONTAMINATION

A. The CONTRACTOR shall be responsible for preventing the spread of contaminated material beyond the excavation and temporary storage areas. To accomplish this, the CONTRACTOR shall include, as part of the health and safety plan, written procedures for decontamination of personnel and equipment, including transport vehicles that come in contact with potentially contaminated material.

B. The CONTRACTOR shall establish exclusion and contamination reduction zones around the excavation when potentially contaminated soils and/or water are encountered. The exclusion zone is the zone around the excavation and the temporary storage piles and/or tanks. All personnel and equipment entering or exiting the exclusion zone must do so through the contamination reduction zone. The contamination reduction zone includes all of the equipment and materials necessary to clean workers and equipment, and to collect all decontamination materials and water for proper disposal.

C. The CONTRACTOR shall be responsible for all fines, penalties, or citations resulting from non-conformance with these specifications.

PART 4 MEASUREMENT AND PAYMENT

4.01 Work Includes

A. Provide all labor, equipment, and materials to excavate, handle, load, place in

temporary storage, transport, and dispose of contaminated soils and groundwater in accordance with this specification.

4.02 Measurement

A. Soils- Measurement of soils will be based on tons of waste received and disposed at the approved off-site facility as weighed on a certified scale at the disposal facility. Submittal of certificates of disposal and weight tickets will be required for all nonhazardous solid wastes prior to the OWNER's recommendation for payment. Submittal of final waste manifests will be required for Class I industrial nonhazardous solid wastes prior to the OWNER's recommendation of payment. Soils transported and disposed of off-site shall contain no free liquids.

B. Water - Measurement of bulk liquid nonhazardous wastes will be based on gallons of wastewater received and disposed at the approved facility/location as measured at the disposal facility/location by a means accepted by the OWNER. Measurement of nonhazardous liquid wastes in drums, barrels or other containers will be based on the number of waste containers received and disposed at the off-site facility. Submittal of certificates of disposal and load tickets will be required for all nonhazardous liquid wastes prior to the OWNER's recommendation of payment. Submittal of final waste manifests will be required for Class I industrial nonhazardous wastes prior to the OWNER's recommendation of payment.

4.03 Payment – Payment for soil and water disposal under this section shall be all inclusive of all costs associated with disposal of this material, including but not limited to fees, temporary storage, loading and unloading storage containers, decontamination of equipment if required, and any and all other costs associated with disposal of this material.

Payment for Contaminated Soil and Water will be covered by the Allowance Item on Section 00300U. The total aggregate Allowance amount for Contaminated Soil and Water will not exceed the Allowance value.